

MN65531AS

Low Power 6-Bit CMOS A/D Converter for Image Processing

■ Overview

The MN65531AS is a totally parallel 6-bit CMOS ana-to-digital converter with a maximum conversion rate of 20 MSPS. It includes a built-in 3-input multiplexer, clamp circuit, and reference voltage power supply.


■ Features

- Maximum conversion rate: 20 MSPS (min.)
- Linearity error: ± 0.5 LSB (typ.)
- Differential linearity error: ± 0.5 LSB (typ.)
- Power supply voltage: 5.0 ± 0.5 V
- Power consumption: 100 mW (typ.)
- Built-in 3-input multiplexer, clamp circuit, and reference voltage power supply


■ Applications

- Digital television receivers
- Digital video equipment
- Picture in picture systems
- Digital image processing equipment

■ Pin Assignment

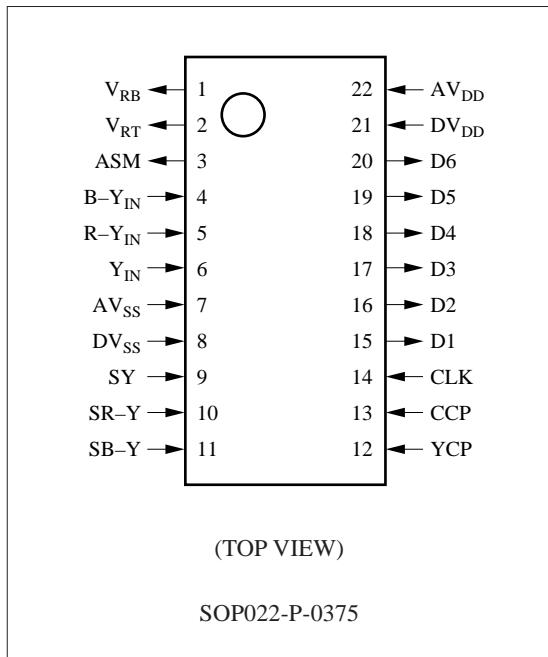

■ Block Diagram

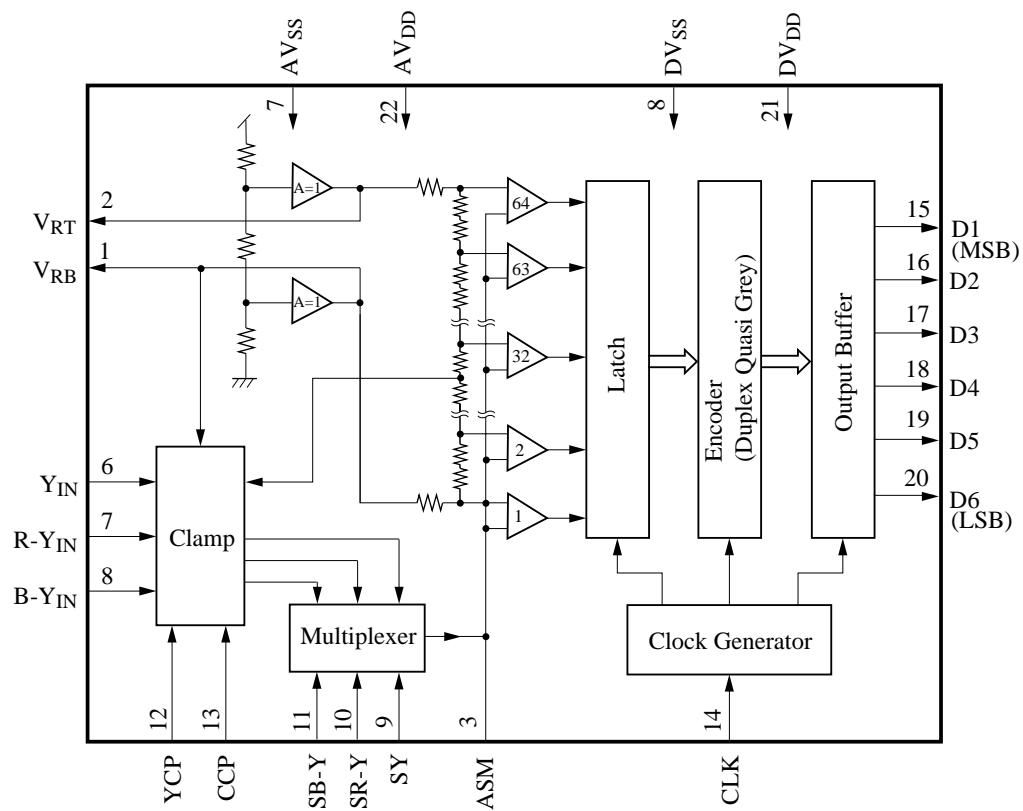

■ Pin Descriptions

Pin No.	Symbol	Function Description
1	V _{RB}	Reference voltage output (BOTTOM)
2	V _{RT}	Reference voltage output (TOP)
3	ASM	Analog monitor
4	B-Y _{IN}	Analog input (B-Y)
5	R-Y _{IN}	Analog input (R-Y)
6	Y _{IN}	Analog input (Y)
7	AV _{SS}	Ground for analog circuits
8	DV _{SS}	Ground for digital circuits
9	SY	Multiplexer control (Y)
10	SR-Y	Multiplexer control (R-Y)
11	SB-Y	Multiplexer control (B-Y)
12	YCP	Clamp pulse (Y)
13	CCP	Clamp pulse (R-Y, B-Y)
14	CLK	Clock input
15	D1	Digital output (MSB)
16	D2	Digital output
17	D3	Digital output
18	D4	Digital output
19	D5	Digital output
20	D6	Digital output (LSB)
21	DV _{DD}	Power supply for digital circuits
22	AV _{DD}	Power supply for analog circuits

■ Absolute Maximum Ratings Ta=25°C

Parameter	Symbol	Rating	Unit
Power supply voltage for digital circuits	DV _{DD}	-0.3 to +7.0	V
Power supply voltage for analog circuits	AV _{DD}	-0.3 to +7.0	V
Input voltage	V _I	AV _{SS} - 0.3 to AV _{DD} +0.3	V
Output voltage	V _O	DV _{SS} - 0.3 to DV _{DD} +0.3	V
Operating ambient temperature	T _{opr}	-20 to +75	°C
Storage temperature	T _{stg}	-55 to +125	°C

■ Recommended Operating Conditions V_{DD}=DV_{DD}=AV_{DD}=5.0V, V_{SS}=DV_{SS}=AV_{SS}=0V, Ta=25°C, C_C=1μF


Parameter	Symbol	min	typ	max	Unit
Power supply voltage	V _{DD}	4.5	5.0	5.5	V
Clock input voltage	"H" level	V _{CH}	0.7 × V _{DD}		V
	"L" level	V _{CL}	V _{SS}	0.8	V
Digital input voltage	"H" level	V _{IH}	0.7 × V _{DD}		V
	"L" level	V _{IL}	V _{SS}	0.2 × V _{DD}	V
Clamp pulse width	t _{CP}	1.5	2.0		μs

■ Electrical Characteristics DV_{DD}=AV_{DD}=5.0V, DV_{SS}=AV_{SS}=0V, Ta=25°C


Parameter	Symbol	Conditions	min	typ	max	Unit
Power supply current	I _{DD}	f _{CLK} =20MHz		20	40	mA
Resolution	RES			6		bit
Linearity error	E _L				±1.0	LSB
Differential linearity error	E _D				±1.0	LSB
Maximum conversion rate	F _{c(max.)}		20			MSPS
Reference voltage output (bottom)	V _{RB}		0.38×V _{DD}	0.40×V _{DD}	0.42×V _{DD}	V
Reference voltage output (top)	V _{RT}		0.78×V _{DD}	0.80×V _{DD}	0.82×V _{DD}	V
Clamp current	I _{CP}	ΔV _{CP} ±0.1V	±0.5	±0.8		mA
Output current "H" level	I _{OH}	V _{OH} =V _{DD} -0.8V			-2	mA
	I _{OL}	V _{OL} =0.4V	2			mA
Output delay time	t _d	C _L =50pF	10		35	ns
Analog input capacitance	C _I			15		pF

■ Timing Chart

1. A/D converter and multiplexer timing

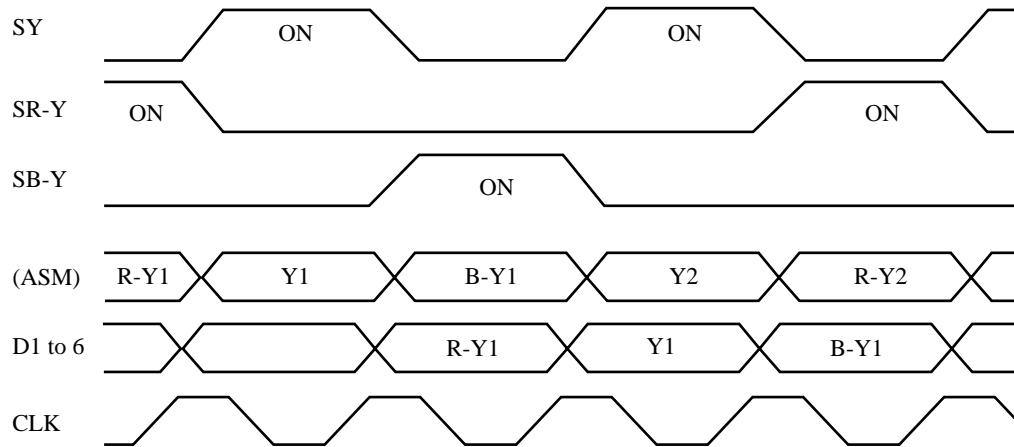

2. Clamp timing

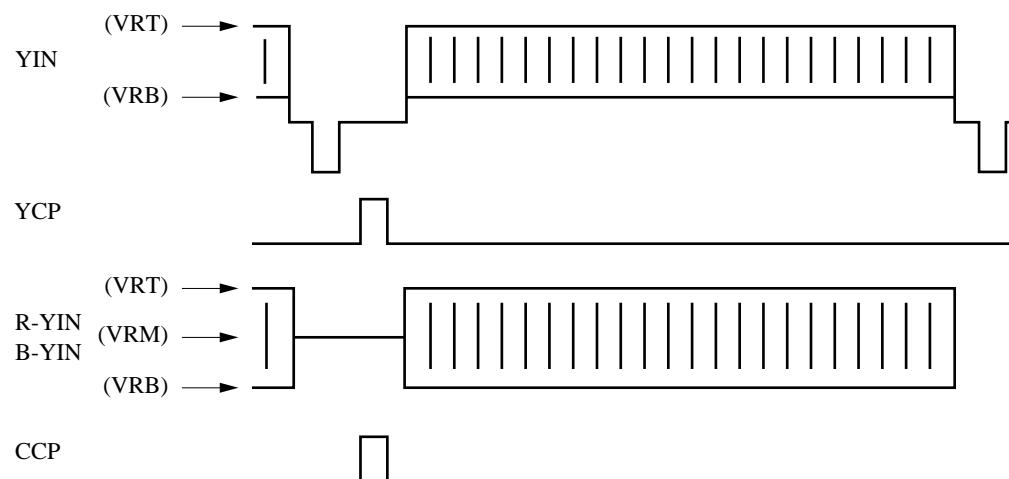

■ Package Dimensions (Unit:mm)

SOP022-P-0375

