

**Proposal Specification****TO-BIDI\* Transceiver Optical Module****Coax-BIDI<sup>®</sup> 1300/1550 nm with DIL10 Adaptation Board and Receiver Preamplifier**

- Designed for application in passive-optical networks
- Integrated Wavelength Division Multiplexer
- Bidirectional Transmission in 2nd and 3rd optical window
- Laser diode with Multi-Quantum Well structure
- Suitable for bit rates up to OC-3 and STM-1
- Ternary Photodiode at rear mirror for monitoring and control of radiant power
- Low noise/high bandwidth PIN diode
- Hermetically sealed subcomponents, similar to TO 18
- With singlemode fiber pigtail
- DIL10 adaptation board with receiver preamplifier

**Applications**

Stable Operation with High Capacitance Detectors Low Noise Preamplifiers  
Single-Ended to Differential Conversion I-to-V Converters

**Preamp description**

The TIA is a wide bandwidth, single supply transimpedance amplifier optimized for use in a fiber optic receiver circuit. It is a complete, single chip solution for converting photodiode current into a differential voltage output. The 240 MHz bandwidth enables application in FDDI receivers and SONET/SDH receivers with data rates up to 155 Mbps. The differential outputs drive ECL directly, or can drive a comparator/ fiber optic post amplifier.

The IC can be used with a standard ECL power supply (-5.2 V) or a PECL (+5 V) power supply; the common mode at the output is ECL compatible.

**Maximum Ratings**

<b>Module</b>	<b>Symbol</b>	<b>Values</b>	<b>Unit</b>
Operating Temperature range at case	$T_C$	-40 ... +85	°C
Storage Temperature range	$T_{stg}$	-40 ... +85	°C
Soldering Temperature $T_{max} = 10$ s, 2 mm distance from bottom edge of case	$T_S$	260	°C

<b>Laserdiode</b>	<b>Symbol</b>	<b>Values</b>	<b>Unit</b>
Direct forward current	$I_{F_{max}}$	120	mA
Radiant power CW	$\Phi_e$	1	mW
Reverse Voltage	$V_{R_{max}}$	2	V

<b>Monitor Diode</b>	<b>Symbol</b>	<b>Values</b>	<b>Unit</b>
Reverse Voltage	$V_{R_{max}}$	10	V

**Characteristics**

All optical data refer to the optical port (10/125µm SM fiber),  $T_C = -40 \dots +85^\circ\text{C}$

<b>Laser Diode</b>	<b>Symbol</b>	<b>Values</b>	<b>Unit</b>
Optical Peak Output Power	$\Phi_e$	> 0.4	mW
Emission wavelength center of range $\Phi_e = 0.2$ mW	$\lambda$	1260...1360	nm
Spectral bandwidth $\Phi_e = 0.2$ mW (RMS)	$\Delta\lambda$	< 5	nm
Threshold current	$I_{th}$	2...55	mA
Forward voltage $\Phi_e = 0.2$ mW	$V_F$	< 1.5	V
Slope Efficiency	$\eta$	10...150	mW/A
Differential series resistance	$R_S$	< 8	$\Omega$
Rise Time/Fall Time	$t_R, t_F$	< 1	ns

Monitor Diode	Symbol	Values			Unit
Dark Current, $V_R = 5 \text{ V}$ , $\Phi_e = 0$	$I_R$	< 200			nA
Photocurrent, $\Phi_e = 0.2 \text{ mW}$		100...800			$\mu\text{A}$
Capacitance, $V_R = 5 \text{ V}$ , $f = 1 \text{ MHz}$	$C_5$	< 10			pF
Tracking Error, $V_R = 2 \text{ V}$ (see note 1)	TE	-1...1			dB

Detector + Preamplifier	Symbol	Values			Unit
		Min.	Typ.	Max.	
Power Supply $T_{\min}$ to $T_{\max}$		+4.5	+5	+11	V
Operating range single supply		25	26	26	mA
Current					
Bandwidth 3dB		180	240		MHz
Overload				-6	dBm
Sensitivity (BER > $10^{-10}$ ; $P_{\text{opt}}$ (Transmitter) < -7dBm; $I_{\text{mod}} < 40 \text{ mA}$ ) under discussion		-25			dBm
Output					
Noise: (Minimum S/N > 10 (2.4 V/mW / 0.2V/mW) -> equivalent to BER > $10^{-10}$ )				0.2	V/mW
Signal:					
Output voltage to optical power (Input power < 100 $\mu\text{W}$ tbd)					
Single Ended $S\lambda * R_{\text{trs}}$		2.4	6	12	V/mW
Differential $S\lambda * R_{\text{trs}}$		4.8	12	24	V/mW

Module	Symbol	Values			Unit
Optical Crosstalk (see note 2)	CRT	< -30			dB

Note 1: The tracking error TE is the variation rate of  $\Phi_e$  at constant current  $I_{\text{mon}}$  over a specified temperature range and relative to the reference point:  $I_{\text{mon,ref}} = I_{\text{mon}}(T = 25^\circ\text{C}, \Phi_e = 0.2 \text{ mW})$ . Thus, TE is given by:

$$TE [\text{dB}] = 10 \times \log \frac{f_e [T_c] - f_e [25^\circ C]}{f_e [25^\circ C]}$$

Note 2: Optical Crosstalk is defined as  $\text{CRT} = 10 \times \log(I_{\text{Det,0}} / I_{\text{Det,1}})$  with:  $I_{\text{Det,0}}$  the photo-current with  $\Phi_e = 0.2 \text{ mW}$ , CW laser operation,  $V_R = 2 \text{ V}$ , with minimum optical return loss from fiber end and  $I_{\text{Det,1}}$  the photocurrent without  $\Phi_e$ , but 0.2 mW optical input power,  $\lambda = 1300 \text{ nm}$ .

**Proposal for Measuring Crosstalk****Needed equipment:**

- Average Voltmeter (R&S URV5)
- Lowpassfilter 125 MHz
- Signal generator (Pseudorandom Word generator 155 Mbit/s or Sine wave frequency tbd)

**Measuring**

Connect the preamplifier output (perhaps with an additional amplifier - not limiting!!!) with Average Voltmeter

Step 1 Output voltage without any incoming optical signal, BIDI internal transmitter off  
-> U<sub>o</sub>

Step 2 Output voltage with incoming optical signal 1 µW 100% modulated  
(Pseudorandom Word 155 Mbit/s) light, BIDI internal transmitter off -> U<sub>1</sub>

Step 3 Output voltage without any incoming optical signal, BIDI internal transmitter modulated (Pseudorandom Word 155 Mbit/s) 10 mA bias 5 mA (below threshold) -> U<sub>3</sub>

Step 4 Output voltage without any incoming optical signal, BIDI internal transmitter modulated (Pseudorandom Word 155 Mbit/s) 10 mA bias 25 mA (over threshold) -> U<sub>4</sub>

**Calculations:**

Check the difference U<sub>3</sub> (only electrical crosstalk) and U<sub>4</sub> electrical + optical crosstalk (electrical crosstalk is dominating if U<sub>4</sub> = U<sub>3</sub>; optical crosstalk is dominating if U<sub>4</sub> > U<sub>3</sub>)

Check the needed modulation current for 100% modulated light (EOL max temp)  
 $I_{mod\ max}$  and change U<sub>3</sub> to U<sub>3corr</sub> = U<sub>3</sub> \*  $I_{mod\ max}$  [mA]/10.

The same procedure for U<sub>4</sub>.

**TO\_BIDI Performance**

U<sub>1</sub> should be > 10 \* U<sub>o</sub>

Normally the sensitivity will be limited by crosstalk. The needed optical power is  
 $P_{optical\ min} [\mu W] = 10 * U_{4corr} / U_1$

### Accompanying Information

$T = 25 \text{ }^{\circ}\text{C}$ : Threshold current, current above threshold for 0.2 mW output power, monitor current for 0.2 mW output power, peak wavelength.

$T = 85 \text{ }^{\circ}\text{C}$ : Threshold current, current above threshold for 0.2 mW output power, monitor current for 0.2 mW output power.

### End of Life Values

Parameter	Symbol	Values	Unit
Threshold current at $T = 85 \text{ }^{\circ}\text{C}$	$I_{\text{th}}$	80	mA
Slope efficiency ( $-40 \dots +85 \text{ }^{\circ}\text{C}$ )	$S$	$> 5$	mW/A
Tracking error (see note 1)	TE	$-1.0 \dots 1.0$	dB
Detector dark current, $V_R = 2 \text{ V}$ , $T = 85 \text{ }^{\circ}\text{C}$	$I_R$	$< 400$	nA
Monitor dark current, $V_R = 2 \text{ V}$ , $T = 85 \text{ }^{\circ}\text{C}$	$I_R$	$< 1$	$\mu\text{A}$

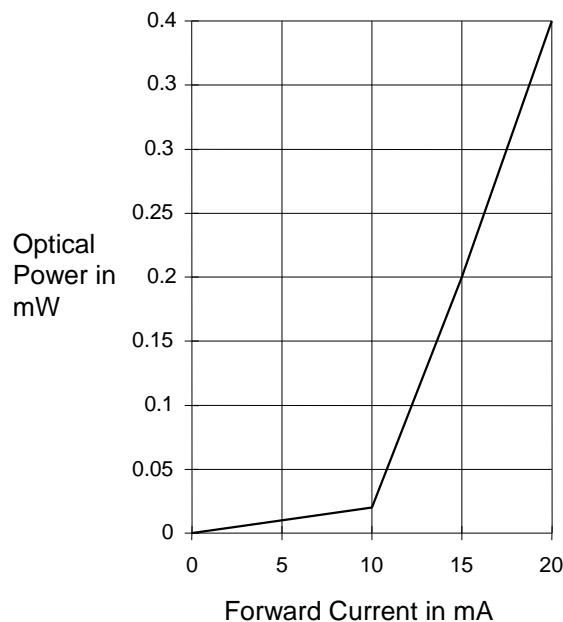
### Fiber Pigtail

Type: single mode, silica

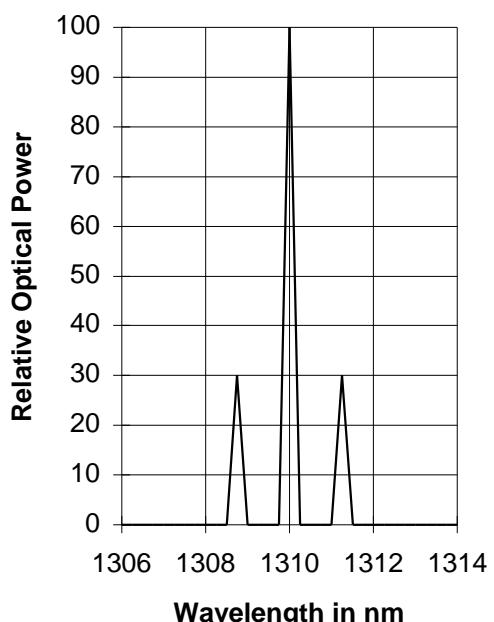
Parameter	Values	Unit
Mode field diameter	$9 \pm 1$	$\mu\text{m}$
Cladding diameter	$125 \pm 2$	$\mu\text{m}$
Mode field/cladding concentricity error	$< 1$	$\mu\text{m}$
Cladding non-circularity	$< 2$	%
Mode field non-circularity	$< 6$	%
Cut-off wavelength	$> 1270$	nm
Jacket diameter	$0.9 \pm 0.1$	mm
Bending radius	$> 30$	Mm
Allowed Tensile strength fiber/case	max. 5	N
Length	$1 \pm 0.2$	m

**Laser Diode**

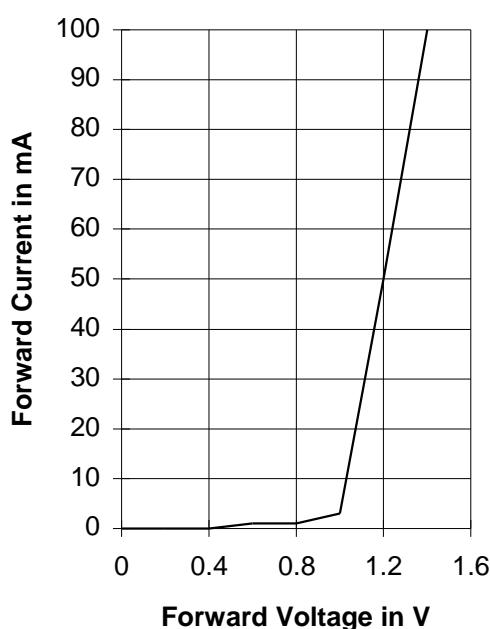
Radiant Power in Singlemode Fiber

**Relative Radiant Power**

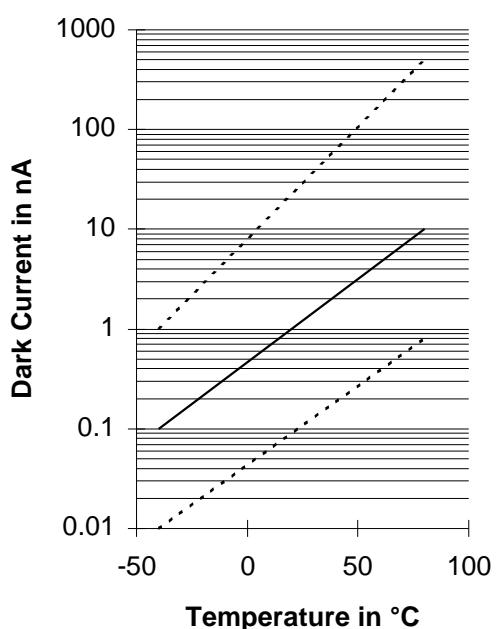
$$\Phi_e = f(\lambda)$$

**Laser Forward Current**

$$I_F = f(V_F)$$

**Monitor Diode Dark Current  $I_R =$** 

$$f(T_A) \quad \Phi_{\text{port}} = 0, V_R = 5 \text{ V}$$



Package Outlines (Dimensions in mm):

Coaxial modules have to be mechanically fixed. Only soldered pins do not fulfill mechanical connection of the coaxial module. Preferred for mechanical connection is our laser flange.