


## SINGLE-SUPPLY QUAD OPERATIONAL AMPLIFIER

### ■ GENERAL DESCRIPTION


The NJM324 consists of four independent, high gain, internally frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltages. Operation from split power supplies is also possible and the low power supply current drain is independent of the magnitude of the power supply voltage.

Application areas include transducer amplifiers, DC gain blocks and all the conventional op amp circuits which now can be more easily implemented in single power supply systems. For example, the NJM324 can be directly operated off of the standard  $+5V_{DC}$  power supply voltage which is used in digital systems and will easily provide the required interface electronics without requiring the additional  $\pm 15V_{DC}$  power supplies.


### ■ PACKAGE OUTLINE



NJM324D



NJM324M




NJM324V

### ■ FEATURES

- Single Supply Operation
- Operating Voltage ( +3V~+32V )
- Low Operating Current ( 0.7mA typ. )
- Package Outline DIP14,DMP14,SSOP14
- Bipolar Technology

### ■ PIN CONFIGURATION




NJM324D  
NJM324M  
NJM324V

### PIN FUNCTION

- 1. A OUTPUT
- 2. A -INPUT
- 3. A +INPUT
- 4.  $V^+$
- 5. B +INPUT
- 6. B -INPUT
- 7. B OUTPUT
- 8. C OUTPUT
- 9. C -INPUT
- 10. C +INPUT
- 11. GND
- 12. D +INPUT
- 13. D -INPUT
- 14. D OUTPUT

### ■ EQUIVALENT CIRCUIT ( 1/4 Shown )

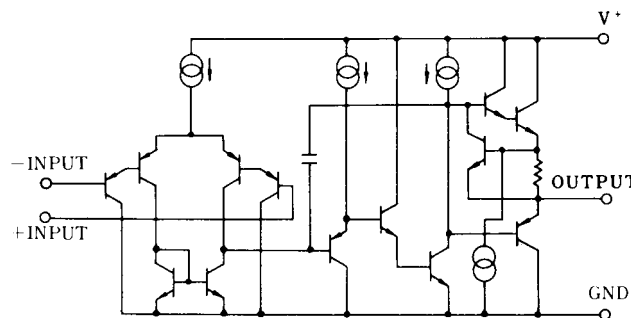

# NJM324

## ■ ABSOLUTE MAXIMUM RATINGS

( Ta=25°C )

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V^+ / V^-$	32 ( or $\pm 16$ )	V
Differential Input Voltage	$V_{ID}$	32	V
Input Voltage	$V_{IC}$	-0.3~+32	V
Power Dissipation	$P_D$	( DIP14 ) 570 ( DMP14 ) 300 ( SSOP14 ) 300	mW
Operating Temperature Range	$T_{opr}$	-40~+85	°C
Storage Temperature Range	$T_{stg}$	-40~+125	°C


## ■ ELECTRICAL CHARACTERISTICS

( Ta=+25°C,  $V^+=5V$  )


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Offset Voltage	$V_{IO}$	$R_S=0\Omega, V^+=5\sim 30V_{DC}$	-	2	7	mV
Input Offset Current	$I_{IO}$		-	5	50	nA
Input Bias Current	$I_B$		-	20	250	nA
Input Common Mode Voltage Range	$V_{ICM}$		0~3.5	-	-	V
Operating Current	$I_{OC}$	$R_L=\infty$	-	0.7	1.2	mA
Large-signal Voltage Gain	$A_V$	$R_L \geq 2k\Omega, V^+=15V$	88	100	-	dB
Maximum Peak-to-peak Output Voltage Swing	$V_{OPP}$	$R_L=2k\Omega$	3.5	-	-	V
Common Mode Rejection Ratio	CMR	DC	65	70	-	dB
Supply Voltage Rejection Ratio	SVR	DC	65	100	-	dB
Output Source Current	$I_{SOURCE}$	$V_{IN}^+ / V_{IN}^- = 1/0V, V^+=15V$	20	40	-	mA
Output Sink Current 1	$I_{SINK1}$	$V_{IN}^+ / V_{IN}^- = 0/1V, V^+=15V$	10	20	-	mA
Output Sink Current 2	$I_{SINK2}$	$V_{IN}^+ / V_{IN}^- = 0/1V, V_o=200mV$	12	50	-	$\mu A$
Channel Separation	CS	$f=1kHz\sim 20kHz, \text{Input Referred}$	-	120	-	dB

## ■ TYPICAL CHARACTERISTICS


### Voltage Gain, Phase vs. Frequency

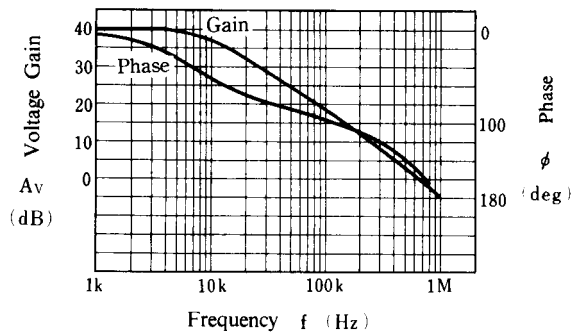


### Output Sink Current

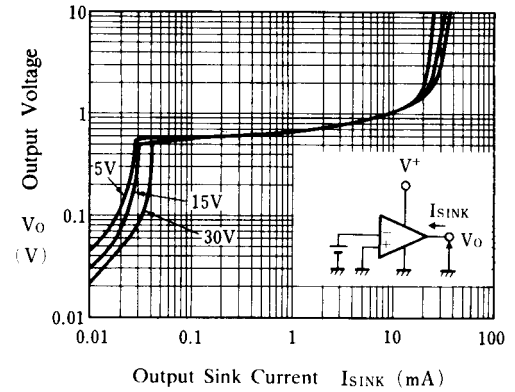


### Output Source Current

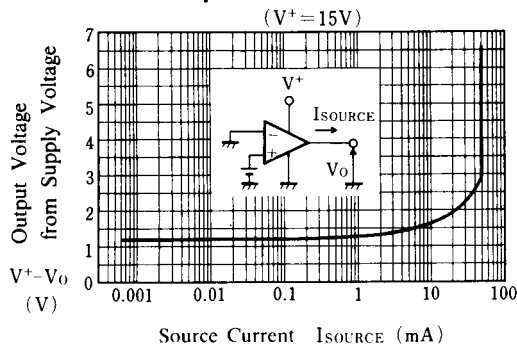


### Maximum Output Voltage Swing vs. Frequency

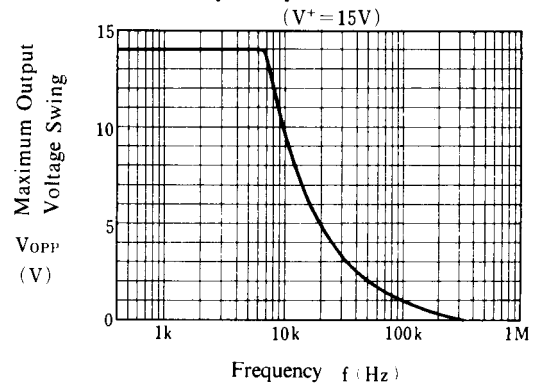

### Maximum Output Voltage Swing vs. Load Resistance

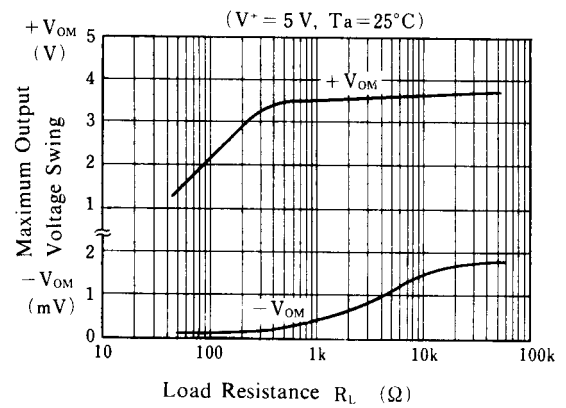


### Pulse Response

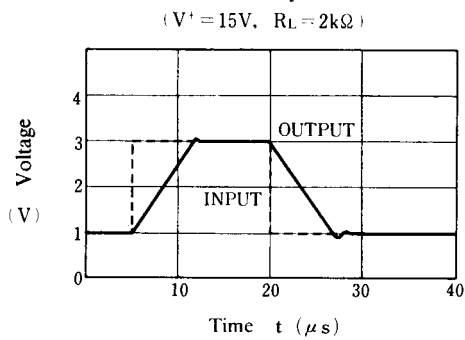


## ■ TYPICAL CHARACTERISTICS


**Input Offset Voltage vs. Temperature**

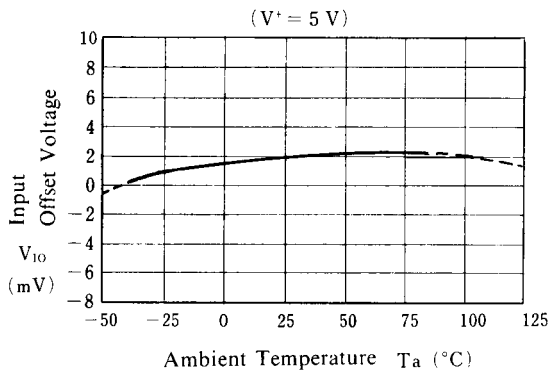


**Input Bias Current vs. Temperature**

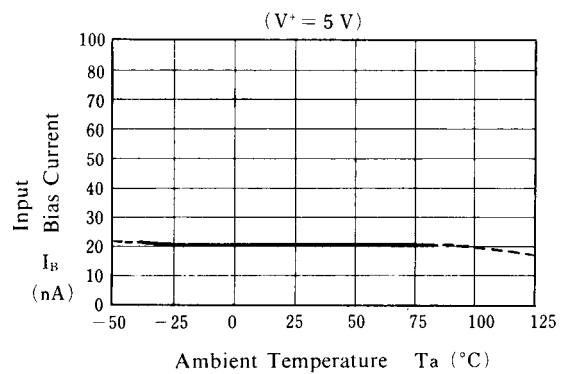


**Operating Current vs. Temperature**

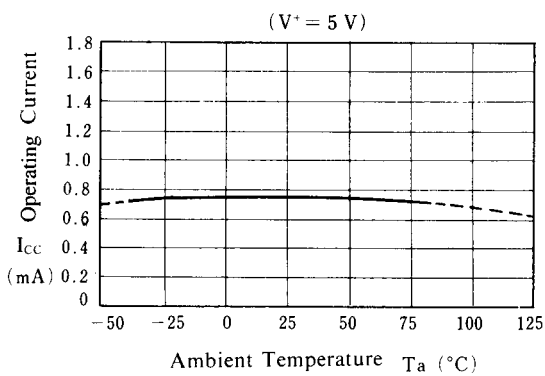


**Maximum Output Voltage Swing vs. Temperature**

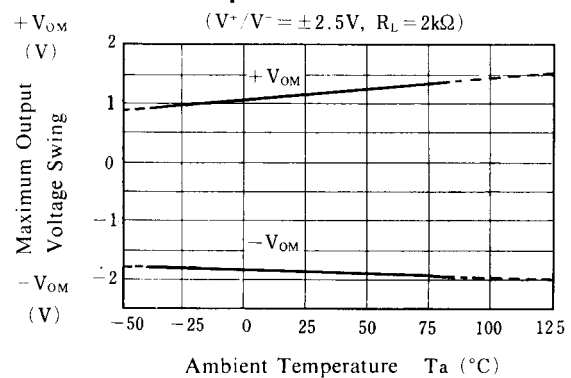

**Output Sink Current 1 vs. Temperature**

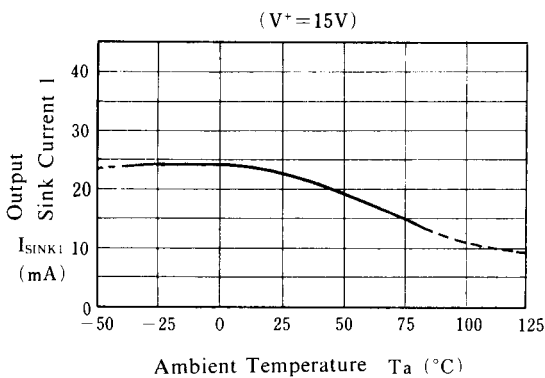


**Output Sink Current 2 vs. Temperature**

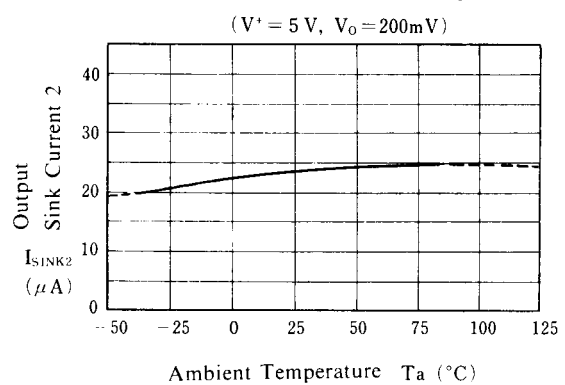


## ■ TYPICAL CHARACTERISTICS


### Output Source Current vs. Temperature

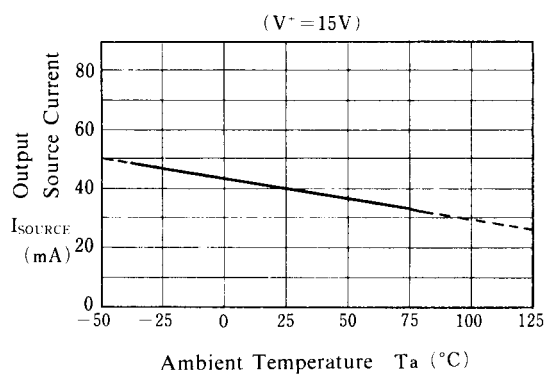

### Operating Current vs. Operating Voltage

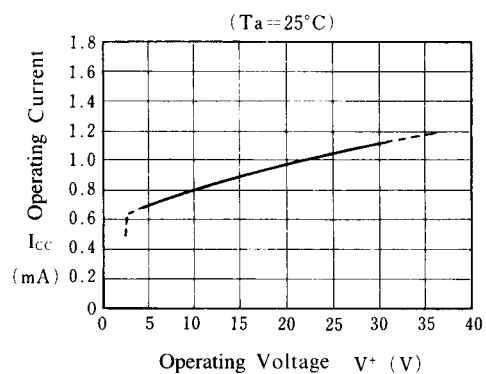

### Maximum Output Voltage Swing vs. Operating Voltage

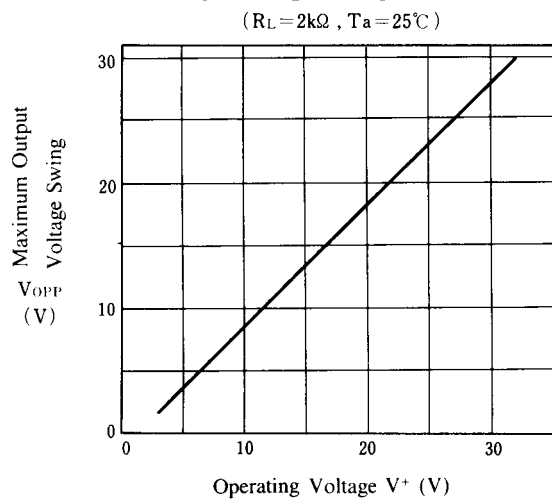

**[CAUTION]**

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.