

■ GENERAL DESCRIPTION

The NJM2147 is a dual high voltage and Low power operational amplifier IC.

The feature of high operating voltage is suitable for high supply voltage items, such as PBX, and others.

■ PACKAGE OUTLINE



NJM2147D




NJM2147M

■ FEATURES

- High Operating Voltage (±8V~±28V)
- High Slew Rate (0.5V/us typ.)
- Low Operating Current (175uA typ.)
- Short-Circuit Protection
- Package Outline DIP8, DMP8
- Bipolar Technology

■ PIN CONFIGURATION




NJM2147D
NJM2147M

PIN FUNCTION

1. A OUTPUT
2. A -INPUT
3. A +INPUT
4. V⁻
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V⁺

■ EQUIVALENT CIRCUIT

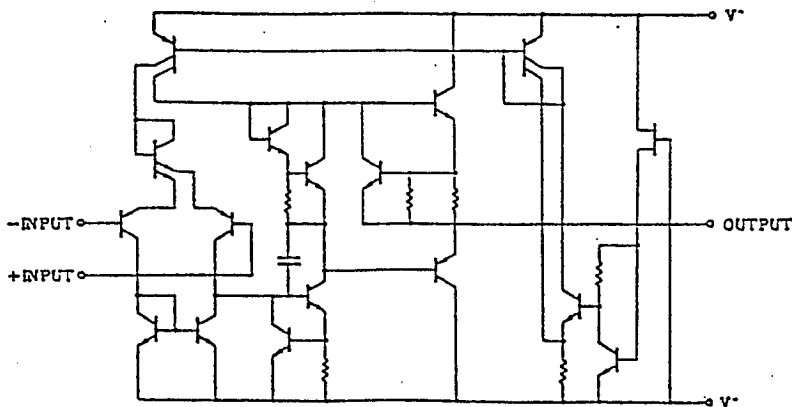

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)







PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ /V ⁻	±30	V
Input Voltage	V _{IC}	±28 (note)	V
Differential Input Voltage	V _{ID}	±30	V
Power Dissipation	P _D	(DIP8) 500 (DMP8) 300	mW
Operating Temperature Range	T _{OP}	-40 ~ +85	°C
Storage Temperature Range	T _{STG}	-40 ~ +125	°C

(note) When supply voltage is less than ±15V,
the absolute maximum input voltage is equal supply voltage.

■ ELECTRICAL CHARACTERISTICS (V⁺/V⁻=±15V, Ta=25°C)





PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺		±8	±15	±28	V
Input Offset Voltage	V _{IO}	R _S ≤ 10kΩ	—	1.0	5.0	mV
Input Bias Current	I _B		—	15	250	nA
Input Offset Voltage	I _{IO}		—	1	80	nA
Large Signal Voltage Gain	A _V	R _L ≥ 10kΩ, V _O =±10V	60	88	—	dB
Input Common Mode	V _{ICM}		±12	±13	—	V
Voltage Range						
Common Mode	CMR	R _S ≤ 10kΩ, V _{IC} =±12V	60	90	—	dB
Rejection Ratio						
Supply Voltage	SVR	R _S ≤ 10kΩ, V ⁺ /V ⁻ =±14V~±28V	74	110	—	dB
Rejection Ratio						
Maximum Peak-to-peak	V _{OM1}	R _L ≥ 10kΩ	±10	±14	—	V
Output Voltage Swing 1						
Maximum Peak-to-peak	V _{OM2}	R _L ≥ 50kΩ	±13	±14	—	V
Output Voltage Swing 2						
Operating Current	I _{CC}	R _L =∞ (All Circuit)	—	175	300	uA
Short-circuit	I _{OS}		—	±6	—	mA
Output Current						
Slew Rate	SR	R _L =10kΩ, C _L =100pF, V _{IN} =10V	—	0.5	—	V/us
Response Time (Rise Time)	t _R	R _L =10kΩ, C _L =100pF, V _{IN} =20mV	—	0.3	—	us
Equivalent Input	e _n	A _V =20dB, f=1kHz	—	50	—	nV/√Hz
Noise Voltage						

■ TYPICAL CHARACTERISTICS

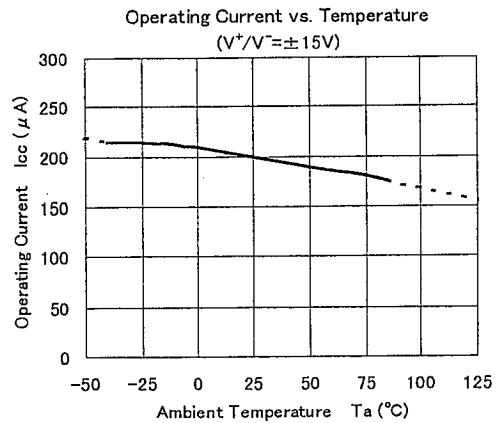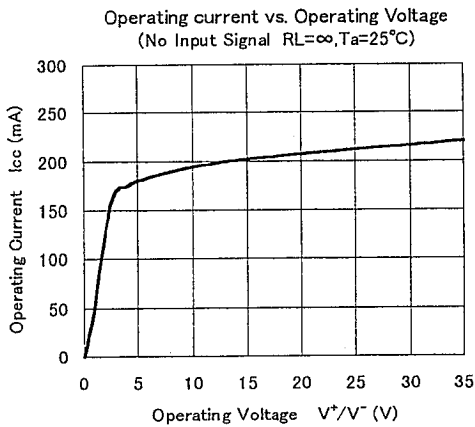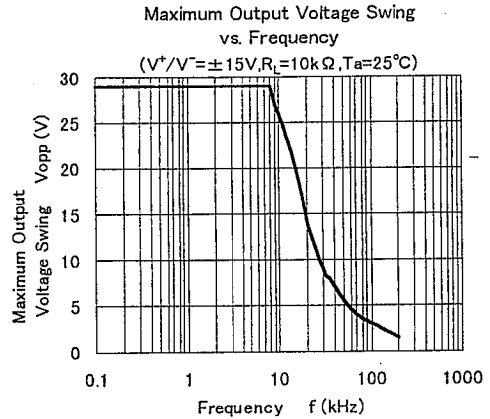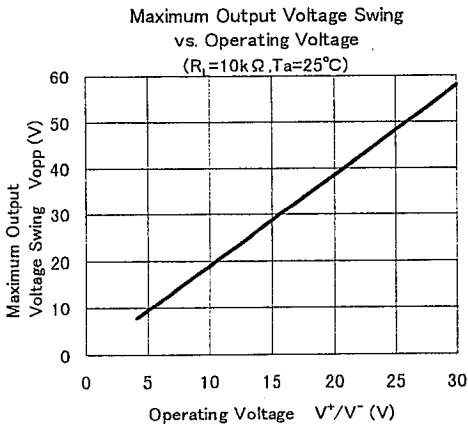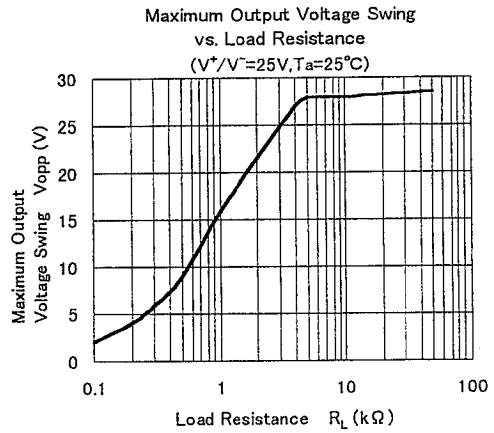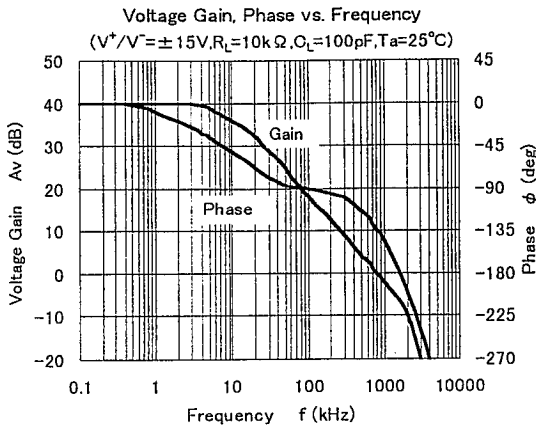

4

TYPICAL CHARACTERISTICS

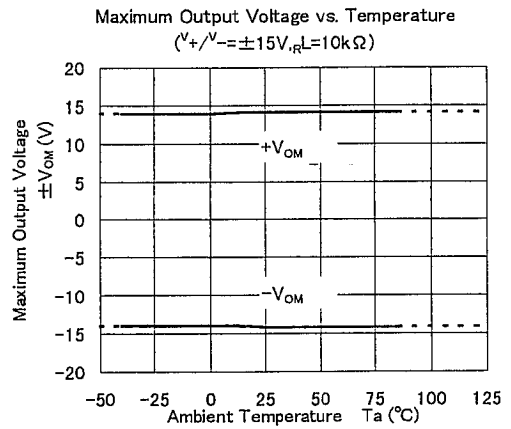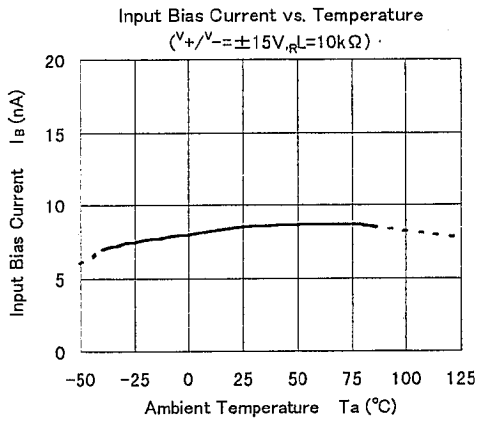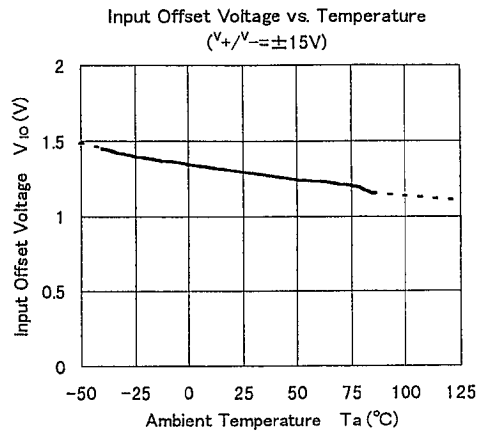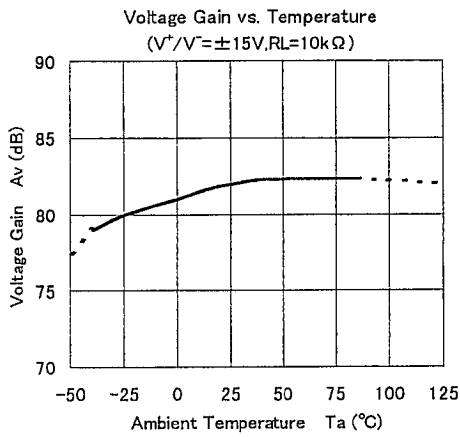

4

MEMO

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.