


# TA8044F

## 3.3V / 5V DUAL-VOLTAGE REGULATOR WITH WATCHDOG TIMER

Designed specifically for use in 3.3V microcomputers, this IC contains two constant-voltage power supplies for 3.3V and 5V uses and various system reset functions. This IC's Power Supply Output 1 provides an output voltage of 3.4V and contains an output transistor capable of producing 10mA of output current. With an external boost transistor connected, this IC can supply a large output current. A 250mA current limiter is included. Power Supply Output 2 provides an output voltage of 5.0V which can be turned on or off from the EN pin. This output uses an external output transistor. Any desired current limiter value can be set using an external adjusting resistor. For a system reset, it has a low-voltage monitor / power-on reset / watchdog timer at Power Supply Output 2.

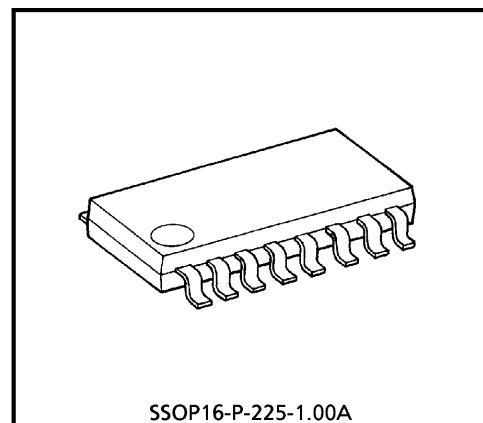

SSOP16-P-225-1.00A

Weight : 0.14g (Typ.)


### FEATURES

- Power Supply Output 1
  - Output voltage :  $3.4V \pm 0.15V$
  - Output current : 10mA (built-in transistor) / 300 mA (when current boost transistor connected)
  - Current limiter : 250mA
- Power Supply Output 2
  - Output voltage :  $5.0V +0.15V -0.18V$
  - Output current : 600mA (External transistor)
  - Current limiter : Variable using external adjusting resistor
- Reset functions : Low-voltage monitor and power-on watchdog timer
- Low standby current :  $800\mu A$  (Max)
- Wide operating temperature range :  $-40^{\circ}C$  to  $125^{\circ}C$
- Compact flat package SSOP-16pin : 16-pin SSOP

980910EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.


BLOCK DIAGRAM AND PIN ASSIGNMENT

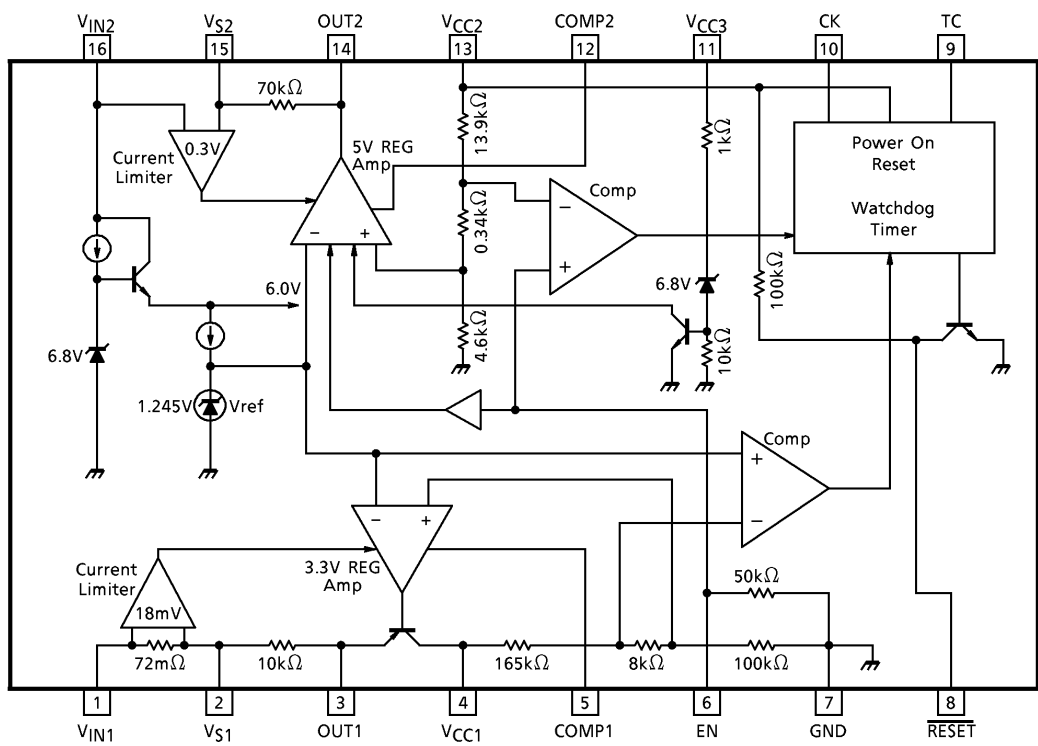

## PIN DESCRIPTION

PIN No.	SYMBOL	DESCRIPTION
1	V <sub>IN1</sub>	Power supply input pin for V <sub>CC1</sub> . It contains a 250mA (Typ.) current limiter.
2	V <sub>S1</sub>	Current limiter pin for V <sub>CC1</sub> . A 72mΩ sense resistor is included between pin 1 and this pin.
3	OUT1	Power supply input pin for V <sub>CC1</sub> . When using an external current boost transistor, connect the base of a PNP transistor to this pin. No external transistor is required when using the IC at a load current of 10mA or less. In this case, connect the power supplies by shorting pins 1, 2, and 3.
4	V <sub>CC1</sub>	Voltage detection / output pin for V <sub>CC1</sub> . When using a current boost transistor, connect the collector of a PNP transistor to this pin. When used with a load current of 10mA or less, this pin serves as an output pin for the 3.3V power supply.
5	COMP1	Phase compensating pin for V <sub>CC1</sub> . Connect a phase compensating capacitor between pin 4 and this pin.
6	EN	On / off control pin for V <sub>CC2</sub> . The 5V output is turned on when EN is high and turned off when EN is low. A 50kΩ pull-down resistor is included in GND.
7	GND	Grounded
8	$\overline{\text{RESET}}$	Power-on reset / watchdog timer reset output pin. <ul style="list-style-type: none"> <li>Generates a reset signal that is determined by C<sub>T</sub> and R<sub>T</sub> at the TC pin.</li> <li>If no clock is fed to the CK input, this pin generates a reset pulse intermittently.</li> </ul> This is an NPN transistor collector output, with a 100kΩ pull-up resistor built into V <sub>CC2</sub> .
9	TC	Time setup pin for the reset and watchdog timers. Connect resistor R <sub>T</sub> to V <sub>CC2</sub> and capacitor C <sub>T</sub> to GND.
10	CK	Clock input pin for the watchdog timer. If used only as a power-on reset timer, pull up this input to V <sub>CC2</sub> .
11	V <sub>CC3</sub>	This pin contains a 7.5V Zener diode. To use this pin, short it to pin 13. When the V <sub>CC2</sub> voltage becomes abnormal, the Zener diode suppresses the voltage.
12	COMP2	Phase compensating pin for V <sub>CC2</sub> . Connect a phase compensating capacitor between pin 13 and this pin.
13	V <sub>CC2</sub>	Voltage detection pin for the 5V constant-voltage power supply, V <sub>CC2</sub> . It also supplies power to the reset timer block.
14	OUT2	This pin is used to connect the base of an external PNP transistor. The output voltage is controlled by an internal op-amp to maintain it stably at 5V. Since the recommended current of I <sub>OUT</sub> is 5mA, an output current of up to 600mA can be flowed if HFE of the external transistor is 120 or more.
15	V <sub>S2</sub>	Detection pin for the V <sub>CC2</sub> current limiter. A voltage drop occurring in the external resistor R <sub>s</sub> between pins 15 and 16 is monitored. The current limiter is actuated when the voltage drop exceeds 0.3V. Ex.) When the current limiter need to be actuated at a load current of 600mA $R_s = 0.3V / 600mA = 0.5\Omega$
16	V <sub>IN2</sub>	Power supply input pin. An internal 6V constant voltage is connected to this pin for supplying power to the V <sub>CC1/2</sub> current limiters, voltage regulating circuit for V <sub>CC1</sub> , reference voltage source, and the EN input circuit.

TIMING CHART

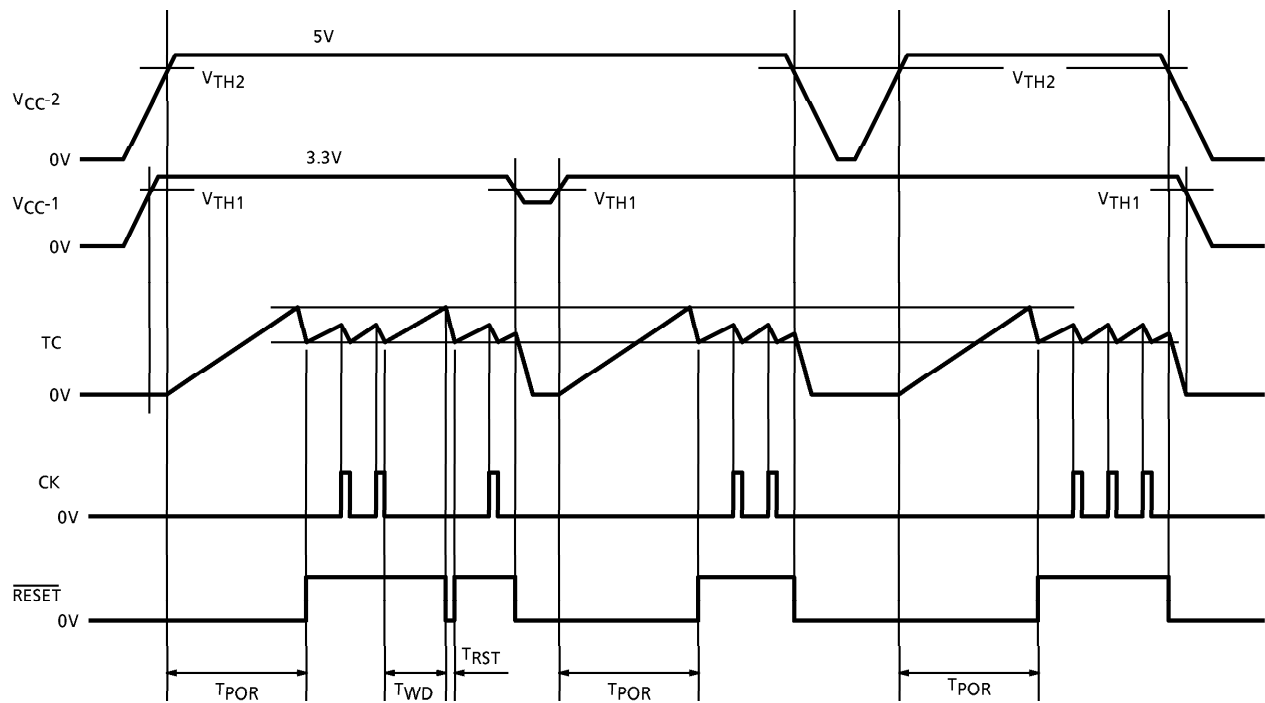

Note : See Electrical Characteristics for symbols in the timing chart.

**MAXIMUM RATINGS** ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	$V_{IN}$	60 (1s)	V
Output Current	$I_{OUT1}$	10	mA
	$I_{OUT2}$	10	
Operating Temperature	$T_{opr}$	- 40~125	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	- 55~150	$^\circ\text{C}$
Lead Temperature (Time)	$T_{sol}$	260 (10s)	$^\circ\text{C}$

**SSOP16-P-225 HEAT RESISTANCE DATA** ( $T_a = 25^\circ\text{C}$ )


CHARACTERISTIC	RATING	CONDITION	UNIT
$R_{\theta j-a}$	200	Single unit	$^\circ\text{C} / \text{W}$
$P_{D1}$	0.6	Single unit	W
$P_{D2}$	0.78	Mounted on 50 × 50 × 1.6mm, 30% Cu	W

**ELECTRICAL CHARACTERISTICS** ( $V_{CC}=6$  to  $16V$ ,  $I_{LOAD-1}=10mA$ ,  $I_{LOAD-2}=10mA$ ,  
 $T_a = -40\sim 125^{\circ}C$  unless otherwise specified)


CHARACTERISTIC	SYMBOL	PIN	TEST CIR-CUIT	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	$V_{REG-1}$	$V_{CC-1}$	—	$T_a = -40\sim 105^{\circ}C$	3.28	3.4	3.52	V
			—	$T_a = -40\sim 125^{\circ}C$	3.25	3.4	3.55	
	$V_{REG-2}$	$V_{CC-2}$	—	$T_a = -40\sim 105^{\circ}C$	4.85	5.0	5.15	
			—	$T_a = -40\sim 125^{\circ}C$	4.82	5.0	5.15	
Input Stability	$V_{LINE}$	$V_{CC-1/2}$	—	$V_{IN}=6\sim 40V$	—	0.1	0.5	%
Load Stability	$V_{LOAD-1}$	$V_{CC-1}$	—	$I_{LOAD}=1\sim 200mA$	—	0.2	1.0	%
	$V_{LOAD-2}$	$V_{CC-2}$	—	$I_{LOAD}=1\sim 300mA$	—	0.2	1.0	
Temperature Coefficient	—	$V_{CC-1/2}$	—	—	—	0.01	—	% / $^{\circ}C$
Input Current	$I_{IN}$	EN	—	$V_{IN}=5V$	—	0.1	0.2	mA
Input Voltage	$V_{IH}$	EN	—	—	2	—	—	V
	$V_{IL}$		—	—	—	—	0.8	
Output Voltage	$V_{OL}$	$\overline{RESET}$	—	$I_{OL}=2mA$	—	—	0.3	V
Output Leakage Current	$I_{LEAK}$	$\overline{RESET}$	—	$V_{IN}=V_{CC2}$	—	—	5	$\mu A$
Input Current	$I_{IN}$	TC	—	$V_{IN}=0\sim 3.5V$	-3	—	3	$\mu A$
Threshold Voltage	$V_{IH}$	TC	—	—	—	4	—	V
	$V_{IL}$		—	—	—	2	—	
Input Current	$I_{IN}$	CK	—	$V_{IN}=5V$	—	0.18	0.35	mA
Input Voltage	$V_{IH}$	CK	—	—	2	—	—	V
	$V_{IL}$		—	—	—	—	0.5	
Current Limiter	$I_{LIMIT}$	$V_{CC-1}$	—	—	—	250	—	mA
Current Limiter Detection	$V_{LIMIT}$	$V_{CC-2}$	—	—	—	0.3	—	V
Standby Current	$I_{ST}$	—	—	$V_{IN}=14V$	—	400	800	$\mu A$
Reset Detection Voltage	$V_{TH1}$	$V_{CC-1}$	—	—	3.0	3.15	3.3	V
	$\Delta V_{TH1}$		—	$V_{CC-1}-V_{TH1}$	0.2	0.25	0.3	
	$V_{TH2}$	$V_{CC-2}$	—	—	4.5	4.7	4.87	
	$\Delta V_{TH2}$		—	$V_{CC-2}-V_{TH2}$	0.25	0.30	0.35	
Power-on Reset	$T_{POR}$	$\overline{RESET}$	—	—	—	$1.6 \times C_T \times R_T$	—	ms
Watchdog Timer	$T_{WD}$	$\overline{RESET}$	—	—	—	$1.1 \times C_T \times R_T$	—	
Reset Timer	$T_{RST}$	$\overline{RESET}$	—	—	—	$0.7 \times C_T$	—	
Clock Pulse Width	$T_{WV}$	CK	—	—	3	—	—	$\mu s$

(Note) The unit for  $C_T$  is  $\mu F$ , the unit for  $R_T$  is  $k\Omega$ .


EXAMPLE OF APPLICATION CIRCUIT (1) Built-in 3.3V power supply + 5V power supply

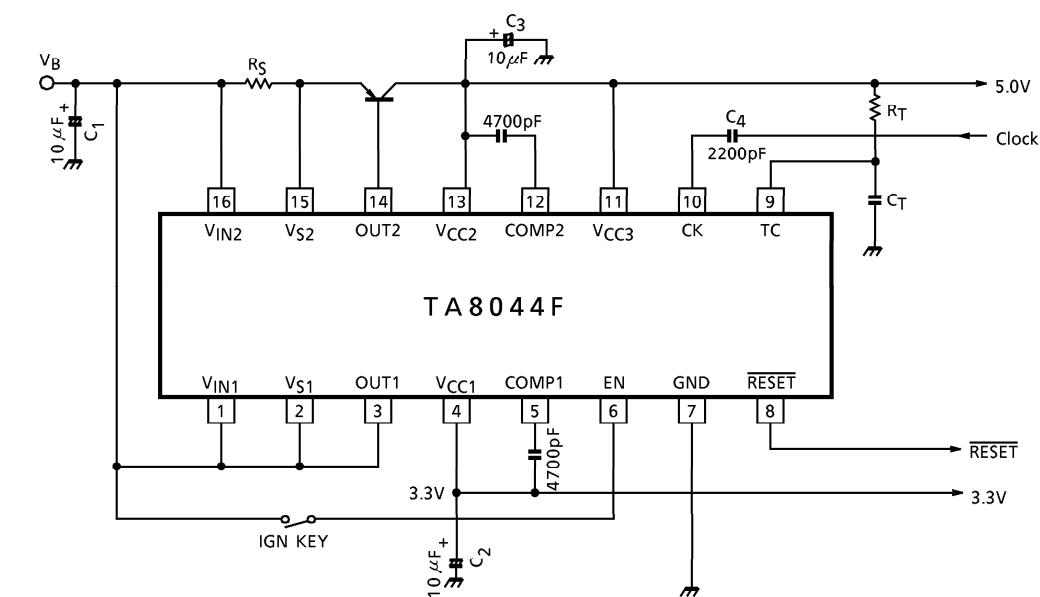

EXAMPLE OF APPLICATION CIRCUIT (2) 3.3V power supply with current boost transistor + 5V power supply, 5V / 3V series connected

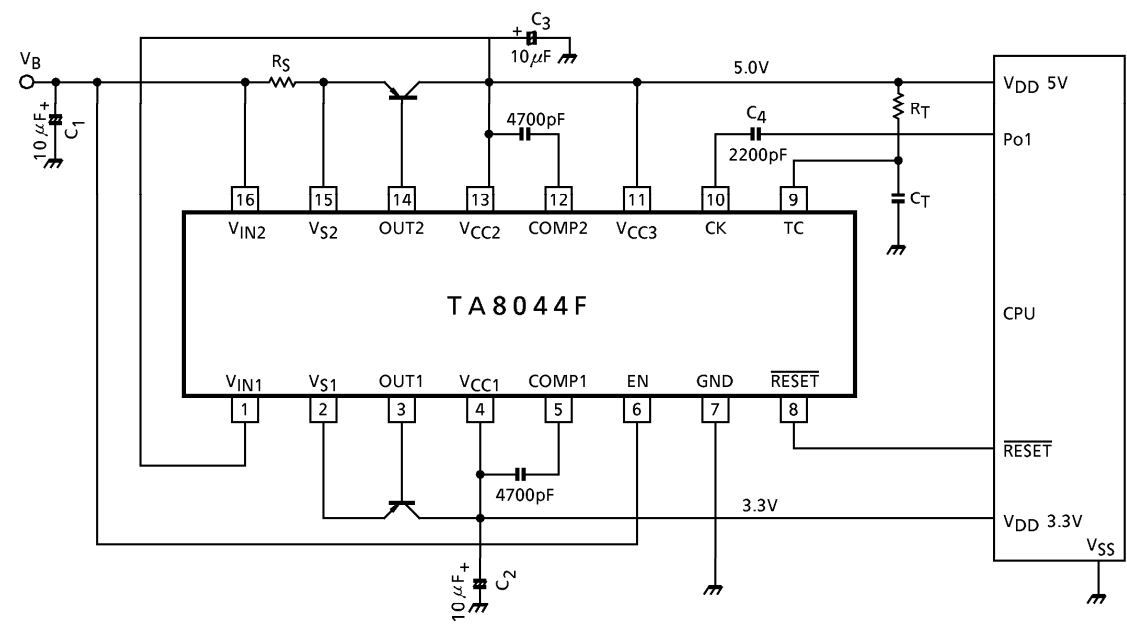

EXAMPLE OF APPLICATION CIRCUIT (3) 3.3V power supply with current boost transistor + 5V power supply, 5V/3V parallel connected

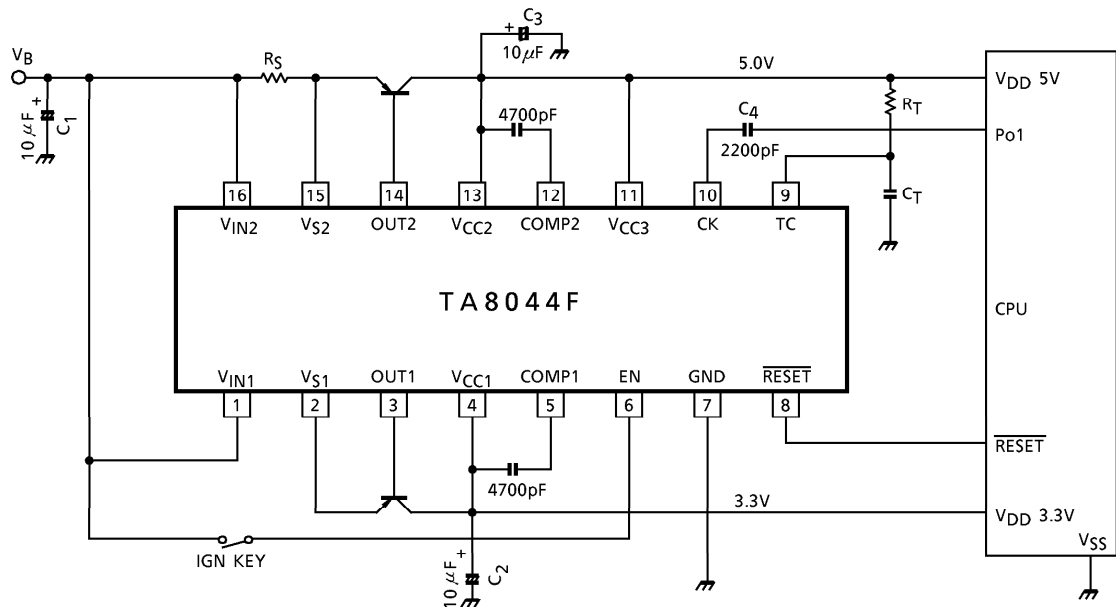


RECOMMENDED CONDITIONS


PART NAME	MIN.	MAX.	UNIT
C <sub>T</sub>	0.01	100	µF
R <sub>T</sub>	5	100	kΩ

APPLICATION CIRCUIT FOR CK INPUT

Capacitor Coupling

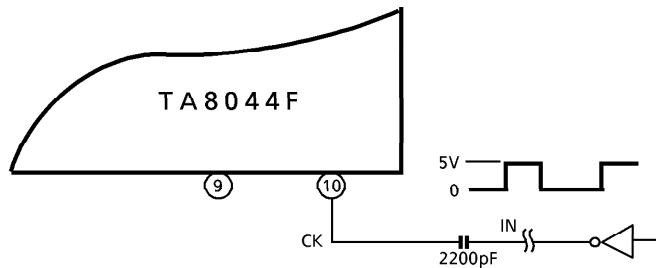

Timing Chart

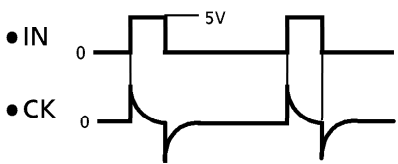


The capacitor coupling allows reset pulses to be supplied intermittently from the  $\overline{\text{RESET}}$  pin whether the input level (IN) is high or low.



OUTLINE DRAWING  
SSOP16-P-225-1.00A

Unit : mm

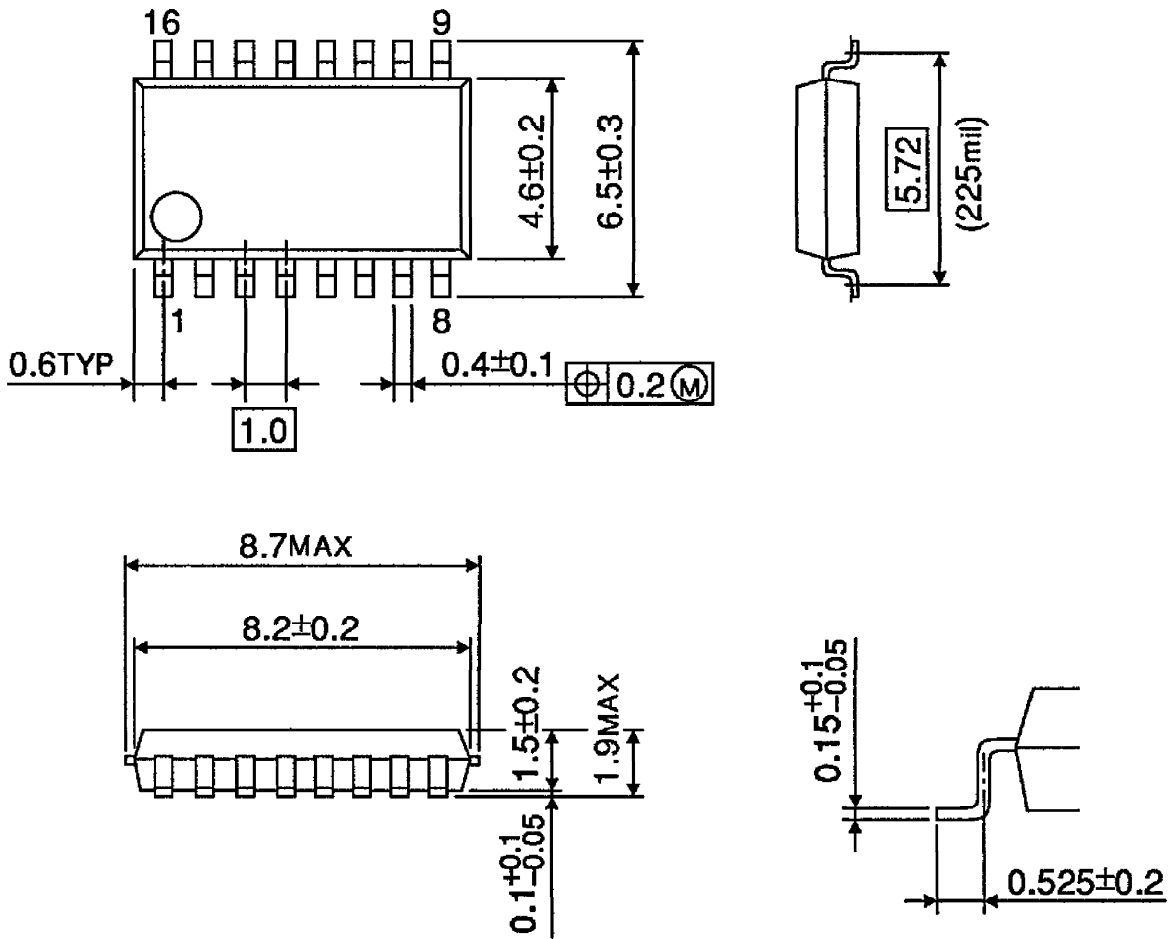

Weight : 0.14g (Typ.)