

## LM1577/LM2577 Series SIMPLE SWITCHER® Step-Up Voltage Regulator

### General Description

The LM1577/LM2577 are monolithic integrated circuits that provide all of the power and control functions for step-up (boost), flyback, and forward converter switching regulators. The device is available in three different output voltage versions: 12V, 15V, and adjustable.

Requiring a minimum number of external components, these regulators are cost effective, and simple to use. Listed in this data sheet are a family of standard inductors and flyback transformers designed to work with these switching regulators.

Included on the chip is a 3.0A NPN switch and its associated protection circuitry, consisting of current and thermal limiting, and undervoltage lockout. Other features include a 52 kHz fixed-frequency oscillator that requires no external components, a soft start mode to reduce in-rush current during start-up, and current mode control for improved rejection of input voltage and output load transients.


### Features

- Requires few external components
- NPN output switches 3.0A, can stand off 65V
- Wide input voltage range: 3.5V to 40V
- Current-mode operation for improved transient response, line regulation, and current limit
- 52 kHz internal oscillator
- Soft-start function reduces in-rush current during start-up
- Output switch protected by current limit, under-voltage lockout, and thermal shutdown

### Typical Applications

- Simple boost regulator
- Flyback and forward regulators
- Multiple-output regulator

### Typical Application

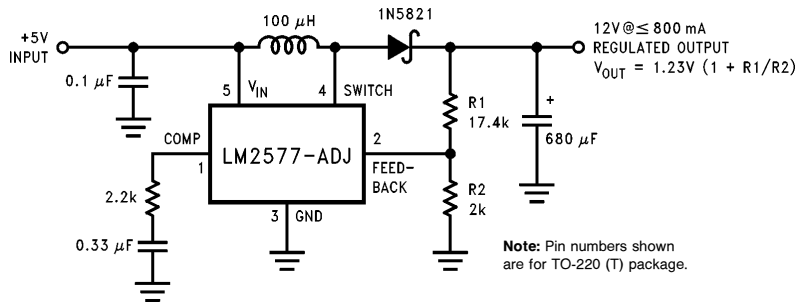

TL/H/11468-1

### Ordering Information

| Temperature Range               | Package Type           | Output Voltage |                |                 | NSC Package Drawing | Package |
|---------------------------------|------------------------|----------------|----------------|-----------------|---------------------|---------|
|                                 |                        | 12V            | 15V            | ADJ             |                     |         |
| -40°C ≤ T <sub>A</sub> ≤ +125°C | 24-Pin Surface Mount   | LM2577M-12     | LM2577M-15     | LM2577M-ADJ     | M24B                | SO      |
|                                 | 16-Pin Molded DIP      | LM2577N-12     | LM2577N-15     | LM2577N-ADJ     | N16A                | N       |
|                                 | 5-Lead Surface Mount   | LM2577S-12     | LM2577S-15     | LM2577S-ADJ     | TS5B                | TO-263  |
|                                 | 5-Straight Leads       | LM2577T-12     | LM2577T-15     | LM2577T-ADJ     | T05A                | TO-220  |
|                                 | 5-Bent Staggered Leads | LM2577T-12     | LM2577T-15     | LM2577T-ADJ     | T05D                | TO-220  |
| -55°C ≤ T <sub>A</sub> ≤ +150°C | Flow LB03              | Flow LB03      | Flow LB03      | Flow LB03       |                     |         |
|                                 | 4-Pin TO-3             | LM1577K-12/883 | LM1577K-15/883 | LM1577K-ADJ/883 | K04A                | TO-3    |

SIMPLE SWITCHER® is a registered trademark of National Semiconductor Corporation.

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

|                                                |                    |
|------------------------------------------------|--------------------|
| Supply Voltage                                 | 45V                |
| Output Switch Voltage                          | 65V                |
| Output Switch Current (Note 2)                 | 6.0A               |
| Power Dissipation                              | Internally Limited |
| Storage Temperature Range                      | −65°C to +150°C    |
| Lead Temperature (Soldering, 10 sec.)          | 260°C              |
| Maximum Junction Temperature                   | 150°C              |
| Minimum ESD Rating<br>(C = 100 pF, R = 1.5 kΩ) | 2 kV               |

## Operating Ratings

|                            |                                            |
|----------------------------|--------------------------------------------|
| Supply Voltage             | $3.5V \leq V_{IN} \leq 40V$                |
| Output Switch Voltage      | $0V \leq V_{SWITCH} \leq 60V$              |
| Output Switch Current      | $I_{SWITCH} \leq 3.0A$                     |
| Junction Temperature Range |                                            |
| LM1577                     | $-55^{\circ}C \leq T_J \leq +150^{\circ}C$ |
| LM2577                     | $-40^{\circ}C \leq T_J \leq +125^{\circ}C$ |

## Electrical Characteristics—LM1577-12, LM2577-12

Specifications with standard type face are for  $T_J = 25^{\circ}C$ , and those in **bold type face** apply over full **Operating Temperature Range**. Unless otherwise specified,  $V_{IN} = 5V$ , and  $I_{SWITCH} = 0$ .

| Symbol                                                | Parameter                               | Conditions                                                              | Typical | LM1577-12<br>Limit<br>(Notes 3, 4)         | LM2577-12<br>Limit<br>(Note 5)             | Units<br>(Limits)              |
|-------------------------------------------------------|-----------------------------------------|-------------------------------------------------------------------------|---------|--------------------------------------------|--------------------------------------------|--------------------------------|
| <b>SYSTEM PARAMETERS</b> Circuit of Figure 1 (Note 6) |                                         |                                                                         |         |                                            |                                            |                                |
| $V_{OUT}$                                             | Output Voltage                          | $V_{IN} = 5V$ to 10V<br>$I_{LOAD} = 100$ mA to 800 mA<br>(Note 3)       | 12.0    | 11.60/ <b>11.40</b><br>12.40/ <b>12.60</b> | 11.60/ <b>11.40</b><br>12.40/ <b>12.60</b> | V<br>V(min)<br>V(max)          |
| $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$                | Line Regulation                         | $V_{IN} = 3.5V$ to 10V<br>$I_{LOAD} = 300$ mA                           | 20      | 50/ <b>100</b>                             | 50/ <b>100</b>                             | mV<br>mV(max)                  |
| $\frac{\Delta V_{OUT}}{\Delta I_{LOAD}}$              | Load Regulation                         | $V_{IN} = 5V$<br>$I_{LOAD} = 100$ mA to 800 mA                          | 20      | 50/ <b>100</b>                             | 50/ <b>100</b>                             | mV<br>mV(max)                  |
| $\eta$                                                | Efficiency                              | $V_{IN} = 5V$ , $I_{LOAD} = 800$ mA                                     | 80      |                                            |                                            | %                              |
| <b>DEVICE PARAMETERS</b>                              |                                         |                                                                         |         |                                            |                                            |                                |
| $I_S$                                                 | Input Supply Current                    | $V_{FEEDBACK} = 14V$ (Switch Off)                                       | 7.5     | 10.0/ <b>14.0</b>                          | 10.0/ <b>14.0</b>                          | mA<br>mA(max)                  |
|                                                       |                                         | $I_{SWITCH} = 2.0A$<br>$V_{COMP} = 2.0V$ (Max Duty Cycle)               | 25      | 50/ <b>85</b>                              | 50/ <b>85</b>                              | mA<br>mA(max)                  |
| $V_{UV}$                                              | Input Supply Undervoltage Lockout       | $I_{SWITCH} = 100$ mA                                                   | 2.90    | 2.70/ <b>2.65</b><br>3.10/ <b>3.15</b>     | 2.70/ <b>2.65</b><br>3.10/ <b>3.15</b>     | V<br>V(min)<br>V(max)          |
| $f_O$                                                 | Oscillator Frequency                    | Measured at Switch Pin<br>$I_{SWITCH} = 100$ mA                         | 52      | 48/ <b>42</b><br>56/ <b>62</b>             | 48/ <b>42</b><br>56/ <b>62</b>             | kHz<br>kHz(min)<br>kHz(max)    |
| $V_{REF}$                                             | Output Reference Voltage                | Measured at Feedback Pin<br>$V_{IN} = 3.5V$ to 40V<br>$V_{COMP} = 1.0V$ | 12      | 11.76/ <b>11.64</b><br>12.24/ <b>12.36</b> | 11.76/ <b>11.64</b><br>12.24/ <b>12.36</b> | V<br>V(min)<br>V(max)          |
| $\frac{\Delta V_{REF}}{\Delta V_{IN}}$                | Output Reference Voltage Line Regulator | $V_{IN} = 3.5V$ to 40V                                                  | 7       |                                            |                                            | mV                             |
| $R_{FB}$                                              | Feedback Pin Input Resistance           |                                                                         | 9.7     |                                            |                                            | kΩ                             |
| $G_M$                                                 | Error Amp Transconductance              | $I_{COMP} = -30$ μA to +30 μA<br>$V_{COMP} = 1.0V$                      | 370     | 225/ <b>145</b><br>515/ <b>615</b>         | 225/ <b>145</b><br>515/ <b>615</b>         | μmho<br>μmho(min)<br>μmho(max) |
| $A_{VOL}$                                             | Error Amp Voltage Gain                  | $V_{COMP} = 1.1V$ to 1.9V<br>$R_{COMP} = 1.0$ MΩ<br>(Note 7)            | 80      | 50/ <b>25</b>                              | 50/ <b>25</b>                              | V/V<br>V/V(min)                |

## Electrical Characteristics—LM1577-12, LM2577-12 (Continued)

Specifications with standard type face are for  $T_J = 25^\circ\text{C}$ , and those in **bold type face** apply over full **Operating Temperature Range**. Unless otherwise specified,  $V_{IN} = 5\text{V}$ , and  $I_{\text{SWITCH}} = 0$ .

| Symbol                                                    | Parameter                         | Conditions                                                                                | Typical   | LM1577-12<br>Limit<br>(Notes 3, 4)                      | LM2577-12<br>Limit<br>(Note 5)                          | Units<br>(Limits)                                                       |
|-----------------------------------------------------------|-----------------------------------|-------------------------------------------------------------------------------------------|-----------|---------------------------------------------------------|---------------------------------------------------------|-------------------------------------------------------------------------|
| <b>DEVICE PARAMETERS</b> (Continued)                      |                                   |                                                                                           |           |                                                         |                                                         |                                                                         |
|                                                           | Error Amplifier<br>Output Swing   | Upper Limit<br>$V_{\text{FEEDBACK}} = 10.0\text{V}$                                       | 2.4       | 2.2/ <b>2.0</b>                                         | 2.2/ <b>2.0</b>                                         | V<br>V(min)                                                             |
|                                                           |                                   | Lower Limit<br>$V_{\text{FEEDBACK}} = 15.0\text{V}$                                       | 0.3       | 0.40/ <b>0.55</b>                                       | 0.40/ <b>0.55</b>                                       | V<br>V(max)                                                             |
|                                                           | Error Amplifier<br>Output Current | $V_{\text{FEEDBACK}} = 10.0\text{V}$ to $15.0\text{V}$<br>$V_{\text{COMP}} = 1.0\text{V}$ | $\pm 200$ | $\pm 130/\pm \mathbf{90}$<br>$\pm 300/\pm \mathbf{400}$ | $\pm 130/\pm \mathbf{90}$<br>$\pm 300/\pm \mathbf{400}$ | $\mu\text{A}$<br>$\mu\text{A}(\text{min})$<br>$\mu\text{A}(\text{max})$ |
| $I_{\text{SS}}$                                           | Soft Start Current                | $V_{\text{FEEDBACK}} = 10.0\text{V}$<br>$V_{\text{COMP}} = 0\text{V}$                     | 5.0       | 2.5/ <b>1.5</b><br>7.5/ <b>9.5</b>                      | 2.5/ <b>1.5</b><br>7.5/ <b>9.5</b>                      | $\mu\text{A}$<br>$\mu\text{A}(\text{min})$<br>$\mu\text{A}(\text{max})$ |
| D                                                         | Maximum Duty Cycle                | $V_{\text{COMP}} = 1.5\text{V}$<br>$I_{\text{SWITCH}} = 100\text{ mA}$                    | 95        | 93/ <b>90</b>                                           | 93/ <b>90</b>                                           | %<br>%(min)                                                             |
| $\frac{\Delta I_{\text{SWITCH}}}{\Delta V_{\text{COMP}}}$ | Switch<br>Transconductance        |                                                                                           | 12.5      |                                                         |                                                         | A/V                                                                     |
| $I_{\text{L}}$                                            | Switch Leakage<br>Current         | $V_{\text{SWITCH}} = 65\text{V}$<br>$V_{\text{FEEDBACK}} = 15\text{V}$ (Switch Off)       | 10        | 300/ <b>600</b>                                         | 300/ <b>600</b>                                         | $\mu\text{A}$<br>$\mu\text{A}(\text{max})$                              |
| $V_{\text{SAT}}$                                          | Switch Saturation<br>Voltage      | $I_{\text{SWITCH}} = 2.0\text{A}$<br>$V_{\text{COMP}} = 2.0\text{V}$ (Max Duty Cycle)     | 0.5       | 0.7/ <b>0.9</b>                                         | 0.7/ <b>0.9</b>                                         | V<br>V(max)                                                             |
|                                                           | NPN Switch<br>Current Limit       |                                                                                           | 4.5       | 3.7/ <b>3.0</b><br>5.3/ <b>6.0</b>                      | 3.7/ <b>3.0</b><br>5.3/ <b>6.0</b>                      | A<br>A(min)<br>A(max)                                                   |

## Electrical Characteristics—LM1577-15, LM2577-15

Specifications with standard type face are for  $T_J = 25^\circ\text{C}$ , and those in **bold type face** apply over full **Operating Temperature Range**. Unless otherwise specified,  $V_{IN} = 5\text{V}$ , and  $I_{SWITCH} = 0$ .

| Symbol                                                       | Parameter                                 | Conditions                                                                                      | Typical | LM1577-15<br>Limit<br>(Notes 3, 4)         | LM2577-15<br>Limit<br>(Note 5)             | Units<br>(Limits)                                                             |
|--------------------------------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------|---------|--------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------|
| <b>SYSTEM PARAMETERS</b> Circuit of <i>Figure 2</i> (Note 6) |                                           |                                                                                                 |         |                                            |                                            |                                                                               |
| $V_{OUT}$                                                    | Output Voltage                            | $V_{IN} = 5\text{V to } 12\text{V}$<br>$I_{LOAD} = 100\text{ mA to } 600\text{ mA}$<br>(Note 3) | 15.0    | 14.50/ <b>14.25</b><br>15.50/ <b>15.75</b> | 14.50/ <b>14.25</b><br>15.50/ <b>15.75</b> | V<br>V(min)<br>V(max)                                                         |
| $\frac{\Delta V_{OUT}}{V_{IN}}$                              | Line Regulation                           | $V_{IN} = 3.5\text{V to } 12\text{V}$<br>$I_{LOAD} = 300\text{ mA}$                             | 20      | 50/ <b>100</b>                             | 50/ <b>100</b>                             | mV<br>mV(max)                                                                 |
| $\frac{\Delta V_{OUT}}{\Delta I_{LOAD}}$                     | Load Regulation                           | $V_{IN} = 5\text{V}$<br>$I_{LOAD} = 100\text{ mA to } 600\text{ mA}$                            | 20      | 50/ <b>100</b>                             | 50/ <b>100</b>                             | mV<br>mV(max)                                                                 |
| $\eta$                                                       | Efficiency                                | $V_{IN} = 5\text{V}$ , $I_{LOAD} = 600\text{ mA}$                                               | 80      |                                            |                                            | %                                                                             |
| <b>DEVICE PARAMETERS</b>                                     |                                           |                                                                                                 |         |                                            |                                            |                                                                               |
| $I_S$                                                        | Input Supply Current                      | $V_{FEEDBACK} = 18.0\text{V}$<br>(Switch Off)                                                   | 7.5     | 10.0/ <b>14.0</b>                          | 10.0/ <b>14.0</b>                          | mA<br>mA(max)                                                                 |
|                                                              |                                           | $I_{SWITCH} = 2.0\text{A}$<br>$V_{COMP} = 2.0\text{V}$<br>(Max Duty Cycle)                      | 25      | 50/ <b>85</b>                              | 50/ <b>85</b>                              | mA<br>mA(max)                                                                 |
| $V_{UV}$                                                     | Input Supply Undervoltage Lockout         | $I_{SWITCH} = 100\text{ mA}$                                                                    | 2.90    | 2.70/ <b>2.65</b><br>3.10/ <b>3.15</b>     | 2.70/ <b>2.65</b><br>3.10/ <b>3.15</b>     | V<br>V(min)<br>V(max)                                                         |
| $f_O$                                                        | Oscillator Frequency                      | Measured at Switch Pin<br>$I_{SWITCH} = 100\text{ mA}$                                          | 52      | 48/ <b>42</b><br>56/ <b>62</b>             | 48/ <b>42</b><br>56/ <b>62</b>             | kHz<br>kHz(min)<br>kHz(max)                                                   |
| $V_{REF}$                                                    | Output Reference Voltage                  | Measured at Feedback Pin<br>$V_{IN} = 3.5\text{V to } 40\text{V}$<br>$V_{COMP} = 1.0\text{V}$   | 15      | 14.70/ <b>14.55</b><br>15.30/ <b>15.45</b> | 14.70/ <b>14.55</b><br>15.30/ <b>15.45</b> | V<br>V(min)<br>V(max)                                                         |
| $\frac{\Delta V_{REF}}{\Delta V_{IN}}$                       | Output Reference Voltage Line Regulation  | $V_{IN} = 3.5\text{V to } 40\text{V}$                                                           | 10      |                                            |                                            | mV                                                                            |
| $R_{FB}$                                                     | Feedback Pin Input Voltage Line Regulator |                                                                                                 | 12.2    |                                            |                                            | k $\Omega$                                                                    |
| $G_M$                                                        | Error Amp Transconductance                | $I_{COMP} = -30\text{ }\mu\text{A to } +30\text{ }\mu\text{A}$<br>$V_{COMP} = 1.0\text{V}$      | 300     | 170/ <b>110</b><br>420/ <b>500</b>         | 170/ <b>110</b><br>420/ <b>500</b>         | $\mu\text{mho}$<br>$\mu\text{mho}(\text{min})$<br>$\mu\text{mho}(\text{max})$ |
| $A_{VOL}$                                                    | Error Amp Voltage Gain                    | $V_{COMP} = 1.1\text{V to } 1.9\text{V}$<br>$R_{COMP} = 1.0\text{ M}\Omega$<br>(Note 7)         | 65      | 40/ <b>20</b>                              | 40/ <b>20</b>                              | V/V<br>V/V(min)                                                               |

## Electrical Characteristics—LM1577-15, LM2577-15 (Continued)

Specifications with standard type face are for  $T_J = 25^\circ\text{C}$ , and those in **bold type face** apply over full **Operating Temperature Range**. Unless otherwise specified,  $V_{IN} = 5\text{V}$ , and  $I_{\text{SWITCH}} = 0$ .

| Symbol                                                    | Parameter                       | Conditions                                                                                | Typical   | LM1577-15<br>Limit<br>(Notes 3, 4)                          | LM2577-15<br>Limit<br>(Note 5)                              | Units<br>(Limits)                                                       |
|-----------------------------------------------------------|---------------------------------|-------------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>DEVICE PARAMETERS</b> (Continued)                      |                                 |                                                                                           |           |                                                             |                                                             |                                                                         |
|                                                           | Error Amplifier<br>Output Swing | Upper Limit<br>$V_{\text{FEEDBACK}} = 12.0\text{V}$                                       | 2.4       | 2.2/ <b>2.0</b>                                             | 2.2/ <b>2.0</b>                                             | V<br>V(min)                                                             |
|                                                           |                                 | Lower Limit<br>$V_{\text{FEEDBACK}} = 18.0\text{V}$                                       | 0.3       | 0.4/ <b>0.55</b>                                            | 0.40/ <b>0.55</b>                                           | V<br>V(max)                                                             |
|                                                           | Error Amp<br>Output Current     | $V_{\text{FEEDBACK}} = 12.0\text{V}$ to $18.0\text{V}$<br>$V_{\text{COMP}} = 1.0\text{V}$ | $\pm 200$ | $\pm 130 / \pm \mathbf{90}$<br>$\pm 300 / \pm \mathbf{400}$ | $\pm 130 / \pm \mathbf{90}$<br>$\pm 300 / \pm \mathbf{400}$ | $\mu\text{A}$<br>$\mu\text{A}(\text{min})$<br>$\mu\text{A}(\text{max})$ |
| $I_{\text{SS}}$                                           | Soft Start Current              | $V_{\text{FEEDBACK}} = 12.0\text{V}$<br>$V_{\text{COMP}} = 0\text{V}$                     | 5.0       | 2.5/ <b>1.5</b><br>7.5/ <b>9.5</b>                          | 2.5/ <b>1.5</b><br>7.5/ <b>9.5</b>                          | $\mu\text{A}$<br>$\mu\text{A}(\text{min})$<br>$\mu\text{A}(\text{max})$ |
| D                                                         | Maximum Duty<br>Cycle           | $V_{\text{COMP}} = 1.5\text{V}$<br>$I_{\text{SWITCH}} = 100\text{ mA}$                    | 95        | 93/ <b>90</b>                                               | 93/ <b>90</b>                                               | %<br>%(min)                                                             |
| $\frac{\Delta I_{\text{SWITCH}}}{\Delta V_{\text{COMP}}}$ | Switch<br>Transconductance      |                                                                                           | 12.5      |                                                             |                                                             | A/V                                                                     |
| $I_L$                                                     | Switch Leakage<br>Current       | $V_{\text{SWITCH}} = 65\text{V}$<br>$V_{\text{FEEDBACK}} = 18.0\text{V}$<br>(Switch Off)  | 10        | 300/ <b>600</b>                                             | 300/ <b>600</b>                                             | $\mu\text{A}$<br>$\mu\text{A}(\text{max})$                              |
| $V_{\text{SAT}}$                                          | Switch Saturation<br>Voltage    | $I_{\text{SWITCH}} = 2.0\text{A}$<br>$V_{\text{COMP}} = 2.0\text{V}$<br>(Max Duty Cycle)  | 0.5       | 0.7/ <b>0.9</b>                                             | 0.7/ <b>0.9</b>                                             | V<br>V(max)                                                             |
|                                                           | NPN Switch<br>Current Limit     | $V_{\text{COMP}} = 2.0\text{V}$                                                           | 4.3       | 3.7/ <b>3.0</b><br>5.3/ <b>6.0</b>                          | 3.7/ <b>3.0</b><br>5.3/ <b>6.0</b>                          | A<br>A(min)<br>A(max)                                                   |

## Electrical Characteristics—LM1577-ADJ, LM2577-ADJ

Specifications with standard type face are for  $T_J = 25^\circ\text{C}$ , and those in **bold type face** apply over full **Operating Temperature Range**. Unless otherwise specified,  $V_{IN} = 5\text{V}$ ,  $V_{FEEDBACK} = V_{REF}$ , and  $I_{SWITCH} = 0$ .

| Symbol                                                       | Parameter                         | Conditions                                                                                    | Typical | LM1577-ADJ<br>Limit<br>(Notes 3, 4)        | LM2577-ADJ<br>Limit<br>(Note 5)            | Units<br>(Limits)                                                             |
|--------------------------------------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------|---------|--------------------------------------------|--------------------------------------------|-------------------------------------------------------------------------------|
| <b>SYSTEM PARAMETERS</b> Circuit of <i>Figure 3</i> (Note 6) |                                   |                                                                                               |         |                                            |                                            |                                                                               |
| $V_{OUT}$                                                    | Output Voltage                    | $V_{IN} = 5\text{V to }10\text{V}$<br>$I_{LOAD} = 100\text{ mA to }800\text{ mA}$<br>(Note 3) | 12.0    | 11.60/ <b>11.40</b><br>12.40/ <b>12.60</b> | 11.60/ <b>11.40</b><br>12.40/ <b>12.60</b> | V<br>V(min)<br>V(max)                                                         |
| $\Delta V_{OUT}/\Delta V_{IN}$                               | Line Regulation                   | $V_{IN} = 3.5\text{V to }10\text{V}$<br>$I_{LOAD} = 300\text{ mA}$                            | 20      | 50/ <b>100</b>                             | 50/ <b>100</b>                             | mV<br>mV(max)                                                                 |
| $\Delta V_{OUT}/\Delta I_{LOAD}$                             | Load Regulation                   | $V_{IN} = 5\text{V}$<br>$I_{LOAD} = 100\text{ mA to }800\text{ mA}$                           | 20      | 50/ <b>100</b>                             | 50/ <b>100</b>                             | mV<br>mV(max)                                                                 |
| $\eta$                                                       | Efficiency                        | $V_{IN} = 5\text{V}$ , $I_{LOAD} = 800\text{ mA}$                                             | 80      |                                            |                                            | %                                                                             |
| <b>DEVICE PARAMETERS</b>                                     |                                   |                                                                                               |         |                                            |                                            |                                                                               |
| $I_S$                                                        | Input Supply Current              | $V_{FEEDBACK} = 1.5\text{V}$ (Switch Off)                                                     | 7.5     | 10.0/ <b>14.0</b>                          | 10.0/ <b>14.0</b>                          | mA<br>mA(max)                                                                 |
|                                                              |                                   | $I_{SWITCH} = 2.0\text{A}$<br>$V_{COMP} = 2.0\text{V}$ (Max Duty Cycle)                       | 25      | 50/ <b>85</b>                              | 50/ <b>85</b>                              | mA<br>mA(max)                                                                 |
| $V_{UV}$                                                     | Input Supply Undervoltage Lockout | $I_{SWITCH} = 100\text{ mA}$                                                                  | 2.90    | 2.70/ <b>2.65</b><br>3.10/ <b>3.15</b>     | 2.70/ <b>2.65</b><br>3.10/ <b>3.15</b>     | V<br>V(min)<br>V(max)                                                         |
| $f_O$                                                        | Oscillator Frequency              | Measured at Switch Pin<br>$I_{SWITCH} = 100\text{ mA}$                                        | 52      | 48/ <b>42</b><br>56/ <b>62</b>             | 48/ <b>42</b><br>56/ <b>62</b>             | kHz<br>kHz(min)<br>kHz(max)                                                   |
| $V_{REF}$                                                    | Reference Voltage                 | Measured at Feedback Pin<br>$V_{IN} = 3.5\text{V to }40\text{V}$<br>$V_{COMP} = 1.0\text{V}$  | 1.230   | 1.214/ <b>1.206</b><br>1.246/ <b>1.254</b> | 1.214/ <b>1.206</b><br>1.246/ <b>1.254</b> | V<br>V(min)<br>V(max)                                                         |
| $\Delta V_{REF}/\Delta V_{IN}$                               | Reference Voltage Line Regulation | $V_{IN} = 3.5\text{V to }40\text{V}$                                                          | 0.5     |                                            |                                            | mV                                                                            |
| $I_B$                                                        | Error Amp Input Bias Current      | $V_{COMP} = 1.0\text{V}$                                                                      | 100     | 300/ <b>800</b>                            | 300/ <b>800</b>                            | nA<br>nA(max)                                                                 |
| $G_M$                                                        | Error Amp Transconductance        | $I_{COMP} = -30\text{ }\mu\text{A to }+30\text{ }\mu\text{A}$<br>$V_{COMP} = 1.0\text{V}$     | 3700    | 2400/ <b>1600</b><br>4800/ <b>5800</b>     | 2400/ <b>1600</b><br>4800/ <b>5800</b>     | $\mu\text{mho}$<br>$\mu\text{mho}(\text{min})$<br>$\mu\text{mho}(\text{max})$ |
| $A_{VOL}$                                                    | Error Amp Voltage Gain            | $V_{COMP} = 1.1\text{V to }1.9\text{V}$<br>$R_{COMP} = 1.0\text{ M}\Omega$ (Note 7)           | 800     | 500/ <b>250</b>                            | 500/ <b>250</b>                            | V/V<br>V/V(min)                                                               |
|                                                              | Error Amplifier Output Swing      | Upper Limit<br>$V_{FEEDBACK} = 1.0\text{V}$                                                   | 2.4     | 2.2/ <b>2.0</b>                            | 2.2/ <b>2.0</b>                            | V<br>V(min)                                                                   |
|                                                              |                                   | Lower Limit<br>$V_{FEEDBACK} = 1.5\text{V}$                                                   | 0.3     | 0.40/ <b>0.55</b>                          | 0.40/ <b>0.55</b>                          | V<br>V(max)                                                                   |

## Electrical Characteristics—LM1577-ADJ, LM2577-ADJ (Continued)

Specifications with standard type face are for  $T_J = 25^\circ\text{C}$ , and those in **bold type face** apply over full **Operating Temperature Range**. Unless otherwise specified,  $V_{IN} = 5\text{V}$ ,  $V_{FEEDBACK} = V_{REF}$ , and  $I_{SWITCH} = 0$ .

| Symbol                                | Parameter                    | Conditions                                                              | Typical   | LM1577-ADJ<br>Limit<br>(Notes 3, 4)                         | LM2577-ADJ<br>Limit<br>(Note 5)                             | Units<br>(Limits)                                                       |
|---------------------------------------|------------------------------|-------------------------------------------------------------------------|-----------|-------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>DEVICE PARAMETERS (Continued)</b>  |                              |                                                                         |           |                                                             |                                                             |                                                                         |
|                                       | Error Amp<br>Output Current  | $V_{FEEDBACK} = 1.0\text{V to }1.5\text{V}$<br>$V_{COMP} = 1.0\text{V}$ | $\pm 200$ | $\pm 130 / \pm \mathbf{90}$<br>$\pm 300 / \pm \mathbf{400}$ | $\pm 130 / \pm \mathbf{90}$<br>$\pm 300 / \pm \mathbf{400}$ | $\mu\text{A}$<br>$\mu\text{A}(\text{min})$<br>$\mu\text{A}(\text{max})$ |
| $I_{SS}$                              | Soft Start Current           | $V_{FEEDBACK} = 1.0\text{V}$<br>$V_{COMP} = 0\text{V}$                  | 5.0       | 2.5/ <b>1.5</b><br>7.5/ <b>9.5</b>                          | 2.5/ <b>1.5</b><br>7.5/ <b>9.5</b>                          | $\mu\text{A}$<br>$\mu\text{A}(\text{min})$<br>$\mu\text{A}(\text{max})$ |
| D                                     | Maximum Duty Cycle           | $V_{COMP} = 1.5\text{V}$<br>$I_{SWITCH} = 100\text{ mA}$                | 95        | 93/ <b>90</b>                                               | 93/ <b>90</b>                                               | %<br>%(min)                                                             |
| $\Delta I_{SWITCH} / \Delta V_{COMP}$ | Switch<br>Transconductance   |                                                                         | 12.5      |                                                             |                                                             | A/V                                                                     |
| $I_L$                                 | Switch Leakage<br>Current    | $V_{SWITCH} = 65\text{V}$<br>$V_{FEEDBACK} = 1.5\text{V (Switch Off)}$  | 10        | 300/ <b>600</b>                                             | 300/ <b>600</b>                                             | $\mu\text{A}$<br>$\mu\text{A}(\text{max})$                              |
| $V_{SAT}$                             | Switch Saturation<br>Voltage | $I_{SWITCH} = 2.0\text{A}$<br>$V_{COMP} = 2.0\text{V (Max Duty Cycle)}$ | 0.5       | 0.7/ <b>0.9</b>                                             | 0.7/ <b>0.9</b>                                             | V<br>V(max)                                                             |
|                                       | NPN Switch<br>Current Limit  | $V_{COMP} = 2.0\text{V}$                                                | 4.3       | 3.7/ <b>3.0</b><br>5.3/ <b>6.0</b>                          | 3.7/ <b>3.0</b><br>5.3/ <b>6.0</b>                          | A<br>A(min)<br>A(max)                                                   |

## THERMAL PARAMETERS (All Versions)

|               |                    |                                            |     |  |  |                    |
|---------------|--------------------|--------------------------------------------|-----|--|--|--------------------|
| $\theta_{JA}$ | Thermal Resistance | K Package, Junction to Ambient             | 35  |  |  | $^\circ\text{C/W}$ |
| $\theta_{JC}$ |                    | K Package, Junction to Case                | 1.5 |  |  |                    |
| $\theta_{JA}$ |                    | T Package, Junction to Ambient             | 65  |  |  |                    |
| $\theta_{JC}$ |                    | T Package, Junction to Case                | 2   |  |  |                    |
| $\theta_{JA}$ |                    | N Package, Junction to<br>Ambient (Note 8) | 85  |  |  |                    |
| $\theta_{JA}$ |                    | M Package, Junction<br>to Ambient (Note 8) | 100 |  |  |                    |
| $\theta_{JA}$ |                    | S Package, Junction to<br>Ambient (Note 9) | 37  |  |  |                    |

**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating ratings indicate conditions the device is intended to be functional, but device parameter specifications may not be guaranteed under these conditions. For guaranteed specifications and test conditions, see the Electrical Characteristics.

**Note 2:** Due to timing considerations of the LM1577/LM2577 current limit circuit, output current cannot be internally limited when the LM1577/LM2577 is used as a step-up regulator. To prevent damage to the switch, its current must be externally limited to 6.0A. However, output current is internally limited when the LM1577/LM2577 is used as a flyback or forward converter regulator in accordance to the Application Hints.

**Note 3:** All limits guaranteed at room temperature (standard type face) and at temperature extremes (**boldface type**). All limits are used to calculate Outgoing Quality Level, and are 100% production tested.

**Note 4:** A military RETS electrical test specification is available on request. At the time of printing, the LM1577K-12/883, LM1577K-15/883, and LM1577K-ADJ/883 RETS specifications complied fully with the **boldface** limits in these columns. The LM1577K-12/883, LM1577K-15/883, and LM1577K-ADJ/883 may also be procured to Standard Military Drawing specifications.

**Note 5:** All limits guaranteed at room temperature (standard type face) and at temperature extremes (**boldface type**). All room temperature limits are 100% production tested. All limits at temperature extremes are guaranteed via correlation using standard Statistical Quality Control (SQC) methods.













**Note 6:** External components such as the diode, inductor, input and output capacitors can affect switching regulator performance. When the LM1577/LM2577 is used as shown in the Test Circuit, system performance will be as specified by the system parameters.

**Note 7:** A 1.0 M $\Omega$  resistor is connected to the compensation pin (which is the error amplifier's output) to ensure accuracy in measuring  $A_{VOL}$ . In actual applications, this pin's load resistance should be  $\geq 10\text{ M}\Omega$ , resulting in  $A_{VOL}$  that is typically twice the guaranteed minimum limit.

**Note 8:** Junction to ambient thermal resistance with approximately 1 square inch of pc board copper surrounding the leads. Additional copper area will lower thermal resistance further. See thermal model in "Switchers Made Simple" software.









**Note 9:** If the TO-263 package is used, the thermal resistance can be reduced by increasing the PC board copper area thermally connected to the package. Using 0.5 square inches of copper area,  $\theta_{JA}$  is 50 $^\circ\text{C/W}$ ; with 1 square inch of copper area,  $\theta_{JA}$  is 37 $^\circ\text{C/W}$ ; and with 1.6 or more square inches of copper area,  $\theta_{JA}$  is 32 $^\circ\text{C/W}$ .

## Typical Performance Characteristics




TL/H/11468-2

## Typical Performance Characteristics (Continued)



TL/H/11468-3


### Maximum Power Dissipation (TO-263) (See Note 9)

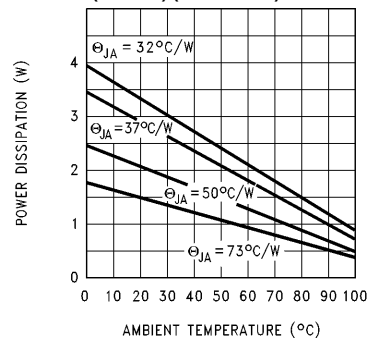

TL/H/11468-31

## Connection Diagrams

**Straight Leads  
5-Lead TO-220 (T)**




TL/H/11468-4

**Top View**

Order Number LM2577T-12, LM2577T-15,  
or LM2577T-ADJ  
See NS Package Number T05A

**Bent, Staggered Leads  
5-Lead TO-220 (T)**




TL/H/11468-5

**Top View**

Order Number LM2577T-12 Flow LB03, LM2577T-15  
Flow LB03, or LM2577T-ADJ Flow LB03  
See NS Package Number T05D

**16-Lead DIP (N)**




\*No internal  
Connection  
TL/H/11468-6

**Top View**

Order Number LM2577N-12, LM2577N-15,  
or LM2577N-ADJ  
See NS Package Number N16A

**24-Lead Surface Mount (M)**

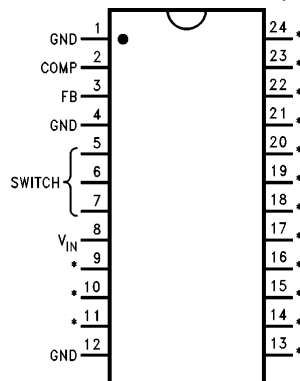


\*No internal  
Connection  
TL/H/11468-7

**Top View**


Order Number LM2577M-12, LM2577M-15,  
or LM2577M-ADJ  
See NS Package Number M24B

**TO-263 (S)  
5-Lead Surface-Mount Package**



TL/H/11468-32

**Top View**




TL/H/11468-33

**Side View**

Order Number LM2577S-12, LM2577S-15,  
or LM2577S-ADJ  
See NS Package Number TS5B

**4-Lead TO-3 (K)**



TL/H/11468-8

**Bottom View**

Order Number LM1577K-12/883, LM1577K-15/883, or  
LM1577K-ADJ/883  
See NS Package Number K04A

## Test Circuits

### LM1577-12, LM2577-12

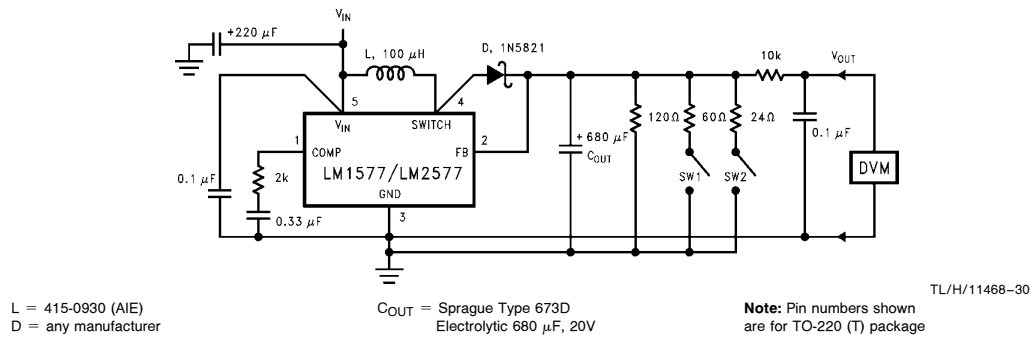


FIGURE 1. Circuit Used to Specify System Parameters for 12V Versions

### LM1577-15, LM2577-15

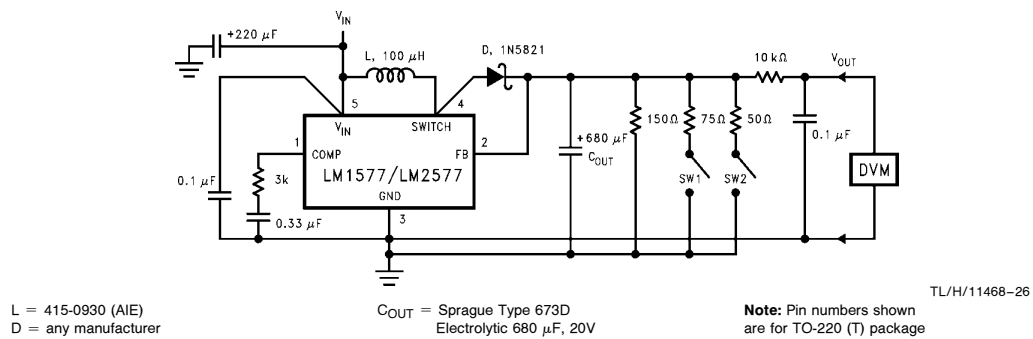


FIGURE 2. Circuit Used to Specify System Parameters for 15V Versions

### LM1577-ADJ, LM2577-ADJ

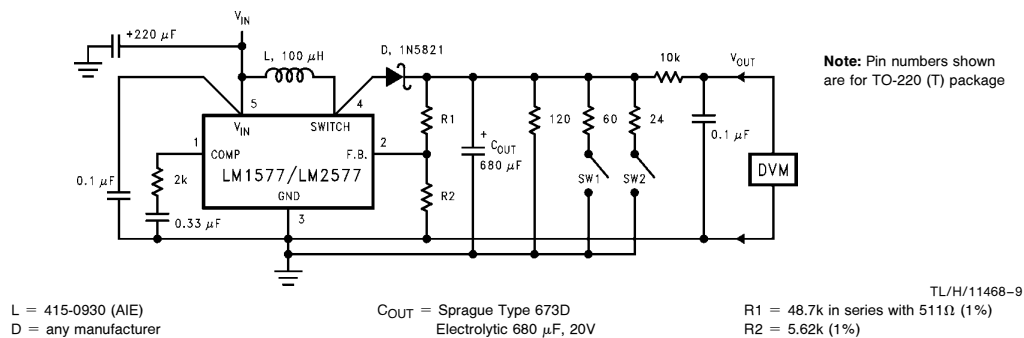


FIGURE 3. Circuit Used to Specify System Parameters for ADJ Versions

## Application Hints

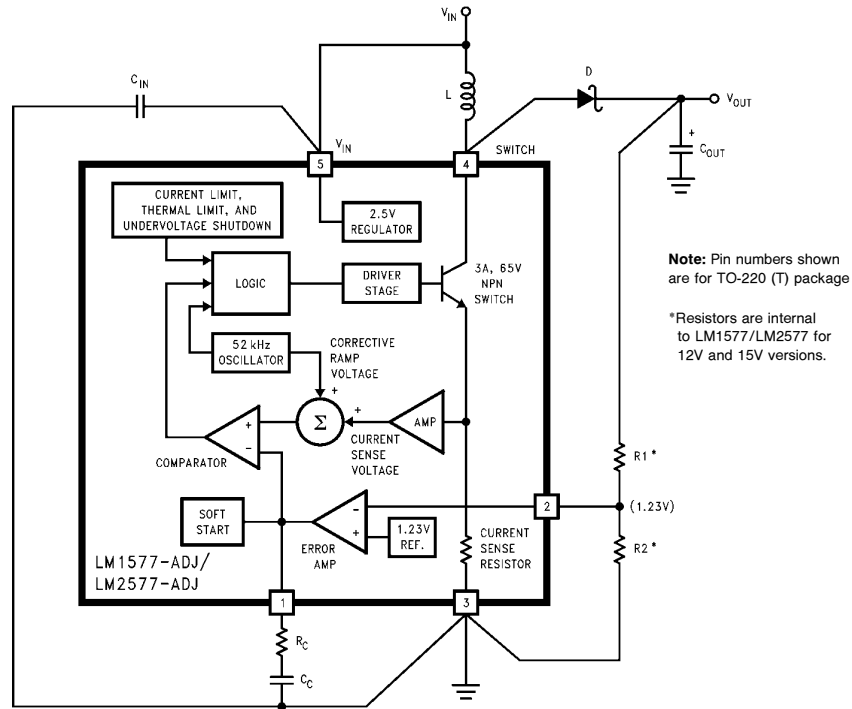


FIGURE 4. LM1577/LM2577 Block Diagram and Boost Regulator Application

TL/H/11468-10

### STEP-UP (BOOST) REGULATOR

Figure 4 shows the LM1577-ADJ/LM2577-ADJ used as a Step-Up Regulator. This is a switching regulator used for producing an output voltage greater than the input supply voltage. The LM1577-12/LM2577-12 and LM1577-15/LM2577-15 can also be used for step-up regulators with 12V or 15V outputs (respectively), by tying the feedback pin directly to the regulator output.


A basic explanation of how it works is as follows. The LM1577/LM2577 turns its output switch on and off at a frequency of 52 kHz, and this creates energy in the inductor (L). When the NPN switch turns on, the inductor current charges up at a rate of  $V_{IN}/L$ , storing current in the inductor.

When the switch turns off, the lower end of the inductor flies above  $V_{IN}$ , discharging its current through diode (D) into the output capacitor ( $C_{OUT}$ ) at a rate of  $(V_{OUT} - V_{IN})/L$ . Thus, energy stored in the inductor during the switch on time is transferred to the output during the switch off time. The output voltage is controlled by the amount of energy transferred which, in turn, is controlled by modulating the peak inductor current. This is done by feeding back a portion of the output voltage to the error amp, which amplifies the difference between the feedback voltage and a 1.230V reference. The error amp output voltage is compared to a voltage proportional to the switch current (i.e., inductor current during the switch on time).

## Application Hints (Continued)

The comparator terminates the switch on time when the two voltages are equal, thereby controlling the peak switch current to maintain a constant output voltage.

Voltage and current waveforms for this circuit are shown in Figure 5, and formulas for calculating them are given in Figure 6.

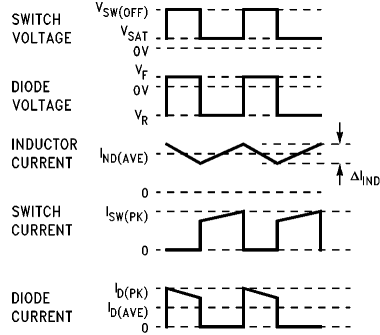

TL/H/11468-11

FIGURE 5. Step-Up Regulator Waveforms

| Duty Cycle                       | D                | $\frac{V_{OUT} + V_F - V_{IN}}{V_{OUT} + V_F - V_{SAT}} \approx \frac{V_{OUT} - V_{IN}}{V_{OUT}}$ |
|----------------------------------|------------------|---------------------------------------------------------------------------------------------------|
| Average Inductor Current         | $I_{IND(AVE)}$   | $\frac{I_{LOAD}}{1 - D}$                                                                          |
| Inductor Current Ripple          | $\Delta I_{IND}$ | $\frac{V_{IN} - V_{SAT}}{L} \frac{D}{52,000}$                                                     |
| Peak Inductor Current            | $I_{IND(PK)}$    | $\frac{I_{LOAD(max)}}{1 - D_{(max)}} + \frac{\Delta I_{IND}}{2}$                                  |
| Peak Switch Current              | $I_{SW(PK)}$     | $\frac{I_{LOAD(max)}}{1 - D_{(max)}} + \frac{\Delta I_{IND}}{2}$                                  |
| Switch Voltage When Off          | $V_{SW(OFF)}$    | $V_{OUT} + V_F$                                                                                   |
| Diode Reverse Voltage            | $V_R$            | $V_{OUT} - V_{SAT}$                                                                               |
| Average Diode Current            | $I_{D(AVE)}$     | $I_{LOAD}$                                                                                        |
| Peak Diode Current               | $I_{D(PK)}$      | $\frac{I_{LOAD}}{1 - D_{(max)}} + \frac{\Delta I_{IND}}{2}$                                       |
| Power Dissipation of LM1577/2577 | $P_D$            | $0.25 \Omega \left( \frac{I_{LOAD}}{1 - D} \right)^2 D + \frac{I_{LOAD} D V_{IN}}{50 (1 - D)}$    |

$V_F$  = Forward Biased Diode Voltage

$I_{LOAD}$  = Output Load Current

FIGURE 6. Step-Up Regulator Formulas

### STEP-UP REGULATOR DESIGN PROCEDURE

The following design procedure can be used to select the appropriate external components for the circuit in Figure 4, based on these system requirements.

#### Given:

$V_{IN(min)}$  = Minimum input supply voltage

$V_{OUT}$  = Regulated output voltage

$I_{LOAD(max)}$  = Maximum output load current

Before proceeding any further, determine if the LM1577/LM2577 can provide these values of  $V_{OUT}$  and  $I_{LOAD(max)}$  when operating with the minimum value of  $V_{IN}$ . The upper limits for  $V_{OUT}$  and  $I_{LOAD(max)}$  are given by the following equations.

$$\begin{aligned} V_{OUT} &\leq 60V \\ \text{and } V_{OUT} &\leq 10 \times V_{IN(min)} \\ I_{LOAD(max)} &\leq \frac{2.1A \times V_{IN(min)}}{V_{OUT}} \end{aligned}$$

These limits must be greater than or equal to the values specified in this application.

#### 1. Inductor Selection (L)

##### A. Voltage Options:

##### 1. For 12V or 15V output

From Figure 7a (for 12V output) or Figure 7b (for 15V output), identify inductor code for region indicated by  $V_{IN(min)}$  and  $I_{LOAD(max)}$ . The shaded region indicates conditions for which the LM1577/LM2577 output switch would be operating beyond its switch current rating. The minimum operating voltage for the LM1577/LM2577 is 3.5V.

From here, **proceed to step C**.

##### 2. For Adjustable version

##### Preliminary calculations:

The inductor selection is based on the calculation of the following three parameters:

$D_{(max)}$ , the maximum switch duty cycle ( $0 \leq D \leq 0.9$ ):

$$D_{(max)} = \frac{V_{OUT} + V_F - V_{IN(min)}}{V_{OUT} + V_F - 0.6V}$$

where  $V_F$  = 0.5V for Schottky diodes and 0.8V for fast recovery diodes (typically);

$E \bullet T$ , the product of volts  $\times$  time that charges the inductor:

$$E \bullet T = \frac{D_{(max)} (V_{IN(min)} - 0.6V) 10^6}{52,000 \text{ Hz}} \quad (V \bullet \mu s)$$

$I_{IND,DC}$ , the average inductor current under full load;

$$I_{IND,DC} = \frac{1.05 \times I_{LOAD(max)}}{1 - D_{(max)}}$$

##### B. Identify Inductor Value:

1. From Figure 7c, identify the inductor code for the region indicated by the intersection of  $E \bullet T$  and  $I_{IND,DC}$ . This code gives the inductor value in microhenries. The L or H prefix signifies whether the inductor is rated for a maximum  $E \bullet T$  of 90  $V \bullet \mu s$  (L) or 250  $V \bullet \mu s$  (H).


2. If  $D < 0.85$ , go on to step C. If  $D \geq 0.85$ , then calculate the minimum inductance needed to ensure the switching regulator's stability:

$$L_{MIN} = \frac{6.4 (V_{IN(min)} - 0.6V) (2D_{(max)} - 1)}{1 - D_{(max)}} \quad (\mu H)$$

If  $L_{MIN}$  is smaller than the inductor value found in step B1, go on to step C. Otherwise, the inductor value found in step B1 is too low; an appropriate inductor code should be obtained from the graph as follows:


- Find the lowest value inductor that is greater than  $L_{MIN}$ .
- Find where  $E \bullet T$  intersects this inductor value to determine if it has an L or H prefix. If  $E \bullet T$  intersects both the L and H regions, select the inductor with an H prefix.

## Application Hints (Continued)

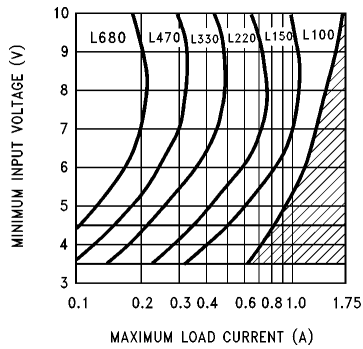


TL/H/11468-27

**FIGURE 7a. LM2577-12 Inductor Selection Guide**

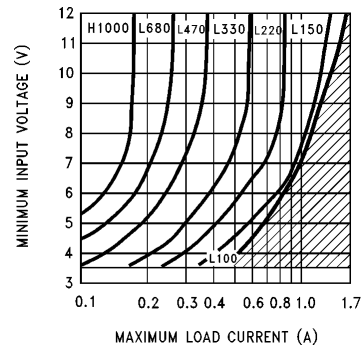

TL/H/11468-28

**FIGURE 7b. LM2577-15 Inductor Selection Guide**

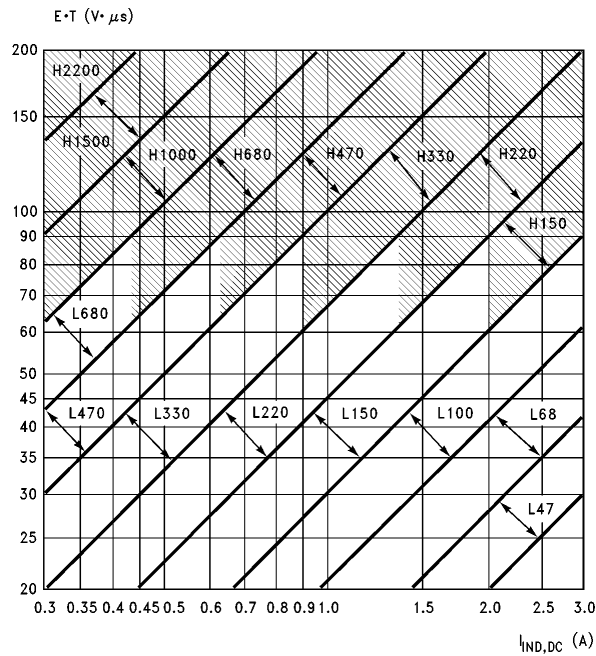

TL/H/11468-12

**FIGURE 7c. LM1577-ADJ/LM2577-ADJ Inductor Selection Graph**

### Note:

These charts assume that the inductor ripple current is approximately 20% to 30% of the average inductor current (when the regulator is under full load). Greater ripple current causes higher peak switch currents and greater output ripple voltage; lower ripple current is achieved with larger-value inductors. The factor of 20 to 30% is chosen as a convenient balance between the two extremes.

## Application Hints (Continued)

C. Select an inductor from the table of Figure 8 which cross-references the inductor codes to the part numbers of three different manufacturers. Complete specifications for these inductors are available from the respective manufacturers. The inductors listed in this table have the following characteristics:

**A/E:** ferrite, pot-core inductors; Benefits of this type are low electro-magnetic interference (EMI), small physical size, and very low power dissipation (core loss). Be careful not to operate these inductors too far beyond their maximum ratings for E•T and peak current, as this will saturate the core.

**Pulse:** powdered iron, toroid core inductors; Benefits are low EMI and ability to withstand E•T and peak current above rated value better than ferrite cores.

**Renco:** ferrite, bobbin-core inductors; Benefits are low cost and best ability to withstand E•T and peak current above rated value. Be aware that these inductors generate more EMI than the other types, and this may interfere with signals sensitive to noise.

| Inductor Code | Manufacturer's Part Number |            |        |
|---------------|----------------------------|------------|--------|
|               | Schott                     | Pulse      | Renco  |
| L47           | 67126980                   | PE - 53112 | RL2442 |
| L68           | 67126990                   | PE - 92114 | RL2443 |
| L100          | 67127000                   | PE - 92108 | RL2444 |
| L150          | 67127010                   | PE - 53113 | RL1954 |
| L220          | 67127020                   | PE - 52626 | RL1953 |
| L330          | 67127030                   | PE - 52627 | RL1952 |
| L470          | 67127040                   | PE - 53114 | RL1951 |
| L680          | 67127050                   | PE - 52629 | RL1950 |
| H150          | 67127060                   | PE - 53115 | RL2445 |
| H220          | 67127070                   | PE - 53116 | RL2446 |
| H330          | 67127080                   | PE - 53117 | RL2447 |
| H470          | 67127090                   | PE - 53118 | RL1961 |
| H680          | 67127100                   | PE - 53119 | RL1960 |
| H1000         | 67127110                   | PE - 53120 | RL1959 |
| H1500         | 67127120                   | PE - 53121 | RL1958 |
| H2200         | 67127130                   | PE - 53122 | RL2448 |

**Schott Corp.**, (612) 475-1173  
1000 Parkers Lake Rd., Wayzata, MN 55391  
**Pulse Engineering**, (619) 268-2400  
P.O. Box 12235, San Diego, CA 92112  
**Renco Electronics Inc.**, (516) 566-5566  
60 Jeffryn Blvd. East, Deer Park, NY 11729

**FIGURE 8. Table of Standardized Inductors and Manufacturer's Part Numbers**

### 2. Compensation Network ( $R_C$ , $C_C$ ) and Output Capacitor ( $C_{OUT}$ ) Selection

$R_C$  and  $C_C$  form a pole-zero compensation network that stabilizes the regulator. The values of  $R_C$  and  $C_C$  are mainly dependant on the regulator voltage gain,  $I_{LOAD(max)}$ ,  $L$  and  $C_{OUT}$ . The following procedure calculates values for  $R_C$ ,  $C_C$ , and  $C_{OUT}$  that ensure regulator stability. Be aware that this procedure doesn't necessarily result in  $R_C$  and  $C_C$  that provide optimum compensation. In order to guarantee optimum compensation, one of the standard procedures for testing loop stability must be used, such as measuring  $V_{OUT}$  transient response when pulsing  $I_{LOAD}$  (see Figure 13).

A. First, calculate the maximum value for  $R_C$ :

$$R_C \leq \frac{750 \times I_{LOAD(max)} \times V_{OUT}^2}{V_{IN(min)}^2}$$

Select a resistor less than or equal to this value, and it should also be no greater than 3 k $\Omega$ .

B. Calculate the minimum value for  $C_{OUT}$  using the following two equations.

$$C_{OUT} \geq \frac{0.19 \times L \times R_C \times I_{LOAD(max)}}{V_{IN(min)} \times V_{OUT}}$$

and

$$C_{OUT} \geq \frac{V_{IN(min)} \times R_C \times (V_{IN(min)} + (3.74 \times 10^5 \times L))}{487,800 \times V_{OUT}^3}$$

The larger of these two values is the minimum value that ensures stability.

C. Calculate the minimum value of  $C_C$ :

$$C_C \geq \frac{58.5 \times V_{OUT}^2 \times C_{OUT}}{R_C^2 \times V_{IN(min)}}$$

The compensation capacitor is also part of the soft start circuitry. When power to the regulator is turned on, the switch duty cycle is allowed to rise at a rate controlled by this capacitor (with no control on the duty cycle, it would immediately rise to 90%, drawing huge currents from the input power supply). In order to operate properly, the soft start circuit requires  $C_C \geq 0.22 \mu F$ .

The value of the output filter capacitor is normally large enough to require the use of aluminum electrolytic capacitors. Figure 9 lists several different types that are recommended for switching regulators, and the following parameters are used to select the proper capacitor.

**Working Voltage (WVDC):** Choose a capacitor with a working voltage at least 20% higher than the regulator output voltage.

**Ripple Current:** This is the maximum RMS value of current that charges the capacitor during each switching cycle. For step-up and flyback regulators, the formula for ripple current is

$$I_{RIPPLE(RMS)} = \frac{I_{LOAD(max)} \times D_{(max)}}{1 - D_{(max)}}$$

Choose a capacitor that is rated at least 50% higher than this value at 52 kHz.

**Equivalent Series Resistance (ESR):** This is the primary cause of output ripple voltage, and it also affects the values of  $R_C$  and  $C_C$  needed to stabilize the regulator. As a result, the preceding calculations for  $C_C$  and  $R_C$  are only valid if ESR doesn't exceed the maximum value specified by the following equations.

$$ESR \leq \frac{0.01 \times V_{OUT}}{I_{RIPPLE(P-P)}} \text{ and } \leq \frac{8.7 \times (10) - 3 \times V_{IN}}{I_{LOAD(max)}}$$

where

$$I_{RIPPLE(P-P)} = \frac{1.15 \times I_{LOAD(max)}}{1 - D_{(max)}}$$

Select a capacitor with ESR, at 52 kHz, that is less than or equal to the lower value calculated. Most electrolytic capacitors specify ESR at 120 Hz which is 15% to 30% higher than at 52 kHz. Also, be aware that ESR increases by a factor of 2 when operating at  $-20^\circ C$ .

## Application Hints (Continued)

In general, low values of ESR are achieved by using large value capacitors ( $C \geq 470 \mu\text{F}$ ), and capacitors with high WVDC, or by paralleling smaller-value capacitors.

### 3. Output Voltage Selection (R1 and R2)

This section is for applications using the LM1577-ADJ/LM2577-ADJ. Skip this section if the LM1577-12/LM2577-12 or LM1577-15/LM2577-15 is being used.

With the LM1577-ADJ/LM2577-ADJ, the output voltage is given by

$$V_{\text{OUT}} = 1.23\text{V} (1 + R1/R2)$$

Resistors R1 and R2 divide the output down so it can be compared with the LM1577-ADJ/LM2577-ADJ internal 1.23V reference. For a given desired output voltage  $V_{\text{OUT}}$ , select R1 and R2 so that

$$\frac{R1}{R2} = \frac{V_{\text{OUT}}}{1.23\text{V}} - 1$$

### 4. Input Capacitor Selection ( $C_{\text{IN}}$ )

The switching action in the step-up regulator causes a triangular ripple current to be drawn from the supply source. This in turn causes noise to appear on the supply voltage. For proper operation of the LM1577, the input voltage should be decoupled. Bypassing the Input Voltage pin directly to

**Cornell Dublier**—Types 239, 250, 251, UFT, 300, or 350

P.O. Box 128, Pickens, SC 29671  
(803) 878-6311

**Nichicon**—Types PF, PX, or PZ

927 East Parkway, Schaumburg, IL 60173  
(708) 843-7500

**Sprague**—Types 672D, 673D, or 674D

Box 1, Sprague Road, Lansing, NC 28643  
(919) 384-2551

**United Chemi-Con**—Types LX, SXF, or SXJ

9801 West Higgins Road, Rosemont, IL 60018  
(708) 696-2000

**FIGURE 9. Aluminum Electrolytic Capacitors Recommended for Switching Regulators**

ground with a good quality, low ESR, 0.1  $\mu\text{F}$  capacitor (leads as short as possible) is normally sufficient.

If the LM1577 is located far from the supply source filter capacitors, an additional large electrolytic capacitor (e.g. 47  $\mu\text{F}$ ) is often required.

### 5. Diode Selection (D)

The switching diode used in the boost regulator must withstand a reverse voltage equal to the circuit output voltage, and must conduct the peak output current of the LM2577. A suitable diode must have a minimum reverse breakdown voltage greater than the circuit output voltage, and should be rated for average and peak current greater than  $I_{\text{LOAD(max)}}$  and  $I_{\text{D(PK)}}$ . Schottky barrier diodes are often favored for use in switching regulators. Their low forward voltage drop allows higher regulator efficiency than if a (less expensive) fast recovery diode was used. See Figure 10 for recommended part numbers and voltage ratings of 1A and 3A diodes.

| $V_{\text{OUT}}$<br>(max) | Schottky                    |                             | Fast Recovery                       |                                   |
|---------------------------|-----------------------------|-----------------------------|-------------------------------------|-----------------------------------|
|                           | 1A                          | 3A                          | 1A                                  | 3A                                |
| 20V                       | 1N5817<br>MBR120P           | 1N5820<br>MBR320P           |                                     |                                   |
| 30V                       | 1N5818<br>MBR130P<br>11DQ03 | 1N5821<br>MBR330P<br>31DQ03 |                                     |                                   |
| 40V                       | 1N5819<br>MBR140P<br>11DQ04 | 1N5822<br>MBR340P<br>31DQ04 |                                     |                                   |
| 50V                       | MBR150<br>11DQ05            | MBR350<br>31DQ05            | 1N4933<br>MUR105                    |                                   |
| 100V                      |                             |                             | 1N4934<br>HER102<br>MUR110<br>10DL1 | MR851<br>30DL1<br>MR831<br>HER302 |


**FIGURE 10. Diode Selection Chart**

## Application Hints (Continued)

### BOOST REGULATOR CIRCUIT EXAMPLE

By adding a few external components (as shown in *Figure 11*), the LM2577 can be used to produce a regulated output voltage that is greater than the applied input voltage. Typical


performance of this regulator is shown in *Figures 12* and *13*. The switching waveforms observed during the operation of this circuit are shown in *Figure 14*.

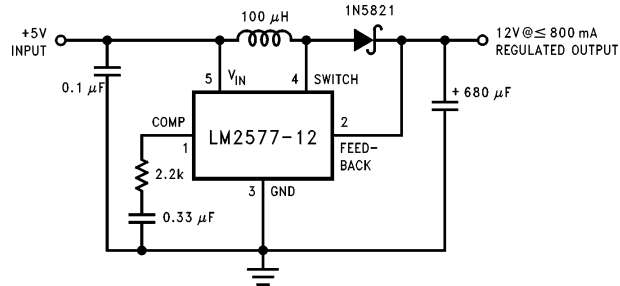

TL/H/11468-13


**Note:** Pin numbers shown are for TO-220 (T) package.

**FIGURE 11. Step-up Regulator Delivers 12V from a 5V Input**



TL/H/11468-14


**FIGURE 12. Line Regulation (Typical) of Step-Up Regulator of Figure 11**

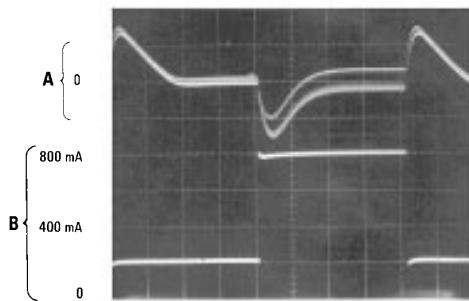

TL/H/11468-15

**FIGURE 13. Load Transient Response of Step-Up Regulator of Figure 11**

A: Output Voltage Change, 100 mV/div. (AC-coupled)  
B: Load current, 0.2 A/div  
Horizontal: 5 ms/div

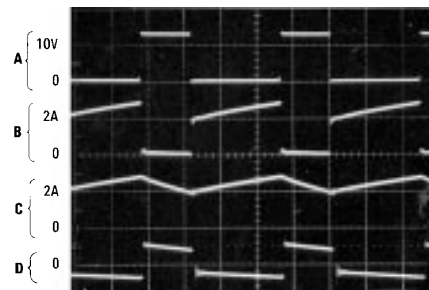

TL/H/11468-16

**FIGURE 14. Switching Waveforms of Step-Up Regulator of Figure 11**

A: Switch pin voltage, 10 V/div  
B: Switch pin current, 2 A/div  
C: Inductor current, 2 A/div  
D: Output ripple voltage, 100 mV/div (AC-coupled)  
Horizontal: 5 μs/div

## Application Hints (Continued)

### FLYBACK REGULATOR

A Flyback regulator can produce single or multiple output voltages that are lower or greater than the input supply voltage. Figure 15 shows the LM1577/LM2577 used as a flyback regulator with positive and negative regulated outputs. Its operation is similar to a step-up regulator, except the output switch controls the primary current of a flyback transformer. Note that the primary and secondary windings are out of phase, so no current flows through secondary when current flows through the primary. This allows the primary to charge up the transformer core when the switch is on. When the switch turns off, the core discharges by sending current through the secondary, and this produces voltage at the outputs. The output voltages are controlled by adjusting the peak primary current, as described in the step-up regulator section.

Voltage and current waveforms for this circuit are shown in Figure 16, and formulas for calculating them are given in Figure 17.

### FLYBACK REGULATOR DESIGN PROCEDURE

#### 1. Transformer Selection

A family of standardized flyback transformers is available for creating flyback regulators that produce dual output voltages, from  $\pm 10V$  to  $\pm 15V$ , as shown in Figure 15. Figure 18 lists these transformers with the input voltage, output voltages and maximum load current they are designed for.

#### 2. Compensation Network ( $C_C$ , $R_C$ ) and Output Capacitor ( $C_{OUT}$ ) Selection

As explained in the Step-Up Regulator Design Procedure,  $C_C$ ,  $R_C$  and  $C_{OUT}$  must be selected as a group. The following procedure is for a dual output flyback regulator with equal turns ratios for each secondary (i.e., both output voltages have the same magnitude). The equations can be used for a single output regulator by changing  $\Sigma I_{LOAD(max)}$  to  $I_{LOAD(max)}$  in the following equations.

##### A. First, calculate the maximum value for $R_C$ .

$$R_C \leq \frac{750 \times \Sigma I_{LOAD(max)} \times (15V + V_{IN(min)})N^2}{V_{IN(min)}^2}$$

Where  $\Sigma I_{LOAD(max)}$  is the sum of the load current (magnitude) required from both outputs. Select a resistor less than or equal to this value, and no greater than 3 k $\Omega$ .


B. Calculate the minimum value for  $\Sigma C_{OUT}$  (sum of  $C_{OUT}$  at both outputs) using the following two equations.

$$C_{OUT} \geq \frac{0.19 \times R_C \times L_P \times \Sigma I_{LOAD(max)}}{15V \times V_{IN(min)}}$$

and


$$C_{OUT} \geq \frac{V_{IN(min)} \times R_C \times N^2 \times (V_{IN(min)} + (3.74 \times 10^5 \times L_P))}{487,800 \times (15V)^2 \times (15V + V_{IN(min)} \times N)}$$

The larger of these two values must be used to ensure regulator stability.



TL/H/11468-17

FIGURE 16. Flyback Regulator Waveforms

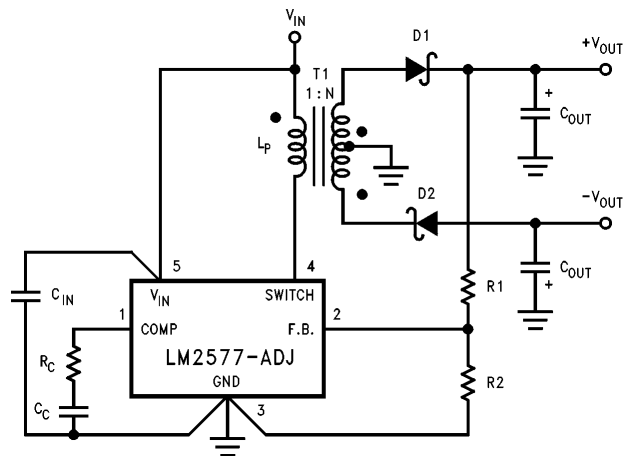

TL/H/11468-18

T1 = Pulse Engineering, PE-65300

D1, D2 = 1N5821

FIGURE 15. LM1577-ADJ/LM2577-ADJ Flyback Regulator with  $\pm$  Outputs

## Application Hints (Continued)

|                                    |               |                                                                                                         |
|------------------------------------|---------------|---------------------------------------------------------------------------------------------------------|
| Duty Cycle                         | D             | $\frac{V_{OUT} + V_F}{N(V_{IN} - V_{SAT}) + V_{OUT} + V_F} \approx \frac{V_{OUT}}{N(V_{IN}) + V_{OUT}}$ |
| Primary Current Variation          | $\Delta I_P$  | $\frac{D(V_{IN} - V_{SAT})}{L_P \times 52,000}$                                                         |
| Peak Primary Current               | $I_{P(PK)}$   | $\frac{N}{\eta} \times \frac{\Sigma I_{LOAD}}{1 - D} + \frac{\Delta I_{PK}}{2}$                         |
| Switch Voltage when Off            | $V_{SW(OFF)}$ | $V_{IN} + \frac{V_{OUT} + V_F}{N}$                                                                      |
| Diode Reverse Voltage              | $V_R$         | $V_{OUT} + N(V_{IN} - V_{SAT})$                                                                         |
| Average Diode Current              | $I_{D(AVE)}$  | $I_{LOAD}$                                                                                              |
| Peak Diode Current                 | $I_{D(PK)}$   | $\frac{I_{LOAD}}{1 - D} + \frac{\Delta I_{IND}}{2}$                                                     |
| Short Circuit Diode Current        |               | $\approx \frac{6A}{N}$                                                                                  |
| Power Dissipation of LM1577/LM2577 | $P_D$         | $0.25\Omega \left( \frac{N \Sigma I_{LOAD}}{1 - D} \right)^2 + \frac{N I_{LOAD} D}{50(1 - D)} V_{IN}$   |

$$N = \text{Transformer Turns Ratio} = \frac{\text{number of secondary turns}}{\text{number of primary turns}}$$

$$\eta = \text{Transformer Efficiency (typically 0.95)}$$

$$\Sigma I_{LOAD} = |I_{LOAD}| + |-I_{LOAD}|$$

**FIGURE 17. Flyback Regulator Formulas**

C. Calculate the minimum value of  $C_C$

$$C_C \geq \frac{58.5 \times C_{OUT} \times V_{OUT} \times (V_{OUT} + (V_{IN(min)} \times N))}{R_C^2 \times V_{IN(min)} \times N}$$

D. Calculate the maximum ESR of the  $+V_{OUT}$  and  $-V_{OUT}$  output capacitors in parallel.

$$ESR + \|ESR\| \leq \frac{8.7 \times 10^{-3} \times V_{IN(min)} \times V_{OUT} \times N}{\Sigma I_{LOAD(max)} \times (V_{OUT} + (V_{IN(min)} \times N))}$$

This formula can also be used to calculate the maximum ESR of a single output regulator.

At this point, refer to this same section in the **Step-Up Regulator Design Procedure** for more information regarding the selection of  $C_{OUT}$ .

## Application Hints (Continued)

### 3. Output Voltage Selection

This section is for applications using the LM1577-ADJ/LM2577-ADJ. Skip this section if the LM1577-12/LM2577-12 or LM1577-15/LM2577-15 is being used.

With the LM1577-ADJ/LM2577-ADJ, the output voltage is given by

$$V_{OUT} = 1.23V (1 + R1/R2)$$

Resistors R1 and R2 divide the output voltage down so it can be compared with the LM1577-ADJ/LM2577-ADJ internal 1.23V reference. For a desired output voltage  $V_{OUT}$ , select R1 and R2 so that

$$\frac{R1}{R2} = \frac{V_{OUT}}{1.23V} - 1$$

### 4. Diode Selection

The switching diode in a flyback converter must withstand the reverse voltage specified by the following equation.

$$V_R = V_{OUT} + \frac{V_{IN}}{N}$$

A suitable diode must have a reverse voltage rating greater than this. In addition it must be rated for more than the average and peak diode currents listed in Figure 17.

### 5. Input Capacitor Selection

The primary of a flyback transformer draws discontinuous pulses of current from the input supply. As a result, a fly-

| Transformer Type |                                | Input Voltage | Dual Output Voltage | Maximum Output Current |
|------------------|--------------------------------|---------------|---------------------|------------------------|
| 1                | $L_P = 100 \mu H$<br>$N = 1$   | 5V            | $\pm 10V$           | 325 mA                 |
|                  |                                | 5V            | $\pm 12V$           | 275 mA                 |
|                  |                                | 5V            | $\pm 15V$           | 225 mA                 |
| 2                | $L_P = 200 \mu H$<br>$N = 0.5$ | 10V           | $\pm 10V$           | 700 mA                 |
|                  |                                | 10V           | $\pm 12V$           | 575 mA                 |
|                  |                                | 10V           | $\pm 15V$           | 500 mA                 |
|                  |                                | 12V           | $\pm 10V$           | 800 mA                 |
|                  |                                | 12V           | $\pm 12V$           | 700 mA                 |
|                  |                                | 12V           | $\pm 15V$           | 575 mA                 |
| 3                | $L_P = 250 \mu H$<br>$N = 0.5$ | 15V           | $\pm 10V$           | 900 mA                 |
|                  |                                | 15V           | $\pm 12V$           | 825 mA                 |
|                  |                                | 15V           | $\pm 15V$           | 700 mA                 |

| Transformer Type | Manufacturers' Part Numbers |          |         |
|------------------|-----------------------------|----------|---------|
|                  | AIE                         | Pulse    | Renco   |
| 1                | 326-0637                    | PE-65300 | RL-2580 |
| 2                | 330-0202                    | PE-65301 | RL-2581 |
| 3                | 330-0203                    | PE-65302 | RL-2582 |

FIGURE 18. Flyback Transformer Selection Guide

back regulator generates more noise at the input supply than a step-up regulator, and this requires a larger bypass capacitor to decouple the LM1577/LM2577  $V_{IN}$  pin from this noise. For most applications, a low ESR, 1.0  $\mu F$  cap will be sufficient, if it is connected very close to the  $V_{IN}$  and Ground pins.

In addition to this bypass cap, a larger capacitor ( $\geq 47 \mu F$ ) should be used where the flyback transformer connects to the input supply. This will attenuate noise which may interfere with other circuits connected to the same input supply voltage.

### 6. Snubber Circuit

A "snubber" circuit is required when operating from input voltages greater than 10V, or when using a transformer with  $L_P \geq 200 \mu H$ . This circuit clamps a voltage spike from the transformer primary that occurs immediately after the output switch turns off. Without it, the switch voltage may exceed the 65V maximum rating. As shown in Figure 19, the snubber consists of a fast recovery diode, and a parallel RC. The RC values are selected for switch clamp voltage ( $V_{CLAMP}$ ) that is 5V to 10V greater than  $V_{SW(OFF)}$ . Use the following equations to calculate R and C;

$$C \geq \frac{0.02 \times L_P \times I_{P(PK)}^2}{(V_{CLAMP})^2 - (V_{SW(OFF)})^2}$$

$$R \leq \left( \frac{V_{CLAMP} + V_{SW(OFF)} - V_{IN}}{2} \right)^2 \times \left( \frac{19.2 \times 10^{-4}}{L_P \times I_{P(PK)}^2} \right)$$

Power dissipation (and power rating) of the resistor is;

$$P = \left( \frac{V_{CLAMP} + V_{SW(OFF)} - V_{IN}}{2} \right)^2 / R$$

The fast recovery diode must have a reverse voltage rating greater than  $V_{CLAMP}$ .

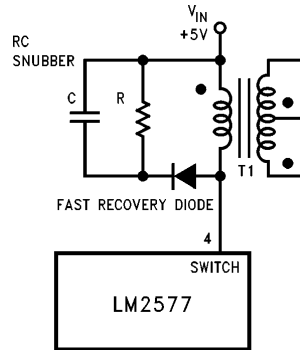



FIGURE 19. Snubber Circuit

TL/H/11468-19

## Application Hints (Continued)

### FLYBACK REGULATOR CIRCUIT EXAMPLE


The circuit of *Figure 20* produces  $\pm 15\text{V}$  (at 225 mA each) from a single 5V input. The output regulation of this circuit is shown in *Figures 21* and *22*, while the load transient response is shown in *Figures 23* and *24*. Switching waveforms seen in this circuit are shown in *Figure 25*.

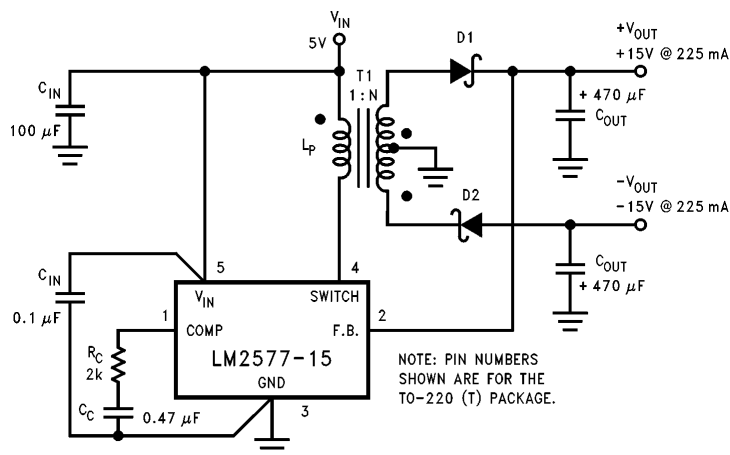

T1 = Pulse Engineering, PE-65300  
D1, D2 = 1N5821


TL/H/11468-20

**FIGURE 20. Flyback Regulator Easily Provides Dual Outputs**

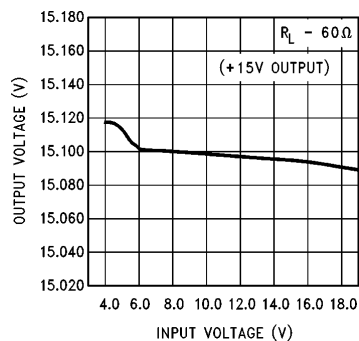

TL/H/11468-21


**FIGURE 21. Line Regulation (Typical) of Flyback Regulator of Figure 20, +15V Output**

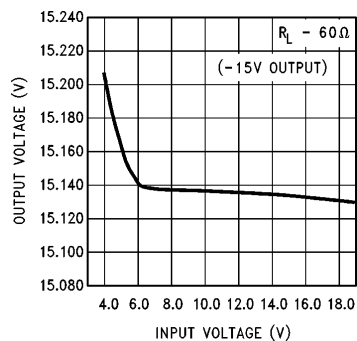

TL/H/11468-22

**FIGURE 22. Line Regulation (Typical) of Flyback Regulator of Figure 20, -15V Output**


## Application Hints (Continued)

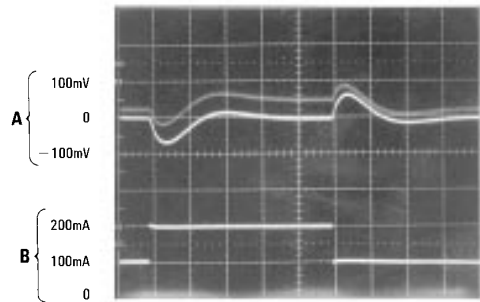

TL/H/11468-23

**FIGURE 23. Load Transient Response of Flyback Regulator of Figure 20, +15V Output**


A: Output Voltage Change, 100 mV/div  
B: Output Current, 100 mA/div  
Horizontal: 10 ms/div

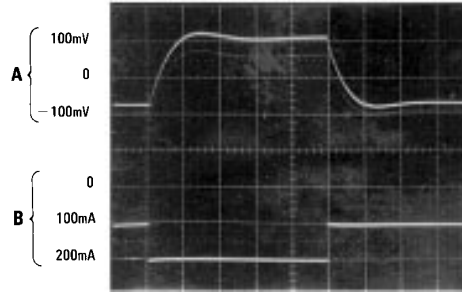

TL/H/11468-24

**FIGURE 24. Load Transient Response of Flyback Regulator of Figure 20, -15V Output**

A: Output Voltage Change, 100 mV/div  
B: Output Current, 100 mA/div  
Horizontal: 10 ms/div

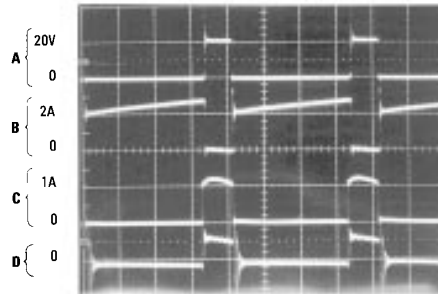


TL/H/11468-25

**FIGURE 25. Switching Waveforms of Flyback Regulator of Figure 20, Each Output Loaded with 60Ω**


A: Switch pin voltage, 20 V/div  
B: Primary current, 2 A/div  
C: +15V Secondary current, 1 A/div  
D: +15V Output ripple voltage, 100 mV/div  
Horizontal: 5 μs/div

# Physical Dimensions inches (millimeters)

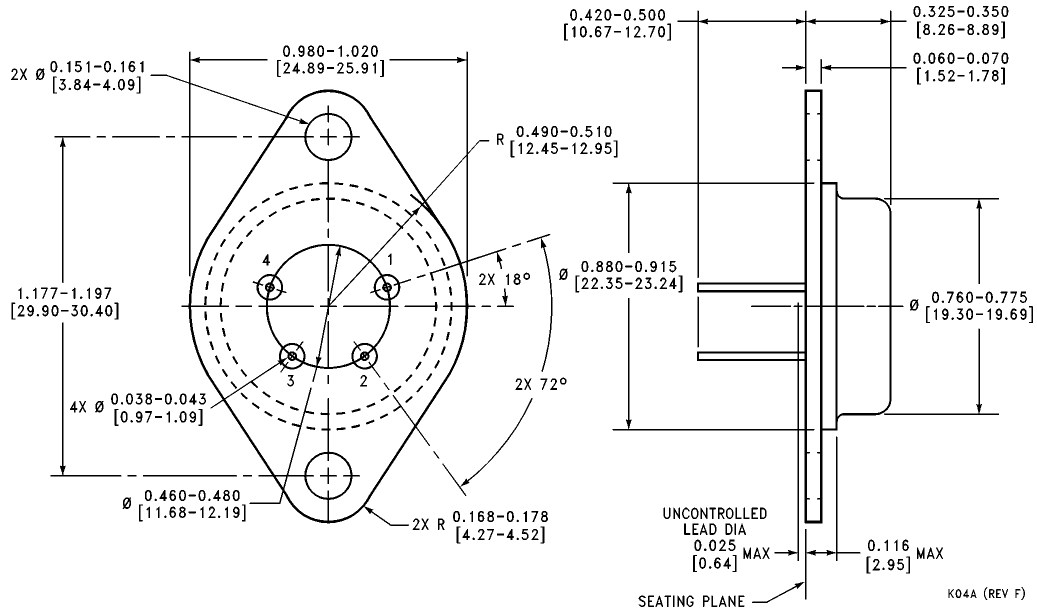


**TO-3 Metal Can Package (K)**  
**Order Number LM1577K-12/883, LM1577K-15/883, or LM1577K-ADJ/883**  
**NS Package Number K04A**

# Physical Dimensions inches (millimeters) (Continued)

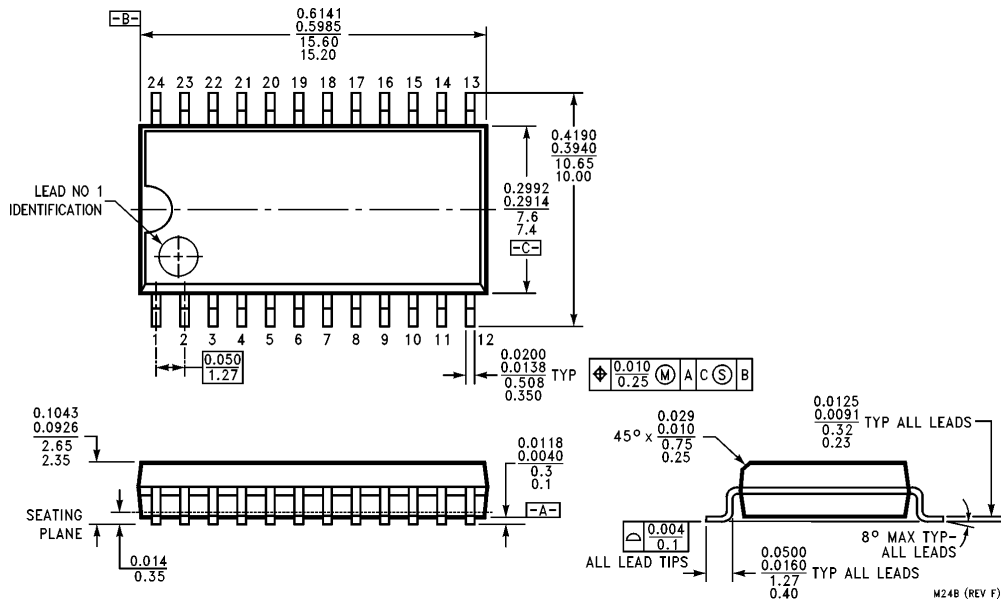


**0.300 Wide SO Package (M)**  
**Order Number LM2577M-12, LM2577M-15 or LM2577M-ADJ**  
**NS Package Number M24B**

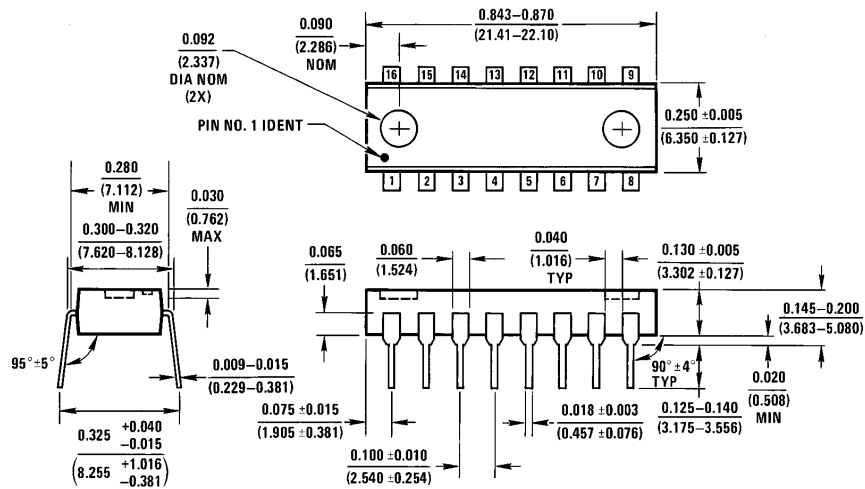


**Molded Dual-In-Line Package (N)**  
**Order Number LM2577N-12, LM2577N-15, or LM2577N-ADJ**  
**NS Package Number N16A**


# Physical Dimensions inches (millimeters) (Continued)

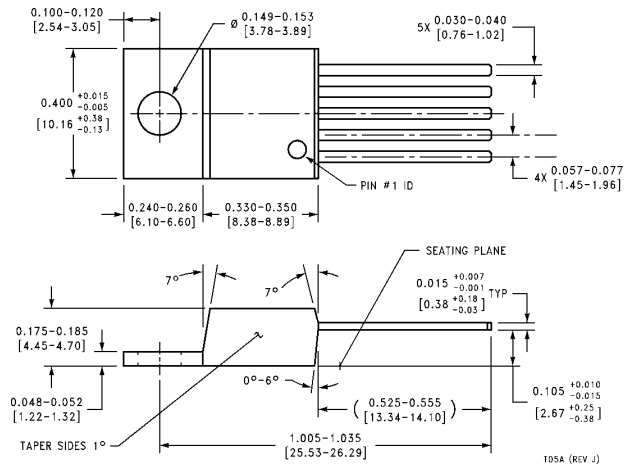

**TO-220, Straight Leads (T)**  
**Order Number LM2577T-12, LM2577T-15, or LM2577T-ADJ**  
**NS Package Number TO5A**

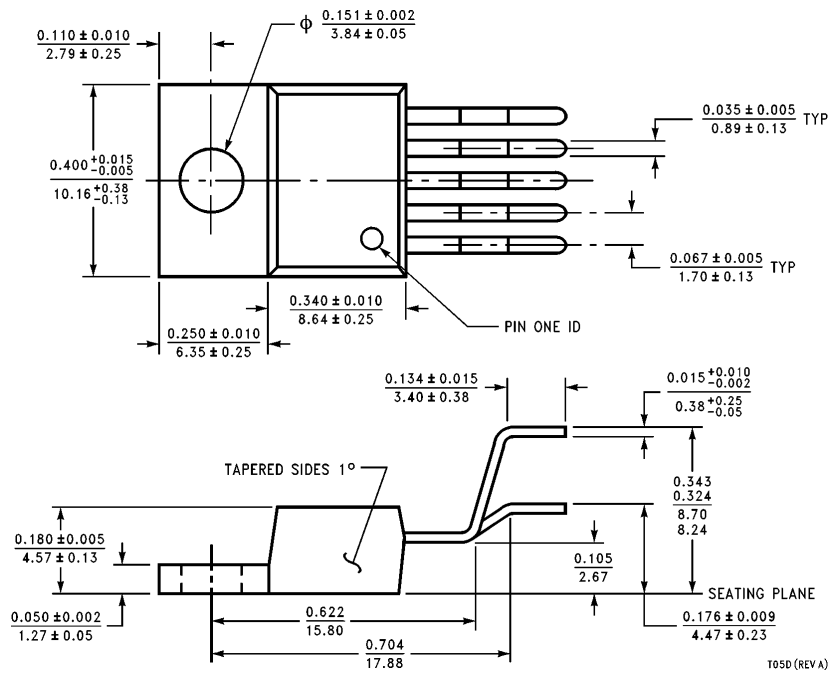

**TO-220, Bent Staggered Leads (T)**  
**Order Number LM2577T-12 Flow LB03, LM2577T-15 Flow LB03, or LM2577T-ADJ Flow LB03**  
**NS Package Number T05D**

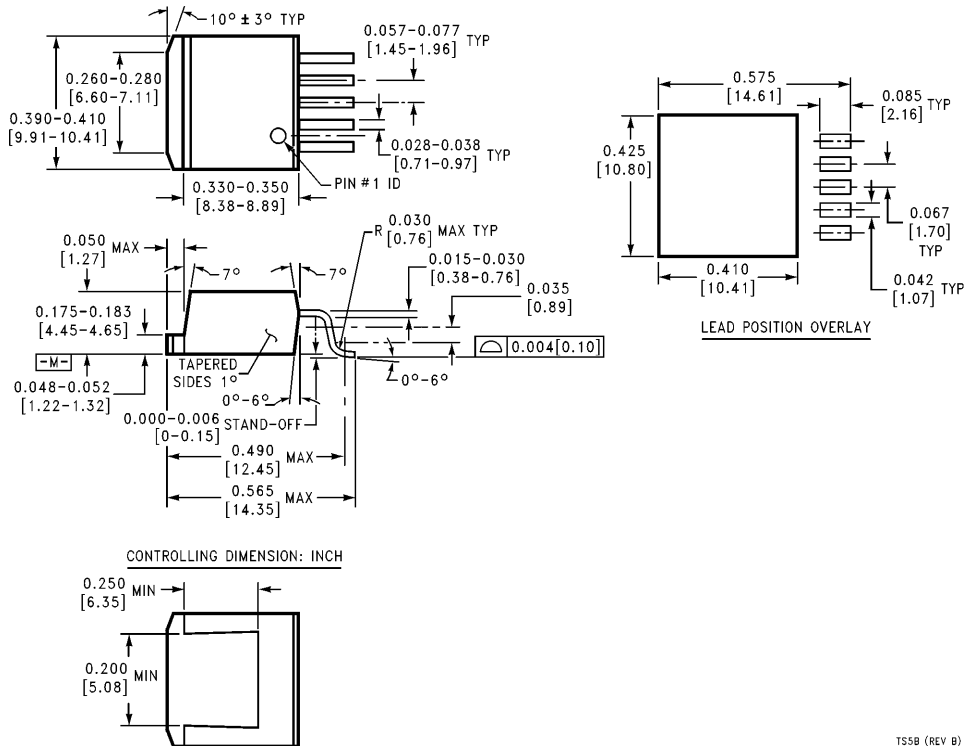**Physical Dimensions** inches (millimeters) (Continued)**5-Lead TO-263 (S)**

Order Number **LM2577S-12, LM2577S-15 or LM2577S-ADJ**  
NS Package Number **TS5B**

TS5B (REV B)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
2900 Semiconductor Drive  
P.O. Box 58090  
Santa Clara, CA 95052-8090  
Tel: (408) 272-9959  
TWX: (910) 339-9240

**National Semiconductor GmbH**  
Livny-Gargan-Str. 10  
D-82256 Fürstenfeldbruck  
Germany  
Tel: (81-41) 35-0  
Telex: 527849  
Fax: (81-41) 35-1

**National Semiconductor Japan Ltd.**  
Sumitomo Chemical  
Engineering Center  
Bldg. 7F  
1-7-1, Nakase, Mihama-Ku  
Chiba-City,  
Chiba Prefecture 261  
Tel: (043) 299-2300  
Fax: (043) 299-2500

**National Semiconductor Hong Kong Ltd.**  
13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

**National Semicondutores Do Brazil Ltda.**  
Rue Deputado Lacorda Franco  
120-3A  
Sao Paulo-SP  
Brazil 05418-000  
Tel: (55-11) 212-5066  
Telex: 391-1131931 NSBR BR  
Fax: (55-11) 212-1181

**National Semiconductor (Australia) Pty. Ltd.**  
Building 16  
Business Park Drive  
Monash Business Park  
Nottingham, Melbourne  
Victoria 3168 Australia  
Tel: (3) 558-9999  
Fax: (3) 558-9998

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.