

Terminal Relay

G6D-F4B/G3DZ-F4B

Easy-to-use, Space-saving Terminal Relay with Four-point Output

- Almost the same size as PYF Socket: 31 x 35 x 68 mm (W x H x D)
- Each terminal circuit (with coil or contact) is independent from one another.
- Short Bar ensures easy connection of common and adjacent terminals.
- Provided with a terminal cover that prevents electric-shock accidents.
- Relay and MOS FET relay models are available.
- LED operation indicator.
- Built-in diode absorbs coil surge.
- Mounts either on DIN track or screws.
- Tool for easy mounting or removal of Relays provided.



Ordering Information

Model Number Legend:

G6D/G3DZ-□□
1 2

1. Terminal Form

F: Flat type

2. Number of Relays Mounted

4B: 4

| Output | Contact configuration | Terminals | Rated coil voltage | Model |
|----------------------------|-----------------------|------------------------------|--------------------|----------|
| Relay output | SPST-NO × 4 | Phillips head screw terminal | 12 VDC | G6D-F4B |
| | | | 24 VDC | |
| Power MOS FET relay output | | | 12 VDC | G3DZ-F4B |
| | | | 24 VDC | |

Note: When ordering add the rated coil voltage to the model number.

Example: G6D-F4B 24 VDC

□ Rated coil voltage

■ Accessories (Order Separately)

Replacement Relays

| Applicable Terminal Relay | Rated voltage | Model |
|---------------------------|---------------|----------------------|
| G6D-F4B | 12 VDC | G6D-1A (see note) |
| | 24 VDC | |
| | 12 VDC | G6D-1A-AP (see note) |
| | 24 VDC | |
| G3DZ-F4B | 12 VDC | G3DZ-2R6PL |
| | 24 VDC | |

Note: Error rate (P level) for the G6D-1A is 5 V at 10 mA and that for the G6D-1A-AP is 5 V at 1 mA.

Short Bar

| Applicable Terminal Relay | Model |
|---------------------------|----------|
| G6D-F4B | G6D-4-SB |
| G3DZ-F4B | |

Specifications

■ Ratings

Coil Ratings (per G6D Relay)

| Rated voltage | Rated current | Coil resistance | Must operate voltage | Must release voltage | Max. voltage | Power consumption |
|---------------|---------------|-----------------|--------------------------|----------------------|--------------|-------------------|
| 12 VDC | 18.7 mA | 720 Ω | 70% max. (see note 1) | 10% min. | 130% | Approx. 200 mW |
| 24 VDC | 10.5 mA | 2,880 Ω | | | | |

- Note:**
1. The must operate voltage is 75% or less of the rated voltage if the Relay is mounted upside down.
 2. Rated current and coil resistance were measured at a coil temperature of 23°C with a tolerance of $\pm 10\%$.
 3. Operating characteristics were measured at a coil temperature of 23°C.
 4. The maximum allowable voltage is the maximum value of the allowable voltage range for the relay coil operating power supply. There is no continuous allowance.
 5. The rated current includes the terminal's LED current.

Contact Ratings (per G6D Relay)

| Item | Resistive load ($\cos\phi = 1$) |
|---|-----------------------------------|
| Rated load | 3 A at 250 VAC, 3 A at 30 VDC |
| Rated carry current | 5 A |
| Max. switching voltage | 250 VAC, 30 VDC |
| Max. switching current | 5 A |
| Max. permissible capacity (reference value) | 1,250 VA, 150 W |
| Error rate (reference value) (see note) | 5 VDC, 1 mA |

Note: This value is for a switching frequency of 120 times per minute.

■ Power MOS FET Relay Specifications

Input (per G3DZ Power MOS FET Relay)

| Rated voltage | Operating voltage | Must operate voltage level | Must release voltage level | Input impedance | Rated current |
|---------------|-------------------|----------------------------|----------------------------|-------------------------|-------------------|
| 12 VDC | 9.6 to 14.4 VDC | 9.6 VDC max. | 1 VDC min. | 2 k Ω $\pm 20\%$ | 8.0 mA $\pm 20\%$ |
| 24 VDC | 19.2 to 28.8 VDC | 19.2 VDC max. | | 4 k Ω $\pm 20\%$ | 8.2 mA $\pm 20\%$ |

Note: The rated current includes the terminal's LED current.

Output (per G3DZ Power MOS FET Relay)

| Load voltage | Load current | Inrush current |
|------------------------------|--------------------|----------------|
| 3 to 264 VAC 3 to 125 VDC | 100 μ to 0.3 A | 6 A (10 ms) |

■ Characteristics

| Item | G6D-F4B |
|---|---|
| | Relay output |
| Contact resistance (see note 2) | 100 mΩ max. |
| Must operate time (see note 3) | 10 ms max. |
| Release time (see note 3) | 10 ms max. |
| Insulation resistance | 1,000 MΩ min. (at 500 VDC) |
| Dielectric strength | 2,000 VAC, 50/60 Hz for 1 min between coil and contacts. |
| | 750 VAC, 50/60 Hz for 1 min between contacts of same polarity |
| Impulse withstand voltage (between coil and contacts) | 4,000 V (1.2 × 50 μs) |
| Vibration resistance | Destruction: 10 to 55 Hz, 1.5-mm double amplitude |
| | Malfunction: 10 to 55 Hz, 1.5-mm double amplitude |
| Shock resistance | Destruction: 500 m/s ² |
| | Malfunction: 100 m/s ² |
| Life expectancy | Mechanical: 20,000,000 operations min. (at 18,000 operations/hr) |
| | Electrical: 100,000 operations min. (3 A at 250 VAC, resistive load) 100,000 operations min. (3 A at 30 VDC, resistive load) (at 1,800 operations /hr) |
| Ambient temperature | Operating: -25°C to 55°C (with no icing) |
| | Storage: -25°C to 55°C (with no icing) |
| Ambient humidity | Operating: 45% to 85% |
| Weight | Approx. 65 g |


- Note:**
1. The above values are initial values.
 2. Measurement condition: 1 A at 5 VDC
 3. Ambient temperature condition: 23°C

| Item | G3DZ-F4B |
|------------------------------|--|
| | Power MOS FET relay output |
| Must operate time | 10 ms max. |
| Release time | 15 ms max. |
| Output ON-resistance | 2.4 Ω max. |
| Leakage current at OFF state | 10 μA max. (at 125 VDC) |
| Insulation resistance | 100 MΩ min. (at 500 VDC) |
| Dielectric strength | 2,000 VAC, 50/60 Hz for 1 min between input and output terminals |
| Vibration resistance | 10 to 55 Hz, 1.5-mm double amplitude |
| Shock resistance | 500 m/s ² |
| Ambient temperature | Operating: -25°C to 55°C (with no icing) |
| | Storage: -25°C to 55°C (with no icing) |
| Ambient humidity | Operating: 45% to 85% |
| Weight | Approx. 65 g |


Engineering Data

G6D-F4B

Max. Switching Capacity

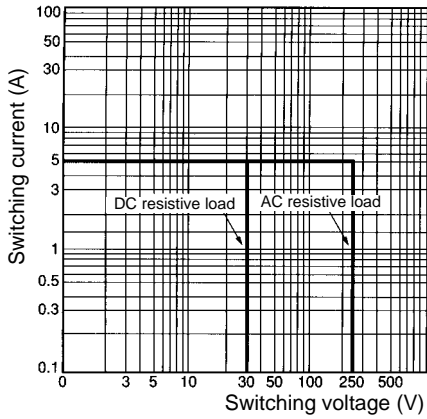


Life Expectancy

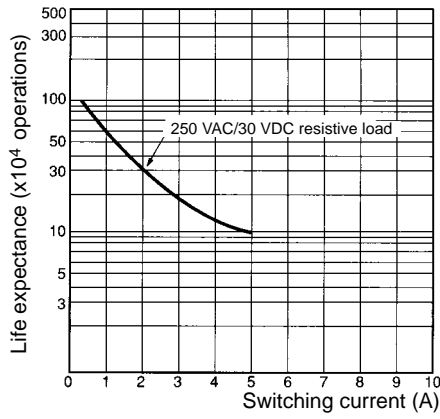


G3DZ-F4B

Load Current vs. Ambient Temperature Characteristics

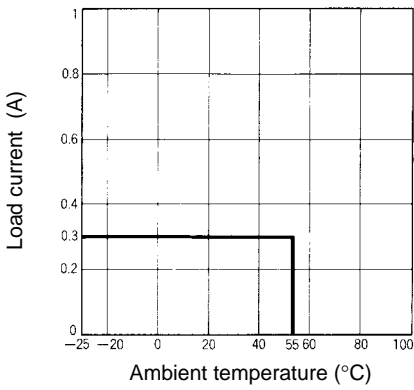

Inrush Current Resistivity



Non-repetitive (Keep the inrush current to half the rated value if it occurs repetitively.)

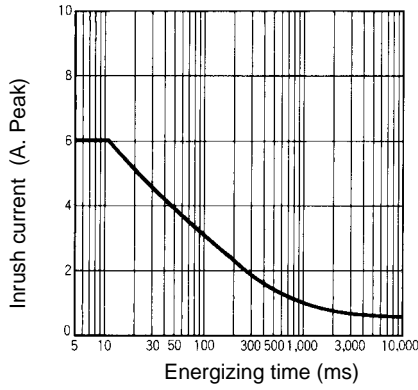


Dimensions

Note: All units are in millimeters unless otherwise indicated.


G6D-F4B G3DZ-F4B

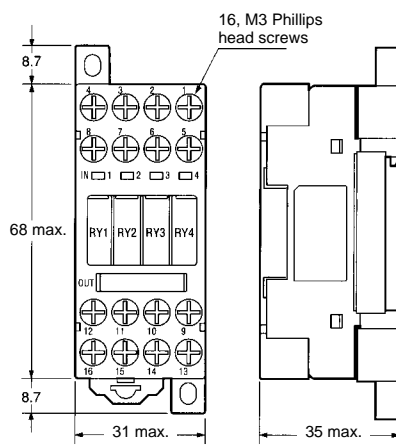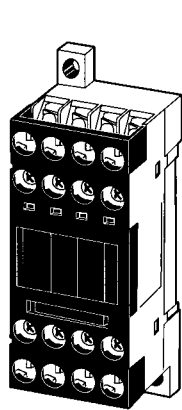

Mounting Dimensions

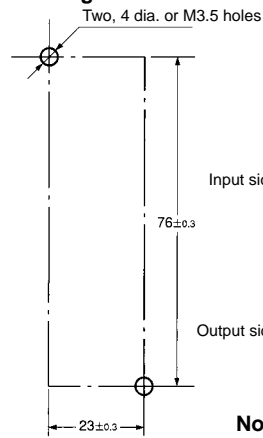



Terminal Arrangement/ Internal Connections (Top View)



Note: Make sure that the polarity of the coil is correct.

■ Accessories

G6D-4-SB Short Bar

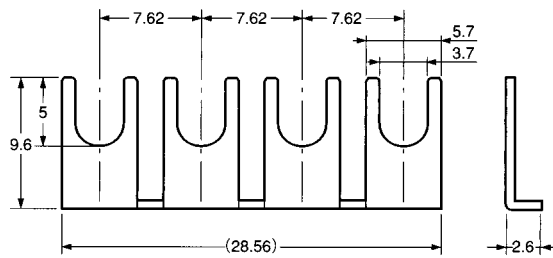

| Applicable model | Model |
|------------------|----------|
| G6D-F4B | G6D-4-SB |
| G3DZ-F4B | |

Precautions

Wiring

Be sure to turn OFF the power when wiring the Unit and do not touch the charged terminals of the Unit. Otherwise, an electric shock may result.

Do not apply overvoltage to the input terminals. Otherwise, the Unit may malfunction or burn.

Relay Models

Do not connect the Unit to loads exceeding the rated switching capacity (switching voltage or current). Otherwise, faulty insulation, contact weld, or faulty contact of Relays, or damage to Relays may result, or the Relays may malfunction or burn.

The life of Relays varies with the switching condition. Test the Relays under the actual operating conditions before using the Relays within the permissible switching frequency. The use of deteriorated Relays may result in the faulty insulation of the Relays or cause the Relays to burn.

Do not use the Unit in locations with inflammable gas. Otherwise, a fire or explosion due to the heat of the Relays or sparks from the Relays may result when they are switched.

SSR Output (Power MOS FET Relay Model)

Do not connect the Unit to loads consuming a total current exceeding the rated output current of the Unit. Otherwise, the output element of the Unit may be damaged and a short or open-circuit malfunction may result.

If the Unit is connected to a DC inductive load, connect a diode to the Unit to protect the Unit from counter-electromotive voltage, otherwise the counter-electromotive voltage may damage the output element and a short or open-circuit malfunction may result.

■ Correct Use

Mounting

When mounting two or more Units, reduce the current and ON duty and provide an appropriate distance between the Units so that the ambient temperature will not exceed 55°C.

Relay Replacement

Use the Relay Removal Tool provided with the Unit to dismount a Relay.

Be sure to turn OFF the power to the Unit before replacing a Relay. When mounting a Relay, insert the Relay vertically so that the relay terminals will come in contact with the socket contact pins properly. Do not mount Relays that are different to one another in voltage.

Wiring


Pay utmost attention not to make mistakes with the polarity of the input terminals.

Coil Voltage

Make sure not to impose voltage exceeding the permissible voltage on the coil continuously.

Do not connect any inductive load in parallel to the coil input as shown in the following example or power supply with a surge voltage. Otherwise, the surge absorption diode will be damaged.

Do Not Use the Following Circuit

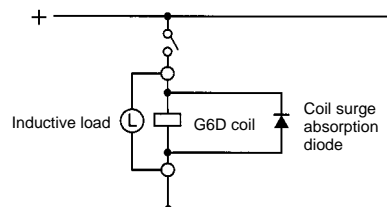

Handling

Do not drop, shock, or vibrate the Unit excessively. Otherwise, damage to the Unit may result or the Unit may malfunction.

Make sure that all the Relays are properly mounted before use.

Screw Tightening Torque

Tighten each terminal screw to a torque of 0.78 to 1.18 N • m.

Tighten each mounting screw to a torque of 0.59 to 0.98 N • m.

Installation Environment

Do not install the Unit in the following locations. Otherwise, damage to the Unit may result or the Unit may malfunction.

Locations with direct sunlight.

Locations with an ambient temperature range not within -25°C to 55°C.

Locations with rapid temperature changes resulting in condensation or locations with relative humidity ranges not within 45% to 85%.

Locations with corrosive or inflammable gas.

Locations with excessive dust, salinity, or metal powder.

Locations with vibration or shock affecting the Unit.

Locations with water, oil, or chemical sprayed on the Unit.

Disassembly, Repair, and Modification

Do not disassemble, repair, or modify the Unit. Otherwise, an electric shock may result or the Unit may malfunction.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. J115-E1-1 **In the interest of product improvement, specifications are subject to change without notice.**

OMRON Corporation

Industrial Automation Company

Industrial Control Components Division
28th Fl., Crystal Tower Bldg.,
1-2-27, Shiromi, Chuo-ku,
Osaka 540-6028 Japan
Phone: (81)6-6949-6025 Fax: (81)6-6949-6029

Printed in Japan
0799-1M (0799) Ⓐ