




MECHANICAL DATA

Dimensions in mm

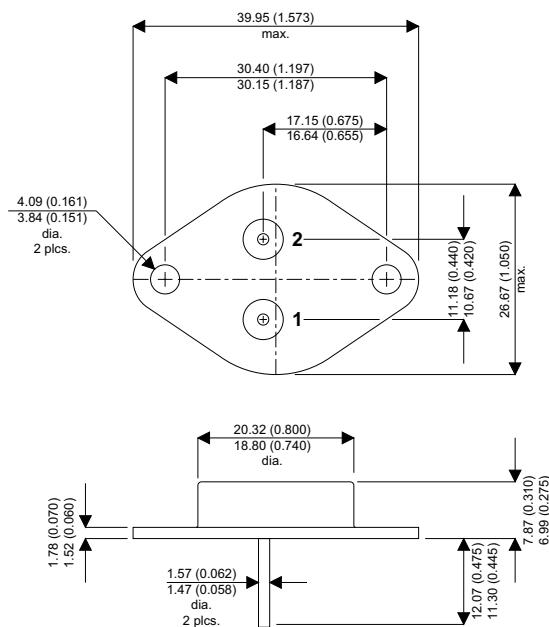

TO3B

Pin 1 – Base

Pin 2 – Emitter

Case – Collector

NPN MULTI-EPIAXIAL TRANSISTOR

FEATURES

- LOW $V_{CE(SAT)}$
- FAST SWITCHING
- SINGLE CHIP CONSTRUCTION
- HIGH SWITCHING CURRENTS
- HIGH RELIABILITY
- MILITARY OPTIONS AVAILABLE

APPLICATIONS

- SWITCHING REGULATORS
- MOTOR DRIVE CONTROL
- HIGH POWER CONVERTORS

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^\circ\text{C}$ unless otherwise stated)

V_{CEX}	Collector – Emitter Voltage ($V_{BE} = -1.5\text{V}$)	500V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	275V
V_{EBO}	Emitter – Base Voltage	10V
I_C	Collector Current	50A
$I_{C(PK)}$	Peak Collector Current	70A
P_{tot}	Total Dissipation at $T_{case} = 25^\circ\text{C}$	300W
T_{stg}	Storage Temperature	-55 to 200°C
T_J	Maximum Operating Junction Temperature	200°C
R_{th}	Thermal Resistance (junction-case)	Max. 0.58°C/W



**SEME
LAB**

BUP54

ELECTRICAL CHARACTERISTICS ($T_{case} = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
I_{CEX} Collector Cut-Off Current	$V_{BE} = 1.5\text{V}$ $V_{CEX} = 500\text{V}$			0.1	mA
	$T_C = 150^\circ\text{C}$			5	
I_{EBO} Emitter Cut-Off Current	$V_{BE} = 8\text{V}$			0.1	mA
$V_{CE(sat)}$ Collector – Emitter Saturation Voltage	$I_C = 20\text{A}$ $I_B = 2\text{A}$		0.4	0.6	V
	$I_C = 40\text{A}$ $I_B = 5.5\text{A}$		0.8	1.0	
$V_{BE(sat)}$ Base – Emitter Saturation Voltage	$I_C = 20\text{A}$ $I_B = 2\text{A}$		1.0	1.2	V
	$I_C = 40\text{A}$ $I_B = 4\text{A}$		1.1	1.3	
h_{FE} DC Current Gain	$I_C = 16\text{A}$ $V_{CE} = 4\text{V}$	20	35		—
	$I_C = 35\text{A}$ $V_{CE} = 4\text{V}$	10	20		

SWITCHING CHARACTERISTICS ($T_{case} = 25^\circ\text{C}$ unless otherwise stated)

t_s Storage Time	$I_C = 20\text{A}$ $V_{CC} = 200\text{V}$			1.8	μs
t_f Fall Time	$I_{B1} = -I_{B2} = 10\text{ A}$			0.35	