
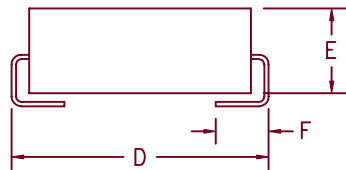


# Ultra Fast Recovery Rectifiers

## UFS110J — UFS120J

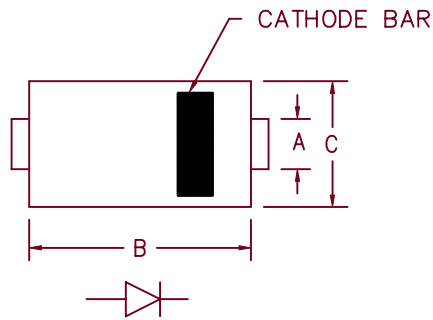

| Dim. | Inches  |         | Millimeter |         | Notes |
|------|---------|---------|------------|---------|-------|
|      | Minimum | Maximum | Minimum    | Maximum |       |
| A    | .073    | .087    | 1.85       | 2.21    |       |
| B    | .160    | .180    | 4.06       | 4.57    |       |
| C    | .130    | .155    | 3.30       | 3.94    |       |
| D    | .205    | .220    | 5.21       | 5.59    |       |
| E    | .075    | .130    | 1.91       | 3.30    |       |
| F    | .030    | .060    | .760       | 1.52    |       |

### D0-214BA Package

| Microsemi Catalog Number | Working Peak Reverse Voltage | Repetitive Peak Reverse Voltage |
|--------------------------|------------------------------|---------------------------------|
| UFS110J                  | 100V                         | 100V                            |
| UFS115J                  | 150V                         | 150V                            |
| UFS120J                  | 200V                         | 200V                            |

- Ultra Fast Recovery
- 175°C Junction Temperature
- VRRM 100 to 200 Volts
- 1 Amp Current Rating
- $t_{RR}$  30ns Max.

### Electrical Characteristics

|                              |                    |   |
|------------------------------|--------------------|---|
| Average forward current      | $I_F(AV)$ 1.0 Amps | $T_L = 145^\circ C$ , Square wave, $R_{\theta JL} = 15^\circ C/W$ |
| Maximum surge current        | $I_{FSM}$ 35 Amps  | 8.3ms, half sine, $T_J = 175^\circ C$                             |
| Max peak forward voltage     | $V_{FM}$ .75 Volts | $I_{FM} = 0.1A; T_J = 25^\circ C^*$                               |
| Max peak forward voltage     | $V_{FM}$ .95 Volts | $I_{FM} = 1.0A; T_J = 25^\circ C^*$                               |
| Max reverse recovery time    | $t_{RR}$ 30 ns     | 1/2A, 1A, 1/4A, $T_J = 25^\circ C$                                |
| Max peak reverse current     | $I_{RM}$ 5 $\mu A$ | $V_{RRM}, T_J = 25^\circ C$                                       |
| Typical junction capacitance | $C_J$ 10 pF        | $V_R = 10V, T_J = 25^\circ C$                                     |

\*Pulse test: Pulse width 300  $\mu sec$ , Duty cycle 2%

### Thermal and Thermal Characteristics

|                               |                 |                                   |
|-------------------------------|-----------------|-----------------------------------|
| Storage temperature range     | $T_{STG}$       | -55°C to 175°C                    |
| Operating junction temp range | $T_J$           | -55°C to 175°C                    |
| Maximum thermal resistance    | $R_{\theta JL}$ | 15°C/W Junction to lead           |
| Weight                        |                 | .0047 ounces (.013 grams) typical |

6-8-00 Rev. 1

# UFS110J – UFS120J

Figure 1  
Typical Forward Characteristics

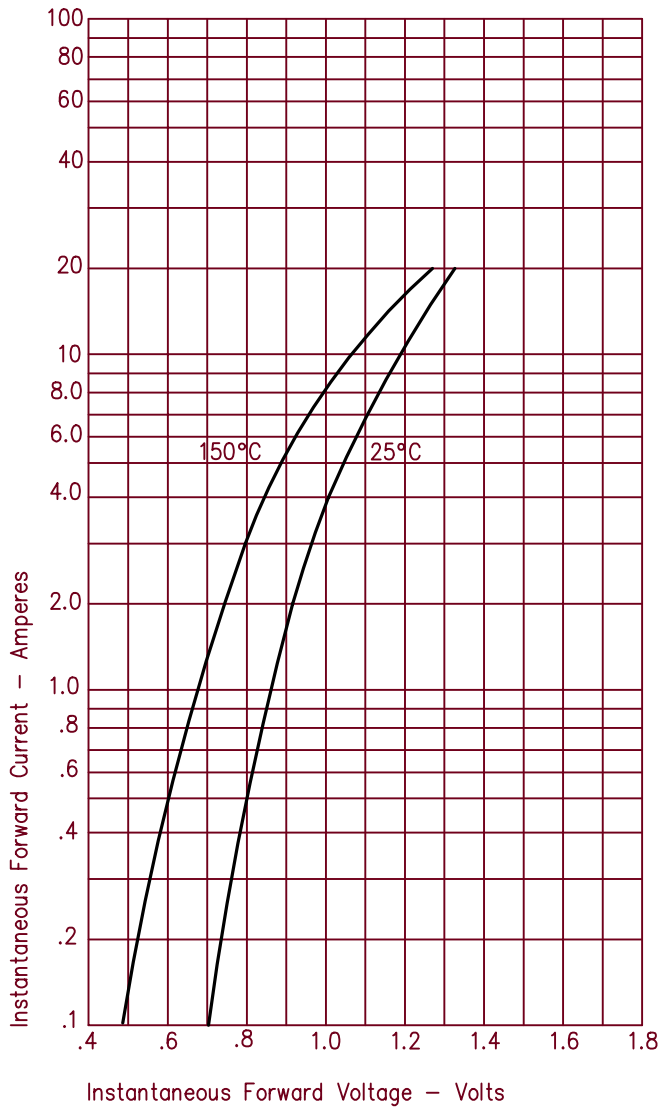


Figure 3  
Typical Junction Capacitance

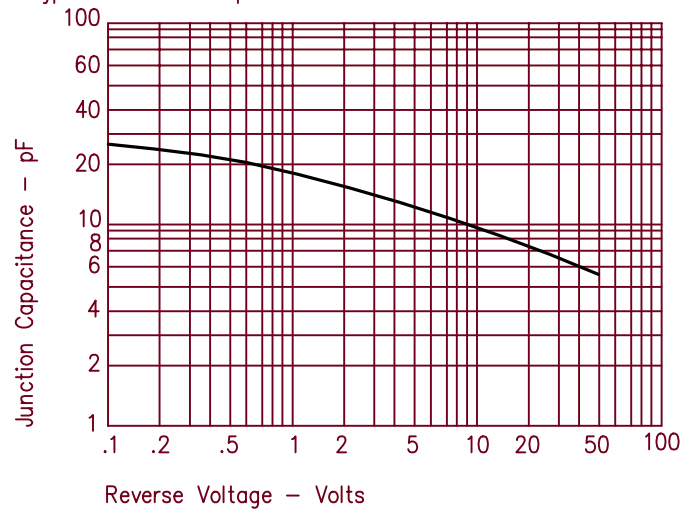


Figure 2  
Typical Reverse Characteristics

