

# NON-ISOLATED DC/DC CONVERTERS


## 3.3V Input / 1.5 – 2.5V Output / 10A



BP02V7PC-10C

### V7PC-10C Series

- Nonisolated
- Industry standard pinout
- Fixed frequency
- High efficiency means less power dissipation
- High power density
- Optimized for cost
- Remote on/off
- Undervoltage lockout
- Over current and short circuit protection

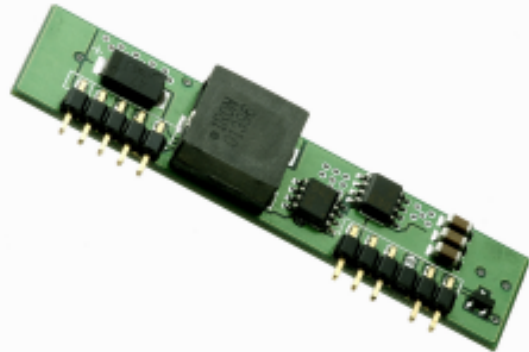

### Description

The Bel V7PC-10C series modules are non-isolated, DC/DC power converters that operate from a nominal 3.3V source. These converters are available in a range of output voltages from 1.5V to 2.5V. They are packaged in an industry standard single-in-line footprint with 10A maximum output. Standard features include remote on/off, over current and short circuit protection and output voltage adjust. Remote sense is an optional feature. These products may be used almost anywhere low voltage silicon is employed and a 3.3V source is available. Typical applications include file servers, routers, line cards and other computing and communications equipment.

### Applications

- Telecommunications
- Networking
- Computers and peripherals

### Options

- Remote Sense

### Part Number Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number	Part Number Remote Sense Option
2.5V	3.3V	10A	25W	92%	V7PC-10C250	V7PC-10C25S
1.8V	3.3V	10A	18W	87%	V7PC-10C180	V7PC-10C18S
1.5V	3.3V	10A	15W	86%	V7PC-10C150	V7PC-10C15S

BP02V7PC-10C

## Absolute Maximum Ratings

Parameter	Symbol	Min	Typical	Max	Unit
Continuous Input Voltage	V <sub>in</sub>	-0.3		4	V
Output Enable Terminal Voltage	V <sub>outen</sub>	-0.3		4	V
Ambient Temperature	T <sub>amb</sub>	0		70	°C
Storage Temperature	T <sub>stor</sub>	-40		125	°C

Note: Use beyond the maximum ratings may cause a reliability degradation of the DC/DC converter or may permanently damage the device.

## Input Specifications

Parameter	Symbol	Min	Typical	Max	Units
Operating Input Voltage	V <sub>in</sub>	3	3.3	3.6	V
Input Current	I <sub>in</sub>			9.2	A
No Load Input Current				100	mA
Remote Off Input Current			10	22	mA
Input Reflected Ripple Current <sup>1</sup>			20	40	mA <sub>rms</sub>
Input Reflected Ripple Current (P-P) <sup>1</sup>			90	150	mApk
I <sup>2</sup> t Inrush Current Transient			0.02	0.05	A <sup>2</sup> s
Turn On Voltage Threshold			2.85		V
Turn Off Voltage Threshold			2.3		V

Note: Input capacitance 2 x 270µF/16V, ESR = 0.03 Ω max at 100kHz @ 25° C.  
 1. With simulated source impedance of 500nH, 5Hz to 20MHz.

# NON-ISOLATED DC/DC CONVERTERS

## 3.3V Input / 1.5 – 2.5V Output / 10A



BP02V7PC-10C

### Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Output Voltage Set Point <sup>1</sup>	2.5V	Vout	2.45	2.5	2.55	V
	1.8V		1.76	1.8	1.84	
	1.5V		1.47	1.5	1.53	
Load Regulation	2.5V			7.5	12.5	mV
	1.8V		5.4	9.0		
	1.5V		4.5	7.5		
Line Regulation	2.5V			3	7.5	mV
	1.8V		2.5	5.4		
	1.5V		2	4.5		
Regulation Over Temperature 0° - 70° C	2.5V			12	30	mV
	1.8V		10	20		
	1.5V		7	15		
Total Output Voltage Regulation	2.5V				50	mV
	1.8V		34.4			
	1.5V		27			
Output Ripple and Noise <sup>2</sup>	All			70	100	mVp-p
Output Ripple and Noise <sup>2</sup>	All			18	25	mVrms
Output Current Range	All	Iout	0		10	A
Output DC Current Limit	All	Ioutlim	13		25	A
Short Circuit Surge	2.5V	Ioutsurge		0.15	0.2	A <sup>2</sup> s
	1.8V		0.27	0.5		
	1.5V		0.27	0.5		
Turn on Time	All	Ton		10	20	ms
Overshoot at Turn On	All				3	%
Output Capacitance	All	Cout	0		4000	μF

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.

1. Vin = 3.3V, Iout = full load, Ta = 25° C.

2. 0 - 20MHz BW, 0.1μF ceramic cap on output.

BP02V7PC-10C

## Output Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	2.5V			100	150	mV
Settling Time		Ts		35	50	$\mu s$
$\Delta V$ 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		35	50	$\mu s$
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	1.8V			100	150	mV
Settling Time		Ts		35	50	$\mu s$
$\Delta V$ 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		35	50	$\mu s$
<b>Transient Response <sup>3</sup></b>						
$\Delta V$ 50% to 100% of Max Load	1.5V			100	150	mV
Settling Time		Ts		35	50	$\mu s$
$\Delta V$ 100% to 50% of Max Load				100	150	mV
Settling Time		Ts		35	50	$\mu s$

Note: All specifications are typical at nominal input, full load at 25° C unless otherwise stated.  
 3. di/dt = 0.5A/ $\mu s$ , Vin = 3.3VDC, Ta = 25° C, and with a 470 $\mu F$  aluminum cap on output.

# NON-ISOLATED DC/DC CONVERTERS

## 3.3V Input / 1.5 – 2.5V Output / 10A



BP02V7PC-10C

### General Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Efficiency <sup>1</sup>	2.5V	$\eta$	88	92		%
	1.8V		84	87		
	1.5V		82	86		
Switching Frequency	All	Fsw	250	300	340	kHz
Output Voltage Trim Range <sup>2</sup>	2.5V		90		105	%
	1.8V		90		110	
	1.5V		90		110	
Remote Sense Compensation	2.5V				5	%
	1.8V				10	
	1.5V				10	
Weight	All			8.3		g

1. Vin=3.3V, full load and Ta=25° C.




2. Total adjustment of trim, setpoint and remote sense combined should not exceed 5% @nominal Vin, 25° C ambient for the 2.5V output module.

### Control Specifications

Parameter	Module	Symbol	Min	Typical	Max	Units
Remote On/Off	All	Vouten				V
Signal Low (Unit Off)	All		-0.3		0.3	V
Signal High (Unit On)	All		2.8		4	V

BP02V7PC-10C

### Efficiency Data

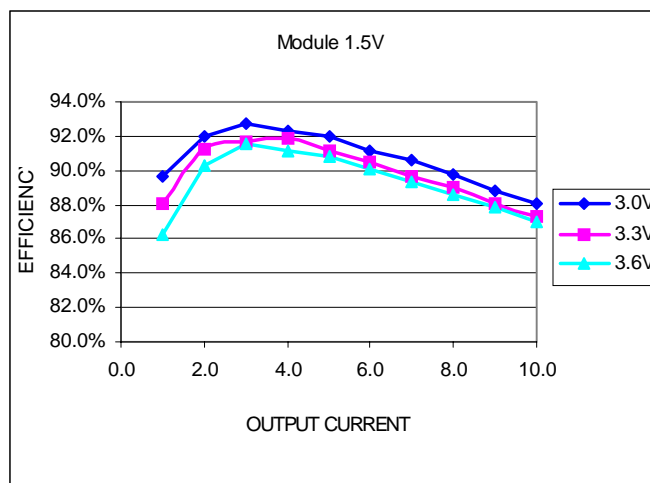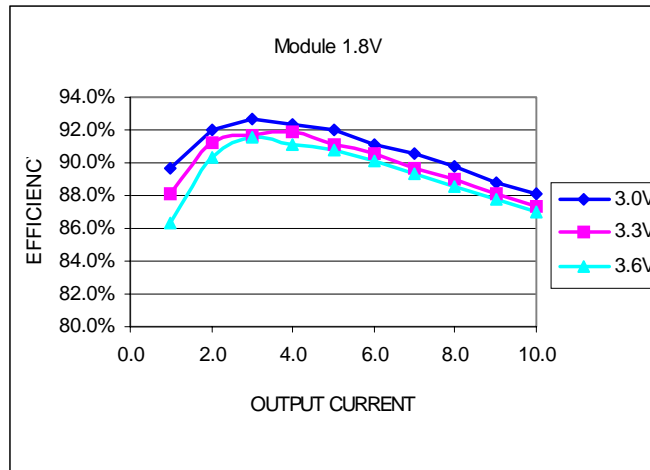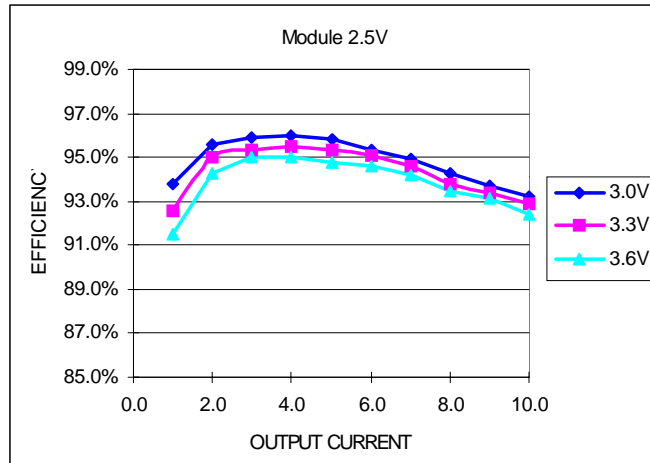

©2002 Bel Fuse Inc. Specifications subject to change without notice. 03.02

#### CORPORATE

**Bel Fuse Inc.**  
 206 Van Vorst Street  
 Jersey City, NJ 07302  
 Tel 201-432-0463  
 Fax 201-432-9542  
 www.belfuse.com

#### FAR EAST


**Bel Fuse Ltd.**  
 8F / 8 Luk Hop Street  
 San Po Kong  
 Kowloon, Hong Kong  
 Tel 852-2328-5515  
 Fax 852-2352-3706  
 www.belfuse.com

#### EUROPE


**Bel Fuse Europe Ltd.**  
 Preston Technology Management Centre  
 Marsh Lane, Suite G7, Preston  
 Lancashire, PR1 8UD, U.K.  
 Tel 44-1772-556601  
 Fax 44-1772-888366  
 www.belfuse.com

BP02V7PC-10C


**Ripple and Noise**

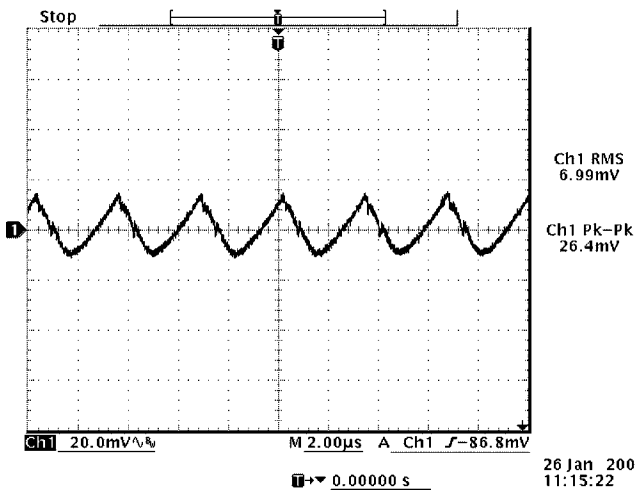

Ripple and noise at full load and 3.3Vdc input, 2.5V output and Ta=25° C

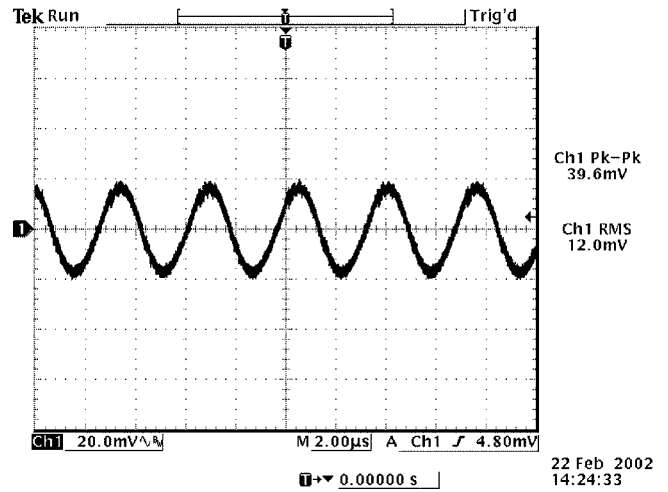

Ripple and noise at full load and 3.3Vdc input, 1.8V output and Ta=25° C

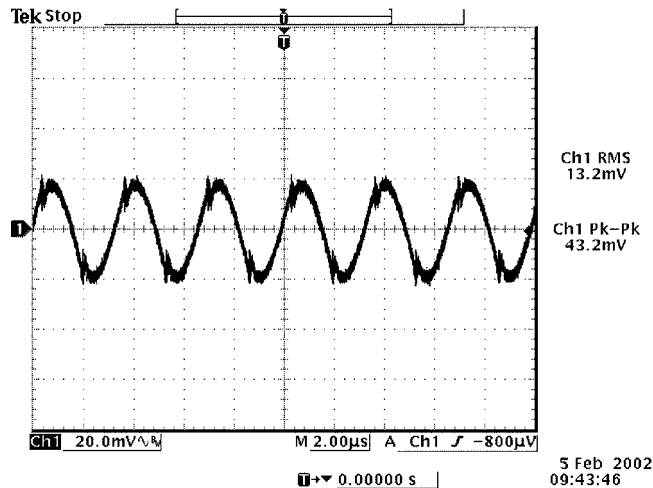


Ripple and noise at full load and 3.3Vdc input, 1.5V output and Ta=25° C


BP02V7PC-10C

### Transient Response


Transient response:  $di/dt = 0.5A/\mu S$ , external load capacitance  $C_o = 470\mu F$  (electrolytic)

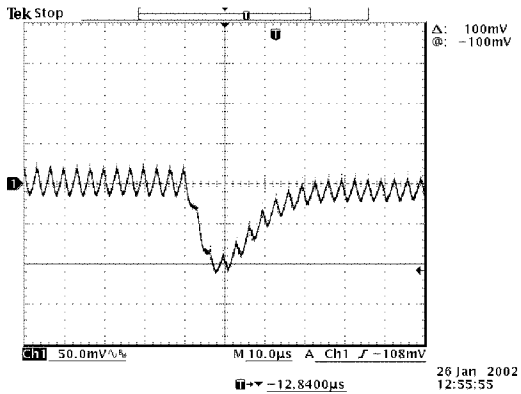


Vout=2.5V  
50% to 100% load transients at 3.3V input and  $T_a=25^\circ C$

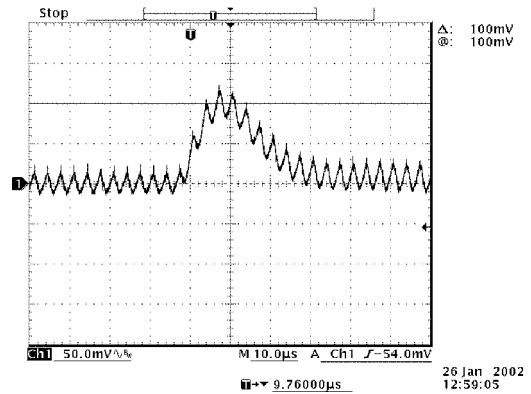


Vout=2.5V  
100% to 50% load transients at 3.3V input and  $T_a=25^\circ C$

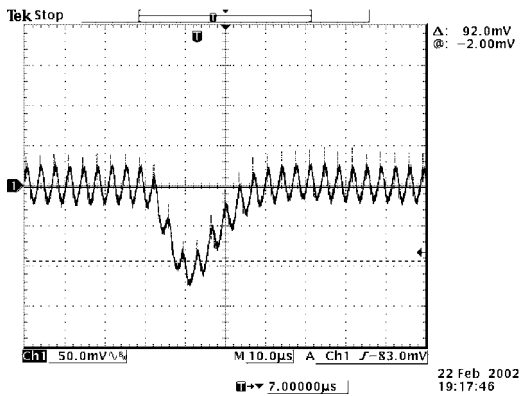


Vout=1.8V  
50% to 100% load transients at 3.3V input and  $T_a=25^\circ C$

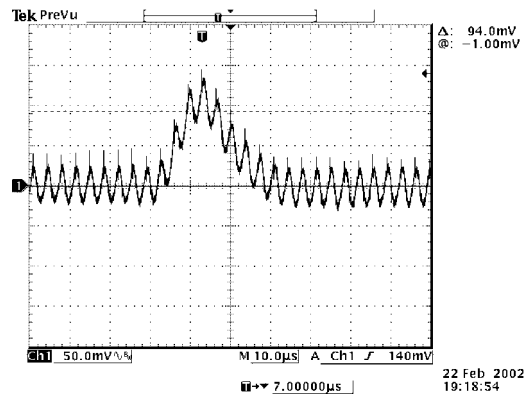

Vout=1.8V  
100% to 50% load transients at 3.3V input and  $T_a=25^\circ C$

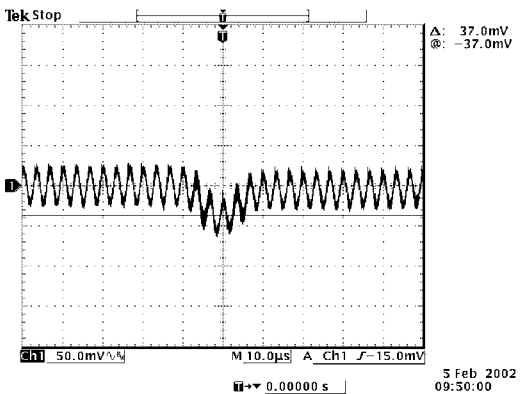

Vout=1.5V  
50% to 100% load transients at 3.3V input and  $T_a=25^\circ C$

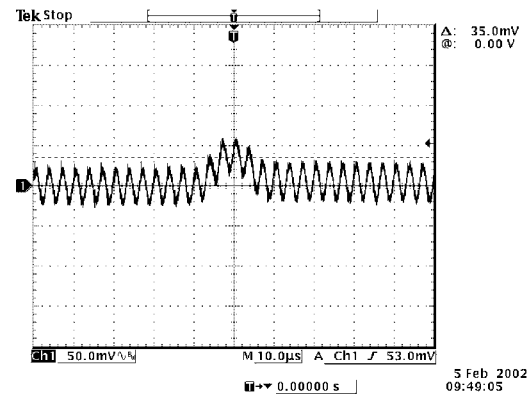


Vout=1.5V  
100% to 50% load transients at 3.3V input and  $T_a=25^\circ C$




BP02V7PC-10C

**Thermal Considerations**

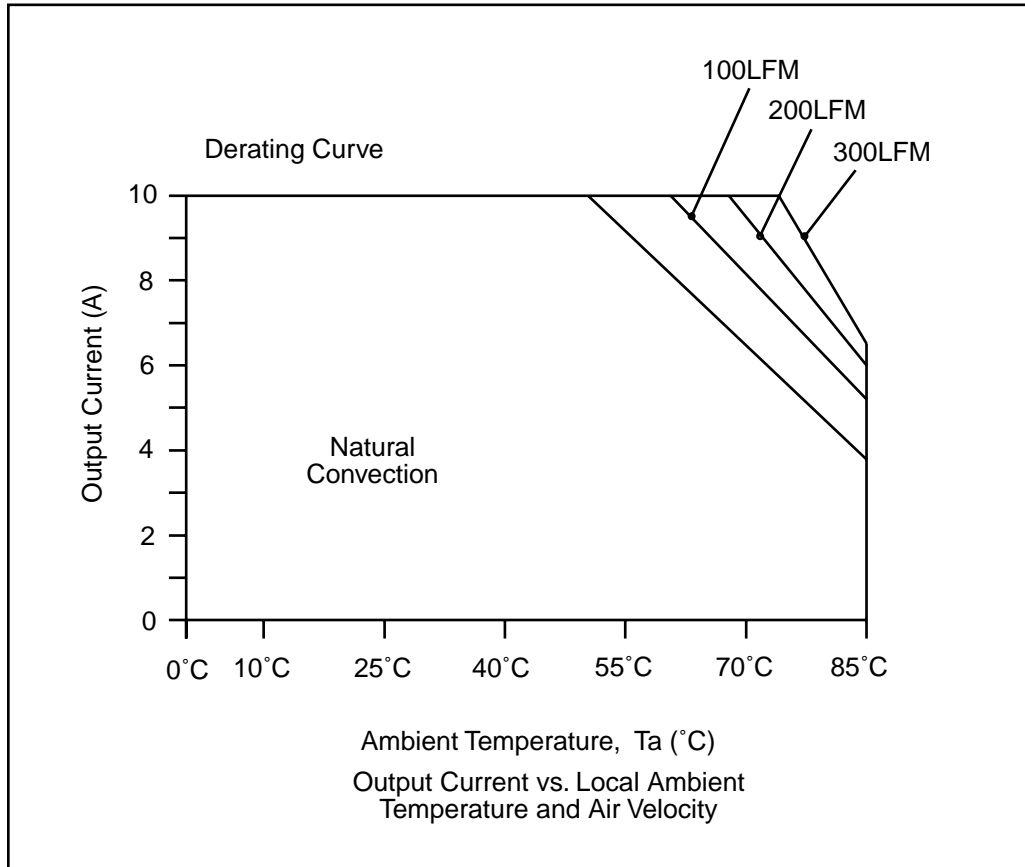


BP02V7PC-10C

### Mechanical

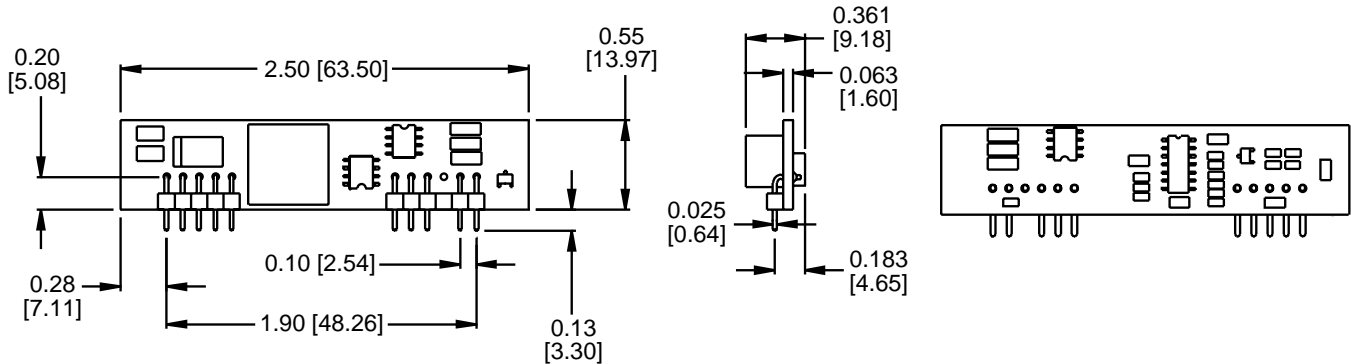

Dimensions are in inches [millimeters].  
Standard dimension tolerance is  $\pm 0.005$  [0.13] unless otherwise noted.

Pin	Function
1	+Vo
2	+Vo
3*	No Pin
4	+Vo
5	Ground
6	Ground
7	+Vin
8	+Vin
9	No Pin
10	Trim
11	Remote On/Off

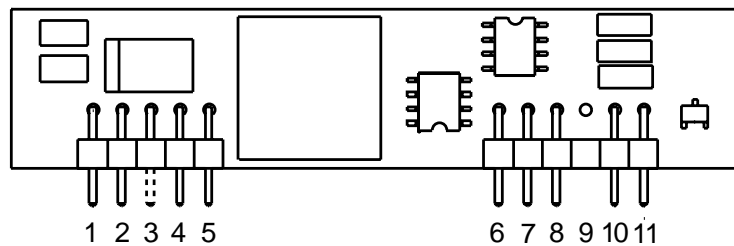

\*Pin 3 used for remote sense option.

©2002 Bel Fuse Inc. Specifications subject to change without notice. 03.02

#### CORPORATE

**Bel Fuse Inc.**  
206 Van Vorst Street  
Jersey City, NJ 07302  
Tel 201-432-0463  
Fax 201-432-9542  
www.belfuse.com

#### FAR EAST

**Bel Fuse Ltd.**  
8F / 8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel 852-2328-5515  
Fax 852-2352-3706  
www.belfuse.com

#### EUROPE

**Bel Fuse Europe Ltd.**  
Preston Technology Management Centre  
Marsh Lane, Suite G7, Preston  
Lancashire, PR1 8UD, U.K.  
Tel 44-1772-556601  
Fax 44-1772-888366  
www.belfuse.com