

January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

QUICK REFERENCE DATA

- $V_R = 6000V$
- $I_F = 500mA$
- $t_{rr} = 350ns$
- $V_F = 11.2V$


AXIAL LEADED HERMETICALLY SEALED HIGH VOLTAGE FAST RECTIFIER DIODE

- Low reverse recovery time
- High thermal shock resistance
- Glass passivated for hermetic sealing
- Low switching losses
- Soft, non-snap off, recovery characteristics

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	PF75	Unit
Working reverse voltage	V_{RWM}	6000	V
Repetitive reverse voltage	V_{RRM}	7500	V
Surge reverse voltage	V_{RSM}	8000	V
Average forward current (@ 55°C in oil)	$I_{F(AV)}$	500	mA
Repetitive surge current (@ 55°C in oil, lead length 0.375")	I_{FRM}	5	A
Non-repetitive surge current ($t_p = 8.3ms$, @ V_R & T_{jmax})	I_{FSM}	22	A
Storage temperature range	T_{STG}	-65 to +165	°C
Operating temperature range	T_{OP}	-65 to +165	°C

MECHANICAL

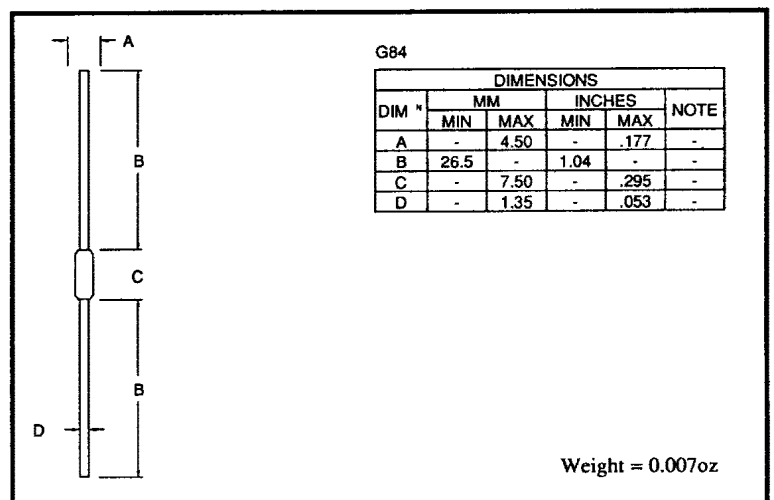

January 7, 1998

CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	PF75	Unit
Average forward current max. (pcb mounted; $T_A = 55^\circ\text{C}$) for sine wave	$I_{F(AV)}$	180	mA
	$I_{F(AV)}$	185	mA
Average forward current max. (unstirred oil at 55°C) for sine wave	$I_{F(AV)}$	490	mA
	$I_{F(AV)}$	500	mA
I^2t for fusing ($t = 8.3\text{ms}$) max.	I^2t	2.0	A^2S
Forward voltage drop max. @ $I_F = 550\text{mA}$, $T_j = 25^\circ\text{C}$	V_F	11.2	V
Reverse current max. @ V_{RWM} , $T_j = 25^\circ\text{C}$ @ V_{RWM} , $T_j = 100^\circ\text{C}$	I_R	5.0	μA
	I_R	50	μA
Reverse recovery time max. 50mA I_F to 100mA I_R . Recover to 25mA I_{RR} .	t_{rr}	350	nS
Junction capacitance typ. @ $V_R = 5\text{V}$, $f = 1\text{MHz}$	C_j	4.0	pF
Thermal resistance - junction to oil Stirred oil	$R_{\theta JO}$	18	$^\circ\text{C}/\text{W}$
	$R_{\theta JO}$	24	$^\circ\text{C}/\text{W}$
Thermal resistance - junction to amb. on 0.06" thick pcb. 1oz copper.	$R_{\theta JA}$	80	$^\circ\text{C}/\text{W}$

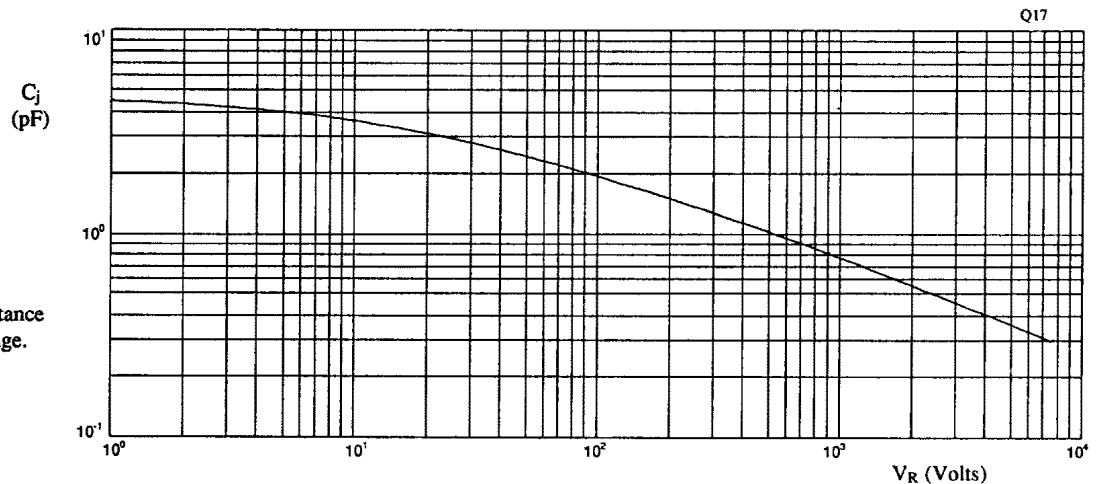


Fig 1. Junction capacitance against reverse voltage.

January 7, 1998

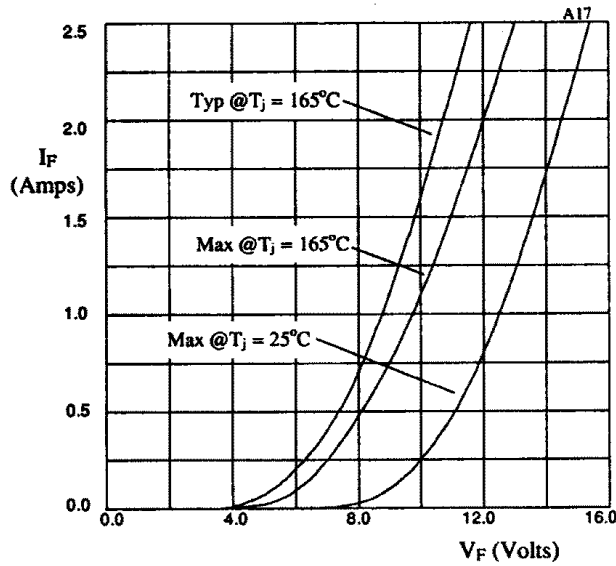


Fig 2. Forward voltage drop as a function of forward current.

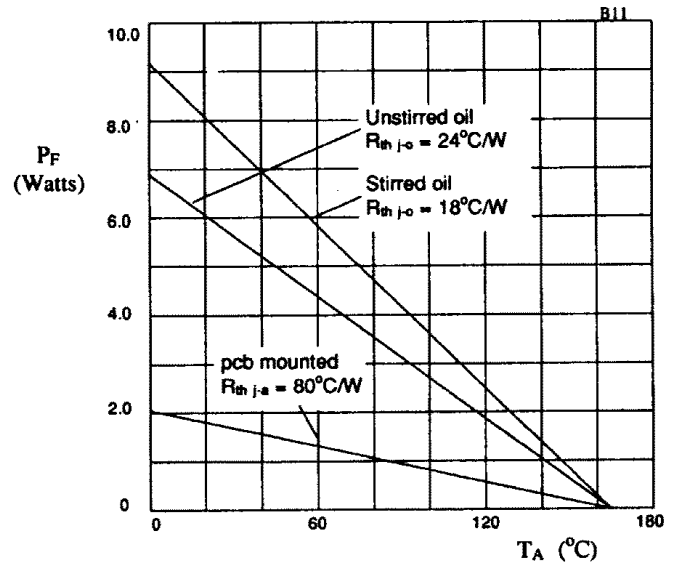


Fig 3. Power derating in air and oil.

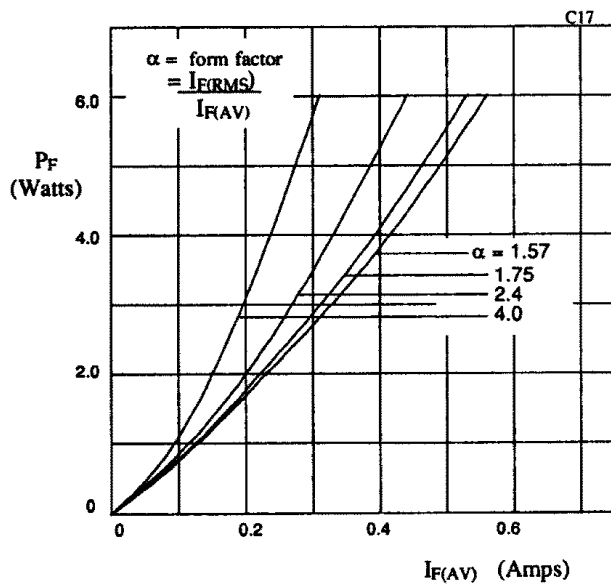


Fig 4. Forward power dissipation as a function of forward current, for sinusoidal operation.

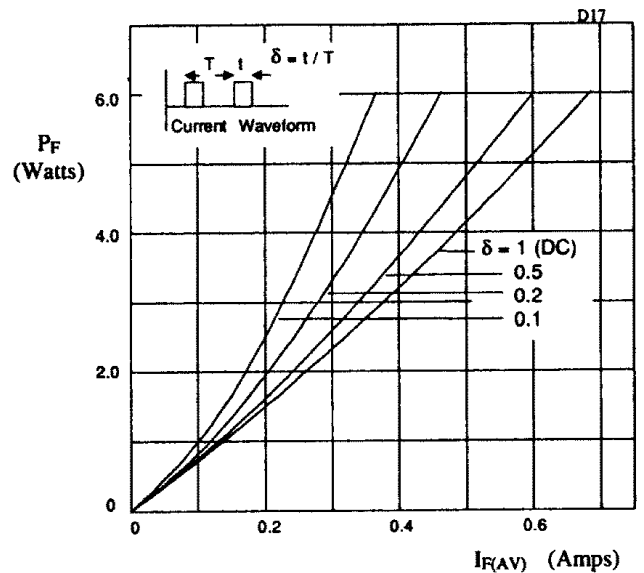


Fig 5. Forward power dissipation as a function of forward current, for square wave operation.