

TOSHIBA

MICROWAVE SEMICONDUCTOR

TECHNICAL DATA

MICROWAVE POWER GaAs FET

TIM5964-8

FEATURES:

- HIGH POWER
P_{1dB} = 39 dBm at 5.9 GHz to 6.4 GHz
- BROAD BAND INTERNALLY MATCHED
- HIGH GAIN
G_{1dB} = 8.0 dB at 5.9 GHz to 6.4 GHz
- HERMETICALLY SEALED PACKAGE

RF PERFORMANCE SPECIFICATIONS (T_a = 25°C)

CHARACTERISTICS	SYMBOL	CONDITION	UNIT	MIN.	TYP.	MAX.
Output Power at 1 dB Compression Point	P _{1dB}	V _{DS} = 10 V f = 5.9~6.4GHz	dBm	38.0	39.0	-
Power Gain at 1 dB Compression Point	G _{1dB}		dB	7.0	8.0	-
Drain Current	I _{DS}		A	-	2.2	2.8
Power Added Efficiency	η _{add}		%	-	30	-
Channel-Temperature Rise	ΔT _{ch}	V _{DS} × I _{DS} × R _{th(c-c)}	°C	-	-	80

ELECTRICAL CHARACTERISTICS (T_a = 25°C)

CHARACTERISTICS	SYMBOL	CONDITION	UNIT	MIN.	TYP.	MAX.
Trans-conductance	g _m	V _{DS} = 3 V I _{DS} = 3.0 A	mS	-	1800	-
Pinch-off Voltage	V _{GSoff}	V _{DS} = 3 V I _{DS} = 40 mA	V	-2	-3.5	-5
Saturated Drain Current	I _{DSS}	V _{DS} = 3 V V _{GS} = 0 V	A	-	5.8	7.5
Gate-Source Breakdown Voltage	V _{GSO}	I _{GS} = -120 μA	V	-5	-	-
Thermal Resistance	R _{th(c-c)}	Channel to Case	°C/W	-	2.3	3.5

- * The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- * The information contained herein may be changed without prior notice. It is therefore advisable to contact TOSHIBA before proceeding with the design of equipment incorporating this product.



TOSHIBA CORPORATION


Revised May 1989

TIM5964-8

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	UNIT	RATING
Drain-Source Voltage	V_{DS}	V	15
Gate-Source Voltage	V_{GS}	V	-5
Drain Current	I_{DS}	A	8
Total Power Dissipation ($T_c = 25^\circ\text{C}$)	P_T	W	37.5
Channel Temperature	T_{ch}	$^\circ\text{C}$	175
Storage Temperature	T_{stg}	$^\circ\text{C}$	-65-175

PACKAGE OUTLINE (2-11D1B)

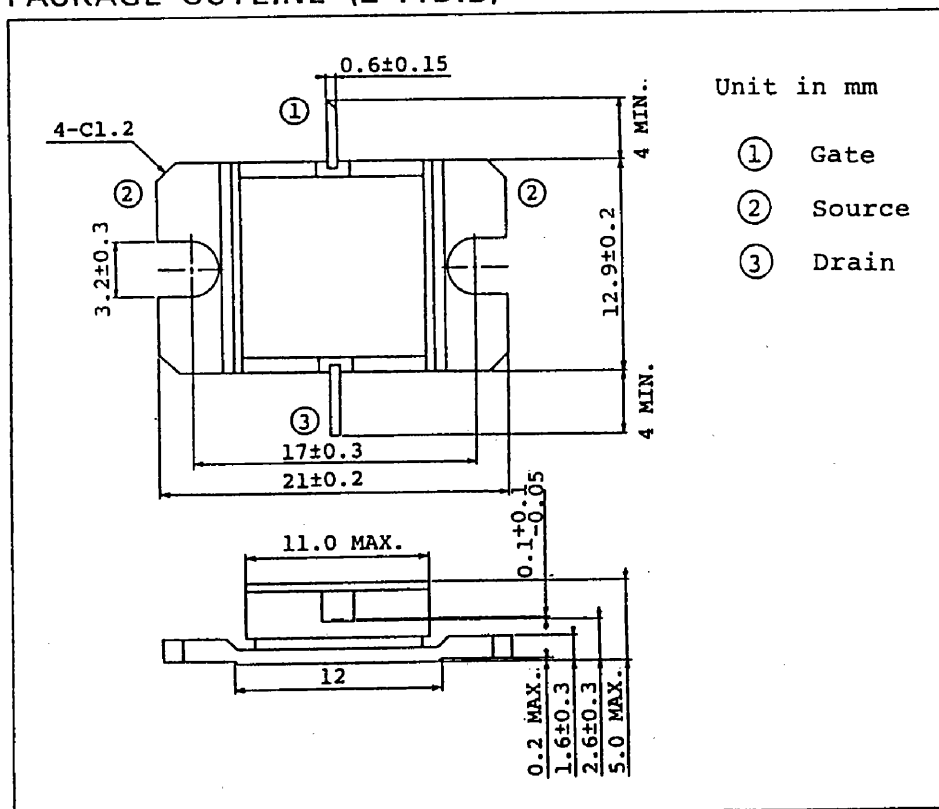


HANDLING PRECAUTIONS FOR PACKAGED TYPE


Soldering iron should be grounded and the operating time should not exceed 10 seconds at 260°C .

RF PERFORMANCES

Output Power vs. Frequency

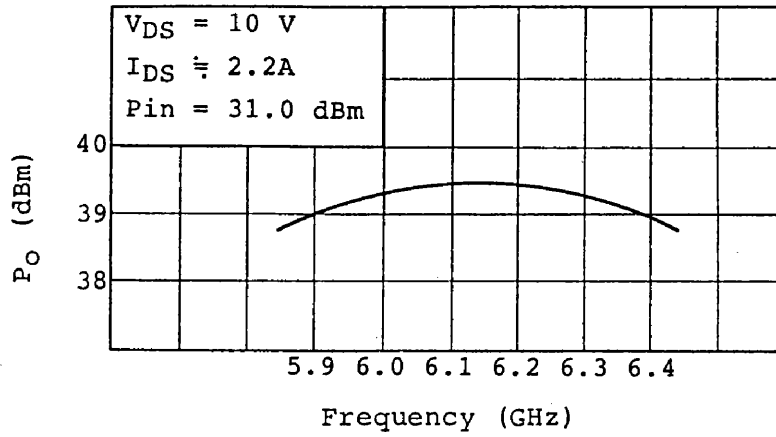


Output Power vs. Input Power

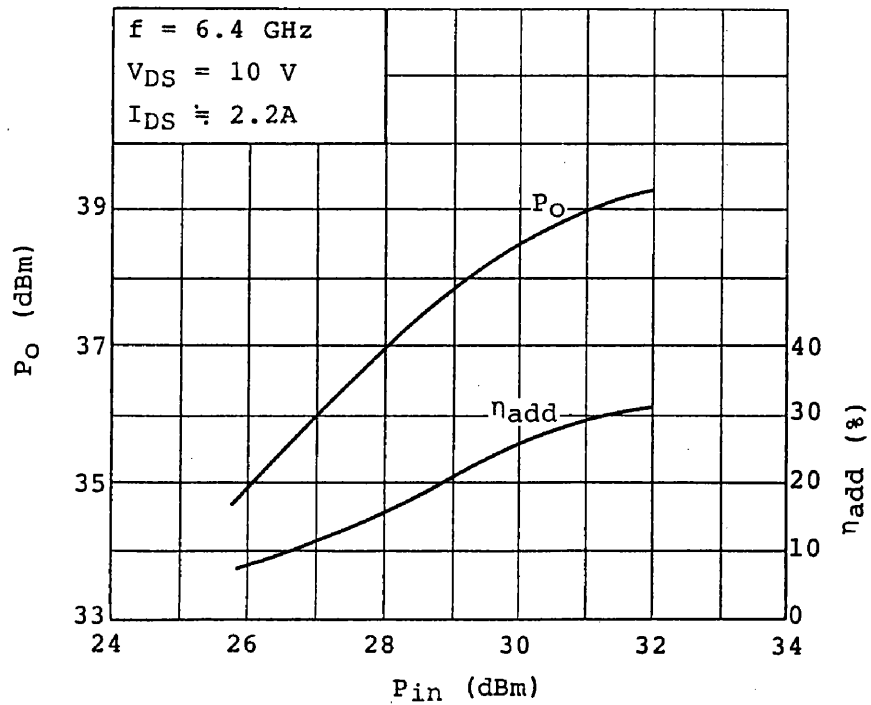

TIM5964-8

POWER DISSIPATION VS. CASE TEMPERATURE


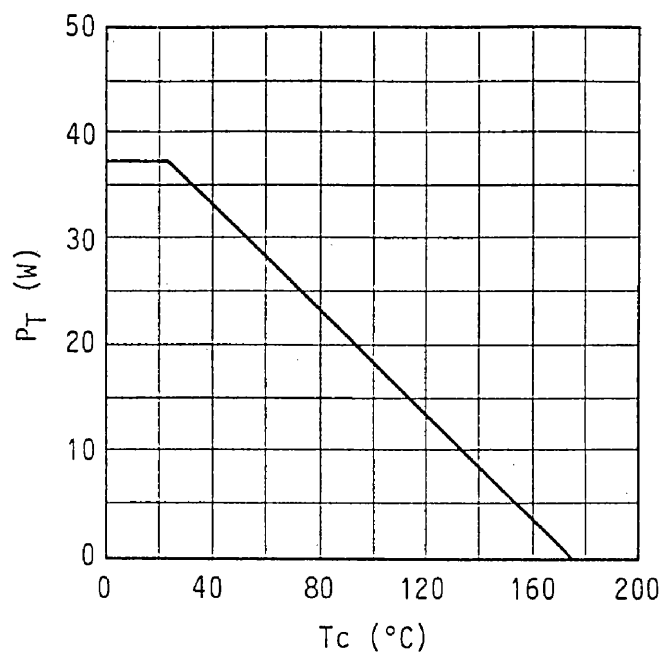


TIM5964-8

TIM5964-8 S-PARAMETERS (MAGN.and ANGLES)

$V_{DS} = 10V, I_{DS} = 2.0A$

$f = 5.4 \sim 6.8GHz$

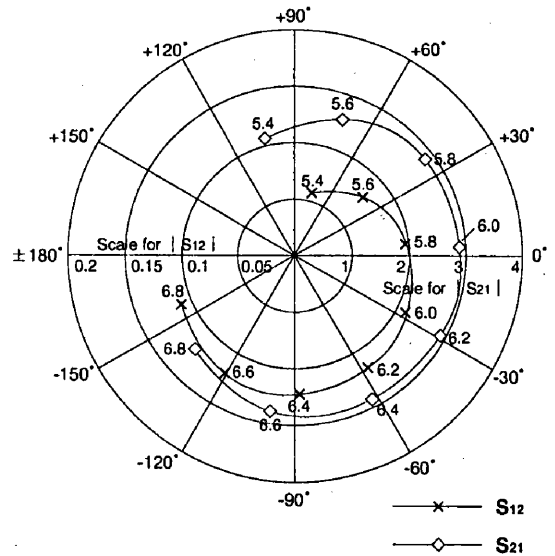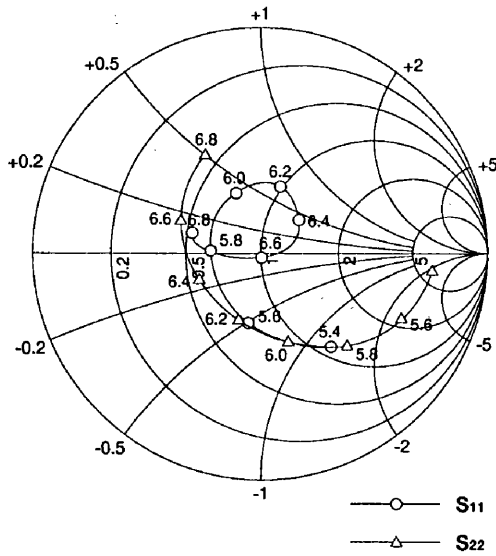

FREQUENCY (GHz)	S_{11}		S_{21}		S_{12}		S_{22}	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
5.4	0.515	-53	2.137	104	0.058	74	0.761	-6
5.6	0.312	-100	2.567	71	0.079	41	0.685	-25
5.8	0.217	177	2.814	37	0.097	6	0.556	-47
6.0	0.287	112	2.880	3	0.108	-27	0.411	-73
6.2	0.309	74	2.883	-29	0.116	-57	0.306	-108
6.4	0.219	42	2.882	-62	0.121	-88	0.290	-156
6.6	0.014	-86	2.788	-99	0.121	-121	0.380	157
6.8	0.312	163	2.430	-137	0.109	-157	0.502	119