



SAW Components

Data Sheet B5006





SAW Components

B5006

Low-Loss Filter

190,0 MHz

Data Sheet


Ceramic package QCC12C

Features

- Low-loss IF filter for W-CDMA base station
- High near-by selectivity
- Temperature stable
- Balanced or unbalanced operation possible
- Ceramic SMD package

Terminals


- Gold plated

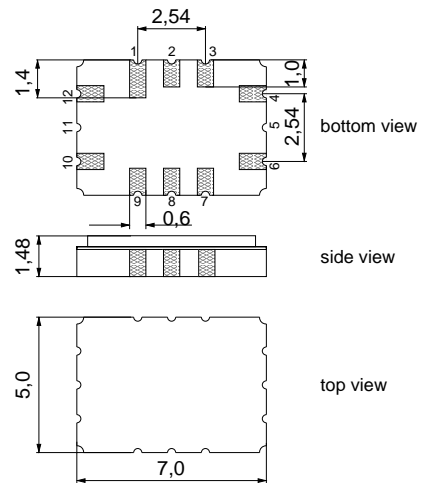

Dimensions in mm, approx. weight 0,2 g

Pin configuration

- | | |
|-------------|----------------------------------|
| 12 | Input |
| 1 | Input ground or balanced input |
| 6 | Output |
| 7 | Output ground or balanced output |
| 2, 4, 8, 10 | To be grounded |
| 3, 9 | Case ground |

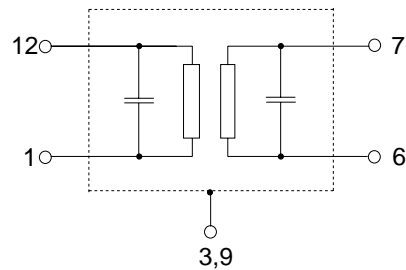

Type	Ordering code	Marking and Package according to	Packing according to
B5006	B39191-B5006-H310	C61157-A7-A95	F61074-V8170-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T_A	-40 / +85	°C
Storage temperature range	T_{stg}	-40 / +85	°C
DC voltage	V_{DC}	0	V
Source power	P_s	10	dBm


SAW Components
B5006
Low-Loss Filter
190,0 MHz
Data Sheet
Characteristics

Operating temperature range:

$$T_A = -10 \dots +85 \text{ } ^\circ\text{C}$$

Terminating source impedance:

$$Z_S = 50 \text{ } \Omega \text{ and matching network}$$

Terminating load impedance:

$$Z_L = 50 \text{ } \Omega \text{ and matching network}$$

		min.	typ.	max.	
Nominal frequency	f_N	—	190,0	—	MHz
Minimum insertion attenuation	α_{\min}	—	10,9	12,0	dB
Passband width					
	$\alpha_{\text{rel}} \leq 1 \text{ dB}$		3,84	4,1	MHz
	$\alpha_{\text{rel}} \leq 30 \text{ dB}$		—	6,4	MHz
Amplitude ripple (p-p)	$\Delta\alpha$				
	$f_N \pm 1,92 \text{ MHz}$	—	0,5	1,0	dB
Phase ripple (rms)	$\Delta\phi$				
	$f_N \pm 1,92 \text{ MHz}$	—	0,8	—	$^\circ \text{ rms}$
Error vector magnitude	<i>EVM</i>				
	$f_N \pm 1,92 \text{ MHz}$	—	2,0	—	%
Adjacent channel suppression	<i>ACS</i>				
	$f_N \pm 3,08 \text{ MHz} \dots f_N \pm 6,92 \text{ MHz}$	—	35	—	dB
Relative attenuation (relative to α_{\min})	α_{rel}				
	$f_N \pm 5 \text{ MHz} \dots f_N \pm 100 \text{ MHz}$	40	48	—	dB
Temperature coefficient of frequency¹⁾	TC_f	—	-0,036	—	ppm/K ²
Turnover temperature	T_0	—	20	—	$^\circ\text{C}$

 1) Temperature dependence of f_c : $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



SAW Components

B5006


Low-Loss Filter

190,0 MHz

Data Sheet

Matching network to 50 Ω

(element values depend on PCB layout)

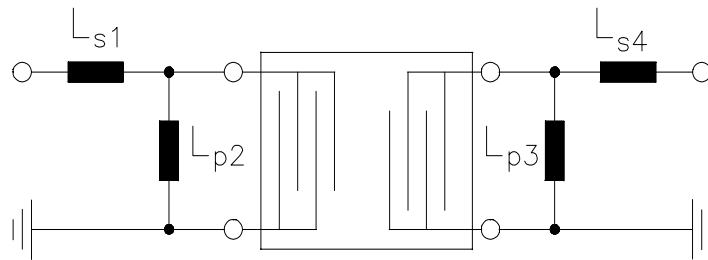

$$L_{s1} = 47 \text{ nH} + 220 \text{ nH}$$

$$L_{p2} = 150 \text{ nH}$$


$$L_{p3} = 150 \text{ nH}$$

$$L_{s4} = 330 \text{ nH} + 68 \text{ nH}$$




Data Sheet

Transfer function

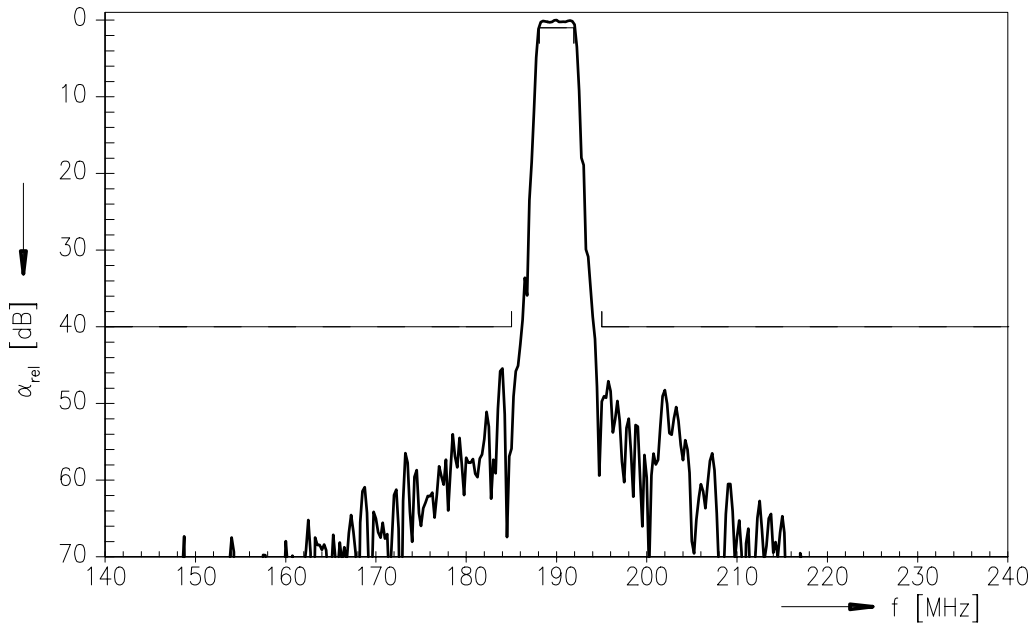

Transfer function (pass band)

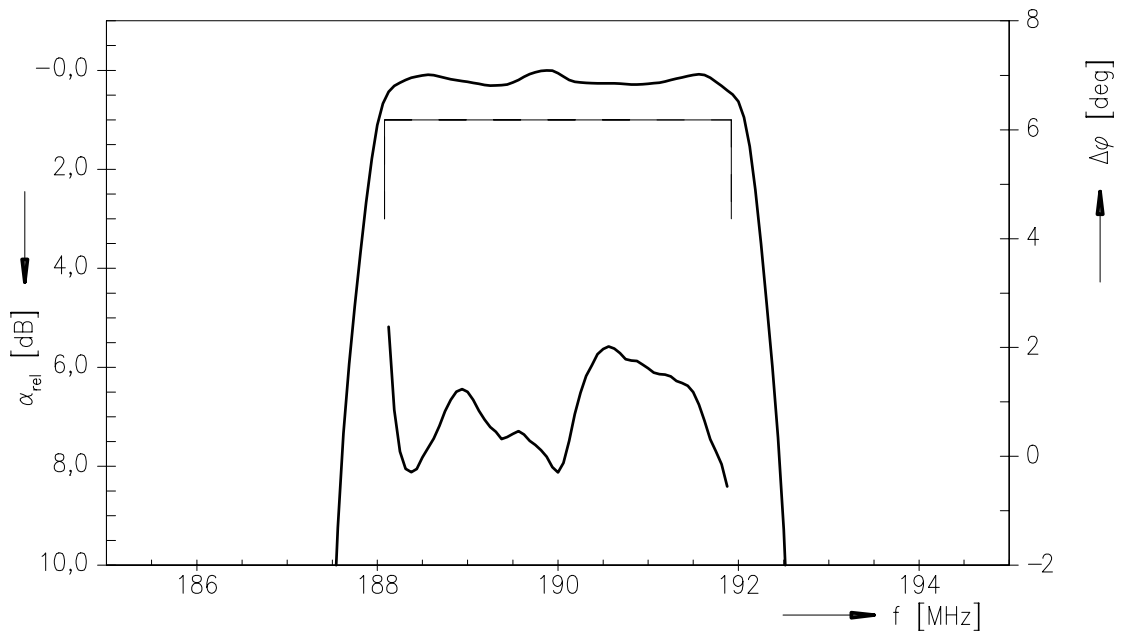



SAW Components

B5006

Low-Loss Filter

190,0 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.