

# HG62G Series High-Speed CMOS Gate Array

## HITACHI

Mar. 1992  
Rev. 1

### Description

The HG62G series free-channel gate arrays are fabricated with 0.8 μm CMOS process and double metal interconnect technology. The HG62G series consists of 4 master slices ranging from 14,540 to 34,797 raw gates with high I/O pin counts.

Internal gate delay time is as low as 0.3 ns per gate and output buffer speed is improved as 1.8 ns with maximum drivability of 24 mA output current.

The macro cells are compatible with the HG62S series, including RAM availability.

With the HG62G, it is easy to design high-speed, high-performance systems with on-chip autodiagnosis support.

### Features

- Ultrahigh-speed operation
  - Internal gate (2-input power NAND, FO = 2, AI = 2 mm).....0.3 ns typ.
  - Input buffer (FO = 2, AI = 2 mm).....0.8 ns typ.
  - Output buffer (C<sub>L</sub> = 50 pF).....1.8 ns typ.
- High drivability output
  - Selective buffers with I<sub>OL</sub> = 2 mA, 8 mA, 12 mA or 24 mA
- High I/O pin counts
  - Around 40% improvement in a comparison with current HG62S series.
- Low power dissipation
  - Internal gate at 10 MHz operation .....90 μw/gate typ.
- Low voltage operation
  - Operating voltage range.....2.7 to 5.5 V
- Autodiagnosis
  - Automatic test circuit and test pattern generation
- RAM capability
  - Various single-/dual-port RAMS
  - Built-in autodiagnosis function
- Macro cell library variation
  - Compatibility with HG62S series
  - Power-type cell variation
  - Normal or scan type latches and flip-flops available
- Wide variety of input and output cells
  - Input, output and I/O buffers
  - TTL or CMOS levels
  - Reduced noise output buffers
  - Driving capacity: I<sub>OL</sub> = 2, 8, 12, 24 mA
  - Oscillator, Schmitt-trigger inputs, pull-up/down resistors
- Package variety: High pin count packages
- Design support environment
  - Hierarchical design support
  - Fault simulator for test pattern evaluation
  - Automatic test pattern
  - Local design support center
  - EWS (engineering work station) support

### Ordering Information

Item	HG62G014	HG62G019	HG62G027	HG62G035
Gate count	14,540	19,519	27,587	34,797
Pad count	160	184	216	240



## HG62G Series

### Maximum Available Signal Pins

Package Type	Body	HG62G014	HG62G019	HG62G027	HG62G035
DILP-64S		60	60	—	—
QFP-64	14 × 14 mm	60	60	60	—
QFP-80	14 × 14 mm	(under dev)	(under dev)	76	76
QFP-100	14 × 14 mm	(under dev)	(under dev)	(under dev)	96
QFP-144	20 × 20 mm	(under dev)	(under dev)	—	—
QFP-176	24 × 24 mm	—	—	(under dev)	(under dev)
QFP-136	28 × 28 mm	128	128	(under dev)	(under dev)
QFP-168	28 × 28 mm	136	152	152	152
QFP-208	28 × 28 mm			188	188

Note: (under dev): Under development

### Logic Design Cautions

#### Number of Usable Gates

In free-channel gate arrays, a routing area is kept open by spoiling some of the basic cells in the channel area used. Therefore, the actual gate count depends on the logic circuit. Table 3 shows approximate gate counts.

If RAM is used, Hitachi needs to know the memory density (word/bit organization) and random logic gate counts to quote the best master slice selection.

#### Autodiagnosis

Automatic generation of high fault coverage (more than 95%) test circuits and test patterns requires the following:

- Dedicate two pins to test functions (figure 1).
- Use cells with scan function for latches, flip-flops, and shift registers. Calculations for timing design and gate count estimation should use macro cells with the scan function. The names of macro cells with the scan function start with "T". For example, FD (normal) → TFD (scan type).

### Approximate Actual Gate Counts

Master	HG62G014	HG62G019	HG62G027	HG62G035
Usable gates (k gates)	5.8–6.5	7.8–8.8	11.0–12.4	13.9–15.7

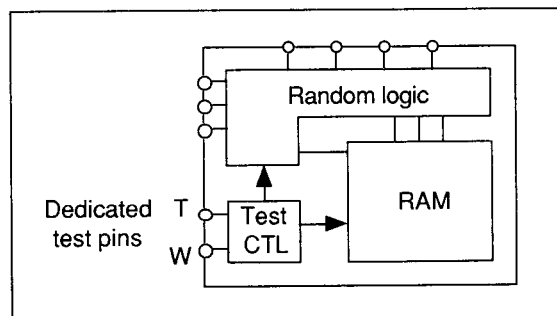


Figure 1 Autodiagnostic Pins

- Autodiagnosis is also available for circuits with RAM, and the RAM itself can be autodiagnosed. Even when autodiagnosis is not required for RAM but only for the peripheral circuits, use RAM cells with the scan function.

$$t_{plh} = t_{olh} + (K_{lh} \times C_L)$$

$$t_{phl} = t_{ohl} + (K_{hl} \times C_L)$$

$$C_L = \Sigma C_{AL} + 0.05 \times \Sigma LV$$

Where:

$C_{AL}$ : Statistic wiring capacitance per fanout  
 LV: Input load constant

**Blocks**

Logically unified circuits can be placed in a block during layout. The maximum number of gates in a block should be 4,000. Also, the total number of gates in all blocks should be less than 60% of the total number of gates.

The macro cell library lists the  $t_o$ , K, and LV constants.

In delay time calculations, the statistic wiring capacitance per fanout depends on whether the circuits are part of a block layout (table 1).

**Gate Delay Time**

Gate delay time calculations are more accurate when they use actual routing information after automatic layout. However, a rough estimation is needed to prevent timing design errors in the earlier design phase. Gate delay times are estimated as follows:

**Table 1 Statistic Wiring Capacitance**

Unit : (pF/fo)

	Inter-block		
	Intra-block	G014, G019	G027, S035
$C_{AL}$	0.12	0.25	0.35

Note: Gate delay time distribution: 35%–180%  
 $V_{CC} = 5 V \pm 5\%$ ,  $T_a = -20^\circ C$  to  $+75^\circ C$

**Macro Cell Library**

**I/O Buffers**

- Input buffers

Macro	Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay					
							In- put Name	Out- put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
TTL-level input buffer IT		—	—			D1			0.53	0.16	1.19	0.14
CMOS-level input buffer IC		—	—			D1			0.65	0.17	0.82	0.14

Note) When using EWS for gate array design, please reconfirm the latest availability of cells.

# HG62G Series

• Input buffers (cont)

Macro Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
									$t_{plh}$ (ns)		$t_{phl}$ (ns)	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Schmitt-trigger TTL-level input buffer ITS		—	—			D1			0.83	0.22	1.57	0.27
Schmitt-trigger CMOS-level input buffer ICS		—	—			D1			0.96	0.26	1.34	0.26
TTL-level input buffer with pull-up ITU		—	—			D2			0.53	0.16	1.19	0.14
TTL-level input buffer with pull-down ITD		—	—			D2			0.53	0.16	1.19	0.14
CMOS-level input buffer with pull-up ICU		—	—			D2			0.65	0.17	0.82	0.14
CMOS-level input buffer with pull-down ICD		—	—			D2			0.65	0.17	0.82	0.14
Schmitt-trigger TTL-level input buffer with pull-up ITSU		—	—			D2			0.83	0.22	1.57	0.27

• Input buffers (cont)





Macro			LV	Clamp Level when Open	Symbol	Symbol No.	Input Name	Output Name	Delay			
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
									t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
Schmitt-trigger TTL-level input buffer with pull-down ITSD		—	—			D2			0.83	0.22	1.57	0.27
Schmitt-trigger CMOS-level input buffer with pull-up ICSU		—	—			D2			0.96	0.26	1.34	0.26
Schmitt-trigger CMOS-level input buffer with pull-down ICSD		—	—			D2			0.96	0.26	1.34	0.26

• Crystal oscillators








Macro			LV	Clamp Level when Open	Symbol	Symbol No.	Input Name	Output Name	Delay			
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
									t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
OSC in (2 M to 20 MHz) XIN		—	—			D1			2.40	0.19	1.80	0.11
OSC out (2 M to 20 MHz) XOUT		—	—			D1			0.96	0.12	0.66	0.13

## HG62G Series

### • Crystal oscillators (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay				
Function and Macro Name	Equiv. Circuit						In- put Name	Out- put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)
								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
OSC in (32 k to 400 kHz) XIN1		—	—			D1		5.34	6.57	3.28	2.88
OSC out (32 k to 400 kHz) XOUT1		—	—			D1		0.96	0.12	0.66	0.13

### • Outputs and bidirectional buffers ( $I_{OL} = 2\text{ mA}$ )

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay				
Function and Macro Name	Equiv. Circuit						In- put Name	Out- put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)
								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Totem-pole output OT1		—	3			D1		1.92	0.114	2.22	0.097
Three-state output OZ1		—	4			E		2.12	0.114	2.42	0.097
			5	D			1.92		2.22		
Open-drain output ODN1		—	3			D1		$(t_{olz})$ 1.92	$(K_{lz})$ —	$(t_{ozl})$ 2.22	$(K_{zl})$ 0.097
TTL-level I/O buffer ITO1	Refer to equivalent circuit of three-state output.  Refer to equivalent circuit of input buffers.	—	4			E		2.12	0.114	2.42	0.097
			5	D			1.92		2.22		
								0.53	0.16	1.19	0.14

# HG62G Series

• Outputs and bidirectional buffers ( $I_{OL} = 2 \text{ mA}$ ) (cont)

Macro	Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
										$t_{\text{plh}}$ (ns)		$t_{\text{phl}}$ (ns)	
										$t_{\text{olh}}$	$K_{\text{lh}}$	$t_{\text{ohl}}$	$K_{\text{hl}}$
CMOS-level I/O buffer ICO1	Refer to equivalent circuit of three-state output.		—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	
TTL-level I/O buffer with Schmitt-trigger ITSO1	Refer to equivalent circuit of three-state output.		—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	
TTL-level I/O buffer with Schmitt-trigger ITSO1	Refer to equivalent circuit of input buffers.		—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	
CMOS-level I/O buffer with Schmitt-trigger ICSO1	Refer to equivalent circuit of three-state output.		—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	
Three-state output buffer with pull-up OZ1U			—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	
Three-state output buffer with pull-down OZ1D			—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	
Open-drain output buffer with pull-up ODN1U			—	3			D2			$(t_{\text{olz}})$ 1.92	$(K_{\text{lz}})$ —	$(t_{\text{ozl}})$ 2.22	$(K_{\text{zl}})$ 0.097
TTL-level I/O buffer with pull-up ITO1U	Refer to equivalent circuit of three-state output.		—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	
TTL-level I/O buffer with pull-up ITO1U	Refer to equivalent circuit of input buffers.		—	4			D2	E D		2.12	0.114	2.42	0.097
				5						1.92		2.22	


# HG62G Series

• Outputs and bidirectional buffers ( $I_{OL} = 2 \text{ mA}$ ) (cont)

Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
									$t_{plh}$ (ns)		$t_{phl}$ (ns)	
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
TTL-level I/O buffer with pull-down ITO1D	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.12	0.114	2.42	0.097
	Refer to equivalent circuit of input buffers.		5						1.92		2.22	
CMOS-level I/O buffer with pull-up ICO1U	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.12	0.114	2.42	0.097
	Refer to equivalent circuit of input buffers.		5						1.92		2.22	
CMOS-level I/O buffer with pull-down ICO1D	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.12	0.114	2.42	0.097
	Refer to equivalent circuit of input buffers.		5						1.92		2.22	
TTL-level Schmitt-trigger I/O buffer with pull-up ITSO1U	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.12	0.114	2.42	0.097
	Refer to equivalent circuit of input buffers.		5						1.92		2.22	0.83
TTL-level Schmitt-trigger I/O buffer with pull-down ITSO1D	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.12	0.114	2.42	0.097
	Refer to equivalent circuit of input buffers.		5						1.92		2.22	0.83
CMOS-level Schmitt-trigger I/O buffer with pull-up ICSO1U	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.12	0.114	2.42	0.097
	Refer to equivalent circuit of input buffers.		5						1.92		2.22	0.96










• Outputs and bidirectional buffers ( $I_{OL} = 2 \text{ mA}$ ) (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
Function and Macro Name	Equiv. Circuit								$t_{plh}$ (ns)		$t_{phl}$ (ns)	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level Schmitt-trigger I/O buffer with pull-down	Refer to equivalent circuit of three-state output. Refer to equivalent circuit of input buffers.	—	4			D2	E		2.12	0.114	2.42	0.097
							D		1.92		2.22	
ICSO1D			5						0.96	0.26	1.34	0.26














Note: Propagation delay constant from enable terminals (E) as three-state output responds to  $t_{olh} \rightarrow t_{olz}$  or  $t_{ozh}$ , and  $t_{ohl} \rightarrow t_{ohz}$  or  $t_{ozl}$ .

• Outputs and bidirectional buffers ( $I_{OL} = 8 \text{ mA}$ )







Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
Function and Macro Name	Equiv. Circuit								$t_{plh}$ (ns)		$t_{phl}$ (ns)	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Totem-pole output OT3		—	3			D1			1.93	0.027	1.29	0.047
Three-state output OZ3		—	4			D1	E		2.13	0.027	1.49	0.047
			5			D		1.93		1.29		
Open-drain output ODN3		—	3			D1			$(t_{olz})$ 1.93	$(K_{lz})$ —	$(t_{ozl})$ 1.29	$(K_{zl})$ 0.047
TTL-level I/O buffer ITO3	Refer to equivalent circuit of three-state output. Refer to equivalent circuit of input buffers.	—	4			D2	E		2.13	0.027	1.49	0.047
			5			D		1.93		1.29		
									0.53	0.16	1.19	0.14

# HG62G Series

• Outputs and bidirectional buffers ( $I_{OL} = 8 \text{ mA}$ ) (cont)


Macro	Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
										$t_{plh} \text{ (ns)}$		$t_{phl} \text{ (ns)}$	
										$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level I/O buffer IC03	Refer to equivalent circuit of three-state output.	Refer to equivalent circuit of input buffers.	—	4			D2	E		2.13	0.027	1.49	0.047
				D				1.93			1.29		
TTL-level I/O buffer with Schmitt-trigger ITSO3	Refer to equivalent circuit of three-state output.	Refer to equivalent circuit of input buffers.	—	4			D2	E		2.13	0.027	1.49	0.047
				D				1.93			1.29		
TTL-level I/O buffer with Schmitt-trigger ITSO3	Refer to equivalent circuit of three-state output.	Refer to equivalent circuit of input buffers.	—	5			D2	E		0.83	0.22	1.57	0.27
				D									
CMOS-level I/O buffer with Schmitt-trigger ICSO3	Refer to equivalent circuit of three-state output.	Refer to equivalent circuit of input buffers.	—	4			D2	E		2.13	0.027	1.49	0.047
				D				1.93			1.29		
CMOS-level I/O buffer with Schmitt-trigger ICSO3	Refer to equivalent circuit of three-state output.	Refer to equivalent circuit of input buffers.	—	5			D2	E		0.96	0.26	1.34	0.26
				D									
Three-state output buffer with pull-up OZ3U		—	—	4			D2	E		2.13	0.027	1.49	0.047
				D				1.93			1.29		
Three-state output buffer with pull-down OZ3D		—	—	4			D2	E		2.13	0.027	1.49	0.047
				D				1.93			1.29		
Open-drain output buffer with pull-up ODN3U		—	—	3			D2			$(t_{olz})$	$(K_{lz})$	$(t_{ozl})$	$(K_{zl})$
								1.93		—	1.29	0.047	
TTL-level I/O buffer with pull-up ITO3U	Refer to equivalent circuit of three-state output.	Refer to equivalent circuit of input buffers.	—	4			D2	E		2.13	0.027	1.49	0.047
				D				1.93			1.29		
TTL-level I/O buffer with pull-up ITO3U	Refer to equivalent circuit of three-state output.	Refer to equivalent circuit of input buffers.	—	5			D2	E		0.53	0.16	1.19	0.14
				D									

• Outputs and bidirectional buffers ( $I_{OL} = 8 \text{ mA}$ ) (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
									$t_{plh}$ (ns)		$t_{phi}$ (ns)	
Function and Macro Name	Equiv. Circuit								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
TTL-level I/O buffer with pull-down ITO3D	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.13	0.027	1.49	0.047
	Refer to equivalent circuit of input buffers.	5		1.93						1.29		0.53
CMOS-level I/O buffer with pull-up ICO3U	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.13	0.027	1.49	0.047
	Refer to equivalent circuit of input buffers.	5		1.93						1.29		0.65
CMOS-level I/O buffer with pull-down ICO3D	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.13	0.027	1.49	0.047
	Refer to equivalent circuit of input buffers.	5		1.93						1.29		0.65
TTL-level Schmitt-trigger I/O buffer with pull-up ITSO3U	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.13	0.027	1.49	0.047
	Refer to equivalent circuit of input buffers.	5		1.93						1.29		0.83
TTL-level Schmitt-trigger I/O buffer with pull-down ITSO3D	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.13	0.027	1.49	0.047
	Refer to equivalent circuit of input buffers.	5		1.93						1.29		0.83
CMOS-level Schmitt-trigger I/O buffer with pull-up ICSO3U	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.13	0.027	1.49	0.047
	Refer to equivalent circuit of input buffers.	5		1.93						1.29		0.96








## HG62G Series

- Outputs and bidirectional buffers ( $I_{OL} = 8 \text{ mA}$ ) (cont)











Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay			
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					In- put Name	Out- put Name	$t_{plh}$ (ns)	
							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level Schmitt-trigger I/O buffer with pull-down ICSO3D	Refer to equivalent circuit of three-state output.	—	4		D2	E	2.13	0.027	1.49	0.047
							D	1.93		1.29
	Refer to equivalent circuit of input buffers.		5				0.96	0.26	1.34	0.26

Note: Propagation delay constant from enable terminals (E) as three-state output responds to  $t_{olh} \rightarrow t_{olz}$  or  $t_{ozh}$ , and  $t_{ohl} \rightarrow t_{ohz}$  or  $t_{ozl}$ .

- GND noise reduction buffers ( $I_{OL} = 8 \text{ mA}$ )

Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay			
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					In- put Name	Out- put Name	$t_{plh}$ (ns)	
							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Totem-pole output OT3R		—	2		D1		2.92	0.035	5.37	0.051
Three-state output OZ3R		—	4		D1	E	2.35	0.037	3.84	0.054
						D	2.15		3.64	
Open-drain output ODN3R		—	2		D1		$(t_{olz})$ 2.92	$(K_{lz})$ —	$(t_{ozl})$ 5.37	$(K_{zl})$ 0.051
TTL-level I/O buffer ITO3R	Refer to equivalent circuit of three-state output.	—	4		D2	E	2.35	0.037	3.84	0.054
	Refer to equivalent circuit of input buffers.		6			D	2.15		3.64	
							0.53	0.16	1.19	0.14

• GND noise reduction buffers ( $I_{OL} = 8 \text{ mA}$ ) (cont)


Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
									$t_{0lh}$	$K_{lh}$	$t_{0hl}$	$K_{hl}$
CMOS- level I/O buffer ICO3R	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
	Refer to equivalent circuit of input buffers.		6						2.15		3.64	
TTL-level I/O buffer with Schmitt-trigger ITSO3R	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
	Refer to equivalent circuit of input buffers.		6						2.15		3.64	
CMOS- level I/O buffer with Schmitt-trigger ICSO3R	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
	Refer to equivalent circuit of input buffers.		6						2.15		3.64	
Three-state output buffer with pull-up OZ3RU		—	4			D2	E D		2.35	0.037	3.84	0.054
			6						2.15		3.64	
Three-state output buffer with pull-down OZ3RD		—	4			D2	E D		2.35	0.037	3.84	0.054
			6						2.15		3.64	
Open-drain output buffer with pull-up ODN3RU		—	2			D2			$(t_{0lz})$ 2.92	$(K_{lz})$ —	$(t_{0zl})$ 5.37	$(K_{zl})$ 0.051
TTL-level I/O buffer with pull-up ITO3RU	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
	Refer to equivalent circuit of input buffers.		6						2.15		3.64	

## HG62G Series

- GND noise reduction buffers ( $I_{OL} = 8 \text{ mA}$ ) (cont)








Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
									$t_{plh}$ (ns)		$t_{phl}$ (ns)	
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
TTL-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
ITO3RD	Refer to equivalent circuit of input buffers.		6						0.53	0.16	1.19	0.14
CMOS-level I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
ICO3RU	Refer to equivalent circuit of input buffers.		6						0.65	0.17	0.82	0.14
CMOS-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
ICO3RD	Refer to equivalent circuit of input buffers.		6						0.65	0.17	0.82	0.14
TTL-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
ITSO3RU	Refer to equivalent circuit of input buffers.		6						0.83	0.22	1.57	0.27
TTL-level Schmitt-trigger I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
ITSO3RD	Refer to equivalent circuit of input buffers.		6						0.83	0.22	1.57	0.27
CMOS-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	4			D2	E D		2.35	0.037	3.84	0.054
ICSO3RU	Refer to equivalent circuit of input buffers.		6						0.96	0.26	1.34	0.26

• GND noise reduction buffers ( $I_{OL} = 8 \text{ mA}$ ) (cont)

Macro				LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay				
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	Input Name					Output Name	$t_{plh} \text{ (ns)}$		$t_{phl} \text{ (ns)}$	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level Schmitt-trigger I/O buffer with pull-down ICSO3RD	Refer to equivalent circuit of three-state output.	—	4		D2	E	D	2.35	0.037	3.84	0.054	
	Refer to equivalent circuit of input buffers.	6	2.15					—	3.64	—		
								0.96	0.26	1.34	0.26	











Note: Propagation delay constant from enable terminals (E) as three-state output responds to  $t_{olh} \rightarrow t_{olz}$  or  $t_{ozh}$ , and  $t_{ohl} \rightarrow t_{ohz}$  or  $t_{ozl}$

• Outputs and bidirectional buffers ( $I_{OL} = 12 \text{ mA}$ )

Macro				LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay				
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	Input Name					Output Name	$t_{plh} \text{ (ns)}$		$t_{phl} \text{ (ns)}$	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Totempole output OT4		—	5		D1			1.92	0.022	1.56	0.032	
Three-state output OZ4		—	5		D1	E		2.12	0.022	1.76	0.032	
						D		1.92	—	1.56	—	
Open-drain output ODN4		—	5		D1			$(t_{olz})$ 1.92	$(K_{lz})$ —	$(t_{ozl})$ 1.56	$(K_{zl})$ 0.032	
TTL-level I/O buffer ITO4	Refer to equivalent circuit of three-state output.	—	5		D2	E		2.12	0.022	1.76	0.032	
	Refer to equivalent circuit of input buffers.	6	D				1.92	—	1.56	—		
								0.53	0.16	1.19	0.14	







# HG62G Series

• Outputs and bidirectional buffers ( $I_{OL} = 12 \text{ mA}$ ) (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
									$t_{plh}$ (ns)		$t_{phl}$ (ns)	
Function and Macro Name	Equiv. Circuit								$t_{0lh}$	$K_{lh}$	$t_{0hl}$	$K_{hl}$
CMOS-level I/O buffer ICO4	Refer to equivalent circuit of three-state output.	—	5			D2	E D		2.12	0.022	1.76	0.032
	Refer to equivalent circuit of input buffers.	6									1.92	
TTL-level I/O buffer with Schmitt-trigger ITSO4	Refer to equivalent circuit of three-state output.	—	5			D2	E D		2.12	0.022	1.76	0.032
	Refer to equivalent circuit of input buffers.	6									1.92	
CMOS-level I/O buffer with Schmitt-trigger ICSO4	Refer to equivalent circuit of three-state output.	—	5			D2	E D		2.12	0.022	1.76	0.032
	Refer to equivalent circuit of input buffers.	6									1.92	
Three-state output buffer with pull-up OZ4U		—	5			D2	E D		2.12	0.022	1.76	0.032
		6									1.92	
Three-state output buffer with pull-down OZ4D		—	5			D2	E D		2.12	0.022	1.76	0.032
		6									1.92	
Open-drain output buffer with pull-up ODN4U		—	5			D2			$(t_{0lz})$ 1.92	$(K_{lz})$ —	$(t_{0zl})$ 1.56	$(K_{zl})$ 0.032
TTL-level I/O buffer with pull-up ITO4U	Refer to equivalent circuit of three-state output.	—	5			D2	E D		2.12	0.022	1.76	0.032
	Refer to equivalent circuit of input buffers.	6									1.92	
									0.53	0.16	1.19	0.14




• Outputs and bidirectional buffers ( $I_{OL} = 12\text{ mA}$ ) (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
									$t_{plh}$ (ns)		$t_{phl}$ (ns)	
Function and Macro Name	Equiv. Circuit							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$	
TTL-level I/O buffer with pull-down ITO4D	Refer to equivalent circuit of three-state output.	—	5			D2	E		2.12	0.022	1.76	0.032
		Refer to equivalent circuit of input buffers.	6				D		1.92		1.56	
CMOS-level I/O buffer with pull-up ICO4U	Refer to equivalent circuit of three-state output.	—	5			D2	E		2.12	0.022	1.76	0.032
		Refer to equivalent circuit of input buffers.	6				D		1.92		1.56	
CMOS-level I/O buffer with pull-down ICO4D	Refer to equivalent circuit of three-state output.	—	5			D2	E		2.12	0.022	1.76	0.032
		Refer to equivalent circuit of input buffers.	6				D		1.92		1.56	
TTL-level Schmitt-trigger I/O buffer with pull-up ITSO4U	Refer to equivalent circuit of three-state output.	—	5			D2	E		2.12	0.022	1.76	0.032
		Refer to equivalent circuit of input buffers.	6				D		1.92		1.56	
TTL-level Schmitt-trigger I/O buffer with pull-down ITSO4D	Refer to equivalent circuit of three-state output.	—	5			D2	E		2.12	0.022	1.76	0.032
		Refer to equivalent circuit of input buffers.	6				D		1.92		1.56	
CMOS-level Schmitt-trigger I/O buffer with pull-up ICSO4U	Refer to equivalent circuit of three-state output.	—	5			D2	E		2.12	0.022	1.76	0.032
		Refer to equivalent circuit of input buffers.	6				D		1.92		1.56	








# HG62G Series

- Outputs and bidirectional buffers ( $I_{OL} = 12 \text{ mA}$ ) (cont)

Macro			LV	Clamp Level when Open	Symbol	Sym-bol No.	Delay					
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					Input Name	Output Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level Schmitt-trigger I/O buffer with pull-down ICSO4D	Refer to equivalent circuit of three-state output. Refer to equivalent circuit of input buffers.	—	5			D2	E		2.12	0.022	1.76	0.032
			D					1.92		1.56		
			6						0.96	0.26	1.34	0.26











Note: Propagation delay constant from anable terminals (E) as three-state output responds to  $t_{olh} \rightarrow t_{olz}$  or  $t_{ozh}$ , and  $t_{ohl} \rightarrow t_{ohz}$  or  $t_{ozl}$ .

- Outputs and bidirectional buffers ( $I_{OL} = 12 \text{ mA}$  high speed buffer)

Macro			LV	Clamp Level when Open	Symbol	Sym-bol No.	Delay					
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					Input Name	Output Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Totem-pole output OT4H		—	5			D1			1.05	0.016	0.60	0.023
Three-state output OZ4H		—	5			D1	E		1.25	0.016	0.80	0.023
			6	D				1.05		0.60		
Open-drain output ODN4H		—	5			D1			$(t_{olz})$ 1.05	$(K_{lz})$ —	$(t_{ozl})$ 0.60	$(K_{zl})$ 0.023
TTL-level I/O buffer ITO4H	Refer to equivalent circuit of three-state output. Refer to equivalent circuit of input buffers.	—	5			D2	E		1.25	0.016	0.80	0.023
			6	D				1.05		0.60		
									0.53	0.16	1.19	0.14







## HG62G Series

- Outputs and bidirectional buffers ( $I_{OL} = 12\text{ mA}$  high speed buffer) (cont)

Macro			LV	Clamp Level when Open	Symbol	Symbol No.	Input Name	Output Name	Delay			
									$t_{pH}$ (ns)		$t_{pL}$ (ns)	
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							$t_{0H}$	$K_{1H}$	$t_{0L}$	$K_{1L}$
CMOS-level I/O buffer ICO4H	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
	Refer to equivalent circuit of input buffers.	6							1.05		0.60	
TTL-level I/O buffer with Schmitt-trigger ITSO4H	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
	Refer to equivalent circuit of input buffers.	6							1.05		0.60	
CMOS-level I/O buffer with Schmitt-trigger ICSO4H	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
	Refer to equivalent circuit of input buffers.	6							1.05		0.60	
Three-state output buffer with pull-up OZ4HU		—	5			D2	E D		1.25	0.016	0.80	0.023
		6							1.05		0.60	
Three-state output buffer with pull-down OZ4HD		—	5			D2	E D		1.25	0.016	0.80	0.023
		6							1.05		0.60	
Open-drain output buffer with pull-up ODN4HU		—	5			D2			$(t_{0Lz})$ 1.05	$(K_{1z})$ —	$(t_{0zL})$ 0.60	$(K_{zL})$ 0.023
TTL-level I/O buffer with pull-up ITO4HU	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
	Refer to equivalent circuit of input buffers.	6							1.05		0.60	


# HG62G Series

• Outputs and bidirectional buffers ( $I_{OL} = 12\text{ mA}$  high speed buffer) (cont)

Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							$t_{plh}$ (ns)		$t_{phl}$ (ns)	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
TTL-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			6						1.05		0.60	
ITO4HD	Refer to equivalent circuit of input buffers.	—	6						0.53	0.16	1.19	0.14
CMOS-level I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			6						1.05		0.60	
ICO4HU	Refer to equivalent circuit of input buffers.	—	6						0.65	0.17	0.82	0.14
CMOS-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			6						1.05		0.60	
ICO4HD	Refer to equivalent circuit of input buffers.	—	6						0.65	0.17	0.82	0.14
TTL-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			6						1.05		0.60	
ITSO4HU	Refer to equivalent circuit of input buffers.	—	6						0.83	0.22	1.57	0.27
TTL-level Schmitt-trigger I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			6						1.05		0.60	
ITSO4HD	Refer to equivalent circuit of input buffers.	—	6						0.83	0.22	1.57	0.27
CMOS-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			6						1.05		0.60	
ICSO4HU	Refer to equivalent circuit of input buffers.	—	6						0.96	0.26	1.34	0.26








## HG62G Series

- Outputs and bidirectional buffers ( $I_{OL} = 12\text{ mA}$  high speed buffer) (cont)

Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay					
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					In- put Name	Out- put Name	$t_{pLH}$ (ns)		$t_{pHL}$ (ns)	
									$t_{OLH}$	$K_{LH}$	$t_{OHL}$	$K_{HL}$
CMOS-level Schmitt-trigger I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	5		D2			1.25	0.016	0.80	0.023	
	Refer to equivalent circuit of input buffers.	6	1.05						0.60			
ICSO4HD								0.96	0.26	1.34	0.26	











Note: Propagation delay constant from enable terminals (E) as three-state output responds to  $t_{OLH} \rightarrow t_{OIZ}$  or  $t_{OZH}$ , and  $t_{OHL} \rightarrow t_{OHZ}$  or  $t_{OZI}$ .

- GND noise reduction buffers ( $I_{OL} = 12\text{ mA}$ )













Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay					
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					In- put Name	Out- put Name	$t_{pLH}$ (ns)		$t_{pHL}$ (ns)	
									$t_{OLH}$	$K_{LH}$	$t_{OHL}$	$K_{HL}$
Totempole output OT4R		—	2		D1			3.22	0.029	6.56	0.043	
Three-state output OZ4R		—	4		D1	E		2.36	0.031	4.03	0.046	
						D		2.16		3.83		
Open-drain output ODN4R		—	2		D1			$(t_{OIZ})$ 3.22	$(K_{IZ})$ —	$(t_{OZI})$ 6.56	$(K_{ZI})$ 0.043	
TTL-level I/O buffer ITO4R	Refer to equivalent circuit of three-state output.	—	4		D2	E		2.36	0.031	4.03	0.046	
						D		2.16		3.83		
	Refer to equivalent circuit of input buffers.	6						0.53	0.16	1.19	0.14	

# HG62G Series

• GND noise reduction buffers ( $I_{OL} = 12 \text{ mA}$ ) (cont)


Macro	Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Symbol No.	In-put Name	Out-put Name	Delay			
										$t_{plh}$ (ns)		$t_{phl}$ (ns)	
										$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level I/O buffer ICO4R	Refer to equivalent circuit of three-state output.		—	4		D2	E D		2.36	0.031	4.03	0.046	
	2.16								3.83				
	Refer to equivalent circuit of input buffers.			6					0.65	0.17	0.82	0.14	
TTL-level I/O buffer with Schmitt-trigger ITSO4R	Refer to equivalent circuit of three-state output.		—	4		D2	E D		2.36	0.031	4.03	0.046	
	2.16								3.83				
	Refer to equivalent circuit of input buffers.			6					0.83	0.22	1.57	0.27	
CMOS-level I/O buffer with Schmitt-trigger ICSO4R	Refer to equivalent circuit of three-state output.		—	4		D2	E D		2.36	0.031	4.03	0.046	
	2.16								3.83				
	Refer to equivalent circuit of input buffers.			6					0.96	0.26	1.34	0.26	
Three-state output buffer with pull-up OZ4RU		—	4	6		D2	E D		2.36	0.031	4.03	0.046	
									2.16		3.83		
													
Three-state output buffer with pull-down OZ4RD			4	6		D2	E D		2.36	0.031	4.03	0.046	
									2.16		3.83		
Open-drain output buffer with pull-up ODN4RU			—	2		D2			$(t_{olz})$ 3.22	$(K_{lz})$ —	$(t_{ozl})$ 6.56	$(K_{zl})$ 0.043	
													
TTL-level I/O buffer with pull-up ITO4RU		Refer to equivalent circuit of three-state output.	—	4		D2	E D		2.36	0.031	4.03	0.046	
	Refer to equivalent circuit of input buffers.			6									0.53
													

• GND noise reduction buffers ( $I_{OL} = 12 \text{ mA}$ ) (cont)

Macro	Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
										$t_{plh}$ (ns)		$t_{phi}$ (ns)	
										$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
TTL-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	—	4	—		D2	E	D	2.36	0.031	4.03	0.046
				2.16							3.83		
ITO4RD	Refer to equivalent circuit of input buffers.	—	—	6	—		D2	E	D	0.53	0.16	1.19	0.14
CMOS-level I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	—	4	—		D2	E	D	2.36	0.031	4.03	0.046
				2.16							3.83		
ICO4RU	Refer to equivalent circuit of input buffers.	—	—	6	—		D2	E	D	0.65	0.17	0.82	0.14
CMOS-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	—	4	—		D2	E	D	2.36	0.031	4.03	0.046
				2.16							3.83		
ICO4RD	Refer to equivalent circuit of input buffers.	—	—	6	—		D2	E	D	0.65	0.17	0.82	0.14
TTL-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	—	4	—		D2	E	D	2.36	0.031	4.03	0.046
				2.16							3.83		
ITSO4RU	Refer to equivalent circuit of input buffers.	—	—	6	—		D2	E	D	0.83	0.22	1.57	0.27
TTL-level Schmitt-trigger I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	—	4	—		D2	E	D	2.36	0.031	4.03	0.046
				2.16							3.83		
ITSO4RD	Refer to equivalent circuit of input buffers.	—	—	6	—		D2	E	D	0.83	0.22	1.57	0.27
CMOS-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	—	4	—		D2	E	D	2.36	0.031	4.03	0.046
				2.16							3.83		
ICSO4RU	Refer to equivalent circuit of input buffers.	—	—	6	—		D2	E	D	0.96	0.26	1.34	0.26








## HG62G Series

- GND noise reduction buffers ( $I_{OL} = 12 \text{ mA}$ ) (cont)

Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay					
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					Input Name	Out- put Name	$t_{plh} \text{ (ns)}$		$t_{phl} \text{ (ns)}$	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level Schmitt-trigger I/O buffer with pull-down ICSO4RD	Refer to equivalent circuit of three-state output.	—	4			D2	E		2.36	0.031	4.03	0.046
	Refer to equivalent circuit of input buffers.		6				D		2.16		3.83	
								0.96	0.26	1.34	0.26	

Note: Propagation delay constant from enable terminals (E) as three-state output responds to  $t_{olh} \rightarrow t_{olz}$  or  $t_{ozh}$ , and  $t_{ohl} \rightarrow t_{ohz}$  or  $t_{ozl}$ .

- Outputs and bidirectional buffers ( $I_{OL} = 24 \text{ mA}$ )

Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	Delay					
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count					Input Name	Out- put Name	$t_{plh} \text{ (ns)}$		$t_{phl} \text{ (ns)}$	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Totempole output OT5		—	5			D1			1.05	0.016	0.60	0.023
Three-state output OZ5		—	5			D1	E		1.25	0.016	0.80	0.023
			6	D			1.05		0.60			
Open-drain output ODN5		—	5			D1			$(t_{olz})$ 1.05	$(K_{lz})$ —	$(t_{ozl})$ 0.60	$(K_{zl})$ 0.023
TTL-level I/O buffer ITO5	Refer to equivalent circuit of three-state output.	—	5			D2	E		1.25	0.016	0.80	0.023
	Refer to equivalent circuit of input buffers.		6	D			1.05		0.60			
								0.53	0.16	1.19	0.14	









# HG62G Series

• Outputs and bidirectional buffers ( $I_{OL} = 24 \text{ mA}$ ) (cont)


Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
Function and Macro Name	Equiv. Circuit								$t_{plh} \text{ (ns)}$		$t_{phi} \text{ (ns)}$	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level I/O buffer IC05	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			1.05						0.60			
	Refer to equivalent circuit of input buffers.		6						0.65	0.17	0.82	0.14
TTL-level I/O buffer with Schmitt-trigger ITS05	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			1.05						0.60			
	Refer to equivalent circuit of input buffers.		6						0.83	0.22	1.57	0.27
CMOS-level I/O buffer with Schmitt-trigger ICSO5	Refer to equivalent circuit of three-state output.	—	5			D2	E D		1.25	0.016	0.80	0.023
			1.05						0.60			
	Refer to equivalent circuit of input buffers.		6						0.96	0.26	1.34	0.26
Three-state output buffer with pull-up OZ5U		—	5			D2	E		1.25	0.016	0.80	0.023
			D				1.05		0.60			
Three-state output buffer with pull-down OZ5D		—	5			D2	E		1.25	0.016	0.80	0.023
			D				1.05		0.60			
Open-drain output buffer with pull-up ODN5U		—	5			D2			$(t_{olz})$ 1.05	$(K_{lz})$ —	$(t_{ozl})$ 0.60	$(K_{zl})$ 0.023
TTL-level I/O buffer with pull-up ITO5U	Refer to equivalent circuit of three-state output.	—	5			D2	E		1.25	0.016	0.80	0.023
			1.05				0.60					
	Refer to equivalent circuit of input buffers.		6						0.53	0.16	1.19	0.14

## HG62G Series

- Outputs and bidirectional buffers ( $I_{OL} = 24 \text{ mA}$ ) (cont)








Macro		Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym-bol No.	In-put Name	Out-put Name	Delay			
									$t_{plh}$ (ns)		$t_{phl}$ (ns)	
Function and Macro Name	Equiv. Circuit							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$	
TTL-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	5			D2	E D	1.25	0.016	0.80	0.023	
								1.05		0.60		
ITO5D	Refer to equivalent circuit of input buffers.		6					0.53	0.16	1.19	0.14	
CMOS-level I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	5			D2	E D	1.25	0.016	0.80	0.023	
								1.05		0.60		
ICO5U	Refer to equivalent circuit of input buffers.		6					0.65	0.17	0.82	0.14	
CMOS-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	5			D2	E D	1.25	0.016	0.80	0.023	
								1.05		0.60		
ICO5D	Refer to equivalent circuit of input buffers.		6					0.65	0.17	0.82	0.14	
TTL-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	5			D2		1.25	0.016	0.80	0.023	
								1.05		0.60		
ITSO5U	Refer to equivalent circuit of input buffers.		6					0.83	0.22	1.57	0.27	
TTL-level Schmitt-trigger I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	5			D2		1.25	0.016	0.80	0.023	
								1.05		0.60		
ITSO5D	Refer to equivalent circuit of input buffers.		6					0.83	0.22	1.57	0.27	
CMOS-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	5			D2		1.25	0.016	0.80	0.023	
								1.05		0.60		
ICSO5U	Refer to equivalent circuit of input buffers.		6					0.96	0.26	1.34	0.26	

• Outputs and bidirectional buffers ( $I_{OL} = 24 \text{ mA}$ ) (cont)

Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							$t_{plh}$ (ns)	$K_{lh}$	$t_{phi}$ (ns)	$K_{hl}$
CMOS-level Schmitt-trigger I/O buffer with pull-down IC505D	Refer to equivalent circuit of three-state output.	—	5			D2			$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
	Refer to equivalent circuit of input buffers.		6						1.25 1.05	0.016	0.80 0.60	0.023
									0.96	0.26	1.34	0.26











Note: Propagation delay constant from enable terminals (E) as three-state output responds to  $t_{olh} \rightarrow t_{olz}$  or  $t_{ozh}$ , and  $t_{ohl} \rightarrow t_{ohz}$  or  $t_{ozl}$ .

• GND noise reduction buffers ( $I_{OL} = 24 \text{ mA}$ )







Macro			LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							$t_{plh}$ (ns)	$K_{lh}$	$t_{phi}$ (ns)	$K_{hl}$
Totem-pole output OT5R		—	2			D1			3.06	0.016	6.30	0.037
Three-state output OZ5R		—	3			D1	E		2.38	0.017	4.00	0.030
			5				D		2.18		3.80	
Open-drain output ODN5R		—	2			D1			$(t_{olz})$ 3.06	$(K_{lz})$ —	$(t_{ozl})$ 6.30	$(K_{zl})$ 0.037
TTL-level I/O buffer ITO5R	Refer to equivalent circuit of three-state output.	—	3			D2	E		2.38	0.017	4.00	0.030
	Refer to equivalent circuit of input buffers.		5				D		2.18		3.80	
									0.53	0.16	1.19	0.14

# HG62G Series

- GND noise reduction buffers ( $I_{OL} = 24 \text{ mA}$ ) (cont)


Macro			LV	Clamp Level when Open	Symbol	Symbol No.	Input Name	Output Name	Delay			
									$t_{plh}$ (ns)		$t_{phi}$ (ns)	
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level I/O buffer IC05R	Refer to equivalent circuit of three-state output.	—	3			D2	E		2.38	0.017	4.00	0.030
	D		2.18				3.80					
	Refer to equivalent circuit of input buffers.		5						0.65	0.17	0.82	0.14
TTL-level I/O buffer with Schmitt-trigger ITSO5R	Refer to equivalent circuit of three-state output.	—	3			D2	E		2.38	0.017	4.00	0.030
	D		2.18				3.80					
	Refer to equivalent circuit of input buffers.		5						0.83	0.22	1.57	0.27
CMOS-level I/O buffer with Schmitt-trigger ICSO5R	Refer to equivalent circuit of three-state output.	—	3			D2	E		2.38	0.017	4.00	0.030
	D		2.18				3.80					
	Refer to equivalent circuit of input buffers.		5						0.96	0.26	1.34	0.26
Three-state output buffer with pull-up OZ5RU		—	3			D2	E		2.38	0.017	4.00	0.030
			D				2.18		3.80			
			5									
Three-state output buffer with pull-down OZ5RD		—	3			D2	E		2.38	0.017	4.00	0.030
			D				2.18		3.80			
			5									
Open-drain output buffer with pull-up ODN5RU		—	2			D2			$(t_{olz})$ 3.06	$(K_{lz})$ —	$(t_{ozl})$ 6.30	$(K_{zl})$ 0.037
TTL-level I/O buffer with pull-up ITO5RU	Refer to equivalent circuit of three-state output.	—	3			D2	E		2.38	0.017	4.00	0.030
	D		2.18				3.80					
	Refer to equivalent circuit of input buffers.		5						0.53	0.16	1.19	0.14

• GND noise reduction buffers ( $I_{OL} = 24\text{ mA}$ ) (cont)

Macro		Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	Delay			
										$t_{plh}$ (ns)		$t_{phl}$ (ns)	
Function and Macro Name										$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
TTL-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	3				D2	E		2.38	0.017	4.00	0.030
	D							2.18		3.80			
ITO5RD	Refer to equivalent circuit of input buffers.	—	5							0.53	0.16	1.19	0.14
CMOS-level I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	3				D2	E		2.38	0.017	4.00	0.030
	D							2.18		3.80			
ICO5RU	Refer to equivalent circuit of input buffers.	—	5							0.65	0.17	0.82	0.14
CMOS-level I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	3				D2	E		2.38	0.017	4.00	0.030
	D							2.18		3.80			
ICO5RD	Refer to equivalent circuit of input buffers.	—	5							0.65	0.17	0.82	0.14
TTL-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	3				D2	E		2.38	0.017	4.00	0.030
	D							2.18		3.80			
ITSO5RU	Refer to equivalent circuit of input buffers.	—	5							0.83	0.22	1.57	0.27
TTL-level Schmitt-trigger I/O buffer with pull-down	Refer to equivalent circuit of three-state output.	—	3				D2	E		2.38	0.017	4.00	0.030
	D							2.18		3.80			
ITSO5RD	Refer to equivalent circuit of input buffers.	—	5							0.83	0.22	1.57	0.27
CMOS-level Schmitt-trigger I/O buffer with pull-up	Refer to equivalent circuit of three-state output.	—	3				D2	E		2.38	0.017	4.00	0.030
	D							2.18		3.80			
ICSO5RU	Refer to equivalent circuit of input buffers.	—	5							0.96	0.26	1.34	0.26















# HG62G Series

- GND noise reduction buffers ( $I_{OL} = 24 \text{ mA}$ ) (cont)

Macro						Delay						
Function and Macro Name	Equiv. Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	Sym- bol No.	In- put Name	Out- put Name	$t_{plh} \text{ (ns)}$		$t_{phl} \text{ (ns)}$	
									$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
CMOS-level Schmitt-trigger I/O buffer with pull-down IC505RD	Refer to equivalent circuit of three-state output.	—	3			D2	E D		2.38	0.017	4.00	0.030
	Refer to equivalent circuit of input buffers.		5						2.18		3.80	
									0.96	0.26	1.34	0.26

Note: Propagation delay constant from enable terminals (E) as three-state output responds to  $t_{olh} \rightarrow t_{olz}$  or  $t_{ozh}$ , and  $t_{ohl} \rightarrow t_{ohz}$  or  $t_{ozl}$ .

## Power Gates

























Macro						Delay			
Function and Macro Name	Equivalent Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	$t_{plh} \text{ (ns)}$		$t_{phl} \text{ (ns)}$	
						$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
Power inverter NAP1		1	2	@		0.18	0.30	0.30	0.30
Power inverter NA3P		2	3	@		0.19	0.24	0.31	0.24
Power inverter NA4P		2	4	@		0.20	0.18	0.32	0.18
2-input power NAND NAP2		2	2	@		0.16	0.30	0.20	0.42
3-input power NAND NAP3		3	2	@		0.18	0.30	0.22	0.58
4-input power NAND NAP4		4	2	@		0.20	0.30	0.25	0.70
6-input power NAND NAP6		5	1	@		0.48	0.30	0.85	0.30

Power Gates (cont)

Macro			Delay						
Function and Macro Name	Equivalent Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
						t <sub>0lh</sub>	K <sub>lh</sub>	t <sub>0hl</sub>	K <sub>hl</sub>
8-input power NAND NAP8		7	1	@		0.52	0.30	0.95	0.30
9-input power NAND NAP9		7	1	@		0.52	0.30	0.95	0.30
12-input power NAND NAP-12		9	1	@		0.52	0.30	1.28	0.30
16-input power NAND NAP16		13	1	@		0.52	0.30	0.88	0.42
2-input NOR NRP2		2	2	#		0.28	0.50	0.24	0.30
3-input NOR NRP3		3	2	#		0.30	0.74	0.26	0.30
4-input NOR NRP4		4	2	#		0.32	0.98	0.28	0.30
6-input NOR NRP6		5	1	#		0.74	0.30	0.55	0.30
8-input NOR NRP8		7	1	#		0.90	0.30	0.55	0.30
9-input NOR NRP9		7	1	#		0.90	0.30	0.55	0.30
12-input NOR NRP12		9	1	#		1.02	0.30	0.58	0.30

# HG62G Series

## Power Gates (cont)

Macro							Delay			
Function and Macro Name	Equivalent Circuit	Equiv. Gate Count	LV	Clamp Level when Open	Symbol	$t_{plh}$ (ns)		$t_{phl}$ (ns)		
						$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$	
16-input NOR NRP16		13	1	#		1.00	0.50	0.62	0.30	
Power buffer ANP		2	1	@		0.20	0.30	0.38	0.30	
Power buffer AN3P		3	2	@		0.20	0.24	0.34	0.24	
Power buffer AN4P		3	2	@		0.22	0.18	0.36	0.18	
2-input power AND ANP2		2	1	@		0.46	0.30	0.38	0.30	
3-input power AND ANP3		3	1	@		0.50	0.30	0.40	0.30	
4-input power AND ANP4		3	1	@		0.58	0.30	0.42	0.30	
2-input power OR ORP2		2	1	#		0.52	0.30	0.46	0.30	
3-input power OR ORP3		3	1	#		0.57	0.30	0.52	0.30	
4-input power OR ORP4		3	1	#		0.64	0.30	0.62	0.30	
2-input power EOR EORP		4	2	#		0.37	0.50	0.50	0.42	
2-input power ENOR ENRP		4	2	#		0.37	0.50	0.48	0.42	



Three-State Power Gates





















Macro			LV	Clamp Level when Open	In - put Name	Out - put Name	Delay			
Function and Macro Name	Equivalent Circuit and Symbol	Equiv. Gate Count					t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
							t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>
3-state power inverter (internal) NAZP		2	0.5	–	D	E/E	0.58	0.40	0.44	0.38
			0.5	–			0.28		0.40	
3-state power buffer (internal) ANZP		4	2	#	D	E	0.50	0.30	0.40	0.30
			2	@			0.60		0.50	

Gates























Macro			LV	Clamp Level when Open	Symbol	Delay			
Function and Macro Name	Equivalent Circuit	Equiv. Gate Count				t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
						t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>
Inverter NA1		1	1	@		0.16	0.50	0.28	0.50
2-input NAND NA2		1	1	@		0.18	0.50	0.30	0.76
3-input NAND NA3		2	1	@		0.22	0.50	0.32	1.08
4-input NAND NA4		2	1	@		0.24	0.50	0.34	1.36
6-input NAND NA6		5	1	@		0.38	0.50	0.75	0.50

## HG62G Series

### Gates (cont)

Macro			LV	Clamp Level when Open	Symbol	Delay			
Function and Macro Name	Equivalent Circuit	Equiv. Gate Count				t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
						t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
8-input NAND NA8		6	1	@		0.42	0.50	0.85	0.50
9-input NAND NA9		7	1	@		0.42	0.50	0.85	0.50
12-input NAND NA12		8	1	@		0.42	0.50	1.18	0.50
16-input NAND NA16		11	1	@		0.42	0.50	0.78	0.76
2-input NOR NR2		1	1	#		0.20	0.92	0.38	0.50
3-input NOR NR3		2	1	#		0.22	1.34	0.43	0.50
4-input NOR NR4		2	1	#		0.24	1.80	0.50	0.50
6-input NOR NR6		5	1	#		0.64	0.50	0.45	0.50
8-input NOR NR8		6	1	#		0.80	0.50	0.45	0.50
9-input NOR NR9		7	1	#		0.80	0.50	0.45	0.50

Gates (cont)





Macro			LV	Clamp Level when Open	Symbol	Delay			
Function and Macro Name	Equivalent Circuit	Equiv. Gate Count				t <sub>ph</sub> (ns)		t <sub>pl</sub> (ns)	
						t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
12-input NOR NR12		8	1	#		0.92	0.50	0.48	0.50
16-input NOR NR16		11	1	#		0.90	0.92	0.52	0.50
Buffer AN1		1	1	@		0.34	0.50	0.26	0.50
2-input AND AN2		2	1	@		0.36	0.50	0.28	0.50
3-input AND AN3		2	1	@		0.40	0.50	0.30	0.50
4-input AND AN4		3	1	@		0.48	0.50	0.32	0.50
2-input OR OR2		2	1	#		0.42	0.50	0.36	0.50
3-input OR OR3		2	1	#		0.47	0.50	0.42	0.50
4-input OR OR4		3	1	#		0.54	0.50	0.52	0.50
2-input EOR EOR		3	2	#		0.27	0.92	0.40	0.76
2-input ENOR ENR		3	2	#		0.27	0.92	0.38	0.76

# HG62G Series

## Three-State Gates







Macro			Delay							
Function and Macro Name	Equivalent Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	In - put Name	Out - put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)	
							$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
3-state inverter (internal) NAZ		1	0.5 0.5 1	@	D		0.48	0.65	0.34	0.62
					E/E		0.18		0.30	
3-state buffer (internal) ANZ		3	2 2	# @	D		0.40	0.50	0.30	0.50
					E		0.50		0.40	

AND-NOR, OR-NAND Power Gates

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym-bol No.	In-put Name	Out-put Name	Delay			
Function and Macro Name	Equiv. Circuit and Symbol							t <sub>ph</sub> (ns)		t <sub>pl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
2-OR NAND NAR23P		3	2	# # @	A1	OR		0.33	0.50	0.48	0.42
	NAND					0.33			0.48		
3-OR NAND NAR34P		4	2	# # # @	A2	OR		0.40	0.74	0.48	0.42
	NAND					0.40			0.48		
2-OR 3-NAND NAR24P		4	2	# # @ @	A2	OR		0.40	0.50	0.48	0.58
	NAND					0.40			0.48		
2-wide, 2-input OR- NAND NA2R2P		4	2	# # # #	A1			0.40	0.50	0.53	0.42

# HG62G Series

## AND-NOR, OR-NAND Power Gates (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
								t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)	
Function and Macro Name	Equiv. Circuit and Symbol							t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
3-wide, 2-input OR-NAND NA3R2P	 	6	2	# # # # #	A3			0.42	0.50	0.60	0.58
2-wide, 3-input OR-NAND NA2R3NP	 	7	2	# # # # #	A2						
						+Y	0.72	0.30	0.97	0.30	
						-Y	0.77	0.74	0.57	0.42	
2-wide, 4-input OR-NAND NA2R4NP	 	9	2	# # # # # #	A4						
						+Y	0.72	0.30	1.00	0.30	
						-Y	0.80	0.98	0.57	0.42	

AND-NOR, OR-NAND Power Gates (cont)

Macro			LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
Function and Macro Name	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>
3-wide, 3-input OR-NAND NA3R3NP		10	2	# # # # # # #			+Y	0.79	0.30	1.00	0.30
							-Y	0.80	0.74	0.64	0.58
3-wide, 4-input OR-NAND NA3R4NP		13	2	# # # # # # # #			+Y	0.79	0.30	1.28	0.30
							-Y	1.08	0.98	0.64	0.58

# HG62G Series

## AND-NOR, OR-NAND Power Gates (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
Function and Macro Name	Equiv. Circuit and Symbol							t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
4-wide, 2-input OR-NAND NA4R2NP		10	2	@ @ @ @ @ @	A4		+Y	0.75	0.30	0.77	0.30
							-Y	0.57	0.50	0.60	0.70
4-wide, 3-input OR-NAND NA4R3NP		13	2	# # # # # # # # # #			+Y	0.95	0.30	1.28	0.30
							-Y	1.08	0.74	0.80	0.70





# HG62G Series

## AND-NOR, OR-NAND Power Gates (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
8-wide, 2-input OR-NAND NA8R2NP		12	1	@	A5	+Y	0.73	0.74	0.67	0.30	
						-Y	0.82	0.30	0.93	0.30	
2-AND-OR-NAND NARA24P		4	2	@	A1	AND	0.33	0.50	0.53	0.58	
						OR	0.33		0.53		
						NAND	0.33		0.40		
2-AND-NOR NRA23P		3	2	@	A1	AND	0.37	0.50	0.50	0.42	
						NOR	0.36		0.50		

AND-NOR, OR-NAND Power Gates (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>
3-AND-NOR NRA34P		4	2	@ @ @ #	A2	AND NOR		0.37	0.50	0.50	0.58
								0.36		0.50	
2-AND-3-NOR NRA24P		4	2	@ @ # #	A2	AND NOR		0.38	0.74	0.50	0.42
								0.38		0.50	
2-wide 2-input AND-NOR NR2A2P		4	2	@ @ @ @	A1			0.40	0.50	0.53	0.42
3-wide 2-input AND-NOR NR3A2P		6	2	@ @ @ @ @ @	A3			0.46	0.74	0.60	0.42

# HG62G Series

## AND-NOR, OR-NAND Power Gates (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
Function and Macro Name	Equiv. Circuit and Symbol							t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>
2-wide 3-input AND- NOR NR2A3NP		7	2	@ @ @ @ @ @	A2		+Y	1.05	0.30	0.60	0.30
							-Y	0.40	0.50	0.90	0.58
2-wide 4-input AND- NOR NR2A4NP		9	2	@ @ @ @ @ @ @ @	A4		+Y	1.05	0.30	0.60	0.30
							-Y	0.40	0.50	0.90	0.70
3-wide 3-input AND- NOR NR3A3NP		10	2	@ @ @ @ @ @ @ @			+Y	1.08	0.30	0.80	0.30
							-Y	0.60	0.74	0.93	0.58





AND-NOR, OR-NAND Power Gates (cont)

Macro			LV	Clamp Level when Open	Sym - bol No.	Delay					
Function and Macro Name	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
6-wide 2-input AND-NOR NR6A2NP		9	1	# # # # # # # # #		+Y	0.80	0.30	0.75	0.30	
						-Y	0.90	0.30	1.00	0.30	

# HG62G Series

## AND-NOR, OR-NAND Power Gates (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
8-wide 2-input AND-NOR NR8A2NP		12	1	# # # # # # # # # # # #	A5		+Y	0.90	0.30	1.08	0.30
							-Y	0.88	0.30	0.75	0.30



AND-NOR, OR-NAND Power Gates (cont)





Macro			LV	Clamp Level when Open	Sym-bol No.	Delay					
Function and Macro Name	Equiv. Circuit and Symbol	Equiv. Gate Count				In-put Name	Out-put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>
2-OR-AND-NOR NRAR24P		4	2	#	A1	OR		0.56	0.74	0.54	0.42
			AND			0.50		0.48			
			NOR			0.40		0.42			
2-to-1 multiplexer M2T1NP		6	2	#	B2	Y0	+Y	0.83	0.30	0.55	0.30
			Y1			0.83		0.55			
			S			0.98		0.88			
			Y0	-Y		0.40	0.50	0.63	0.42		
			Y1			0.40		0.63			
			S			0.73		0.78			
4-to-1 multiplexer M4T1NP		15	1	#	B4	Y0	+Y	1.20	0.30	0.82	0.30
			Y1			1.20		0.82			
			Y2			1.20		0.82			
			Y3			1.20		0.82			
			A			1.40		1.25			
			B			1.40		1.25			
			Y0	-Y		0.67	0.98	1.00	0.58		
			Y1			0.67		1.00			
			Y2			0.67		1.00			
			Y3			0.67		1.00			
			A			1.10		1.20			
			B			1.10		1.20			

# HG62G Series

## AND-NOR, OR-NAND Power Gates (cont)

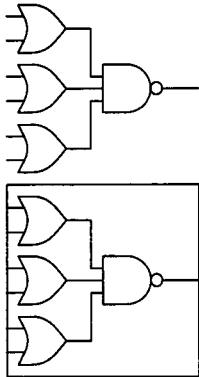

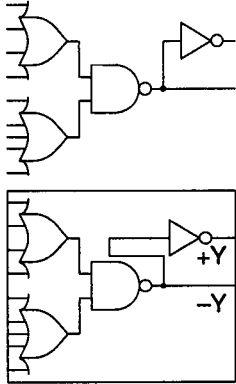
Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
8-to-1 multiplexer M8T1NP		23	1	# # # # # # # #	B6	Y0- Y7 A B C Y0- Y7 A B C	+Y     -Y	1.37  2.10   1.45  1.98	0.30     0.30	1.30  1.83   1.57  2.30	0.58     0.30
1-to-2 demultiplexer M1T2NP		7	2 4	# @	B3	Y A Y A Y A Y A	+0  +1  -0  -1	0.62 0.69 0.62 0.43 0.50 0.43	0.30  0.30 0.30 0.30	0.63 0.70 0.63 0.47 0.54 0.47	0.30  0.30 0.42 0.42

AND-NOR, OR-NAND Gates (Normal)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	Delay					
Function and Macro Name	Equiv. Circuit and Symbol					In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
2-OR NAND NAR23		2	1	# # @	A1	OR		0.23	0.92	0.38	0.76
						NAND		0.23		0.38	
3-OR NAND NAR34		2	1	# # # @	A2	OR		0.30	1.34	0.38	0.76
						NAND		0.30		0.38	
2-OR 3-NAND NAR24		2	1	# # @ @	A2	OR		0.30	0.92	0.38	1.08
						NAND		0.30		0.38	
2-wide, 2-input OR- NAND NA2R2		2	1	# # # #	A1			0.30	0.92	0.43	0.76

# HG62G Series

## AND-NOR, OR-NAND Gates (Normal) (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
Function and Macro Name	Equiv. Circuit and Symbol							t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
3-wide, 2-input OR-NAND NA3R2		3	1	# # # # #	A3			0.32	0.92	0.50	1.08
2-wide, 3-input OR-NAND NA2R3N		4	1	# # # # #	A2	+Y		0.62	0.50	0.87	0.50
						-Y		0.67	1.34	0.47	0.76
2-wide, 4-input OR-NAND NA2R4N		5	1	# # # # # #	A4	+Y		0.62	0.50	0.90	0.50
						-Y		0.70	1.80	0.47	0.76

AND-NOR, OR-NAND Gates (Normal) (cont)

Macro			LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
Function and Macro Name	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
3-wide, 3-input OR-NAND NA3R3N		5	1	# # # # # # #			+Y	0.69	0.50	0.90	0.50
							-Y	0.70	1.34	0.54	1.08
3-wide, 4-input OR-NAND NA3R4N		7	1	# # # # # # # #			+Y	0.69	0.50	1.18	0.50
							-Y	0.98	1.80	0.54	1.08

# HG62G Series

## AND-NOR, OR-NAND Gates (Normal) (cont)

Macro			Delay								
Function and Macro Name	Equiv. Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)	
								t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
4-wide, 2-input OR-NAND NA4R2N		5	1	@ @ @ @ @ @ @	A4		+Y	0.65	0.50	0.67	0.50
							-Y	0.47	0.92	0.50	1.36
4-wide, 3-input OR-NAND NA4R3N		7	1	# # # # # # # # # #			+Y	0.85	0.50	1.18	0.50
							-Y	0.98	1.34	0.70	1.36

AND-NOR, OR-NAND Gates (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>
4-wide, 4-input OR-NAND NA4R4N		9	1	# # # # # # # # # # #	A5		+Y	0.92	0.50	1.47	0.50
							-Y	1.27	1.80	0.77	1.36
6-wide, 2-input OR-NAND NA6R2N		8	1	@ @ @ @ @ @ @ @ @ @ @			+Y	0.60	0.92	0.57	0.50
							-Y	0.72	0.50	0.80	0.50





AND-NOR, OR-NAND Gates (Normal) (cont)

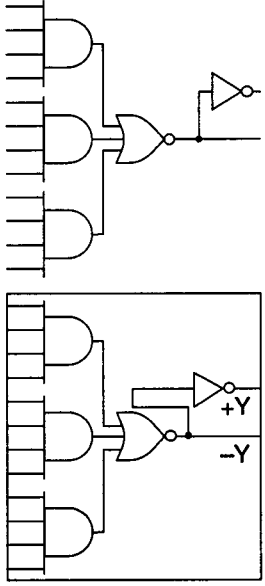

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
3-AND-NOR NRA34		2	1	@ @ @ #	A2	AND		0.27	0.92	0.40	1.08
	NOR						0.26	0.40			
2-AND-3-NOR NRA24		2	1	@ @ # #	A2	AND		0.28	1.34	0.40	0.76
	NOR						0.28	0.40			
2-wide, 2-input AND-NOR NR2A2		2	1	@ @ @ @	A1			0.30	0.92	0.43	0.76
3-wide, 2-input AND-NOR NR3A2		3	1	@ @ @ @ @ @	A3			0.36	1.34	0.50	0.76

# HG62G Series

## AND-NOR, OR-NAND Gates (Normal) (cont)

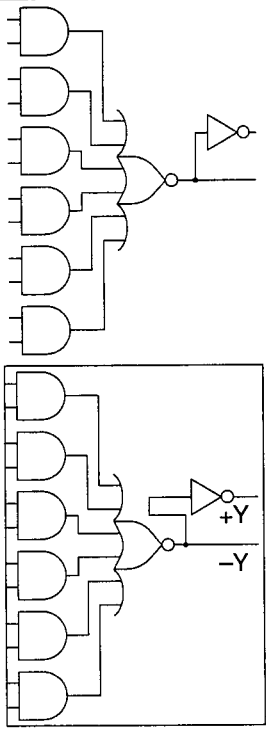
Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
2-wide, 3-input AND-NOR NR2A3N		4	1	@ @ @ @ @	A2		+Y	0.95	0.50	0.50	0.50
							-Y	0.30	0.92	0.80	1.08
2-wide, 4-input AND-NOR NR2A4N		5	1	@ @ @ @ @ @ @	A4		+Y	0.98	0.50	0.60	0.50
							-Y	0.40	0.92	0.83	1.36
3-wide, 3-input AND-NOR NR3A3N		5	1	@ @ @ @ @ @ @			+Y	0.98	0.50	0.70	0.50
							-Y	0.50	1.34	0.83	1.08

AND-NOR, OR-NAND Gates (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym-bol No.	In-put Name	Out-put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
3-wide 4-input AND-NOR NR3A4N		7	1	@ @ @ @ @ @ @ @ @ @			+Y	1.05	0.50	0.90	0.50
							-Y	0.70	1.34	0.90	1.36
4-wide 2-input AND-NOR NR4A2N		5	1	# # # # # # #	A4		+Y	0.72	0.50	0.67	0.50
							-Y	0.47	1.80	0.57	0.76



AND-NOR, OR-NAND Gates (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
6-wide 2-input AND-NOR NR6A2N		8	1	# # # # # # # #		+Y	0.70	0.50	0.65	0.50	
						-Y	0.80	0.50	0.90	0.50	

# HG62G Series

## AND-NOR, OR-NAND Gates (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
8-wide 2-input AND-NOR NR8A2N		10	1	# # # # # # # # # # # #	A5		+Y	0.80	0.50	0.98	0.50
							-Y	0.78	0.50	0.65	0.50

AND-NOR, OR-NAND Gates (Normal) (cont)

Function and Macro Name	Macro Equiv. Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	Symbol No.	Delay					
						In-put Name	Out-put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)	
								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
2-OR-AND-NOR NRAR24		2	1	# # @ #	A1	OR		0.46	1.34	0.44	0.76
						AND		0.40		0.38	
						NOR		0.30		0.32	
2-to-1 multiplexer M2T1N	 	3	2 1 1	# # #	B2	Y0	+Y	0.73	0.50	0.45	0.50
						Y1		0.73		0.45	
						S		0.88		0.78	
						Y0	-Y	0.30	0.92	0.53	0.76
						Y1		0.30		0.53	
						S		0.63		0.68	
4-to-1 multiplexer M4T1N	 	9	1	# # # # # #	B4	Y0	+Y	1.10	0.50	0.72	0.50
						Y1		1.10		0.72	
						Y2		1.10		0.72	
						Y3		1.10		0.72	
						A		1.30		1.15	
						B		1.30		1.15	
						Y0	-Y	0.57	1.80	0.90	1.08
						Y1		0.57		0.90	
						Y2		0.57		0.90	
						Y3		0.57		0.90	
						A		1.00		1.10	
						B		1.00		1.10	

# HG62G Series

## AND-NOR, OR-NAND Gates (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay						
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	$t_{plh}$ (ns)		$t_{phi}$ (ns)		
								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$	
8-to-1 multiplexer M8T1N		21	1	# # # # # # # #	B6	Y0- Y7	+Y	1.27	0.50	1.20	1.08	
								A	2.00		1.73	
								B				
						Y0- Y7	-Y	1.35	0.50	1.47	0.50	
								A	1.88		2.20	
								B				
						Y	+0	0.52	0.50	0.53	0.50	
								A	0.59		0.60	
								Y	0.52	0.50	0.53	0.50
								A	0.52		0.53	
								Y	0.33	0.50	0.37	0.76
								A	0.40		0.44	
Y	-0	0.33	0.50	0.37	0.76							
		A	0.40		0.44							
Y	+1	0.33	0.50	0.37	0.76							
		A	0.33		0.37							
Y	-1	0.33	0.50	0.37	0.76							
		A	0.33		0.37							



Power Decoders





Function and Macro Name	Macro		LV	Clamp Level when Open	Sym- bol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)			
						t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>		
2-bit decoder D2T4NP		14	1	# #	B5	A	-0	0.58	0.30	0.62	0.42
						B		0.58		0.62	
						A	-1	0.70	0.30	0.80	0.42
						B		0.58		0.62	
						A	-2	0.58	0.30	0.62	0.42
						B		0.70		0.80	
						A	-3	0.70	0.30	0.80	0.42
						B		0.70		0.80	
						A	+0	0.77	0.30	0.78	0.30
						B		0.77		0.78	
						A	+1	0.95	0.30	0.90	0.30
						B		0.77		0.78	
						A	+2	0.77	0.30	0.78	0.30
						B		0.95		0.90	
						A	+3	0.95	0.30	0.90	0.30
						B		0.95		0.90	
3-bit decoder D3T8P		26	9	# # #	B5	A, B, C	-0 to -7	0.68	0.30	0.62	0.58

# HG62G Series

## Decoders (Normal)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	$t_{plh}$ (ns)		$t_{phi}$ (ns)	
								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$
2-bit decoder D2T4N		8	1	# #	B5	A	-0	0.48	0.50	0.52	0.76
						B		0.48		0.52	
						A	-1	0.60	0.50	0.70	0.76
						B		0.48		0.52	
						A	-2	0.48	0.50	0.52	0.76
						B		0.60		0.70	
						A	-3	0.60	0.50	0.70	0.76
						B		0.60		0.70	
						A	+0	0.67	0.50	0.68	0.50
						B		0.67		0.68	
						A	+1	0.85	0.50	0.80	0.50
						B		0.67		0.68	
						A	+2	0.67	0.50	0.68	0.50
						B		0.85		0.80	
						A	+3	0.85	0.50	0.80	0.50
						B		0.85		0.80	
3-bit decoder D3T8		14	5	# # #	B5	A, B, C	-0 to -7	0.58	0.50	0.52	1.08

Latches (with Scan Function)





Function and Macro Name	Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	Delay																								
	Equiv. Circuit and Symbol	In - put Name					Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)																					
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>																				
R $\bar{S}$ latch TLRS0	<table border="1"> <tr><th>SN</th><th>RN</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td colspan="2">Latch</td></tr> </table> 	SN	RN	+Q	-Q	0	0	0	0	0	1	1	0	1	0	0	1	1	1	Latch		9	1	@ @	A3	$\bar{S}$	+Q	1.30	0.50	—	0.42
		SN	RN	+Q	-Q																										
		0	0	0	0																										
		0	1	1	0																										
1	0	0	1																												
1	1	Latch																													
$\bar{R}$		1.16		1.00																											
$\bar{S}$	-Q	1.16	0.50	1.00	0.42																										
R		1.30		—																											
RS latch TLRS3	<table border="1"> <tr><th>S</th><th>R</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	S	R	+Q	-Q	0	0	Latch		0	1	0	1	1	0	1	0	1	1	1	1	9	1	# #	A3	S	+Q	1.00	0.50	1.30	0.42
		S	R	+Q	-Q																										
		0	0	Latch																											
		0	1	0	1																										
1	0	1	0																												
1	1	1	1																												
R		—		1.37																											
S	-Q	—	0.50	1.37	0.42																										
R		1.00		1.30																											
2-input RS latch TLR2S20	<table border="1"> <tr><th>SN</th><th>RN</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td colspan="2">Latch</td></tr> </table> 	SN	RN	+Q	-Q	0	0	0	0	0	1	1	0	1	0	0	1	1	1	Latch		10	1	@ @ @ @	A4	$\bar{S}$	+Q	1.37	0.50	—	0.42
		SN	RN	+Q	-Q																										
		0	0	0	0																										
		0	1	1	0																										
1	0	0	1																												
1	1	Latch																													
$\bar{R}$		1.30		1.05																											
$\bar{S}$	-Q	1.30	0.50	1.05	0.42																										
R		1.37		—																											
2-input RS latch TLR2S23	<table border="1"> <tr><th>S</th><th>R</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	S	R	+Q	-Q	0	0	Latch		0	1	0	1	1	0	1	0	1	1	1	1	10	1	# #	A4	S	+Q	1.05	0.50	1.37	0.42
		S	R	+Q	-Q																										
		0	0	Latch																											
		0	1	0	1																										
1	0	1	0																												
1	1	1	1																												
R		—		1.51																											
S	-Q	—	0.50	1.51	0.42																										
R		1.05		1.37																											

# HG62G Series




## Latches (with Scan Function) (cont)

Function and Macro Name	Macro Equiv. Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay					
						In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
D Latch TLD		6	1	@	C	G	+Q	1.20	0.30	1.20	0.30
						D		1.20		1.20	
						G	-Q	1.00	0.30	1.05	0.30
						D		1.00		1.05	
D Latch with CLR TLDC1	<p>X: Don't care</p>	7	1	@	C	G	+Q	1.30	0.30	1.20	0.30
						D		1.30		1.20	
						CL		0.85		0.80	
						G	-Q	1.00	0.30	1.15	0.30
						D		1.00		1.15	
						CL		0.60		0.70	
D Latch with PRE TLDP1	<p>X: Don't care</p>	7	1	@	C	G	+Q	1.20	0.30	1.30	0.30
						D		1.20		1.30	
						PR		0.95		1.05	
						G	-Q	1.10	0.30	1.05	0.30
						D		1.10		1.05	
						PR		0.85		0.80	
D Latch with CLR/PRE TLDPC3	<p>X: Don't care</p>	8	1	@	C	G	+Q	1.40	0.30	1.40	0.30
						D		1.40		1.40	
						PR		1.10		0.95	
						CL		0.85		0.80	
						G	-Q	1.20	0.30	1.25	0.30
						D		1.20		1.25	
						PR		0.75		0.95	
						CL		0.60		0.70	

Latches (with Scan Function) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym- bol No.	Delay										
	Equiv. Circuit and Symbol	Equiv. Gate Count				In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)						
								t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>					
4-bit latch TLD4	G	+Q0	+Q1	+Q2	+Q3	21	1	@	B4	G	+Q0- +Q3	1.12	0.30	1.28	0.30	
	1	D0	D1	D2	D3							1.02		1.07		
	 Latch															
																
4-bit latch with CLR TLD4C1	G	CL	+Q0	+Q1	+Q2	+Q3	27	1	@	B4	G	+Q0- +Q3	1.12	0.30	1.28	0.30
	1	0	D0	D1	D2	D3							1.12		1.07	
	 Latch															
	X	1	0	0	0	0							1.00		1.05	
	X: Don't care 															

Flip-Flops (with Scan Function)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym- bol No.	Delay							
	Equiv. Circuit and Symbol	Equiv. Gate Count				In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)			
								t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>		
D flip-flop TFD	CK	+Q	-Q	8	1	@	C	CK	+Q	1.24	0.30	1.30	0.30
	 D	D											
	 +Q0	-Q0											
													

# HG62G Series

## Flip-Flops (with Scan Function) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay																																			
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)																															
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>																														
D flip-flop with Load TFDL1	<table border="1"> <tr><td>CK</td><td>L</td><td>+Q</td><td>-Q</td></tr> <tr><td></td><td>0</td><td>DC</td><td>DC</td></tr> <tr><td></td><td>1</td><td>DL</td><td>DL</td></tr> <tr><td></td><td>X</td><td>+Q0</td><td>-Q0</td></tr> </table> 	CK	L	+Q	-Q		0	DC	DC		1	DL	DL		X	+Q0	-Q0	10	1	@	C	CK	+Q	1.24	0.30	1.30	0.30														
		CK	L	+Q	-Q																																				
			0	DC	DC																																				
			1	DL	DL																																				
	X	+Q0	-Q0																																						
1	@	-Q	1.10	0.30	1.09	0.30																																			
1	@																																								
2	#																																								
D flip-flop with CLR TFDC1	<table border="1"> <tr><td>CK</td><td>CL</td><td>+Q</td><td>-Q</td></tr> <tr><td></td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td></tr> </table> 	CK	CL	+Q	-Q		0	D	D		0	+Q0	-Q0	X	1	0	1	9	1	@	C	CK	+Q	1.34	0.30	1.30	0.30														
		CK	CL	+Q	-Q																																				
			0	D	D																																				
			0	+Q0	-Q0																																				
X	1	0	1																																						
1	@	CL	—	—	0.87	—																																			
2	#	CK	-Q	1.10	0.30	1.19	0.30																																		
			CL	0.67	—	—	—																																		
D flip-flop with PRE TFDP1	<table border="1"> <tr><td>CK</td><td>PR</td><td>+Q</td><td>-Q</td></tr> <tr><td></td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>0</td></tr> </table> 	CK	PR	+Q	-Q		0	D	D		0	+Q0	-Q0	X	1	1	0	9	1	@	C	CK	+Q	1.26	0.30	1.35	0.30														
		CK	PR	+Q	-Q																																				
			0	D	D																																				
			0	+Q0	-Q0																																				
X	1	1	0																																						
1	@	PR	1.02	—	—	—																																			
2	#	CK	-Q	1.15	0.30	1.11	0.30																																		
			PR	—	—	0.87	—																																		
D flip-flop with CLR/PRE TFDPC3	<table border="1"> <tr><td>CK</td><td>PR</td><td>CL</td><td>+Q</td><td>-Q</td></tr> <tr><td></td><td>0</td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>X</td><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>0</td><td>1</td></tr> </table> 	CK	PR	CL	+Q	-Q		0	0	D	D		0	0	+Q0	-Q0	X	1	0	1	0	X	0	1	0	1	X	1	1	0	1	10	1	@	C	CK	+Q	1.26	0.30	1.35	0.30
		CK	PR	CL	+Q	-Q																																			
			0	0	D	D																																			
			0	0	+Q0	-Q0																																			
		X	1	0	1	0																																			
		X	0	1	0	1																																			
X	1	1	0	1																																					
1	@	CL	0.94	—	0.87	—																																			
		PR	1.16	—	—	—																																			
2	#	CK	-Q	1.15	0.30	1.11	0.30																																		
2	#		CL	0.67	—	0.79	—																																		
			PR	—	—	1.01	—																																		

Flip-Flops (with Scan Function) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay																																																																				
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)																																																																
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>																																																															
JK flip-flop TFJ	<table border="1"> <tr><td>CK</td><td>J</td><td>K</td><td>+Q</td><td>-Q</td></tr> <tr><td></td><td>0</td><td>0</td><td>0</td><td>1</td></tr> <tr><td></td><td>1</td><td>1</td><td>1</td><td>0</td></tr> <tr><td></td><td>0</td><td>1</td><td>+Q0</td><td>-Q0</td></tr> <tr><td></td><td>1</td><td>0</td><td>-Q0</td><td>+Q0</td></tr> <tr><td></td><td>X</td><td>X</td><td>+Q0</td><td>-Q0</td></tr> </table> 	CK	J	K	+Q	-Q		0	0	0	1		1	1	1	0		0	1	+Q0	-Q0		1	0	-Q0	+Q0		X	X	+Q0	-Q0	11	2 1 1	@ @ #	C	CK	+Q	1.96	0.30	1.72	0.30																																	
		CK	J	K	+Q	-Q																																																																				
			0	0	0	1																																																																				
			1	1	1	0																																																																				
			0	1	+Q0	-Q0																																																																				
			1	0	-Q0	+Q0																																																																				
	X	X	+Q0	-Q0																																																																						
-Q	1.96	0.30	1.72	0.30																																																																						
JK flip-flop with CLR TFJC1	<table border="1"> <tr><td>CK</td><td>J</td><td>K</td><td>CL</td><td>+Q</td><td>-Q</td></tr> <tr><td></td><td>0</td><td>0</td><td>0</td><td>0</td><td>1</td></tr> <tr><td></td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td></td><td>0</td><td>1</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td></td><td>1</td><td>0</td><td>0</td><td>-Q0</td><td>+Q0</td></tr> <tr><td></td><td>X</td><td>X</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>X</td><td>X</td><td>1</td><td>0</td><td>1</td></tr> </table> 	CK	J	K	CL	+Q	-Q		0	0	0	0	1		1	1	0	1	0		0	1	0	+Q0	-Q0		1	0	0	-Q0	+Q0		X	X	0	+Q0	-Q0	X	X	X	1	0	1	14	2 1 1 1	@ @ # #	C	CK	+Q	2.16	0.30	1.92	0.30																					
		CK	J	K	CL	+Q	-Q																																																																			
			0	0	0	0	1																																																																			
			1	1	0	1	0																																																																			
			0	1	0	+Q0	-Q0																																																																			
			1	0	0	-Q0	+Q0																																																																			
	X	X	0	+Q0	-Q0																																																																					
X	X	X	1	0	1																																																																					
CL		—		1.72																																																																						
CK	-Q	2.00	0.30	1.94	0.30																																																																					
CL		2.08		—																																																																						
JK flip-flop with PRE/CLR TFJPC1	<table border="1"> <tr><td>CK</td><td>J</td><td>K</td><td>PR</td><td>CL</td><td>+Q</td><td>-Q</td></tr> <tr><td></td><td>0</td><td>0</td><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td></td><td>1</td><td>1</td><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td></td><td>0</td><td>1</td><td>1</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td></td><td>1</td><td>0</td><td>1</td><td>0</td><td>-Q0</td><td>+Q0</td></tr> <tr><td></td><td>X</td><td>X</td><td>1</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>X</td><td>X</td><td>0</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>X</td><td>X</td><td>X</td><td>1</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>X</td><td>X</td><td>X</td><td>0</td><td>1</td><td>1</td><td>1</td></tr> </table> 	CK	J	K	PR	CL	+Q	-Q		0	0	1	0	0	1		1	1	1	0	1	0		0	1	1	0	+Q0	-Q0		1	0	1	0	-Q0	+Q0		X	X	1	0	+Q0	-Q0	X	X	X	0	0	1	0	X	X	X	1	1	0	1	X	X	X	0	1	1	1	15	2 1 1 2 1	@ @ # @ #	C	CK	+Q	1.94	0.30	2.10	0.30
		CK	J	K	PR	CL	+Q	-Q																																																																		
			0	0	1	0	0	1																																																																		
			1	1	1	0	1	0																																																																		
			0	1	1	0	+Q0	-Q0																																																																		
			1	0	1	0	-Q0	+Q0																																																																		
	X	X	1	0	+Q0	-Q0																																																																				
X	X	X	0	0	1	0																																																																				
X	X	X	1	1	0	1																																																																				
X	X	X	0	1	1	1																																																																				
PR		1.32		1.30																																																																						
CL		—		2.10																																																																						
CK	-Q	2.01	0.30	2.16	0.30																																																																					
PR		—		2.06																																																																						
CL		1.72		1.34																																																																						

# HG62G Series


## Flip-Flops (with Scan Function) (cont)

Function and Macro Name	Macro			LV	Clamp Level when Open	Sym - bol No.	Delay																																		
	Equiv. Circuit and Symbol	Equiv. Gate Count	In - put Name				Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)																															
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>																														
T flip-flop with CLR TFTC1	<table border="1"> <tr> <th>CK</th> <th>CL</th> <th>+Q</th> <th>-Q</th> </tr> <tr> <td></td> <td>0</td> <td>-Q0</td> <td>+Q0</td> </tr> <tr> <td></td> <td>0</td> <td>+Q0</td> <td>-Q0</td> </tr> <tr> <td>X</td> <td>1</td> <td>0</td> <td>1</td> </tr> </table>	CK	CL	+Q	-Q		0	-Q0	+Q0		0	+Q0	-Q0	X	1	0	1	10	1	@	C	CK	+Q	1.34	0.30	1.30	0.30														
		CK	CL	+Q	-Q																																				
			0	-Q0	+Q0																																				
			0	+Q0	-Q0																																				
X	1	0	1																																						
2	#	CL		—		0.87																																			
2	#	CK	-Q	1.10	0.30	1.19	0.30																																		
2	#	CL		0.67		—																																			
T flip-flop with PRE TFTP1	<table border="1"> <tr> <th>CK</th> <th>PR</th> <th>+Q</th> <th>-Q</th> </tr> <tr> <td></td> <td>0</td> <td>-Q0</td> <td>+Q0</td> </tr> <tr> <td></td> <td>0</td> <td>+Q0</td> <td>-Q0</td> </tr> <tr> <td>X</td> <td>1</td> <td>1</td> <td>0</td> </tr> </table>	CK	PR	+Q	-Q		0	-Q0	+Q0		0	+Q0	-Q0	X	1	1	0	10	1	@	C	CK	+Q	1.26	0.30	1.35	0.30														
		CK	PR	+Q	-Q																																				
			0	-Q0	+Q0																																				
			0	+Q0	-Q0																																				
X	1	1	0																																						
2	#	PR		1.02		—																																			
2	#	CK	-Q	1.15	0.30	1.11	0.30																																		
2	#	PR		—		0.87																																			
T flip-flop with PRE/CLR TFTPC3	<table border="1"> <tr> <th>CK</th> <th>PR</th> <th>CL</th> <th>+Q</th> <th>-Q</th> </tr> <tr> <td></td> <td>0</td> <td>0</td> <td>-Q0</td> <td>+Q0</td> </tr> <tr> <td></td> <td>0</td> <td>0</td> <td>+Q0</td> <td>-Q0</td> </tr> <tr> <td>X</td> <td>1</td> <td>0</td> <td>1</td> <td>0</td> </tr> <tr> <td>X</td> <td>0</td> <td>1</td> <td>0</td> <td>1</td> </tr> <tr> <td>X</td> <td>1</td> <td>1</td> <td>0</td> <td>1</td> </tr> </table>	CK	PR	CL	+Q	-Q		0	0	-Q0	+Q0		0	0	+Q0	-Q0	X	1	0	1	0	X	0	1	0	1	X	1	1	0	1	11	1	@	C	CK	+Q	1.36	0.30	1.45	0.30
		CK	PR	CL	+Q	-Q																																			
			0	0	-Q0	+Q0																																			
			0	0	+Q0	-Q0																																			
		X	1	0	1	0																																			
		X	0	1	0	1																																			
X	1	1	0	1																																					
2	#	PR		1.26		—																																			
2	#	CL		1.04		0.97																																			
2	#	CK	-Q	1.25	0.30	1.21	0.30																																		
2	#	PR		—		1.11																																			
2	#	CL		0.77		0.89																																			
4-bit D flip-flop TFD4	<table border="1"> <tr> <th>CK</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td></td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> <tr> <td></td> <td>+Q00</td> <td>+Q10</td> <td>+Q20</td> <td>+Q30</td> </tr> </table>	CK	+Q0	+Q1	+Q2	+Q3		D0	D1	D2	D3		+Q00	+Q10	+Q20	+Q30	29	1	@	B4	CK	+Q0- +Q3	1.40	0.30	1.85	0.30															
		CK	+Q0	+Q1	+Q2	+Q3																																			
			D0	D1	D2	D3																																			
			+Q00	+Q10	+Q20	+Q30																																			
1	@																																								
1	@																																								
1	@																																								




Flip-Flops (with Scan Function) (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	Delay																													
Function and Macro Name	Equiv. Circuit and Symbol					In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)																									
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>																								
4-bit D flip-flop with CLR TFD4C1	<table border="1"> <tr> <th>CK</th> <th>CL</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td>↗</td> <td>0</td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> <tr> <td>↘</td> <td>0</td> <td>+Q00</td> <td>+Q10</td> <td>+Q20</td> <td>+Q30</td> </tr> <tr> <td>X</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </table>	CK	CL	+Q0	+Q1	+Q2	+Q3	↗	0	D0	D1	D2	D3	↘	0	+Q00	+Q10	+Q20	+Q30	X	1	0	0	0	0	34	1	@	B4	CK	+Q0— +Q3	1.60	0.30	1.85	0.30
	CK	CL	+Q0	+Q1	+Q2	+Q3																													
	↗	0	D0	D1	D2	D3																													
	↘	0	+Q00	+Q10	+Q20	+Q30																													
	X	1	0	0	0	0																													
<table border="1"> <tr> <th>CK</th> <th>CL</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td>↗</td> <td>0</td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> <tr> <td>↘</td> <td>0</td> <td>+Q00</td> <td>+Q10</td> <td>+Q20</td> <td>+Q30</td> </tr> <tr> <td>X</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </table>	CK	CL	+Q0	+Q1	+Q2	+Q3	↗	0	D0	D1	D2	D3	↘	0	+Q00	+Q10	+Q20	+Q30	X	1	0	0	0	0	1	@	1.60								
CK	CL	+Q0	+Q1	+Q2	+Q3																														
↗	0	D0	D1	D2	D3																														
↘	0	+Q00	+Q10	+Q20	+Q30																														
X	1	0	0	0	0																														
<table border="1"> <tr> <th>CK</th> <th>CL</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td>↗</td> <td>0</td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> <tr> <td>↘</td> <td>0</td> <td>+Q00</td> <td>+Q10</td> <td>+Q20</td> <td>+Q30</td> </tr> <tr> <td>X</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </table>	CK	CL	+Q0	+Q1	+Q2	+Q3	↗	0	D0	D1	D2	D3	↘	0	+Q00	+Q10	+Q20	+Q30	X	1	0	0	0	0	1	@	1.60								
CK	CL	+Q0	+Q1	+Q2	+Q3																														
↗	0	D0	D1	D2	D3																														
↘	0	+Q00	+Q10	+Q20	+Q30																														
X	1	0	0	0	0																														
<table border="1"> <tr> <th>CK</th> <th>CL</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td>↗</td> <td>0</td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> <tr> <td>↘</td> <td>0</td> <td>+Q00</td> <td>+Q10</td> <td>+Q20</td> <td>+Q30</td> </tr> <tr> <td>X</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </table>	CK	CL	+Q0	+Q1	+Q2	+Q3	↗	0	D0	D1	D2	D3	↘	0	+Q00	+Q10	+Q20	+Q30	X	1	0	0	0	0	1	@	1.60								
CK	CL	+Q0	+Q1	+Q2	+Q3																														
↗	0	D0	D1	D2	D3																														
↘	0	+Q00	+Q10	+Q20	+Q30																														
X	1	0	0	0	0																														
<table border="1"> <tr> <th>CK</th> <th>CL</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td>↗</td> <td>0</td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> <tr> <td>↘</td> <td>0</td> <td>+Q00</td> <td>+Q10</td> <td>+Q20</td> <td>+Q30</td> </tr> <tr> <td>X</td> <td>1</td> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> </table>	CK	CL	+Q0	+Q1	+Q2	+Q3	↗	0	D0	D1	D2	D3	↘	0	+Q00	+Q10	+Q20	+Q30	X	1	0	0	0	0	1	@	1.60								
CK	CL	+Q0	+Q1	+Q2	+Q3																														
↗	0	D0	D1	D2	D3																														
↘	0	+Q00	+Q10	+Q20	+Q30																														
X	1	0	0	0	0																														



Shift Registers (with Scan Function)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	Delay																														
Function and Macro Name	Equiv. Circuit and Symbol					In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)																										
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>																									
2-bit shift register TZSR	<table border="1"> <tr> <th>CK</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>+A0</td> <td>+B0</td> </tr> </table>	CK	+A	+B	↗	D	+A0	↘	+A0	+B0	13	1	@	B	CK	+A +B	1.16	0.30	1.33	0.30																
	CK	+A	+B																																	
↗	D	+A0																																		
↘	+A0	+B0																																		
<table border="1"> <tr> <th>CK</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>+A0</td> <td>+B0</td> </tr> </table>	CK	+A	+B	↗	D	+A0	↘	+A0	+B0	1	@	1.33																								
CK	+A	+B																																		
↗	D	+A0																																		
↘	+A0	+B0																																		
2-bit shift register with CLR TZSRC1	<table border="1"> <tr> <th>CK</th> <th>CLA</th> <th>CLB</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>0</td> <td>0</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>0</td> <td>0</td> <td>+A0</td> <td>+B0</td> </tr> <tr> <td>X</td> <td>1</td> <td>X</td> <td>0</td> <td>X</td> </tr> <tr> <td>X</td> <td>X</td> <td>1</td> <td>X</td> <td>0</td> </tr> </table>	CK	CLA	CLB	+A	+B	↗	0	0	D	+A0	↘	0	0	+A0	+B0	X	1	X	0	X	X	X	1	X	0	16	1	@	C	CK	+A +B	1.26	0.30	1.43	0.30
	CK	CLA	CLB	+A	+B																															
	↗	0	0	D	+A0																															
	↘	0	0	+A0	+B0																															
	X	1	X	0	X																															
	X	X	1	X	0																															
<table border="1"> <tr> <th>CK</th> <th>CLA</th> <th>CLB</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>0</td> <td>0</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>0</td> <td>0</td> <td>+A0</td> <td>+B0</td> </tr> <tr> <td>X</td> <td>1</td> <td>X</td> <td>0</td> <td>X</td> </tr> <tr> <td>X</td> <td>X</td> <td>1</td> <td>X</td> <td>0</td> </tr> </table>	CK	CLA	CLB	+A	+B	↗	0	0	D	+A0	↘	0	0	+A0	+B0	X	1	X	0	X	X	X	1	X	0	1	@	1.35								
CK	CLA	CLB	+A	+B																																
↗	0	0	D	+A0																																
↘	0	0	+A0	+B0																																
X	1	X	0	X																																
X	X	1	X	0																																
<table border="1"> <tr> <th>CK</th> <th>CLA</th> <th>CLB</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>0</td> <td>0</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>0</td> <td>0</td> <td>+A0</td> <td>+B0</td> </tr> <tr> <td>X</td> <td>1</td> <td>X</td> <td>0</td> <td>X</td> </tr> <tr> <td>X</td> <td>X</td> <td>1</td> <td>X</td> <td>0</td> </tr> </table>	CK	CLA	CLB	+A	+B	↗	0	0	D	+A0	↘	0	0	+A0	+B0	X	1	X	0	X	X	X	1	X	0	2	#	1.43								
CK	CLA	CLB	+A	+B																																
↗	0	0	D	+A0																																
↘	0	0	+A0	+B0																																
X	1	X	0	X																																
X	X	1	X	0																																
<table border="1"> <tr> <th>CK</th> <th>CLA</th> <th>CLB</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>0</td> <td>0</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>0</td> <td>0</td> <td>+A0</td> <td>+B0</td> </tr> <tr> <td>X</td> <td>1</td> <td>X</td> <td>0</td> <td>X</td> </tr> <tr> <td>X</td> <td>X</td> <td>1</td> <td>X</td> <td>0</td> </tr> </table>	CK	CLA	CLB	+A	+B	↗	0	0	D	+A0	↘	0	0	+A0	+B0	X	1	X	0	X	X	X	1	X	0	2	#	1.35								
CK	CLA	CLB	+A	+B																																
↗	0	0	D	+A0																																
↘	0	0	+A0	+B0																																
X	1	X	0	X																																
X	X	1	X	0																																
<table border="1"> <tr> <th>CK</th> <th>CLA</th> <th>CLB</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>0</td> <td>0</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>0</td> <td>0</td> <td>+A0</td> <td>+B0</td> </tr> <tr> <td>X</td> <td>1</td> <td>X</td> <td>0</td> <td>X</td> </tr> <tr> <td>X</td> <td>X</td> <td>1</td> <td>X</td> <td>0</td> </tr> </table>	CK	CLA	CLB	+A	+B	↗	0	0	D	+A0	↘	0	0	+A0	+B0	X	1	X	0	X	X	X	1	X	0	2	#	1.35								
CK	CLA	CLB	+A	+B																																
↗	0	0	D	+A0																																
↘	0	0	+A0	+B0																																
X	1	X	0	X																																
X	X	1	X	0																																
<table border="1"> <tr> <th>CK</th> <th>CLA</th> <th>CLB</th> <th>+A</th> <th>+B</th> </tr> <tr> <td>↗</td> <td>0</td> <td>0</td> <td>D</td> <td>+A0</td> </tr> <tr> <td>↘</td> <td>0</td> <td>0</td> <td>+A0</td> <td>+B0</td> </tr> <tr> <td>X</td> <td>1</td> <td>X</td> <td>0</td> <td>X</td> </tr> <tr> <td>X</td> <td>X</td> <td>1</td> <td>X</td> <td>0</td> </tr> </table>	CK	CLA	CLB	+A	+B	↗	0	0	D	+A0	↘	0	0	+A0	+B0	X	1	X	0	X	X	X	1	X	0	2	#	1.35								
CK	CLA	CLB	+A	+B																																
↗	0	0	D	+A0																																
↘	0	0	+A0	+B0																																
X	1	X	0	X																																
X	X	1	X	0																																







# HG62G Series

## Shift Registers (with Scan Function) (cont)

Function and Macro Name	Macro							Equiv. Gate Count	LV	Clamp Level when Open	Sym - bol No.	Delay						
	Equiv. Circuit and Symbol											In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)		
	CK	CLA	CLB	PRA	PRB	+A	+B							t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>	
2-bit shift register with CLR/PRE TZSRCP3	CK	CLA	CLB	PRA	PRB	+A	+B	18	1 1 # # # # #	@ @ # # # #	B4	CK	+A	1.46	0.30	1.63	0.30	
		0	0	0	0	D	+A0					CLA		0.75		1.55		
		0	0	0	0	+A0	+B0					PRA		0.82		—		
	X	1	X	X	X	0	X					CK	+B	1.46	0.30	1.63	0.30	
	X	X	1	X	X	X	0					CLB		0.75		1.55		
	X	X	X	1	X	1	X					PRB		0.82		—		
	X	X	X	X	1	X	1											
	X	1	X	1	X	0	X											
	X	X	1	X	1	X	0											
4-bit shift register TZSR4	CK	+A	+B	+C	+D			29	1 1	@ @	C	CK	+A	1.38	0.30	1.55	0.30	
		D	+A0	+B0	+C0							+B	1.38	0.30	1.55	0.30		
		+A0	+B0	+C0	+D0							+C	1.38	0.30	1.55	0.30		
												+D	1.38	0.30	1.55	0.30		
4-bit shift register with CLR TZSR4C1	CK	CLA	CLB	CLC	CLD	+A	+B	+C	+D	37	1 1 # # # #	B4	CK	+A	1.58	0.30	1.75	0.30
		0	0	0	0	D	+A0	+B0	+C0				CLA		—		1.35	
		0	0	0	0	+A0	+B0	+C0	+D0				CK	+B	1.58	0.30	1.75	0.30
	X	1	X	X	X	0	X	X	X				CLB		—		1.35	
	X	X	1	X	X	X	0	X	X				CK	+C	1.58	0.30	1.75	0.30
	X	X	X	1	X	X	X	0	X				CLC		—		1.35	
	X	X	X	X	1	X	X	X	0				CK	+D	1.58	0.30	1.75	0.30
	X	X	X	X	X	1	X	X	0				CLD		—		1.35	

Power Latches

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay																									
Function and Macro Name	Equiv. Circuit and Symbol					In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)																					
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>																				
RS latch LRS0H	<table border="1"> <tr><th>SN</th><th>RN</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td colspan="2">Latch</td></tr> </table> 	SN	RN	+Q	-Q	0	0	0	0	0	1	1	0	1	0	0	1	1	1	Latch		4	1	@ @	A3	S	+Q	0.75	0.30	—	0.30
		SN	RN	+Q	-Q																										
		0	0	0	0																										
		0	1	1	0																										
1	0	0	1																												
1	1	Latch																													
R		0.61		0.45																											
S	-Q	0.61	0.30	0.45	0.30																										
R		0.75		—																											
RS latch LRS3H	<table border="1"> <tr><th>S</th><th>R</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	S	R	+Q	-Q	0	0	Latch		0	1	0	1	1	0	1	0	1	1	1	1	4	1	# #	A3	S	+Q	0.45	0.30	0.75	0.30
		S	R	+Q	-Q																										
		0	0	Latch																											
		0	1	0	1																										
1	0	1	0																												
1	1	1	1																												
R		—		0.82																											
S	-Q	—	0.30	0.82	0.30																										
R		0.45		0.75																											
2-input RS latch LR2S20H	<table border="1"> <tr><th>SN</th><th>RN</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td colspan="2">Latch</td></tr> </table> 	SN	RN	+Q	-Q	0	0	0	0	0	1	1	0	1	0	0	1	1	1	Latch		5	1	@ @ @ @	A4	S	+Q	0.82	0.30	—	0.30
		SN	RN	+Q	-Q																										
		0	0	0	0																										
		0	1	1	0																										
1	0	0	1																												
1	1	Latch																													
R		0.75		0.50																											
S	-Q	0.75	0.30	0.50	0.30																										
R		0.82		—																											
2-input RS latch LR2S23H	<table border="1"> <tr><th>S</th><th>R</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	S	R	+Q	-Q	0	0	Latch		0	1	0	1	1	0	1	0	1	1	1	1	5	1	# # # #	A4	S	+Q	0.50	0.30	0.82	0.30
		S	R	+Q	-Q																										
		0	0	Latch																											
		0	1	0	1																										
1	0	1	0																												
1	1	1	1																												
R		—		0.96																											
S	-Q	—	0.30	0.96	0.30																										
R		0.50		0.82																											

# HG62G Series

## Power Latches (cont)

Function and Macro Name	Macro Equiv. Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay					
						In- put Name	Out- put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)	
								$t_{o1h}$	$K_{1h}$	$t_{o1l}$	$K_{1l}$
D Latch LDH		5	2 1	@ @	C	G	+Q	0.80	0.30	0.80	0.30
						D		0.80		0.80	
						G	-Q	0.95	0.30	1.00	0.30
						D		0.95		1.00	
D Latch with CLR LDC1H	<p>X: Don't care</p>	6	2 1 1	@ @ #	C	G	+Q	1.25	0.30	1.15	0.30
						D		1.25		1.15	
						CL		0.80		0.75	
						G	-Q	0.95	0.30	1.10	0.30
						D		0.95		1.10	
						CL		0.55		0.65	
D Latch with PRE LDP1H	<p>X: Don't care</p>	6	2 1 1	@ @ #	C	G	+Q	0.80	0.30	0.90	0.30
						D		0.80		0.90	
						PR		0.55		0.65	
						G	-Q	1.05	0.30	1.00	0.30
						D		1.05		1.00	
						PR		0.80		0.75	
D Latch with CLR/PRE LDPC3H	<p>X: Don't care</p>	7	2 1 1 1	@ @ # #	C	G	+Q	1.35	0.30	1.35	0.30
						D		1.35		1.35	
						PR		1.05		0.90	
						CL		0.80		0.75	
						G	-Q	1.15	0.30	1.20	0.30
						D		1.15		1.20	
						PR		0.70		0.90	
						CL		0.55		0.65	

Power Latches (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
4-bit latch LD4H	<b>G</b> <b>+Q0</b> <b>+Q1</b> <b>+Q2</b> <b>+Q3</b>	14	1	@	B4	G	+Q0- +Q3	0.92	0.30	1.03	0.30
	1 D0 D1 D2 D3		1	@							
			1	@							
			1	@							
4-bit latch with CLR LD4C1H	<b>G</b> <b>CL</b> <b>+Q0</b> <b>+Q1</b> <b>+Q2</b> <b>+Q3</b>	15	1	@	B4	G	+Q0- +Q3	0.92	0.30	1.03	0.30
	1 0 D0 D1 D2 D3		1	@							
			1	@							
	X 1 0 0 0 0		1	@				0.80	0.80		
	X: Don't care 		1	#							

Power Flip-Flops

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay						
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)		
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>	
D flip-flop FDH	<b>CK</b> <b>+Q</b> <b>-Q</b>	7	1	@	C	CK	+Q	0.84	0.30	0.90	0.30	
			1	@								-Q

# HG62G Series

## Power Flip-Flops (cont)

Function and Macro Name	Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym-bol No.	Delay																																		
	Equiv. Circuit and Symbol	In-put Name					Out-put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)																															
								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$																														
D flip-flop with load FDL1H	<table border="1"> <tr><th>CK</th><th>L</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>DC</td><td>DC</td></tr> <tr><td></td><td>1</td><td>DL</td><td>DL</td></tr> <tr><td></td><td>X</td><td>+Q0</td><td>-Q0</td></tr> </table> 	CK	L	+Q	-Q		0	DC	DC		1	DL	DL		X	+Q0	-Q0	9	1 1 1 2	@ @ @ #	C	CK	+Q	0.84	0.30	0.90	0.30														
		CK	L	+Q	-Q																																				
			0	DC	DC																																				
			1	DL	DL																																				
	X	+Q0	-Q0																																						
-Q	1.05	0.30	1.04	0.30																																					
D flip-flop with CLR FDC1H	<table border="1"> <tr><th>CK</th><th>CL</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td></tr> </table> 	CK	CL	+Q	-Q		0	D	D		0	+Q0	-Q0	X	1	0	1	8	1 1 2	@ @ #	C	CK	+Q	0.84	0.30	0.90	0.30														
		CK	CL	+Q	-Q																																				
			0	D	D																																				
			0	+Q0	-Q0																																				
X	1	0	1																																						
CL		—		1.06																																					
CK	-Q	1.05	0.30	1.14	0.30																																				
CL		0.62		—																																					
D flip-flop with PRE FDP1H	<table border="1"> <tr><th>CK</th><th>PR</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>0</td></tr> </table> 	CK	PR	+Q	-Q		0	D	D		0	+Q0	-Q0	X	1	1	0	8	1 1 2	@ @ #	C	CK	+Q	0.86	0.30	0.94	0.30														
		CK	PR	+Q	-Q																																				
			0	D	D																																				
			0	+Q0	-Q0																																				
X	1	1	0																																						
PR		0.62		—																																					
CK	-Q	1.10	0.30	1.06	0.30																																				
PR		—		0.82																																					
D flip-flop with CLR/PRE FDPC3H	<table border="1"> <tr><th>CK</th><th>PR</th><th>CL</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>X</td><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	CK	PR	CL	+Q	-Q		0	0	D	D		0	0	+Q0	-Q0	X	1	0	1	0	X	0	1	0	1	X	1	1	1	1	9	1 1 2 2	@ @ # #	C	CK	+Q	0.86	0.30	0.94	0.30
		CK	PR	CL	+Q	-Q																																			
			0	0	D	D																																			
			0	0	+Q0	-Q0																																			
		X	1	0	1	0																																			
		X	0	1	0	1																																			
X	1	1	1	1																																					
CL		—		0.96																																					
PR		0.62		0.70																																					
CK	-Q	1.10	0.30	1.06	0.30																																				
CL		0.62		0.74																																					
PR		—		0.82																																					



# HG62G Series

## Power Flip-Flops (cont)

Function and Macro Name	Macro Equiv. Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay																																			
						In- put Name	Out- put Name	$t_{plh}$ (ns)		$t_{phl}$ (ns)																															
								$t_{olh}$	$K_{lh}$	$t_{ohl}$	$K_{hl}$																														
T flip-flop with CLR FTC1H	<table border="1"> <tr><th>CK</th><th>CL</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>-Q0</td><td>+Q0</td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td></tr> </table>	CK	CL	+Q	-Q		0	-Q0	+Q0		0	+Q0	-Q0	X	1	0	1	9	1	@	C	CK	+Q	0.84	0.30	0.90	0.30														
		CK	CL	+Q	-Q																																				
			0	-Q0	+Q0																																				
			0	+Q0	-Q0																																				
X	1	0	1																																						
CL		—		1.06																																					
2	#			CK	-Q	1.05	0.30	1.14	0.30																																
				CL		0.62		—																																	
T flip-flop with PRE FTP1H	<table border="1"> <tr><th>CK</th><th>PR</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>-Q0</td><td>+Q0</td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>0</td></tr> </table>	CK	PR	+Q	-Q		0	-Q0	+Q0		0	+Q0	-Q0	X	1	1	0	9	1	@	C	CK	+Q	0.86	0.30	0.94	0.30														
		CK	PR	+Q	-Q																																				
			0	-Q0	+Q0																																				
			0	+Q0	-Q0																																				
X	1	1	0																																						
PR		0.62		—																																					
2	#			CK	-Q	1.10	0.30	1.06	0.30																																
				PR		—		0.82																																	
T flip-flop with PRE/CLR FTPC3H	<table border="1"> <tr><th>CK</th><th>PR</th><th>CL</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>0</td><td>-Q0</td><td>+Q0</td></tr> <tr><td></td><td>0</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>X</td><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table>	CK	PR	CL	+Q	-Q		0	0	-Q0	+Q0		0	0	+Q0	-Q0	X	1	0	1	0	X	0	1	0	1	X	1	1	1	1	10	1	@	C	CK	+Q	0.86	0.30	0.94	0.30
		CK	PR	CL	+Q	-Q																																			
			0	0	-Q0	+Q0																																			
			0	0	+Q0	-Q0																																			
		X	1	0	1	0																																			
		X	0	1	0	1																																			
X	1	1	1	1																																					
PR		0.62		0.70																																					
2	#			CL		—		0.96																																	
				CK	-Q	1.20	0.30	1.16	0.30																																
2	#			PR		—		0.92																																	
				CL		0.72		0.84																																	
4-bit D flip-flop FD4H	<table border="1"> <tr><th>CK</th><th>+Q0</th><th>+Q1</th><th>+Q2</th><th>+Q3</th></tr> <tr><td></td><td>D0</td><td>D1</td><td>D2</td><td>D3</td></tr> <tr><td></td><td>+Q00</td><td>+Q10</td><td>+Q20</td><td>+Q30</td></tr> </table>	CK	+Q0	+Q1	+Q2	+Q3		D0	D1	D2	D3		+Q00	+Q10	+Q20	+Q30	22	1	@	B4	CK	+Q0- +Q3	1.20	0.30	1.60	0.30															
		CK	+Q0	+Q1	+Q2	+Q3																																			
			D0	D1	D2	D3																																			
			+Q00	+Q10	+Q20	+Q30																																			
		1	@																																						
1	@																																								
1	@																																								
1	@																																								



Power Flip-Flops (cont)

Macro						Equiv. Gate Count	LV	Clamp Level when Open	Symbol No.	Delay						
Function and Macro Name	Equiv. Circuit and Symbol									In-put Name	Out-put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)		
												t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>	
4-bit D flip-flop with CLR FD4C1H	CK	CL	+Q0	+Q1	+Q2	+Q3	26	1	@	B4	CK	+Q0-	1.40	0.30	1.60	0.30
		0	D0	D1	D2	D3		1	@		CL	+Q3	—		1.35	
		0	+Q00	+Q10	+Q20	+Q30		1	@							
	X	1	0	0	0	0		1	@							
								1	#							

Power Shift Registers





Macro						Equiv. Gate Count	LV	Clamp Level when Open	Symbol No.	Delay					
Function and Macro Name	Equiv. Circuit and Symbol									In-put Name	Out-put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
												t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
2-bit shift register ZSRH	CK	+A	+B			11	1	@	B1	CK	+A	0.96	0.30	1.08	0.30
		D	+A0				1	@			+B	0.96	0.30	1.08	0.30
2-bit shift register with CLR ZSRC1H	CK	CLA	CLB	+A	+B	13	1	@	C	CK	+A	1.06	0.30	1.18	0.30
		0	0	D	+A0		1	@		CLA		—		1.10	
		0	0	+A0	+B0		2	#		CK	+B	1.06	0.30	1.18	0.30
	X	1	X	0	X		2	#		CLB		—		1.10	
	X	X	1	X	0										

# HG62G Series

## Power Shift Registers (cont)

Function and Macro Name	Macro							Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay							
	Equiv. Circuit and Symbol											In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)			
	CK	CLA	CLB	PRA	PRB	+A	+B							t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>		
2-bit shift register with CLR/PRE ZSRCP3H	CK	CLA	CLB	PRA	PRB	+A	+B	15	1 1 2 2 2 2	@ @ # # # #	B4	CK	+A	1.26	0.30	1.38	0.30		
	↗	0	0	0	0	D	+A0					—	—	1.30	—				
	↘	0	0	0	0	+A0	+B0					0.62	—	0.70	—				
	X	1	X	X	X	0	X					CK	+B	1.26	0.30	1.38	0.30		
	X	X	1	X	X	X	0					CLB	—	—	1.30	—			
	X	X	X	1	X	1	X					PRB	0.62	—	0.70	—			
	X	X	X	X	1	X	1					—	—	—	—	—			
	X	1	X	1	X	1	X					—	—	—	—	—			
	X	X	1	X	1	X	1					—	—	—	—	—			
4-bit shift register ZSR4H	CK	+A	+B	+C	+D			20	1 1	@ @	C	CK	+A	1.18	0.30	1.30	0.30		
	↗	D	+A0	+B0	+C0							+B	1.18	0.30	1.30	0.30			
	↘	+A0	+B0	+C0	+D0							+C	1.18	0.30	1.30	0.30			
												+D	1.18	0.30	1.30	0.30			
4-bit shift register with CLR ZSR4C1H	CK	CLA	CLB	CLC	CLD	+A	+B	+C	+D	24	1 1 2 2 2 2	@ @ # # # #	B4	CK	+A	1.38	0.30	1.50	0.30
	↗	0	0	0	0	D	+A0	+B0	+C0					—	—	1.10	—		
	↘	0	0	0	0	+A0	+B0	+C0	+D0					1.38	0.30	1.50	0.30		
	X	1	X	X	X	0	X	X	X					CK	+B	—	—	1.10	—
	X	X	1	X	X	X	0	X	X					CLB	—	—	1.10	—	
	X	X	X	1	X	X	X	0	X					CK	+C	1.38	0.30	1.50	0.30
	X	X	X	X	1	X	X	X	0					CLC	—	—	1.10	—	
	X	X	X	X	1	X	X	X	0					CK	+D	1.38	0.30	1.50	0.30
	X	X	X	X	1	X	X	X	0					CLD	—	—	1.10	—	

Latches (Normal)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay																									
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)																					
								t <sub>o1h</sub>	K <sub>1h</sub>	t <sub>o1l</sub>	K <sub>1l</sub>																				
R $\bar{S}$ latch LRS0	<table border="1"> <tr><th>SN</th><th>RN</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td colspan="2">Latch</td></tr> </table> 	SN	RN	+Q	-Q	0	0	0	0	0	1	1	0	1	0	0	1	1	1	Latch		3	1	@ @	A3	S	+Q	0.65	0.50	—	0.50
		SN	RN	+Q	-Q																										
		0	0	0	0																										
		0	1	1	0																										
1	0	0	1																												
1	1	Latch																													
R		0.51		0.35																											
S	-Q	0.51	0.50	0.35	0.50																										
R		0.65		—																											
RS latch LRS3	<table border="1"> <tr><th>S</th><th>R</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	S	R	+Q	-Q	0	0	Latch		0	1	0	1	1	0	1	0	1	1	1	1	3	1	# #	A3	S	+Q	0.35	0.50	0.65	0.50
		S	R	+Q	-Q																										
		0	0	Latch																											
		0	1	0	1																										
1	0	1	0																												
1	1	1	1																												
R		—		0.72																											
S	-Q	—	0.50	0.72	0.50																										
R		0.35		0.65																											
2-input R $\bar{S}$ latch LR2S20	<table border="1"> <tr><th>SN</th><th>RN</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td>0</td><td>0</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>1</td><td colspan="2">Latch</td></tr> </table> 	SN	RN	+Q	-Q	0	0	0	0	0	1	1	0	1	0	0	1	1	1	Latch		4	1	@ @ @ @	A4	S	+Q	0.72	0.50	—	0.50
		SN	RN	+Q	-Q																										
		0	0	0	0																										
		0	1	1	0																										
1	0	0	1																												
1	1	Latch																													
R		0.65		0.40																											
S	-Q	0.65	0.50	0.40	0.50																										
R		0.72		—																											
2-input RS latch LR2S23	<table border="1"> <tr><th>S</th><th>R</th><th>+Q</th><th>-Q</th></tr> <tr><td>0</td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	S	R	+Q	-Q	0	0	Latch		0	1	0	1	1	0	1	0	1	1	1	1	4	1	# # # #	A4	S	+Q	0.40	0.50	0.72	0.50
		S	R	+Q	-Q																										
		0	0	Latch																											
		0	1	0	1																										
1	0	1	0																												
1	1	1	1																												
R		—		0.86																											
S	-Q	—	0.50	0.86	0.50																										
R		0.40		0.72																											

# HG62G Series

## Latches (Normal) (cont)

Function and Macro Name	Macro Equiv. Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay																																			
						In- put Name	Out- put Name	$t_{pLH}$ (ns)		$t_{pHL}$ (ns)																															
								$t_{oLH}$	$K_{LH}$	$t_{oHL}$	$K_{HL}$																														
D Latch LD	<table border="1"> <tr><td>G</td><td>+Q</td><td>-Q</td></tr> <tr><td>1</td><td>D</td><td>D</td></tr> <tr><td></td><td colspan="2">Latch</td></tr> </table>	G	+Q	-Q	1	D	D		Latch		4	2 1	@ @	C	G	+Q	0.70	0.50	0.70	0.50																					
		G	+Q	-Q																																					
		1	D	D																																					
			Latch																																						
D		0.70		0.70																																					
G	-Q	0.85	0.50	0.90	0.50																																				
D		0.85		0.90																																					
D Latch with CLR LDC1	<table border="1"> <tr><td>G</td><td>CL</td><td>+Q</td><td>-Q</td></tr> <tr><td>1</td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td></tr> </table> <p>X: Don't care</p>	G	CL	+Q	-Q	1	0	D	D		0	Latch		X	1	0	1	5	2 1 1	@ @ #	C	G	+Q	1.15	0.50	1.05	0.50														
		G	CL	+Q	-Q																																				
		1	0	D	D																																				
			0	Latch																																					
		X	1	0	1																																				
		D		1.15		1.05																																			
		CL		0.70		0.65																																			
		G	-Q	0.85	0.50	1.00	0.50																																		
D		0.85		1.00																																					
CL		0.45		0.55																																					
D Latch with PRE LDP1	<table border="1"> <tr><td>G</td><td>PR</td><td>+Q</td><td>-Q</td></tr> <tr><td>1</td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>0</td></tr> </table> <p>X: Don't care</p>	G	PR	+Q	-Q	1	0	D	D		0	Latch		X	1	1	0	5	2 1 1	@ @ #	C	G	+Q	0.70	0.50	0.80	0.50														
		G	PR	+Q	-Q																																				
		1	0	D	D																																				
			0	Latch																																					
		X	1	1	0																																				
		D		0.70		0.80																																			
		PR		0.45		0.55																																			
		G	-Q	0.95	0.50	0.90	0.50																																		
D		0.95		0.90																																					
PR		0.70		0.65																																					
D Latch with CLR/PRE LDPC3	<table border="1"> <tr><td>G</td><td>PR</td><td>CL</td><td>+Q</td><td>-Q</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>D</td><td>D</td></tr> <tr><td></td><td>0</td><td>0</td><td colspan="2">Latch</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>X</td><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>0</td><td>1</td></tr> </table> <p>X: Don't care</p>	G	PR	CL	+Q	-Q	1	0	0	D	D		0	0	Latch		X	1	0	1	0	X	0	1	0	1	X	1	1	0	1	6	2 1 1 1	@ @ # #	C	G	+Q	1.25	0.50	1.25	0.50
		G	PR	CL	+Q	-Q																																			
		1	0	0	D	D																																			
			0	0	Latch																																				
		X	1	0	1	0																																			
		X	0	1	0	1																																			
		X	1	1	0	1																																			
		D		1.25		1.25																																			
		PR		0.95		0.80																																			
		CL		0.70		0.65																																			
		G	-Q	1.05	0.50	1.10	0.50																																		
		D		1.05		1.10																																			
PR		0.60		0.80																																					
CL		0.45		0.55																																					

Latches (Normal) (cont)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay																	
Function and Macro Name	Equiv. Circuit and Symbol					In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)													
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>												
4-bit latch LD4	<table border="1"> <tr> <th>G</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td>1</td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> </table>	G	+Q0	+Q1	+Q2	+Q3	1	D0	D1	D2	D3	13	1	@	B4	G	+Q0- +Q3	0.82	0.50	0.93	0.50		
	G	+Q0	+Q1	+Q2	+Q3																		
	1	D0	D1	D2	D3																		
	<table border="1"> <tr> <th>D0-</th> <th>D3</th> </tr> <tr> <td>↘</td> <td>↘</td> </tr> </table>	D0-	D3	↘	↘	0.72	0.72																
D0-	D3																						
↘	↘																						
4-bit latch with CLR LD4C1	<table border="1"> <tr> <th>G</th> <th>CL</th> <th>+Q0</th> <th>+Q1</th> <th>+Q2</th> <th>+Q3</th> </tr> <tr> <td>1</td> <td>0</td> <td>D0</td> <td>D1</td> <td>D2</td> <td>D3</td> </tr> </table>	G	CL	+Q0	+Q1	+Q2	+Q3	1	0	D0	D1	D2	D3	14	1	@	B4	G	+Q0- +Q3	0.82	0.50	0.93	0.50
	G	CL	+Q0	+Q1	+Q2	+Q3																	
	1	0	D0	D1	D2	D3																	
	<table border="1"> <tr> <th>D0-</th> <th>D3</th> </tr> <tr> <td>↘</td> <td>↘</td> </tr> </table>	D0-	D3	↘	↘	0.82	0.72																
	D0-	D3																					
↘	↘																						
<table border="1"> <tr> <th>CL</th> </tr> <tr> <td>0</td> </tr> </table>	CL	0	0.70	0.70																			
CL																							
0																							
<p>X: Don't care</p>																							

Flip-Flops (Normal)

Macro		Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay											
Function and Macro Name	Equiv. Circuit and Symbol					In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)							
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>						
D flip-flop FD	<table border="1"> <tr> <th>CK</th> <th>+Q</th> <th>-Q</th> </tr> <tr> <td>↘</td> <td>D</td> <td>D̄</td> </tr> </table>	CK	+Q	-Q	↘	D	D̄	6	1	@	C	CK	+Q	0.74	0.50	0.80	0.50
	CK	+Q	-Q														
↘	D	D̄															
<table border="1"> <tr> <th>+Q0</th> <th>-Q0</th> </tr> <tr> <td>↘</td> <td>↘</td> </tr> </table>	+Q0	-Q0	↘	↘	0.95	0.50	0.94	0.50									
+Q0	-Q0																
↘	↘																

# HG62G Series

## Flip-Flops (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	Delay																																			
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>pnl</sub> (ns)																															
								t <sub>oih</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>																														
D flip-flop with load FDL1	<table border="1"> <tr><th>CK</th><th>L</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>DC</td><td>DC</td></tr> <tr><td></td><td>1</td><td>DL</td><td>DL</td></tr> <tr><td></td><td>X</td><td>+Q0</td><td>-Q0</td></tr> </table> 	CK	L	+Q	-Q		0	DC	DC		1	DL	DL		X	+Q0	-Q0	8	1	@	C	CK	+Q	0.74	0.50	0.80	0.50														
		CK	L	+Q	-Q																																				
			0	DC	DC																																				
			1	DL	DL																																				
	X	+Q0	-Q0																																						
1	@	-Q	0.95	0.50	0.94	0.50																																			
1	@																																								
2	#																																								
D flip-flop with CLR FDC1	<table border="1"> <tr><th>CK</th><th>CL</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>D</td><td><math>\bar{D}</math></td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td></tr> </table> 	CK	CL	+Q	-Q		0	D	$\bar{D}$		0	+Q0	-Q0	X	1	0	1	7	1	@	C	CK	+Q	0.74	0.50	0.80	0.50														
		CK	CL	+Q	-Q																																				
			0	D	$\bar{D}$																																				
			0	+Q0	-Q0																																				
X	1	0	1																																						
1	@	-Q	—	—	0.96	—																																			
2	#																																								
2	#	0.95	0.50	1.04	0.50																																				
D flip-flop with PRE FDP1	<table border="1"> <tr><th>CK</th><th>PR</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>D</td><td><math>\bar{D}</math></td></tr> <tr><td></td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>0</td></tr> </table> 	CK	PR	+Q	-Q		0	D	$\bar{D}$		0	+Q0	-Q0	X	1	1	0	7	1	@	C	CK	+Q	0.76	0.50	0.84	0.50														
		CK	PR	+Q	-Q																																				
			0	D	$\bar{D}$																																				
			0	+Q0	-Q0																																				
X	1	1	0																																						
1	@	-Q	0.52	—	—	—																																			
2	#																																								
2	#	1.00	0.50	0.96	0.50																																				
D flip-flop with PRE/CLR FDPC3	<table border="1"> <tr><th>CK</th><th>PR</th><th>CL</th><th>+Q</th><th>-Q</th></tr> <tr><td></td><td>0</td><td>0</td><td>D</td><td><math>\bar{D}</math></td></tr> <tr><td></td><td>0</td><td>0</td><td>+Q0</td><td>-Q0</td></tr> <tr><td>X</td><td>1</td><td>0</td><td>1</td><td>0</td></tr> <tr><td>X</td><td>0</td><td>1</td><td>0</td><td>1</td></tr> <tr><td>X</td><td>1</td><td>1</td><td>1</td><td>1</td></tr> </table> 	CK	PR	CL	+Q	-Q		0	0	D	$\bar{D}$		0	0	+Q0	-Q0	X	1	0	1	0	X	0	1	0	1	X	1	1	1	1	8	1	@	C	CK	+Q	0.76	0.50	0.84	0.50
		CK	PR	CL	+Q	-Q																																			
			0	0	D	$\bar{D}$																																			
			0	0	+Q0	-Q0																																			
		X	1	0	1	0																																			
		X	0	1	0	1																																			
X	1	1	1	1																																					
1	@	-Q	—	—	0.86	—																																			
2	#																																								
2	#	0.52	—	0.60	—																																				
CK	-Q	1.00	0.50	0.96	0.50																																				
		CL	0.52	—	0.64	—																																			
PR	-Q	—	—	0.72	—																																				

Flip-Flops (Normal) (cont)

Function and Macro Name	Macro					Equiv. Gate Count	LV	Clamp Level when Open	Symbol No.	Delay							
	Equiv. Circuit and Symbol									Input Name	Output Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)			
	CK	J	K	+Q	-Q							t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>		
JK flip-flop FJ	CK	J	K	+Q	-Q	9	2 1 1	@ @ #	C	CK	+Q	1.06	0.50	0.82	0.50		
		0	0	0	1						-Q	1.06	0.50	0.82	0.50		
		1	1	1	0												
		0	1	+Q0	-Q0												
		1	0	-Q0	+Q0												
		X	X	+Q0	-Q0												
JK flip-flop with CLR FJC1	CK	J	K	CL	+Q	-Q	12	2 1 1 1	@ @ # #	C	CK	+Q	1.26	0.50	1.02	0.50	
		0	0	0	0	1						CL	—	0.82			
		1	1	0	1	0					CK	-Q	1.10	0.50	1.04	0.50	
		0	1	0	+Q0	-Q0					CL		1.18		—		
		1	0	0	-Q0	+Q0											
		X	X	0	+Q0	-Q0											
JK flip-flop with PRE/CLR FJPC1	CK	J	K	PR	CL	+Q	-Q	13	2 1 1	@ @ #	C	CK	+Q	1.26	0.50	1.11	0.50
		0	0	1	0	0	1						PR	1.16	—		
		1	1	1	0	1	0						CL	0.44	0.82		
		0	1	1	0	+Q0	-Q0					CK	-Q	1.20	0.50	1.04	0.50
		1	0	1	0	-Q0	+Q0					PR		0.40	0.42		
		X	X	1	0	+Q0	-Q0					CL		1.20		—	

# HG62G Series

## Flip-Flops (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Symbol No.	Delay											
	Equiv. Circuit and Symbol	Equiv. Gate Count				In - put Name	Out - put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)							
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>						
T flip-flop with CLR FTC1	CK	CL	+Q	-Q	8	1	@	C	+Q	0.74	0.50	0.80	0.50				
	↗	0	-Q0	+Q0						—	—	0.96	—				
	↘	0	+Q0	-Q0					2	#	—	—	0.95	0.50	1.04	0.50	
	X	1	0	1													
T flip-flop with PRE FTP1	CK	PR	+Q	-Q	8	1	@	C	+Q	0.76	0.50	0.84	0.50				
	↗	0	-Q0	+Q0						0.52	—	—	—				
	↘	0	+Q0	-Q0					2	#	—	—	1.00	0.50	0.96	0.50	
	X	1	1	0													
T flip-flop with PRE/CLR FTPC3	CK	PR	CL	+Q	-Q	9	1	@	C	+Q	0.76	0.50	0.84	0.50			
	↗	0	0	-Q0	+Q0						0.52	—	0.60	—			
	↘	0	0	+Q0	-Q0					2	#	—	—	1.10	0.50	1.06	0.50
	X	1	0	1	0												
	X	0	1	0	1					2	#	—	—	—	—	0.82	—
	X	1	1	1	1												
4-bit D flip-flop FD4	CK	+Q0	+Q1	+Q2	+Q3	21	1	@	B4	CK	+Q0- +Q3	1.10	0.50	1.50	0.50		
	↗	D0	D1	D2	D3											1	@
	↘	+Q00	+Q10	+Q20	+Q30											1	@
																1	@



Flip-Flops (Normal) (cont)

Macro						Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay						
Function and Macro Name	Equiv. Circuit and Symbol									Input Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)		
												t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hi</sub>	
4-bit D flip-flop with CLR FD4C1	CK	CL	+Q0	+Q1	+Q2	+Q3	25	1	@	B4	CK	+Q0-	1.30	0.50	1.50	0.50
		0	D0	D1	D2	D3					CL	+Q3	—	1.25		
		0	+Q00	+Q10	+Q20	+Q30										
	X	1	0	0	0	0										
											1	#				

Shift Registers (Normal)

Macro						Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay						
Function and Macro Name	Equiv. Circuit and Symbol									Input Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)		
												t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hi</sub>	
2-bit shift register ZSR	CK	+A	+B	10	1	@	B1	CK	+A	0.86	0.50	0.98	0.50			
		D	+A0						+B	0.86	0.50	0.98				
2-bit shift register with CLR ZSRC1		+A0	+B0	12	1	@	C	CK	+A	0.96	0.50	1.08	0.50			
		0	0						D	+A0	—	1.00				
		0	0						+A0	+B0	0.96	0.50		1.08	0.50	
	X	1	X						0	X	—	1.00				
	X	X	1						X	0						

# HG62G Series

## Shift Registers (Normal)

Function and Macro Name	Macro							Equiv. Gate Count	LV	Clamp Level when Open	Sym- bol No.	Delay							
	Equiv. Circuit and Symbol											In- put Name	Out- put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)			
	CK	CLA	CLB	PRA	PRB	+A	+B							t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>		
2-bit shift register with CLR/PRE ZSRCP3	CK	CLA	CLB	PRA	PRB	+A	+B	14	1 1 2 2 2 2	@ @ # # # #	B4	CK	+A	1.16	0.50	1.28	0.50		
		0	0	0	0	D	+A0					—	—	1.20	—				
		0	0	0	0	+A0	+B0					0.52	—	0.60	—				
	X	1	X	X	X	0	X					CK	+B	1.16	0.50	1.28	0.50		
	X	X	1	X	X	X	0					CLB	—	—	1.20	—			
	X	X	X	1	X	1	X					PRB	0.52	—	0.60	—			
	X	X	X	X	1	X	1												
	X	1	X	1	X	1	X												
	X	X	1	X	1	X	1												
4-bit shift register ZSR4	CK	+A	+B	+C	+D			19	1 1	@ @	C	CK	+A	1.08	0.50	1.20	0.50		
		D	+A0	+B0	+C0							+B	1.08	0.50	1.20	0.50			
		+A0	+B0	+C0	+D0							+C	1.08	0.50	1.20	0.50			
												+D	1.08	0.50	1.20	0.50			
4-bit shift register with CLR ZSR4C1	CK	CLA	CLB	CLC	CLD	+A	+B	+C	+D	23	1 1 2 2 2 2	@ @ # # # #	B4	CK	+A	1.28	0.50	1.40	0.50
		0	0	0	0	D	+A0	+B0	+C0					—	—	1.00	—		
		0	0	0	0	+A0	+B0	+C0	+D0					1.28	0.50	1.40	0.50		
	X	1	X	X	X	0	X	X	X					—	—	1.00	—		
	X	X	1	X	X	X	0	X	X					1.28	0.50	1.40	0.50		
	X	X	X	1	X	X	X	0	X					—	—	1.00	—		
	X	X	X	X	1	X	X	X	0					1.28	0.50	1.40	0.50		
	X	X	X	X	X	1	X	X	0					—	—	1.00	—		

Others (Power)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym-bol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				In-put Name	Out-put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>oh</sub>	K <sub>lh</sub>	t <sub>oh</sub>	K <sub>hl</sub>
4-bit comparator ZEQC4P		14	2	# # # # # #	B5	A0- A3, B0- B3		0.78	0.98	0.70	0.30
1-bit full adder FA1P		9	2 2 2	# # #	B2	A, B Ci	+CO	1.02 0.70	0.30	0.80 0.42	0.42
2-bit full adder FA2P		16	2 2 2 2	# # # #	C	An, Bn Ci	+CO	1.48 1.30	0.30	1.32 0.74	0.42
4-bit full adder FA4P		46	2 2 2 2 2 2 4	# # # # # # #	B5	An, Bn Ci	+CO	1.30 1.10	0.30	1.22 1.06	0.30
						An, Bn Ci	+Sn	2.68 2.26	0.50	2.74 2.32	0.42

# HG62G Series

## Others (Power) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
4-bit parity generator/checker PTGENP		42	1	#	B5	A-I	Ev	2.50	0.98	2.50	0.58
			1	#			OD	2.65	0.30	2.70	0.30
Power buffer BUFP		2	2	@	A1		+Y	0.51	0.30	0.44	0.30
							-Y	0.24	0.30	0.36	0.30

## Other (Normal)



Function and Macro Name	Macro		LV	Clamp Level when Open	Sym - bol No.	In - put Name	Out - put Name	Delay			
	Equiv. Circuit and Symbol	Equiv. Gate Count						t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
4-bit comparator ZEQC4		12	2	#	B5	A0- A3, B0- B3		0.68	1.80	0.60	0.50

Other (Normal) (cont)

Function and Macro Name	Macro Equiv. Circuit and Symbol	Equiv. Gate Count	LV	Clamp Level when Open	Sym-bol No.	Delay					
						In-put Name	Out-put Name	t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)	
								t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
1-bit full adder FA1		7	2	#	B2	A, B	+CO	0.92	0.50	0.70	0.76
						CI		0.60		0.32	
						A, B	+S	0.96	0.50	0.98	0.50
						CI		0.64		0.60	
2-bit full adder FA2		14	2	#	C	An, Bn	+CO	1.38	0.50	1.22	0.76
						CI		1.20		0.64	
						An, Bn	+Sn	1.62	0.50	1.34	0.50
						CI		1.04		0.76	
4-bit full adder FA4		43	2	#	B5	An, Bn	+CO	1.20	0.50	1.12	0.50
						CI		1.00		0.96	
						An, Bn	+Sn	2.58	0.92	2.64	0.76
						CI		2.16		2.22	
9-bit parity generator/checker PTGEN		37	1	#	B5	A-I	Ev	2.40	1.80	2.40	1.08
							OD	2.55	0.50	2.60	0.50
Power buffer BUF		1	1	@	A1		+Y	0.60	0.50	0.50	0.50
							-Y	0.30	0.50	0.45	0.50

# HG62G Series

## Other (Normal) (cont)

Function and Macro Name	Macro		LV	Clamp Level when Open	Symbol No.	Delay					
	Equiv. Circuit and Symbol	Equiv. Gate Count				t <sub>plh</sub> (ns)		t <sub>phl</sub> (ns)			
						t <sub>olh</sub>	K <sub>Ih</sub>	t <sub>ohl</sub>	K <sub>hl</sub>		
Delay cell DLY2		6	1	@		IN	OUT	2.3	0.5	2.4	0.5
Delay cell DLY4		13	1	@		IN	OUT	4.2	0.5	4.3	0.5

RAM

Macro		Delay							
Function and Macro Name	Equiv. Circuit and Symbol	LV	Clamp Level when Open	Input Name	Output Name	t <sub>plh</sub> (ns)		t <sub>phi</sub> (ns)	
						t <sub>olh</sub>	K <sub>lh</sub>	t <sub>ohl</sub>	K <sub>hl</sub>
Single-port RAM		1	#	A0 to Ab-1	O0 to Ob-1	12	0.24	12	0.24
		1	#	R		6		6	
		1	#	W		—		—	
		1	@	G		12		12	
		1	#	I0 to Ib-1		—		—	
<b>Cell Name</b>	<b>Function</b>	<b>Equivalent Gate Count</b>							
TRAMS1A	256 W × 9 b (scan func.)	10000							
TRAMS2A	128 W × 18 b (scan func.)	10000							
TRAMS3A	64 W × 36 b (scan func.)	10000							
RAMS1A	256 W × 9 b	10000							
RAMS2A	128 W × 18 b	10000							
RAMS3A	64 W × 36 b	10000							
Dual-port RAM		1	#	A0 to Ab-1, B0 to Bb-1	OA0 to OAb-1, OB0 to OBb-1	12	0.24	12	0.24
		1	#	R, A, RB		6		6	
		1	#	WA, WB		—		—	
		1	@	GA, GB		12		12	
		1	#	IA0 to IAb-1, IB0 to IBb-1		—		—	
<b>Cell Name</b>	<b>Function</b>	<b>Equivalent Gate Count</b>							
TRAMD1A	128 W × 9 b (scan func.)	10000							
TRAMD2A	64 W × 18 b (scan func.)	10000							
TRAMD3A	32 W × 36 b (scan func.)	10000							
RAMD1A	128 W × 9 b	10000							
RAMD2A	64 W × 18 b	10000							
RAMD3A	32 W × 36 b	10000							

# HG62G Series

## Single-Port RAM

### Features

- One address, one R/W port
- Asynchronous
- Autodiagnosis
- 256 word × 9 bit  
128 word × 18 bit  
64 word × 36 bit

### Notes

- Since the address latch (ADD-L, figure 2) is built in, G must be open (automatically pulled high) when it is not used.
- Outputs ( $O_0-O_{b-1}$ ) are high impedance when read enable (R) is low.
- Change the address while write enable (W) is low only.

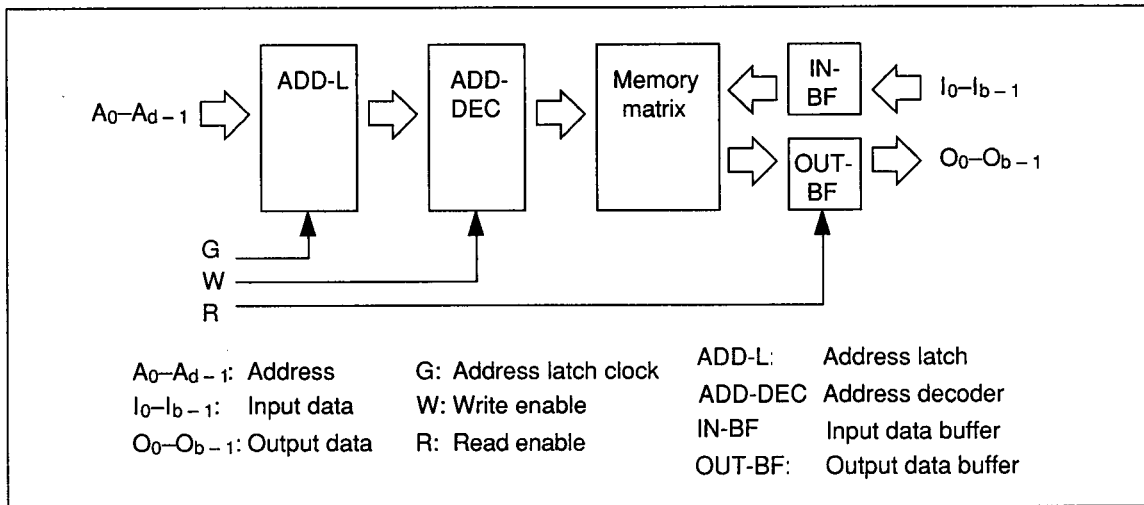


Figure 2 Single-Port RAM Block Diagram



Timing

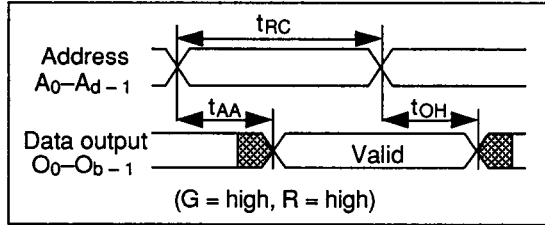


Figure 3 Single-Port Read Cycle Timing

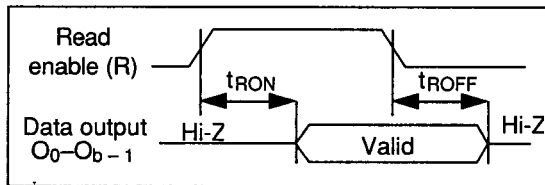


Figure 4 Single-Port Data Output Timing

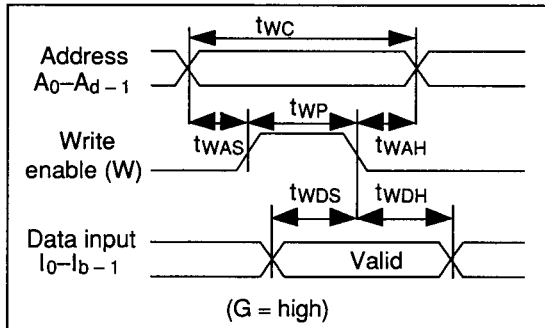


Figure 5 Single-Port Write Cycle Timing

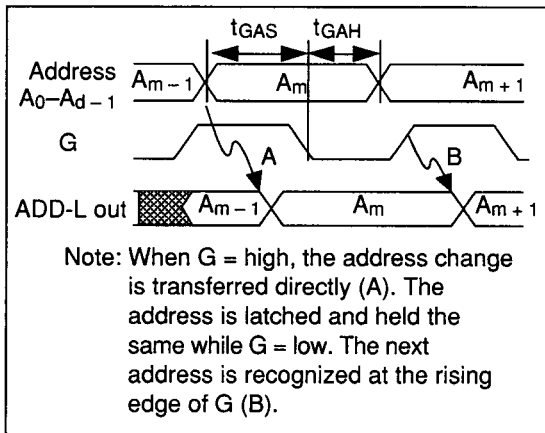


Figure 6 Single-Port Address Latch Timing

Table 6 Single-Port RAM Timing

Item	Symbol	Min	Typ	Max	Unit
Read cycle time	$t_{RC}$	24	—	—	ns
Address access time	$t_{AA}$	—	12	20	ns
Output data hold time	$t_{OH}$	1	—	—	ns
Read enable time	$t_{RON}$	—	6	10	ns
Read disable time	$t_{ROFF}$	0.8	—	—	ns
Write cycle	$t_{WC}$	24	—	—	ns
Write pulse width	$t_{WP}$	10	—	—	ns
Address setup time	$t_{WAS}$	6	—	—	ns
Address hold time	$t_{WAH}$	8	—	—	ns
Data setup time	$t_{WDS}$	10	—	—	ns
Data hold time	$t_{WDH}$	8	—	—	ns
Address latch setup time	$t_{GAS}$	4	—	—	ns
Address latch hold time	$t_{GAH}$	2	—	—	ns

# HG62G Series

## Dual-Port RAM

### Features

- Two addresses, two R/W ports
- Asynchronous
- Autodiagnosis
- 128 word  $\times$  9 bit  
64 word  $\times$  18 bit  
32 word  $\times$  36 bit

### Notes

- Since the address latch (ADD-L, figure 7) is built in, GA and GB must be open (automatically pulled high) when it is not used.
- Outputs ( $OA_0-OA_{b-1}/OB_0-OB_{b-1}$ ) are high impedance when read enable (RA/RB) is low.
- You cannot write to the same address from both the A and B ports simultaneously.
- Change the address while write enable (WA/WB) is low only.

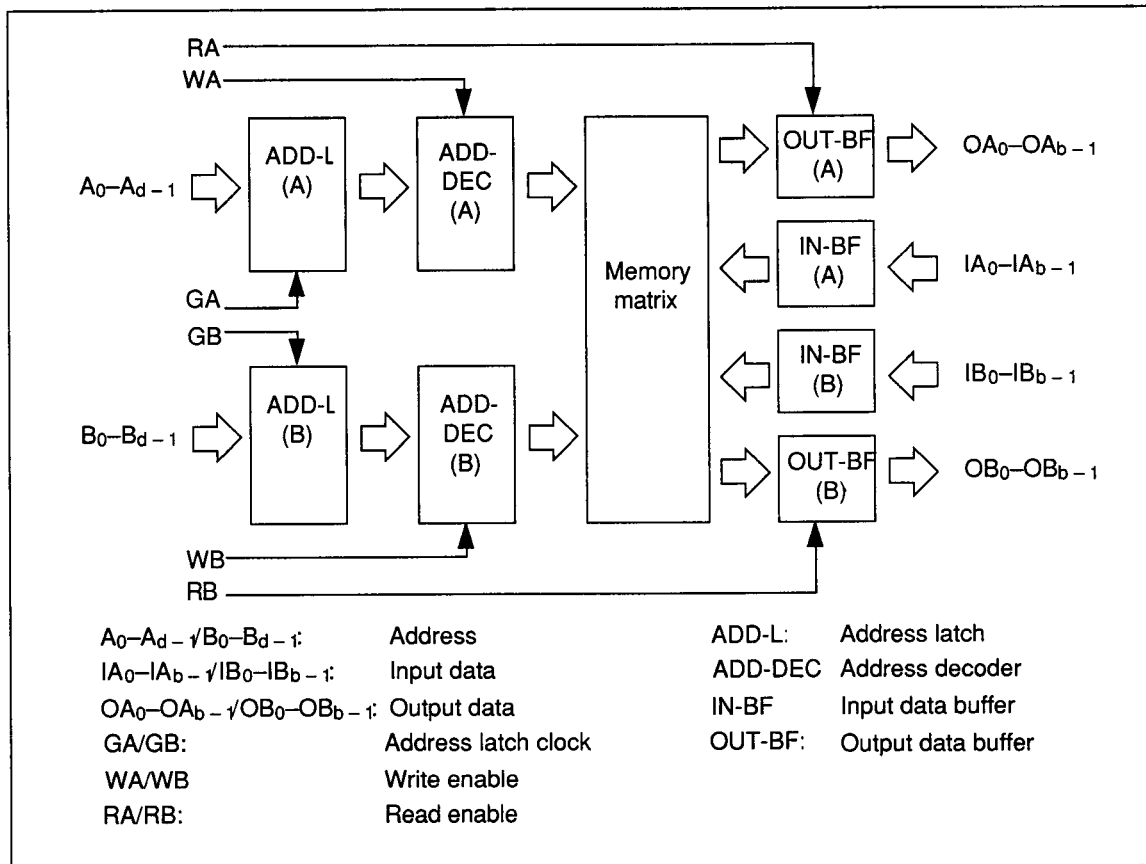


Figure 7 Dual-Port RAM Block Diagram

Timing

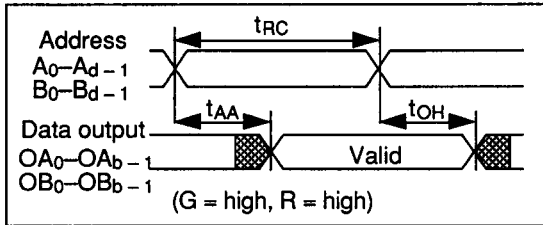


Figure 8 Dual-Port Read Cycle Timing

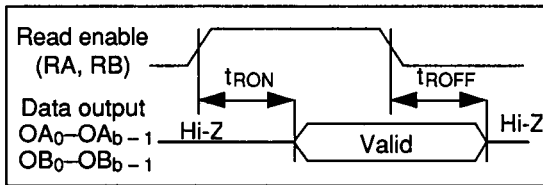


Figure 9 Dual-Port Data Output Timing

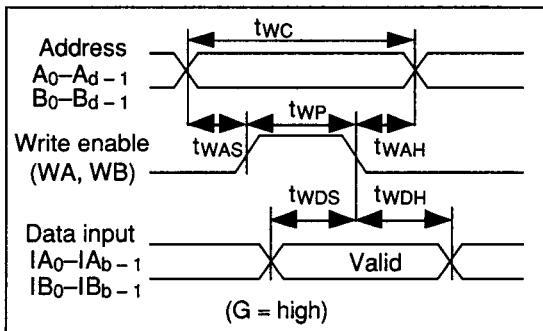


Figure 10 Dual-Port Write Cycle Timing

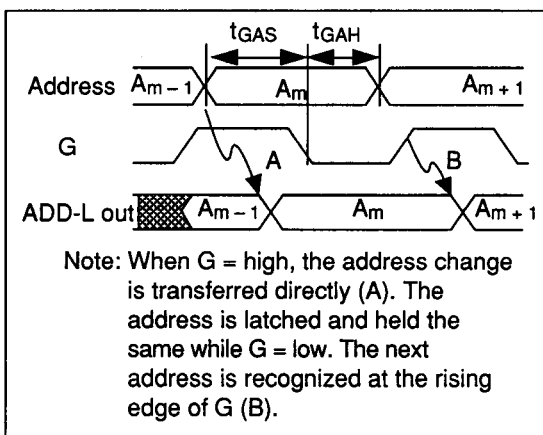


Figure 11 Dual-Port Address Latch Timing

Table 7 Dual-Port RAM Timing

Item	Symbol	Min	Typ	Max	Unit
Read cycle time	$t_{RC}$	24	—	—	ns
Address access time	$t_{AA}$	—	12	20	ns
Output data hold time	$t_{OH}$	1	—	—	ns
Read enable time	$t_{RON}$	—	6	10	ns
Read disable time	$t_{ROFF}$	0.8	—	—	ns
Write cycle	$t_{WC}$	24	—	—	ns
Write pulse width	$t_{WP}$	10	—	—	ns
Address setup time	$t_{WAS}$	6	—	—	ns
Address hold time	$t_{WAH}$	8	—	—	ns
Data setup time	$t_{WDS}$	10	—	—	ns
Data hold time	$t_{WDH}$	8	—	—	ns
Address latch setup time	$t_{GAS}$	4	—	—	ns
Address latch hold time	$t_{GAH}$	2	—	—	ns

## HG62G Series

### Absolute Maximum Ratings

Item		Symbol	Rating	Unit
Supply voltage		$V_{CC}$	-0.3 to +6.7	V
Terminal voltage	Input	$V_{TI}$	-0.3 to $V_{CC} + 0.3$	V
	Output	$V_{TO}$	-0.3 to $V_{CC} + 0.3$	V
Output current	Per output	$I_O$	-32 to +32	mA
	Per $V_{CC}/GND$	$I_{OT}$	-70 to +70	mA
Operating temperature		$T_{opr}$	-20 to +75	°C
Storage temperature	With bias	$T_{bias}$	-20 to +85	°C
	Without bias	$T_{stg}$	-55 to +125	°C

### Electrical Characteristics

Terminal Capacitance ( $T_a = 25^\circ\text{C}$ ,  $f = 1\text{ MHz}$ )

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Terminal capacitance	$C_T$	—	—	12.5	pF	$V_{IN} = 0\text{ V}$

Note: Terminal capacitance is sampled and not 100% tested.

Normal Temperature Range ( $V_{CC} = 5\text{ V} \pm 5\%$ ,  $T_a = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Input voltage (TTL level)	$V_{IHT}$	2.2	—	$V_{CC} + 0.3$	V	
	$V_{ILT}$	-0.3	—	0.8	V	
Input voltage (CMOS level)	$V_{IHC}$	$0.7 \times V_{CC}$	—	$V_{CC} + 0.3$	V	
	$V_{ILC}$	-0.3	—	$0.3 \times V_{CC}$	V	
Schmitt trigger (TTL level)	$V_{TT+}$	(1.5)	—	2.5	V	$V_{CC} = 5\text{ V}$
	$V_{TT-}$	0.7	—	(1.7)	V	$V_{CC} = 5\text{ V}$
	$\Delta V_{TT}$	(0.3)	—	—	V	$V_{CC} = 5\text{ V}$
Schmitt trigger (CMOS level)	$V_{TC+}$	(2.8)	—	4.0	V	$V_{CC} = 5\text{ V}$
	$V_{TC-}$	1.2	—	(2.4)	V	$V_{CC} = 5\text{ V}$
	$\Delta V_{TC}$	(0.3)	—	—	V	$V_{CC} = 5\text{ V}$
Output voltage ( $I_{OL} = 2\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -1\text{ mA}$
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 2\text{ mA}$
Output voltage ( $I_{OL} = 8\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -2\text{ mA}$
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 8\text{ mA}$
Output voltage ( $I_{OL} = 12\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -4\text{ mA}$
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 12\text{ mA}$

## HG62G Series

**Normal Temperature Range (cont)** ( $V_{CC} = 5\text{ V} \pm 5\%$ ,  $T_a = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Item	Symbol	Min	Typ	Max	Unit	Test Condition	
Output voltage ( $I_{OL} = 24\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -12\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 24\text{ mA}$	
Input leakage current	$I_{LI}$	—	—	1	$\mu\text{A}$		
Output leakage current	$I_{LO}$	—	—	1	$\mu\text{A}$	At high impedance	
Pull-up current	$I_{PU}$	80	220	550	$\mu\text{A}$	$V_{IN} = \text{GND}$	
Pull-down current	$I_{PD}$	80	220	550	$\mu\text{A}$	$V_{IN} = V_{CC}$	
Gate delay	Internal	$t_{pd}$	—	0.3	—	ns	2-input power NAND, FO = 2, AI = 2 mm
	Input buffer	$t_{pd}$	—	0.8	—	ns	FO = 2, AI = 2 mm
	Output buffer	$t_{pd}$	—	1.8	—	ns	High-speed buffer $C_L = 50\text{ pF}$
Power dissipation	$P_i$	—	9	—	$\mu\text{W/gate}$	1 MHz	

Note: Input level may be degraded by GND noise due to numbers of output switching simultaneously.

**Extended Temperature Range** ( $V_{CC} = 5\text{ V} \pm 5\%$ ,  $T_a = -20^\circ\text{C}$  to  $+75^\circ\text{C}$ )

Item	Symbol	Min	Typ	Max	Unit	Test Condition	
Input voltage (TTL level)	$V_{IHT}$	2.4	—	$V_{CC} + 0.3$	V		
	$V_{ILT}$	-0.3	—	0.8	V		
Input voltage (CMOS level)	$V_{IHC}$	$0.7 \times V_{CC}$	—	$V_{CC} + 0.3$	V		
	$V_{ILC}$	-0.3	—	$0.3 \times V_{CC}$	V		
Schmitt trigger (TTL level)	$V_{TT+}$	(1.5)	—	2.5	V	$V_{CC} = 5\text{ V}$	
	$V_{TT-}$	0.7	—	(1.7)	V	$V_{CC} = 5\text{ V}$	
	$\Delta V_{TT}$	(0.3)	—	—	V	$V_{CC} = 5\text{ V}$	
Schmitt trigger (CMOS level)	$V_{TC+}$	(2.8)	—	4.0	V	$V_{CC} = 5\text{ V}$	
	$V_{TC-}$	1.2	—	(2.4)	V	$V_{CC} = 5\text{ V}$	
	$\Delta V_{TC}$	(0.3)	—	—	V	$V_{CC} = 5\text{ V}$	
Output voltage ( $I_{OL} = 2\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -1\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 2\text{ mA}$	
Output voltage ( $I_{OL} = 8\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -2\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 8\text{ mA}$	
Output voltage ( $I_{OL} = 12\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -4\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 12\text{ mA}$	
Output voltage ( $I_{OL} = 24\text{ mA}$ )	$V_{OH}$	3.5	—	—	V	$I_{OH} = -12\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 24\text{ mA}$	
Input leakage current	$I_{LI}$	—	—	1	$\mu\text{A}$		
Output leakage current	$I_{LO}$	—	—	1	$\mu\text{A}$	At high impedance	
Pull-up current	$I_{PU}$	80	220	550	$\mu\text{A}$	$V_{IN} = \text{GND}$	
Pull-down current	$I_{PD}$	80	220	550	$\mu\text{A}$	$V_{IN} = V_{CC}$	
Gate delay	Internal	$t_{pd}$	—	0.3	—	ns	2-input power NAND, FO = 2, AI = 2 mm
	Input buffer	$t_{pd}$	—	0.8	—	ns	FO = 2, AI = 2 mm
	Output buffer	$t_{pd}$	—	1.8	—	ns	High-speed buffer $C_L = 50\text{ pF}$
Power dissipation	$P_i$	—	9	—	$\mu\text{W/gate}$	1 MHz	

Note: Input level may be degraded by GND noise due to numbers of output switching simultaneously.

## HG62G Series

Low Voltage Version ( $V_{CC} = 3\text{ V} \pm 10\%$ ,  $T_a = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ )

Item	Symbol	Min	Typ	Max	Unit	Test Condition	
Input voltage *1 (CMOS level)	$V_{IHc}$	$0.7 \times V_{CC}$	—	$V_{CC} + 0.3$	V		
	$V_{ILc}$	-0.3	—	$0.3 \times V_{CC}$	V		
Schmitt trigger *2 (CMOS level)	$V_{TC+}$	(1.7)	—	2.9	V	$V_{CC} = 3\text{ V}$	
	$V_{TC-}$	0.7	—	(1.9)	V	$V_{CC} = 3\text{ V}$	
	$\Delta V_{TC}$	(0.2)	—	—	V	$V_{CC} = 3\text{ V}$	
Output voltage *3 ( $I_{OL} = 2\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -0.5\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 1\text{ mA}$	
Output voltage *3 ( $I_{OL} = 8\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -1\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 4\text{ mA}$	
Output voltage *3 ( $I_{OL} = 12\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -2\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 6\text{ mA}$	
Output voltage *3 ( $I_{OL} = 24\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -6\text{ mA}$	
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 12\text{ mA}$	
Input leakage current	$I_{II}$	—	—	1	$\mu\text{A}$		
Output leakage current	$I_{LO}$	—	—	1	$\mu\text{A}$	At high impedance	
Pull-up current	$I_{PU}$	25	100	230	$\mu\text{A}$	$V_{IN} = \text{GND}$	
Pull-down current	$I_{PD}$	25	100	230	$\mu\text{A}$	$V_{IN} = V_{CC}$	
Gate delay Internal	$t_{pd}$	—	0.45	—	ns	2-input power NAND, FO = 2, Al = 2 mm	
	Input buffer	$t_{pd}$	—	1.2	—	ns	FO = 2, Al = 2 mm
	Output buffer	$t_{pd}$	—	2.7	—	ns	High-speed buffer $C_L = 50\text{ pF}$
Power dissipation	$P_i$	—	3.3	—	$\mu\text{W}/$ gate	1 MHz	
t <sub>pd</sub> Variation	$\alpha$	0.65	1.5	3.1	times	Post-layout	

- Notes:
1. Input voltage may be changed according to the number of simultaneous switching output buffers.
  2. The schmitt input value in ( ) is just for reference. It can be tested and guaranteed by customers test vector.
  3.  $I_{OL}$  current drive in ( ) below Output level is specified at  $V_{CC} = 5\text{ V}$ . For ones at  $V_{CC} = 3\text{ V}$  see test conditions.

## HG62G Series

Low Voltage Version ( $V_{CC} = 3\text{ V} \pm 10\%$ ,  $T_a = -20^\circ\text{C}$  to  $+75^\circ\text{C}$ )

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Input voltage *1 (CMOS level)	$V_{IHC}$	$0.7 \times V_{CC}$	—	$V_{CC} + 0.3$	V	
	$V_{ILC}$	-0.3	—	$0.3 \times V_{CC}$	V	
Schmitt trigger *2 (CMOS level)	$V_{TC+}$	(1.7)	—	2.9	V	$V_{CC} = 3\text{ V}$
	$V_{TC-}$	0.7	—	(1.9)	V	$V_{CC} = 3\text{ V}$
	$\Delta V_{TC}$	(0.2)	—	—	V	$V_{CC} = 3\text{ V}$
Output voltage *3 ( $I_{OL} = 2\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -0.5\text{ mA}$
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 1\text{ mA}$
Output voltage *3 ( $I_{OL} = 8\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -1\text{ mA}$
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 4\text{ mA}$
Output voltage *3 ( $I_{OL} = 12\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -2\text{ mA}$
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 6\text{ mA}$
Output voltage *3 ( $I_{OL} = 24\text{ mA}$ )	$V_{OH}$	$V_{CC} - 0.4$	—	—	V	$I_{OH} = -6\text{ mA}$
	$V_{OL}$	—	—	0.4	V	$I_{OL} = 12\text{ mA}$
Input leakage current	$I_{LI}$	—	—	1	$\mu\text{A}$	
Output leakage current	$I_{LO}$	—	—	1	$\mu\text{A}$	At high impedance
Pull-up current	$I_{PU}$	25	100	230	$\mu\text{A}$	$V_{IN} = \text{GND}$
Pull-down current	$I_{PD}$	25	100	230	$\mu\text{A}$	$V_{IN} = V_{CC}$
Gate delay Internal	$t_{pd}$	—	0.45	—	ns	2-input power NAND, FO = 2, Al = 2 mm
	Input buffer $t_{pd}$	—	1.2	—	ns	FO = 2, Al = 2 mm
	Output buffer $t_{pd}$	—	2.7	—	ns	High-speed buffer $C_L = 50\text{ pF}$
Power dissipation	$P_i$	—	3.3	—	$\mu\text{W/gate}$	1 MHz
$t_{pd}$ Variation	$\alpha$	0.60	1.5	3.1	time	Post-layout

- Notes:
1. Input voltage may be changed according to the number of simultaneous switching output buffers.
  2. The schmitt input value in ( ) is just for reference. It can be tested and guaranteed by customers test vector.
  3.  $I_{OL}$  current drive in ( ) below Output level is specified at  $V_{CC} = 5\text{ V}$ . For ones at  $V_{CC} = 3\text{ V}$  see test conditions.

# HG62G Series

## Characteristic Curves

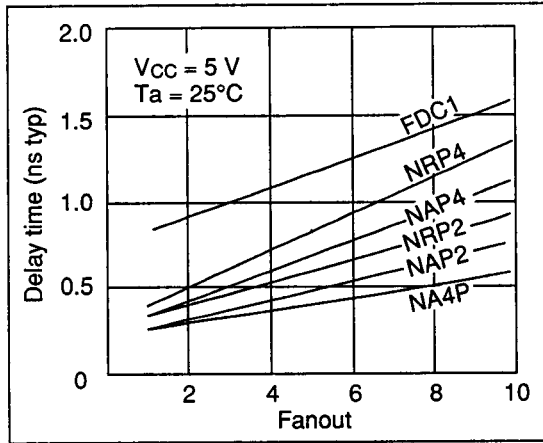


Figure 12 Internal Gate Delay Time

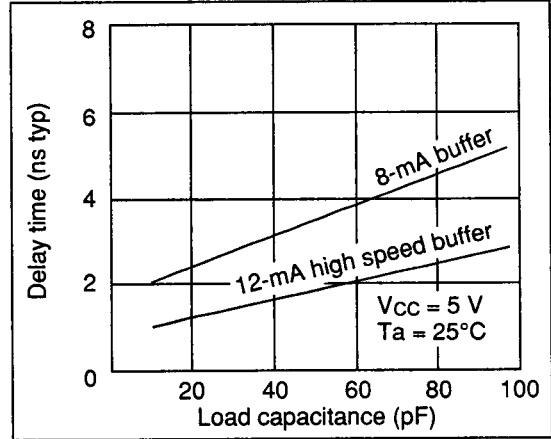


Figure 13 Output Buffer Delay Time

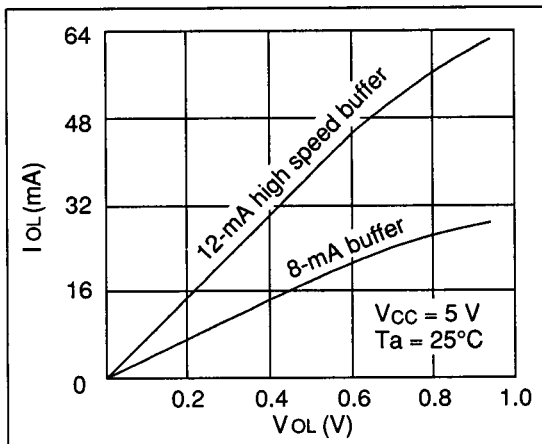


Figure 14 Output Current Characteristics ( $V_{OL}-I_{OL}$ )

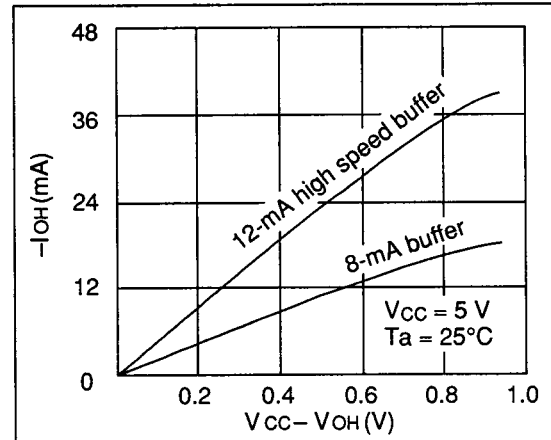


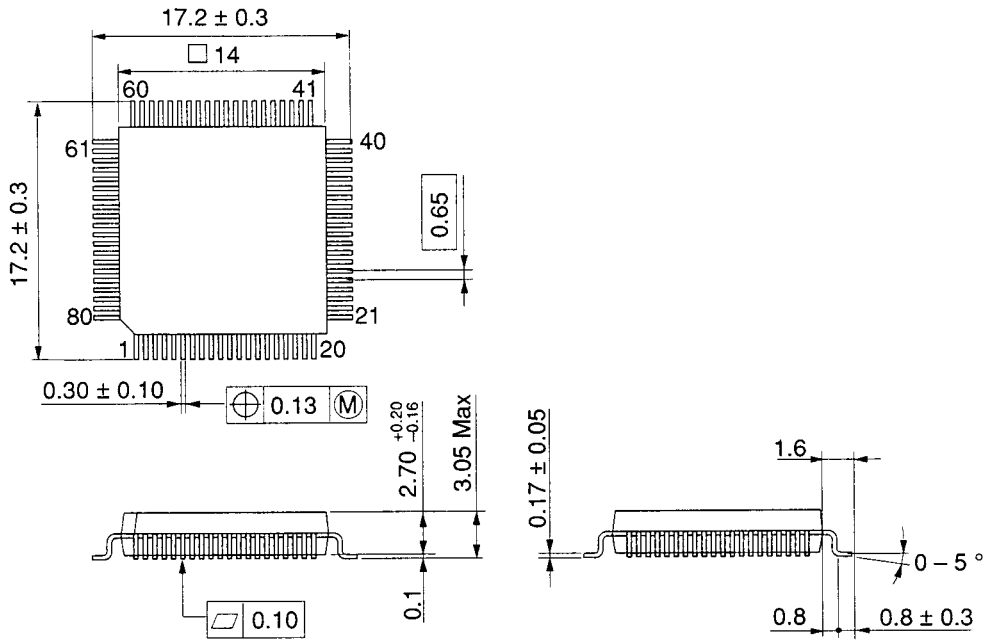
Figure 15 Output Current Characteristics ( $V_{OH}-I_{OH}$ )



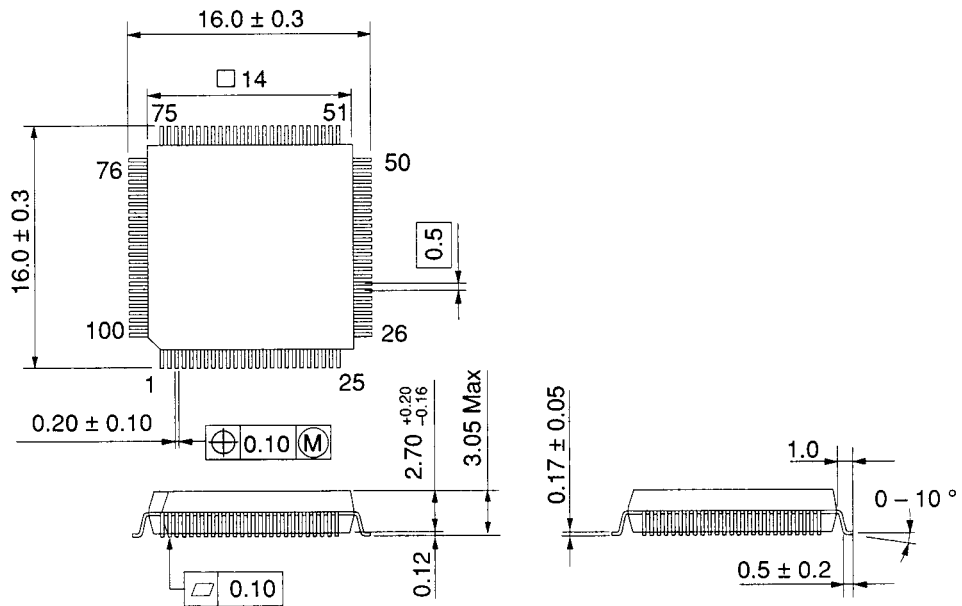


# HG62G Series

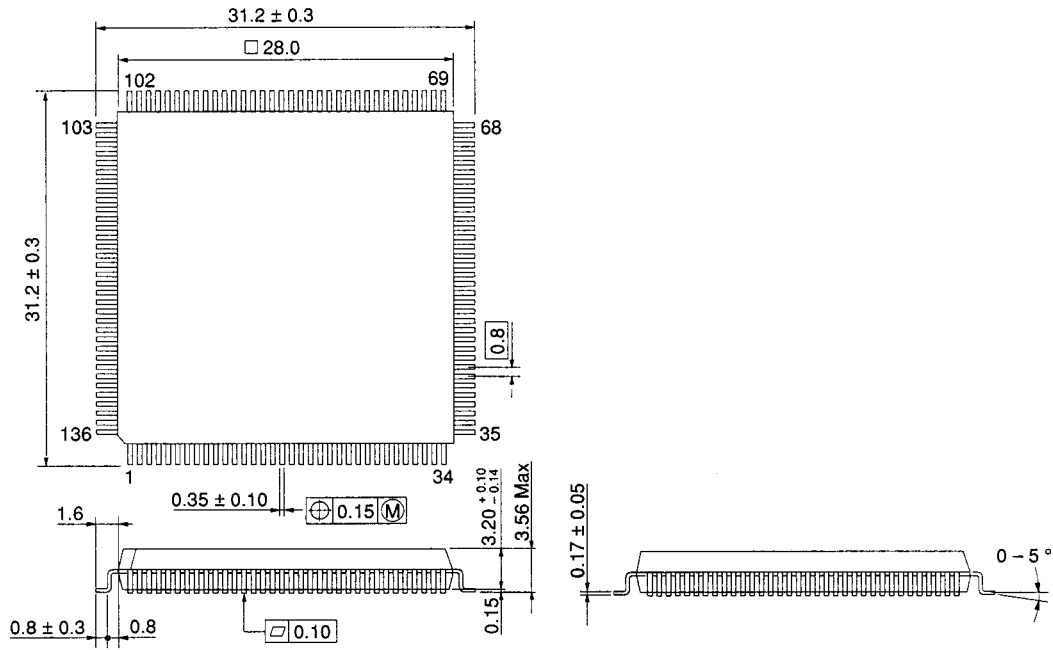
QFP-80



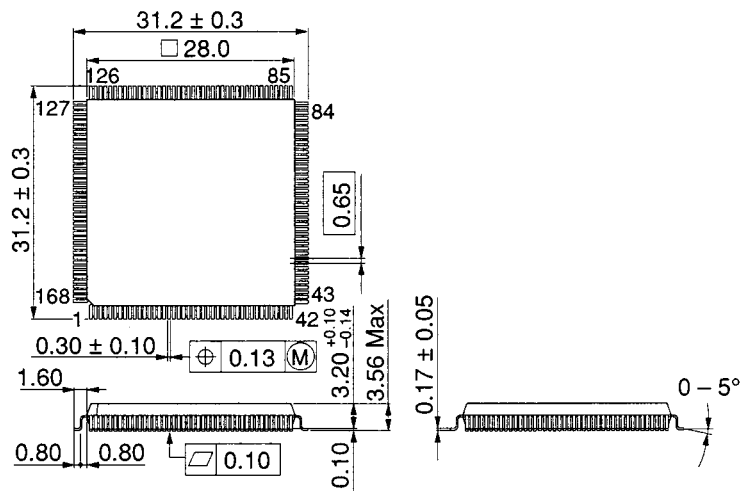
QFP-100



QFP-136

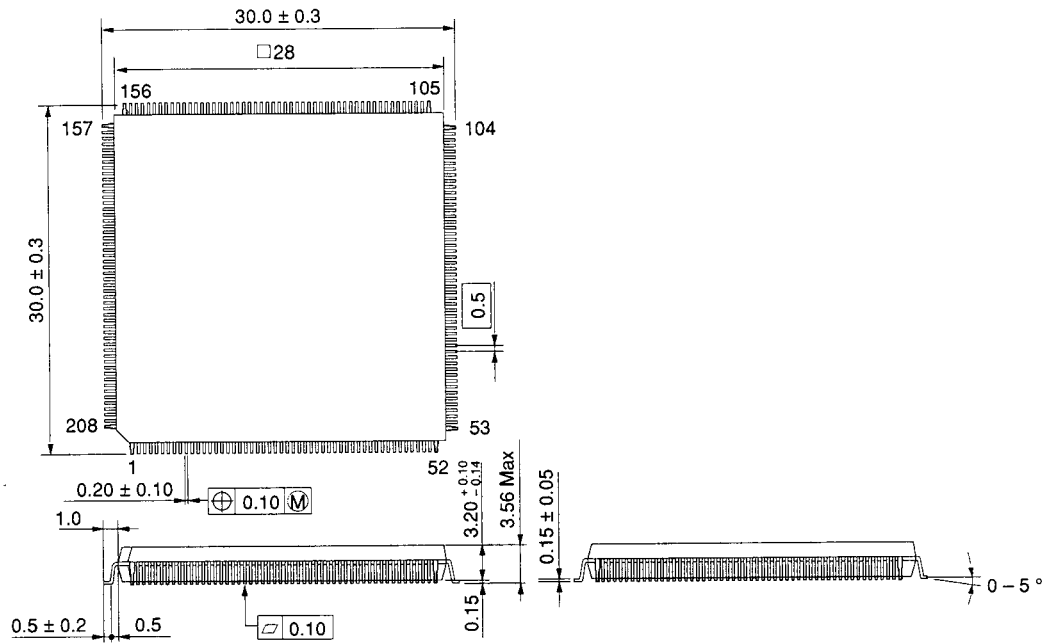


QFP-168



# HG62G Series

QFP-208



When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

---

---

# HITACHI

## Hitachi, Ltd.

Semiconductor & IC Div.  
Karukozaka MN Bldg., 2-1, Ageba-cho, Shinjuku-ku, Tokyo 162, Japan  
Tel: Tokyo (03) 3266-9376  
Fax: (03) 3235-2375

### For further information write to:

Hitachi America, Ltd.  
Semiconductor & IC Div.  
2000 Sierra Point Parkway  
Brisbane, CA. 94005-1819  
U S A  
Tel: 415-589-8300  
Fax: 415-583-4207

Hitachi Europe GmbH  
Electronic Components Div.  
Central Europe Headquarters  
Hans-Pinsel-Straße 10A  
8013 Haar bei München  
F. R. Germany  
Tel: 089-46140  
Fax: 089-463068

Hitachi Europe Ltd.  
Electronic Components Div.  
Northern Europe Headquarters  
Whitebrook Park  
Lower Cookham Road  
Maidenhead  
Berkshire SL6 8YA  
United Kingdom  
Tel: 0628-585000  
Fax: 0628-778322

Hitachi Asia (Hong Kong) Ltd.  
Unit 706, North Tower,  
World Finance Centre,  
Harbour City, Canton Road  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: 7359218  
Fax: 7306071