



General-Purpose CMOS Analog Switches

General Description

The IH5040 family consists of seven CMOS analog switches that are intended for general-purpose applications. These switches are latch-up proof, break-before-make single, dual, and quad versions of the popular switch formats SPST, SPDT, DPST, and 4PST. Key features of the family include a low, 1nA leakage current and a quiescent current of less than 1µA.

Maxim's IH5040 family has faster switching times than the original manufacturer's devices. All devices are bidirectional and maintain almost constant on resistance throughout their operating range. These switches are guaranteed to operate from ±4.5V to ±18V, and will switch input signals that include the supplies.

Applications

- PBX, PABX
- Guidance and Control Systems
- Test Equipment
- Sample-and-Holds
- Military Radios

Features

- ◆ Improved Second Source
- ◆ Guaranteed ±4.5V to ±18V Operation
- ◆ Input Voltage Range Includes Supplies
- ◆ Latchup-Proof Construction
- ◆ TTL/CMOS Logic Compatible
- ◆ >1µA Quiescent Current
- ◆ Monolithic, Low-Power CMOS Design

Ordering Information


PART	TEMP. RANGE	PIN-PACKAGE
SINGLE POLE, SINGLE THROW (SPST)		
IH5040CPE	0°C to +70°C	16 Plastic DIP
IH5040CWE	0°C to +70°C	16 Wide SO
IH5040CJE	0°C to +70°C	16 CERDIP
IH5040C/D	0°C to +70°C	Dice*
IH5040MJE	-55°C to +125°C	16 CERDIP**

Ordering Information continued at end of data sheet.


* Contact factory for dice specifications.

** Contact factory for availability and processing to MIL-STD-883.

Typical Operating Circuit

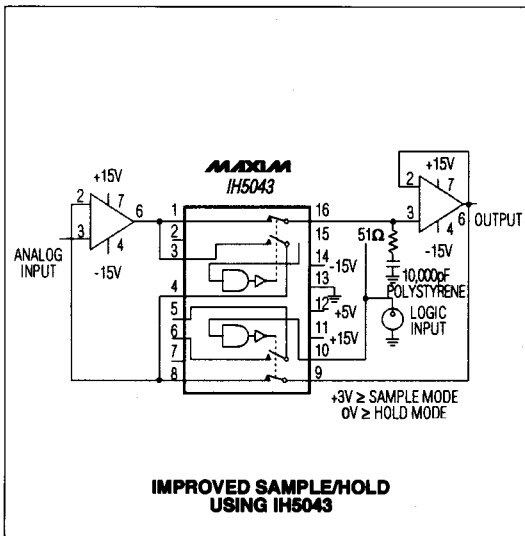

Pin Configurations & Switching-State Diagrams

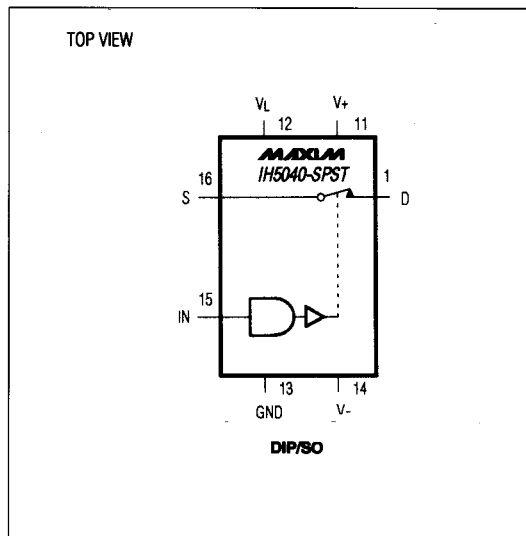

IH5040-IH5045/IH5047

General-Purpose CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS

V+ to V-	44V	Continuous Power Dissipation (TA = +70°C)	
V+ to VD	30V	Plastic DIP (derate 10.53mW/°C above +70°C)	842mW
VD to V-	30V	Wide SO (derate 9.52mW/°C above +70°C)	762mW
VD to VS	±22V	CERDIP (derate 10.00mW/°C above +70°C)	800mW
VL to V-	33V	TO-100 (derate 6.67mW/°C above +70°C)	533mW
VL to VIN	30V	Operating Temperature Ranges:	
VL to GND	20V	IH504_C	0°C to +70°C
VIN to GND	20V	IH504_M	-55°C to +125°C
Digital Inputs	(V+ + 0.3V) to (V+ - 44V)	Storage Temperature Range	-65°C to +150°C
VS or VD (Note 1)	-0.3V to (V+ + 0.3V)	Lead Temperature (soldering, 10sec)	+300°C
Current (any terminal)	30mA		

Note 1: Signals on S, D, and digital inputs that exceed V- or V+ will be clamped by internal diodes. Limit forward diode current to 30mA maximum.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V+ = 15V, V- = -15V, VL = 5V, TA = +25°C unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	IH504_M			IH504_C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Input Logic Current	IIN(ON)	VIN = 2.4V	TA = +25°C	-1	1	-1	1	µA	
			TA = TMAX	-10	10	-10	10		
	IIN(OFF)	VIN = 0.8V	TA = +25°C	-1	1	-1	1		
			TA = TMAX	-10	10	-10	10		
Input Logic Low	VIL	TA = TMIN to TMAX			0.8		0.8	V	
Input Logic High	VIH	TA = TMIN to TMAX	2.4			2.4		V	
Drain-Source On Resistance	rDS(ON)	IS = 10mA, VANALOG = -10V to 10V	TA = +25°C		75		80	Ω	
			TA = TMAX		150		130		
Channel-to-Channel rDS(ON) Match	ΔrDS(ON)			3			5	Ω	
Minimum Analog-Signal Handling Capability	VANALOG		-15	15	-15	15		V	
Switch-Off Leakage Current	IO/IS(OFF)	VANALOG = -10V to 10V	TA = +25°C	-1	1	-5	5	nA	
			TA = TMAX	-100	100	-100	100		

General-Purpose CMOS Analog Switches

IH5040-IH5045/IH5047

ELECTRICAL CHARACTERISTICS (continued)

(V₊ = 15V, V₋ = -15V, V_L = 5V, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	IH504_M			IH504_C			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
Switch-On Leakage Current	I _{D(ON)}	V _D = V _S = -10V to 10V	T _A = +25°C		-2	2	-10	10	nA
			T _A = T _{MAX}		-200	200	-100	100	
Switch-On Time	t _{ON}	Figure 1			400		400	ns	
Switch-Off Time	t _{OFF}	Figure 1			200		200	ns	
Charge Injection	Q(INJ)	Figure 2 (Note 2)		15		20		mV	
Minimum Off-Isolation Rejection Ratio	OIRR	Figure 3, C _L < 5pF		54		50		dB	
V ₊ Quiescent Current	I _{+Q}	V _{IN} = 0V and 5V	T _A = +25°C			1		10	μA
			T _A = T _{MAX}			10		100	
V ₋ Quiescent Current	I _{-Q}	V _{IN} = 0V and 5V	T _A = +25°C		-1		-10	μA	
			T _A = T _{MAX}		-10		-100		
V _L Quiescent Current	I _{LQ}	V _{IN} = 0V and 5V	T _A = +25°C			1		10	μA
			T _A = T _{MAX}			10		100	
Ground Quiescent Current	I _{GND}	V _{IN} = 0V and 5V	T _A = +25°C		-1		-10	μA	
			T _A = T _{MAX}		-10		-100		
Minimum Channel-to-Channel Cross-Coupling Rejection Ratio	CCRR	One channel off (Note 2)		54		50		dB	
Power-Supply Range for Continuous Operation	V _{OP}	(Notes 2, 3)	±4.5		±18		±4.5	±18	V

Note 2: Not production tested.

Note 3: Electrical characteristics, such as on resistance, will change when power supplies other than ±15V are used.

Test Circuits




Figure 1. Switching Time




Figure 2. Charge Injection




Figure 3. Off-Isolation Rejection Ratio

General-Purpose CMOS Analog Switches

Pin Configurations & Switching-State Diagrams (continued)








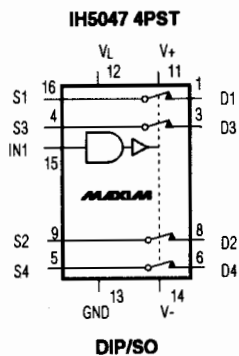


Table 1. Using the IH5040 Family with Only Two Supplies

SUPPLY VOLTAGES (V)	MINIMUM LOGIC I/P FOR "1" STATE (V)
±15	12.6
±12	9.6
±10	7.6
±5	2.6

General-Purpose CMOS Analog Switches

Chip Topography

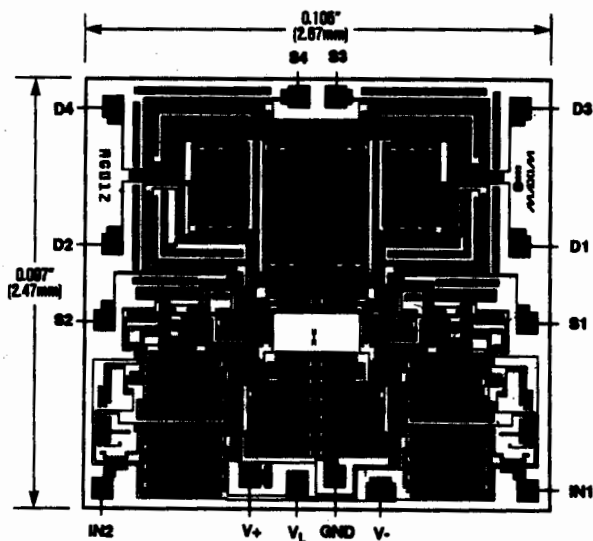

Ordering Information (continued)



PART	TEMP. RANGE	PIN-PACKAGE
DUAL, SINGLE POLE, SINGLE THROW (DUAL SPST)		
IH5041CPE	0°C to +70°C	16 Plastic DIP
IH5041CWE	0°C to +70°C	16 Wide SO
IH5041CJE	0°C to +70°C	16 Cerdip
IH5041CTW	0°C to +70°C	16 TO-100†
IH5041C/D	0°C to +70°C	Dice*
IH5041MJE	-55°C to +125°C	16 Cerdip**
IH5041MTW	-55°C to +125°C	16 TO-100†
SINGLE POLE, DOUBLE THROW (SPDT)		
IH5042CPE	0°C to +70°C	16 Plastic DIP
IH5042CWE	0°C to +70°C	16 Wide SO
IH5042CJE	0°C to +70°C	16 Cerdip
IH5042C/D	0°C to +70°C	Dice*
IH5042MJE	-55°C to +125°C	16 Cerdip**
DUAL, SINGLE POLE, DOUBLE THROW (DUAL SPDT)		
IH5043CPE	0°C to +70°C	16 Plastic DIP
IH5043CWE	0°C to +70°C	16 Wide SO
IH5043CJE	0°C to +70°C	16 Cerdip
IH5043C/D	0°C to +70°C	Dice*
IH5043MJE	-55°C to +125°C	16 Cerdip**
DOUBLE POLE, SINGLE THROW (DPST)		
IH5044CPE	0°C to +70°C	16 Plastic DIP
IH5044CWE	0°C to +70°C	16 Wide SO
IH5044CJE	0°C to +70°C	16 Cerdip
IH5044C/D	0°C to +70°C	Dice*
IH5044MJE	-55°C to +125°C	16 Cerdip**
DUAL, DOUBLE POLE, SINGLE THROW (DUAL DPST)		
IH5045CPE	0°C to +70°C	16 Plastic DIP
IH5045CWE	0°C to +70°C	16 Wide SO
IH5045CJE	0°C to +70°C	16 Cerdip
IH5045C/D	0°C to +70°C	Dice*
IH5045MJE	-55°C to +125°C	16 Cerdip**
QUAD POLE, SINGLE THROW (4PST)		
IH5047CPE	0°C to +70°C	16 Plastic DIP
IH5047CWE	0°C to +70°C	16 Wide SO
IH5047CJE	0°C to +70°C	16 Cerdip
IH5047C/D	0°C to +70°C	Dice*
IH5047MJE	-55°C to +125°C	16 Cerdip**

IH5040-IH5045/IH5047

* Contact factory for dice specifications.
 ** Contact factory for availability and processing to MIL-STD-883.
 † Contact factory for availability.

General-Purpose CMOS Analog Switches

Package Information

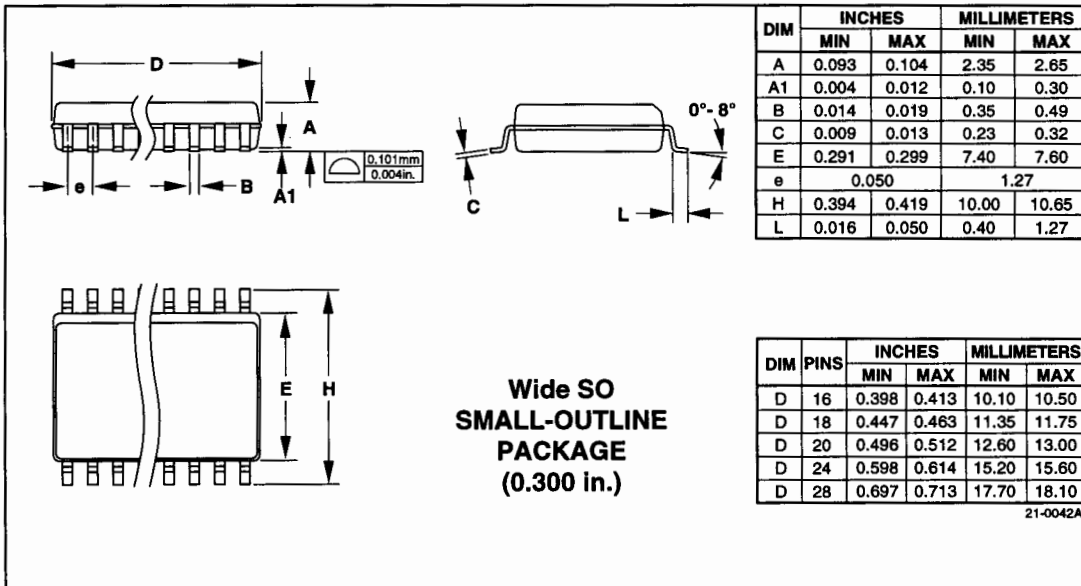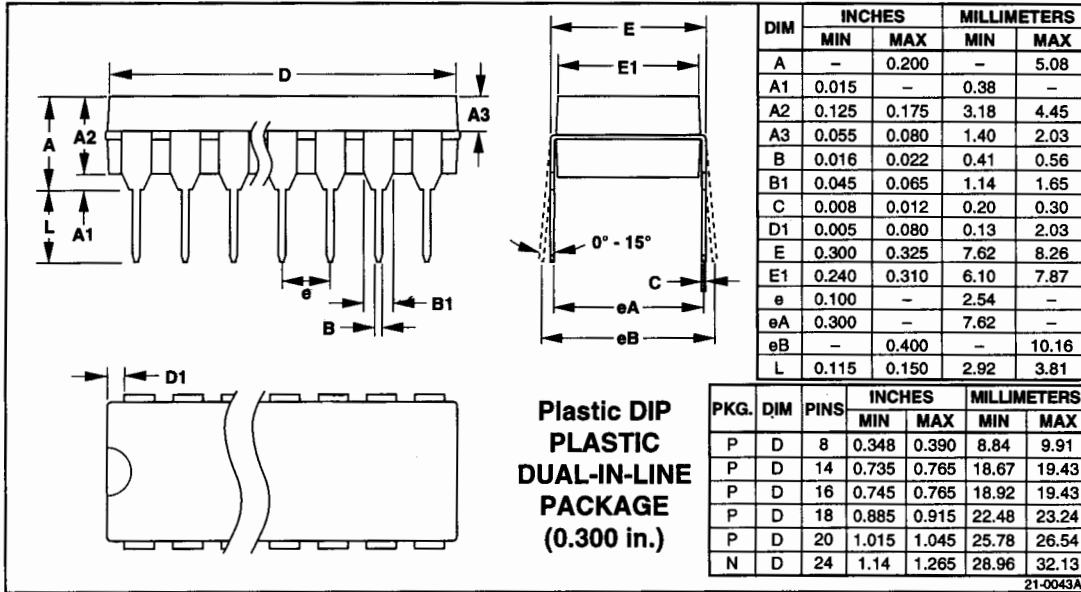

General-Purpose CMOS Analog Switches

Package Information (continued)

IH5040-IH5045/IH5047

