

## 60 WATT SINGLE OUTPUT HIGH DENSITY DC/DC CONVERTER

### VKA60xS Series

#### FEATURES

- 18 - 36V & 33 - 75V INPUT RANGE
- SMALL SIZE: 2.28" X 2.4" X 0.50"
- HIGH EFFICIENCY: 87% TYPICAL AT 5V
- 100 $\mu$ S TRANSIENT RESPONSE 50-100% LOAD STEP
- 420kHz FIXED-FREQUENCY OPERATION
- OPERATION TO +100°C BASEPLATE TEMP.
- PRIMARY REMOTE ON/OFF, CHOICE OF POS/NEG LOGIC
- ADJUSTABLE OUTPUT VOLTAGE
- REMOTE SENSE
- CONTINUOUS SHORT-CIRCUIT PROTECTION
- THERMAL SHUTDOWN
- SAFETY PER UL1950, EN 60950 AND CSA 22.2 #234
- CASE GROUND PIN

#### DESCRIPTION

The VKA60xS Series DC/DC converters present an economical and practical solution for distributed power system architectures which require high power density and efficiency while maintaining system modularity and upgradeability. With the ability to operate over a wide input voltage range of 18 to 36 and 33 to 75 volts, these modules are ideal for use in battery backup applications common in today's telecommunication and electronic data processing applications. The output is fully isolated from the input, allowing for a variety of polarity and grounding configurations.

The VKA60xS's proprietary control circuitry responds to 50-100% load steps in 100 $\mu$ Seconds to within 1% nominal V<sub>out</sub>.

The patented fixed frequency architecture combined with surface mount technology results in a compact, efficient and reliable solution to DC/DC conversion requirements.

| Model     | Input Voltage | V <sub>OUT</sub> (VDC) | I <sub>OUT</sub> (A) | Efficiency(%)<br>Note (1) |     |
|-----------|---------------|------------------------|----------------------|---------------------------|-----|
|           |               |                        |                      | Min                       | Typ |
| VKA60LS03 | 24VDC         | 3.3V                   | 12.0                 | 80                        | 81  |
| VKA60LS05 |               | 5.0V                   | 12.0                 | 85                        | 86  |
| VKA60LS12 |               | 12.0V                  | 6.0                  | 87                        | 88  |
| VKA60LS15 |               | 15.0V                  | 4.0                  | 88                        | 89  |
| VKA60LS24 | (18-36)       | 24.0V                  | 2.5                  | 89                        | 90  |

| Model     | Input Voltage | V <sub>OUT</sub> (VDC) | I <sub>OUT</sub> (A) | Efficiency(%)<br>Note (1) |     |
|-----------|---------------|------------------------|----------------------|---------------------------|-----|
|           |               |                        |                      | Min                       | Typ |
| VKA60MS03 | 48VDC         | 3.3V                   | 12.0                 | 81                        | 82  |
| VKA60MS05 |               | 5.0V                   | 12.0                 | 86                        | 87  |
| VKA60MS12 |               | 12.0V                  | 6.0                  | 88                        | 89  |
| VKA60MS15 |               | 15.0V                  | 4.0                  | 89                        | 90  |
| VKA60MS24 | (33-75)       | 24.0V                  | 2.5                  | 89                        | 90  |

#### AGENCY APPROVALS



Internet: <http://www.cdpowerelectronics.com>

**Power Electronics Division, United States**  
3400 E Britannia Drive, Tucson, Arizona 85706  
Phone: 800.547.2537 Fax: 520.770.9369

**Power Electronics Division, Europe**  
C&D Technologies (Power Electronics) Ltd.  
132 Shannon Industrial Estate, Shannon, Co. Clare, Ireland  
Tel: +353.61.474.133 Fax: +353.61.474.141

# COMMON SPECIFICATIONS

Specifications typical at T<sub>CASE</sub> = +40°C, nominal input voltage, rated output current unless otherwise specified.

| PARAMETER                                   | CONDITIONS                              | MIN  | TYP         | MAX      | UNITS                  |
|---------------------------------------------|-----------------------------------------|------|-------------|----------|------------------------|
| <b>INPUT</b>                                |                                         |      |             |          |                        |
| Voltage Range                               |                                         | 18   | 24          | 36       | VDC                    |
| VKA60LS                                     |                                         | 33   | 48          | 75       | VDC                    |
| VKA60MS                                     |                                         |      |             |          |                        |
| Maximum Input Current                       |                                         |      |             | 4.4      | A                      |
| VKA60LS                                     | V <sub>IN</sub> = 16VDC                 |      |             | 2.6      | A                      |
| VKA60MS                                     | V <sub>IN</sub> = 27VDC                 |      |             |          |                        |
| Reflected Ripple Current                    | Peak - Peak                             | 20   |             |          | mA                     |
| Input Ripple Rejection                      | DC to 1KHz                              | 50   | 60          |          | dB                     |
| No Load Input Current LS/MS                 |                                         |      | 50/100      |          | mA                     |
| Power Dissipation LS/MS                     |                                         |      |             |          |                        |
| No Load                                     |                                         |      | 3.6/4.8     |          | W                      |
| Standby, Primary On/Off Disabled LS/MS      |                                         |      | 0.18/0.4    |          | W                      |
| Inrush Charge                               | V <sub>IN</sub> = V <sub>IN</sub> max.  |      |             | 0.520    | mC                     |
| VKA60LS                                     |                                         |      |             | 0.360    | mC                     |
| VKA60MS                                     |                                         |      |             |          |                        |
| Quiescent Operating Current                 |                                         |      | 8           | 12       | mA                     |
| Primary On/Off Disabled                     |                                         |      |             |          |                        |
| <b>OUTPUT</b>                               |                                         |      |             |          |                        |
| Rated Power                                 |                                         | 0    |             | 60       | W                      |
| Set point Accuracy                          |                                         |      |             | 1        | %                      |
| Line Regulation                             | High Line to Low Line                   |      | 0.02        | 0.05     | %                      |
| Load Regulation                             | No Load to Rated Load                   |      | 0.02        | 0.05     | %                      |
| Output Temperature Drift                    |                                         |      | ±.02        |          | %/°C                   |
| Output Ripple, p-p (4)                      | DC to 20MHz BW                          |      | 1%          |          | V <sub>OUT</sub> , Nom |
| Output Current Limit Inception              |                                         |      |             | 130%     | I <sub>OUT</sub> , Nom |
| Output Short-Circuit Current (5)            | test                                    |      |             | 110%     | I <sub>OUT</sub> , Nom |
| Output Overvoltage Limit                    |                                         |      | 125%        | 135%     | I <sub>OUT</sub> , V   |
| Transient Response                          | 50 to 100% Load Step                    |      |             |          | V <sub>OUT</sub> , Nom |
| Peak Deviation                              | di/dt = 1.0A/μSec                       |      | 2%          |          | μSec                   |
| Settling Time                               | V <sub>OUT</sub> , 1% of Nominal Output |      | 100         |          |                        |
| <b>ISOLATION</b>                            |                                         |      |             |          |                        |
| Input to Output                             | Peak Test for 2 Seconds                 | 1500 |             |          | VDC                    |
| Input to Baseplate                          |                                         | 1500 |             |          | VDC                    |
| Output to Baseplate                         |                                         | 500  |             |          | VDC                    |
| Resistance                                  |                                         | 10   |             |          | MΩ                     |
| Capacitance                                 |                                         |      | 2000        |          | pF                     |
| Leakage Current                             | V <sub>ISO</sub> = 240VAC, 60Hz         |      | 180         |          | μA, rms                |
| <b>GENERAL</b>                              |                                         |      |             |          |                        |
| Efficiency, Line, Load, Temp. (3)           |                                         | 400  | 420         | 440      | KHz                    |
| Switching Frequency                         |                                         |      |             | 0.5      | V                      |
| Remote Sense Compensation                   |                                         |      | -50% / +25% |          | V <sub>OUT</sub> , Nom |
| Output Voltage Adjust Range-12V & higher(4) |                                         |      |             |          |                        |
| Remote On/Off Control Inputs                |                                         |      |             |          |                        |
| Primary                                     | Open Collector/Drain                    |      |             | 1.0      | mA                     |
| Sink Current-Logic Low                      |                                         |      |             | 1        | V                      |
| Vlow                                        |                                         |      |             | 2        | V                      |
| Vhigh                                       |                                         |      |             | 12.5     | mSec                   |
| Turn-on Time                                | Within 1% of Rated Output               |      | 10.0        | 85 (3.0) | g (oz.)                |
| Weight                                      |                                         |      |             |          |                        |
| <b>TEMPERATURE</b>                          |                                         |      |             |          |                        |
| Operation/Specification                     | Case Temperature                        | -40  | +25         | +100     | °C                     |
| Storage                                     | Case Temperature                        | -55  | +25         | +125     | °C                     |
| Shutdown Temperature                        | Case Temperature                        | +100 |             | +115     | °C                     |
| Thermal Impedance, case-ambient             |                                         |      | 7.1         |          | °C/W                   |
| Lead Solder Temperature                     | 10 Seconds max                          |      |             | +300     | °C                     |

( ) See NOTES on page 3.

## NOTES:


- (1) See Typical Performance Curves, page 3
- (2) Continuous Mode
- (3) See graphs for Efficiency vs. Output Load,  $V_{IN}$ ,  $T_{CASE}$
- (4) 3.3V Models Limited in Trim Down Range
- (5) Consult Factory for Details

## ORDERING INFORMATION


|                                            |                                                   |      |
|--------------------------------------------|---------------------------------------------------|------|
| Device Family                              | VKA60                                             | xSzz |
| Indicates 60 Watt Regulated Unit           |                                                   |      |
| Model Number                               | Selected from Table of Electrical Characteristics |      |
| Where:                                     |                                                   |      |
| x = Input Voltage (L = 24VDC; M = 48VDC)   |                                                   |      |
| zz = Output Voltage (03=3.3V, 05=5V, etc.) |                                                   |      |
| Lead Length                                |                                                   |      |
| 0.200" - No Number                         |                                                   |      |
| 0.145" - (6)                               |                                                   |      |
| 0.110" - (8)                               |                                                   |      |
| Remote On-Off Logic:                       |                                                   |      |
| Positive - No Number                       |                                                   |      |
| Negative - (1)                             |                                                   |      |

## TYPICAL PERFORMANCE CURVES

$T_A = +40^\circ\text{C}$ , nominal input voltage, rated load, recommended external components applied, unless otherwise specified.

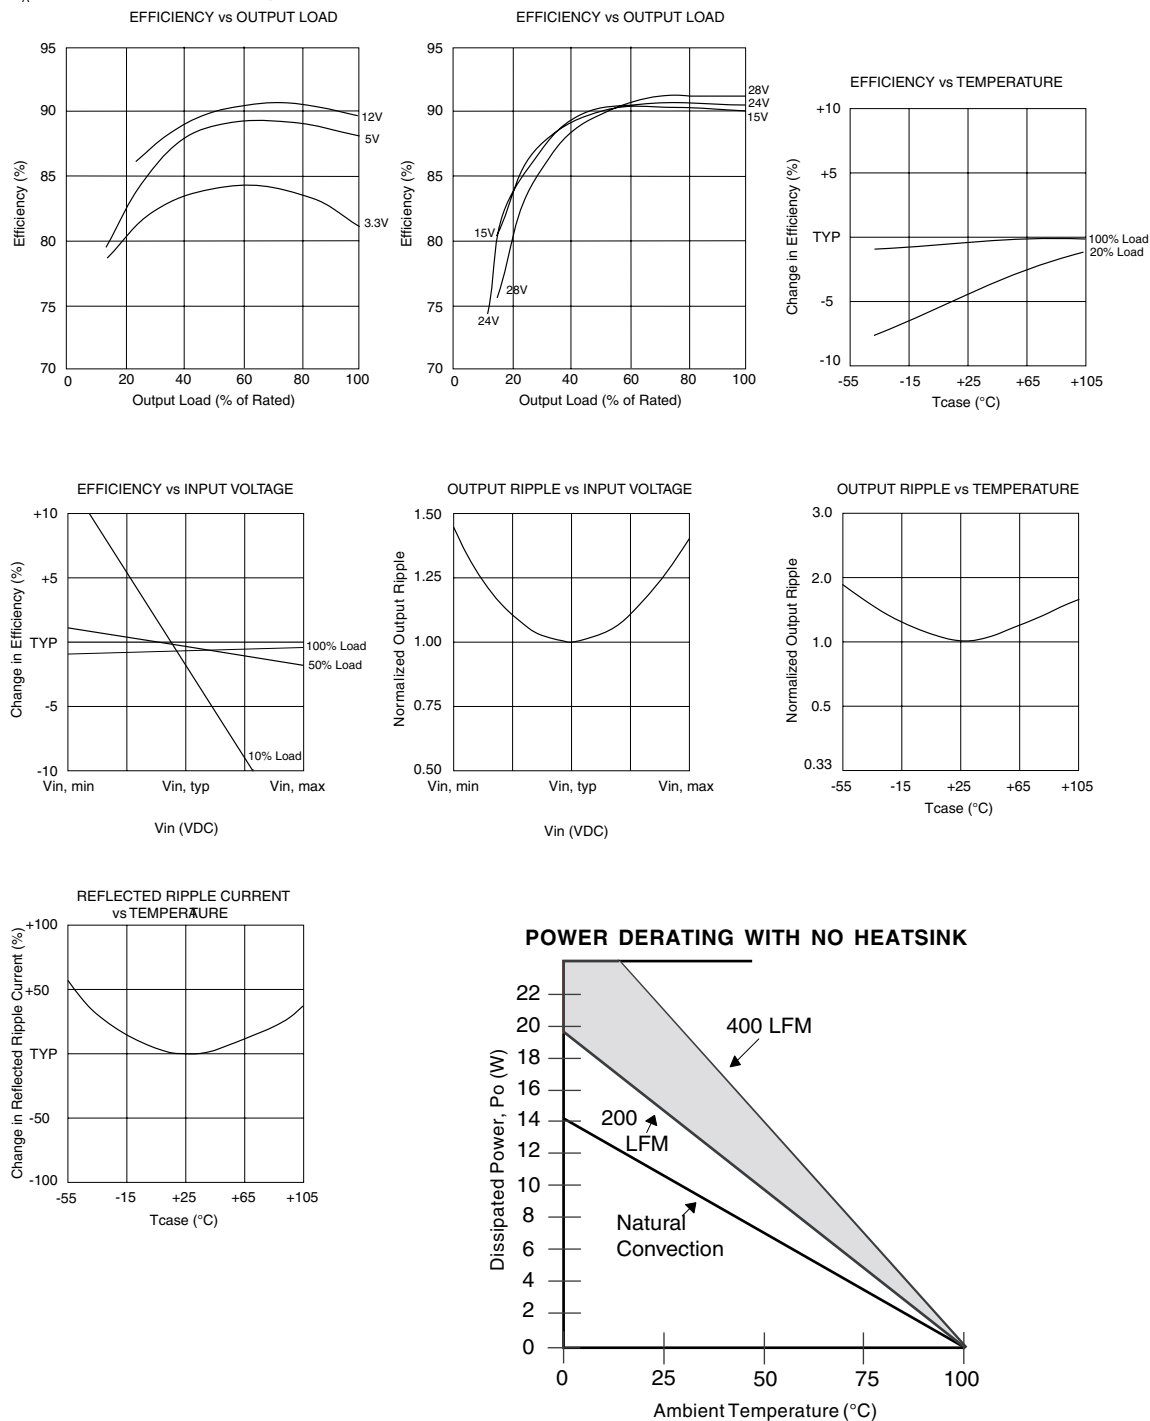

## MECHANICAL

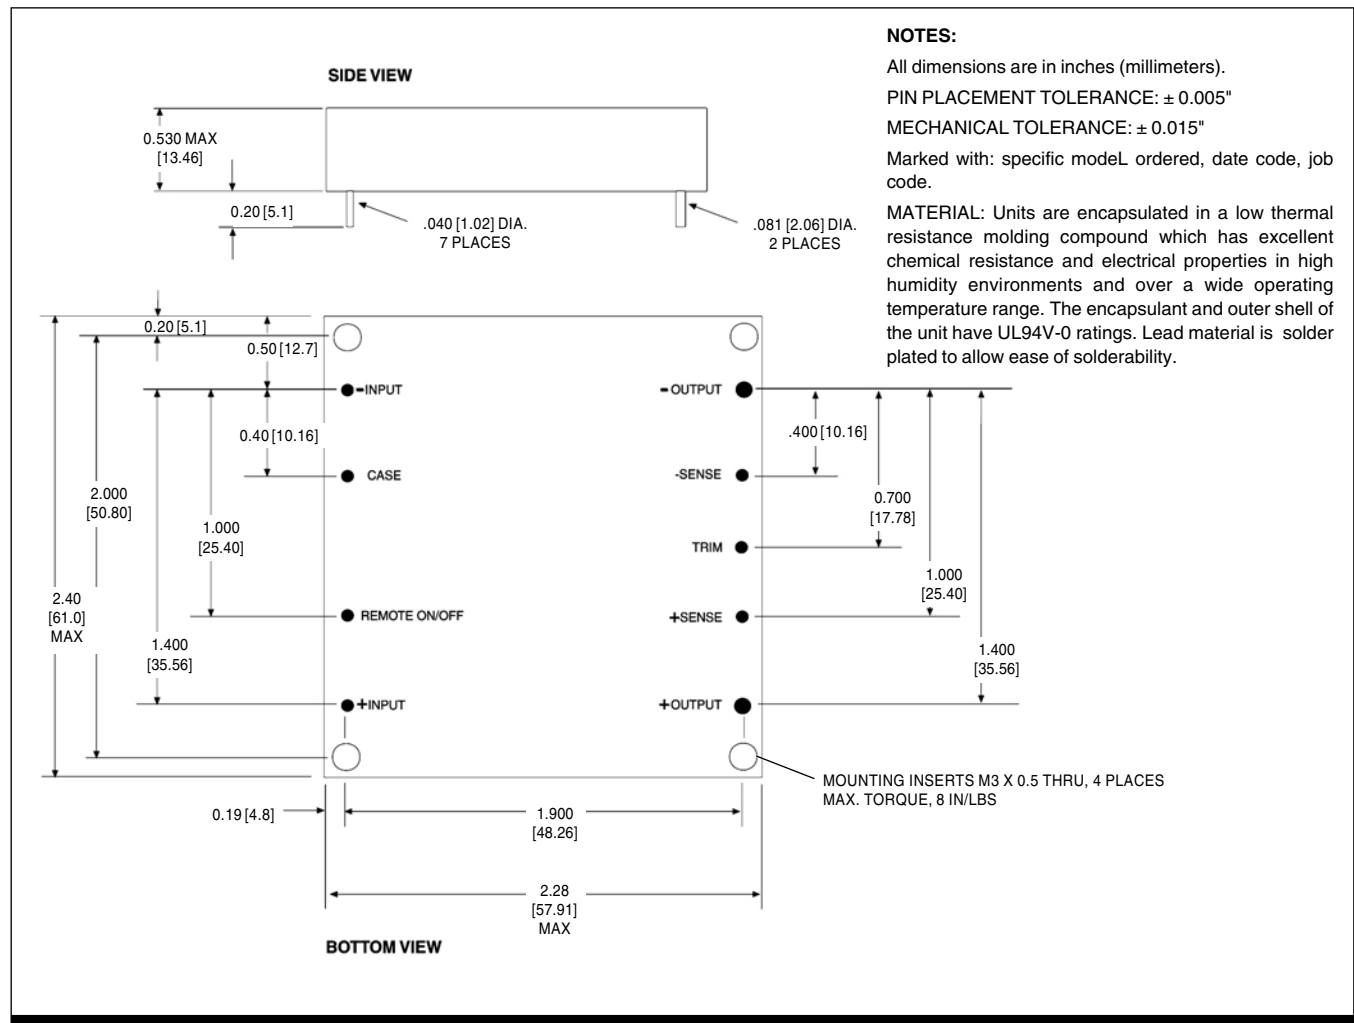

## OUTPUT VOLTAGE ADJUST

This feature allows the user to accurately adjust the module's output voltage set point to a specified level. This is achieved by connecting a resistor or potentiometer from the TRIM terminal to either the +Vout terminal (for increased Vout) or the -Vout terminal (for decreased Vout). The formulae below describe the trim resistor value to obtain a Vout change of  $\Delta\%$ .  $V_o$  is output voltage prior to adjustment (3.3V, 5V, 12V, 15V, 24V or 28V).

$$\text{Radj - up} = \left( \frac{V_o(100 + \Delta\%)}{1.225\Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right) \text{ k}\Omega$$

$$\text{Radj - down} = \left( \frac{100}{\Delta\%} - 2 \right) \text{ k}\Omega$$

## OVP NOTE

Special attention should be given to the peak voltage deviation during a dynamic load step when trimming the output above the original set point to avoid tripping the overvoltage protection circuit. Should an OVP condition occur, the converter will go into a latch condition and must be externally reset before it will return to normal operation.