

# SPECIFICATIONS

## 1. PICTURE TUBE

Size : 19 inch (Flat Slot Mask)  
 Deflection Angle : 90°  
 Neck Diameter : 29.1 mm  
 Phosphor : P22  
 Stripe Pitch : 0.24 mm  
 Low Radiation : TCO-99, MPR-II  
 Face Treatment : AR-ASC coating

## 2. SIGNAL

2-1. Horizontal & Vertical Sync  
 1) Input Voltage Level: Low= ≤0.8V, High= ≥2.1V  
 2) Sync Polarity : Positive or Negative

2-2. Video Input Signal  
 1) Voltage Level : 0~0.7 Vp-p  
     a) Color 0, 0 : 0 Vp-p  
     b) Color 7, 0 : 0.467 Vp-p  
     c) Color 15, 0 : 0.7 Vp-p  
 2) Input Impedance : 75 Ω  
 3) Video Color : R, G, B Analog  
 4) Signal Format : Refer to the Timing Chart

2-3. Signal Connector  
 15 Pin D-Sub Connector, Attached

2-4. Scanning Frequency  
 Horizontal : 30~96 kHz  
 Vertical : 50~160 Hz

## 3. POWER SUPPLY

3-1. Power Range  
 AC 90~264V, 50/60Hz 2.0A (NON PFC)  
 AC 200~240V 50Hz 1.5A (PFC Version)

### 3-2. Power Consumption

MODE	H/V SYNC	POWER CONSUMPTION	LED COLOR
NORMAL (ON)	ON/ON	less than 140W	GREEN
STAND-BY	OFF/ON	less than 8W	ORANGE
SUSPEND	ON/OFF	less than 8W	
OFF	OFF/OFF	less than 3W	ORANGE

## 4. DISPLAY AREA

4-1. Active Video Area :  
 • Max Image Size - 366.0 x 274.5mm (14.40" x 10.80")  
 • Preset Image Size - 350 x 262 mm (13.78" x 10.31")

4-2. Display Color : Full Colors

4-3. Display Resolution : 1600 Dots x 1200Lines/75Hz

4-4. Video Bandwidth : 203MHz

## 5. ENVIRONMENT

5-1. Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F)  
 (Ambient)

5-2. Relative Humidity : 8% ~ 80%  
 (Non-condensing)

5-3. Altitude : 5000m

## 6. DIMENSIONS (with TILT/SWIVEL)

Width : 470 mm (18.60")  
 Depth : 470 mm (18.60")  
 Height : 480 mm (18.90")

## 7. WEIGHT (with TILT/SWIVEL)


Net Weight : 25.7 kg (56.67 lbs)  
 Gross Weight : 28.6 kg (63.06 lbs)

## 8. USB Specifications


USB Standard : Rev. 1.0 complied self-powered hub  
 Downstream power supply : 500mA for each (MAX)  
 Communication speed : 12 Mbps (Full), 1.5 Mbps (Low)  
 USB port : 1 Upstream port  
           : 4 Downstream ports

**SCHEMATIC DIAGRAM**  
**FB995C for P/P**  
 2000.10.30


**IMPORTANT SAFETY NOTICE**  
 THE SYMBOL MARK OF THIS SCHEMATIC DIAGRAM INCORPORATES SPECIAL FEATURES IMPORTANT FOR PROTECTION FROM X-RADIATION, FIRE AND ELECTRICAL SHOCK HAZARDS. WHEN SERVICING IT IS ESSENTIAL THAT ONLY MANUFACTURER SPECIFIED PARTS BE USED FOR THE CRITICAL COMPONENTS IN THE SYMBOL MARK OF THE SCHEMATIC.

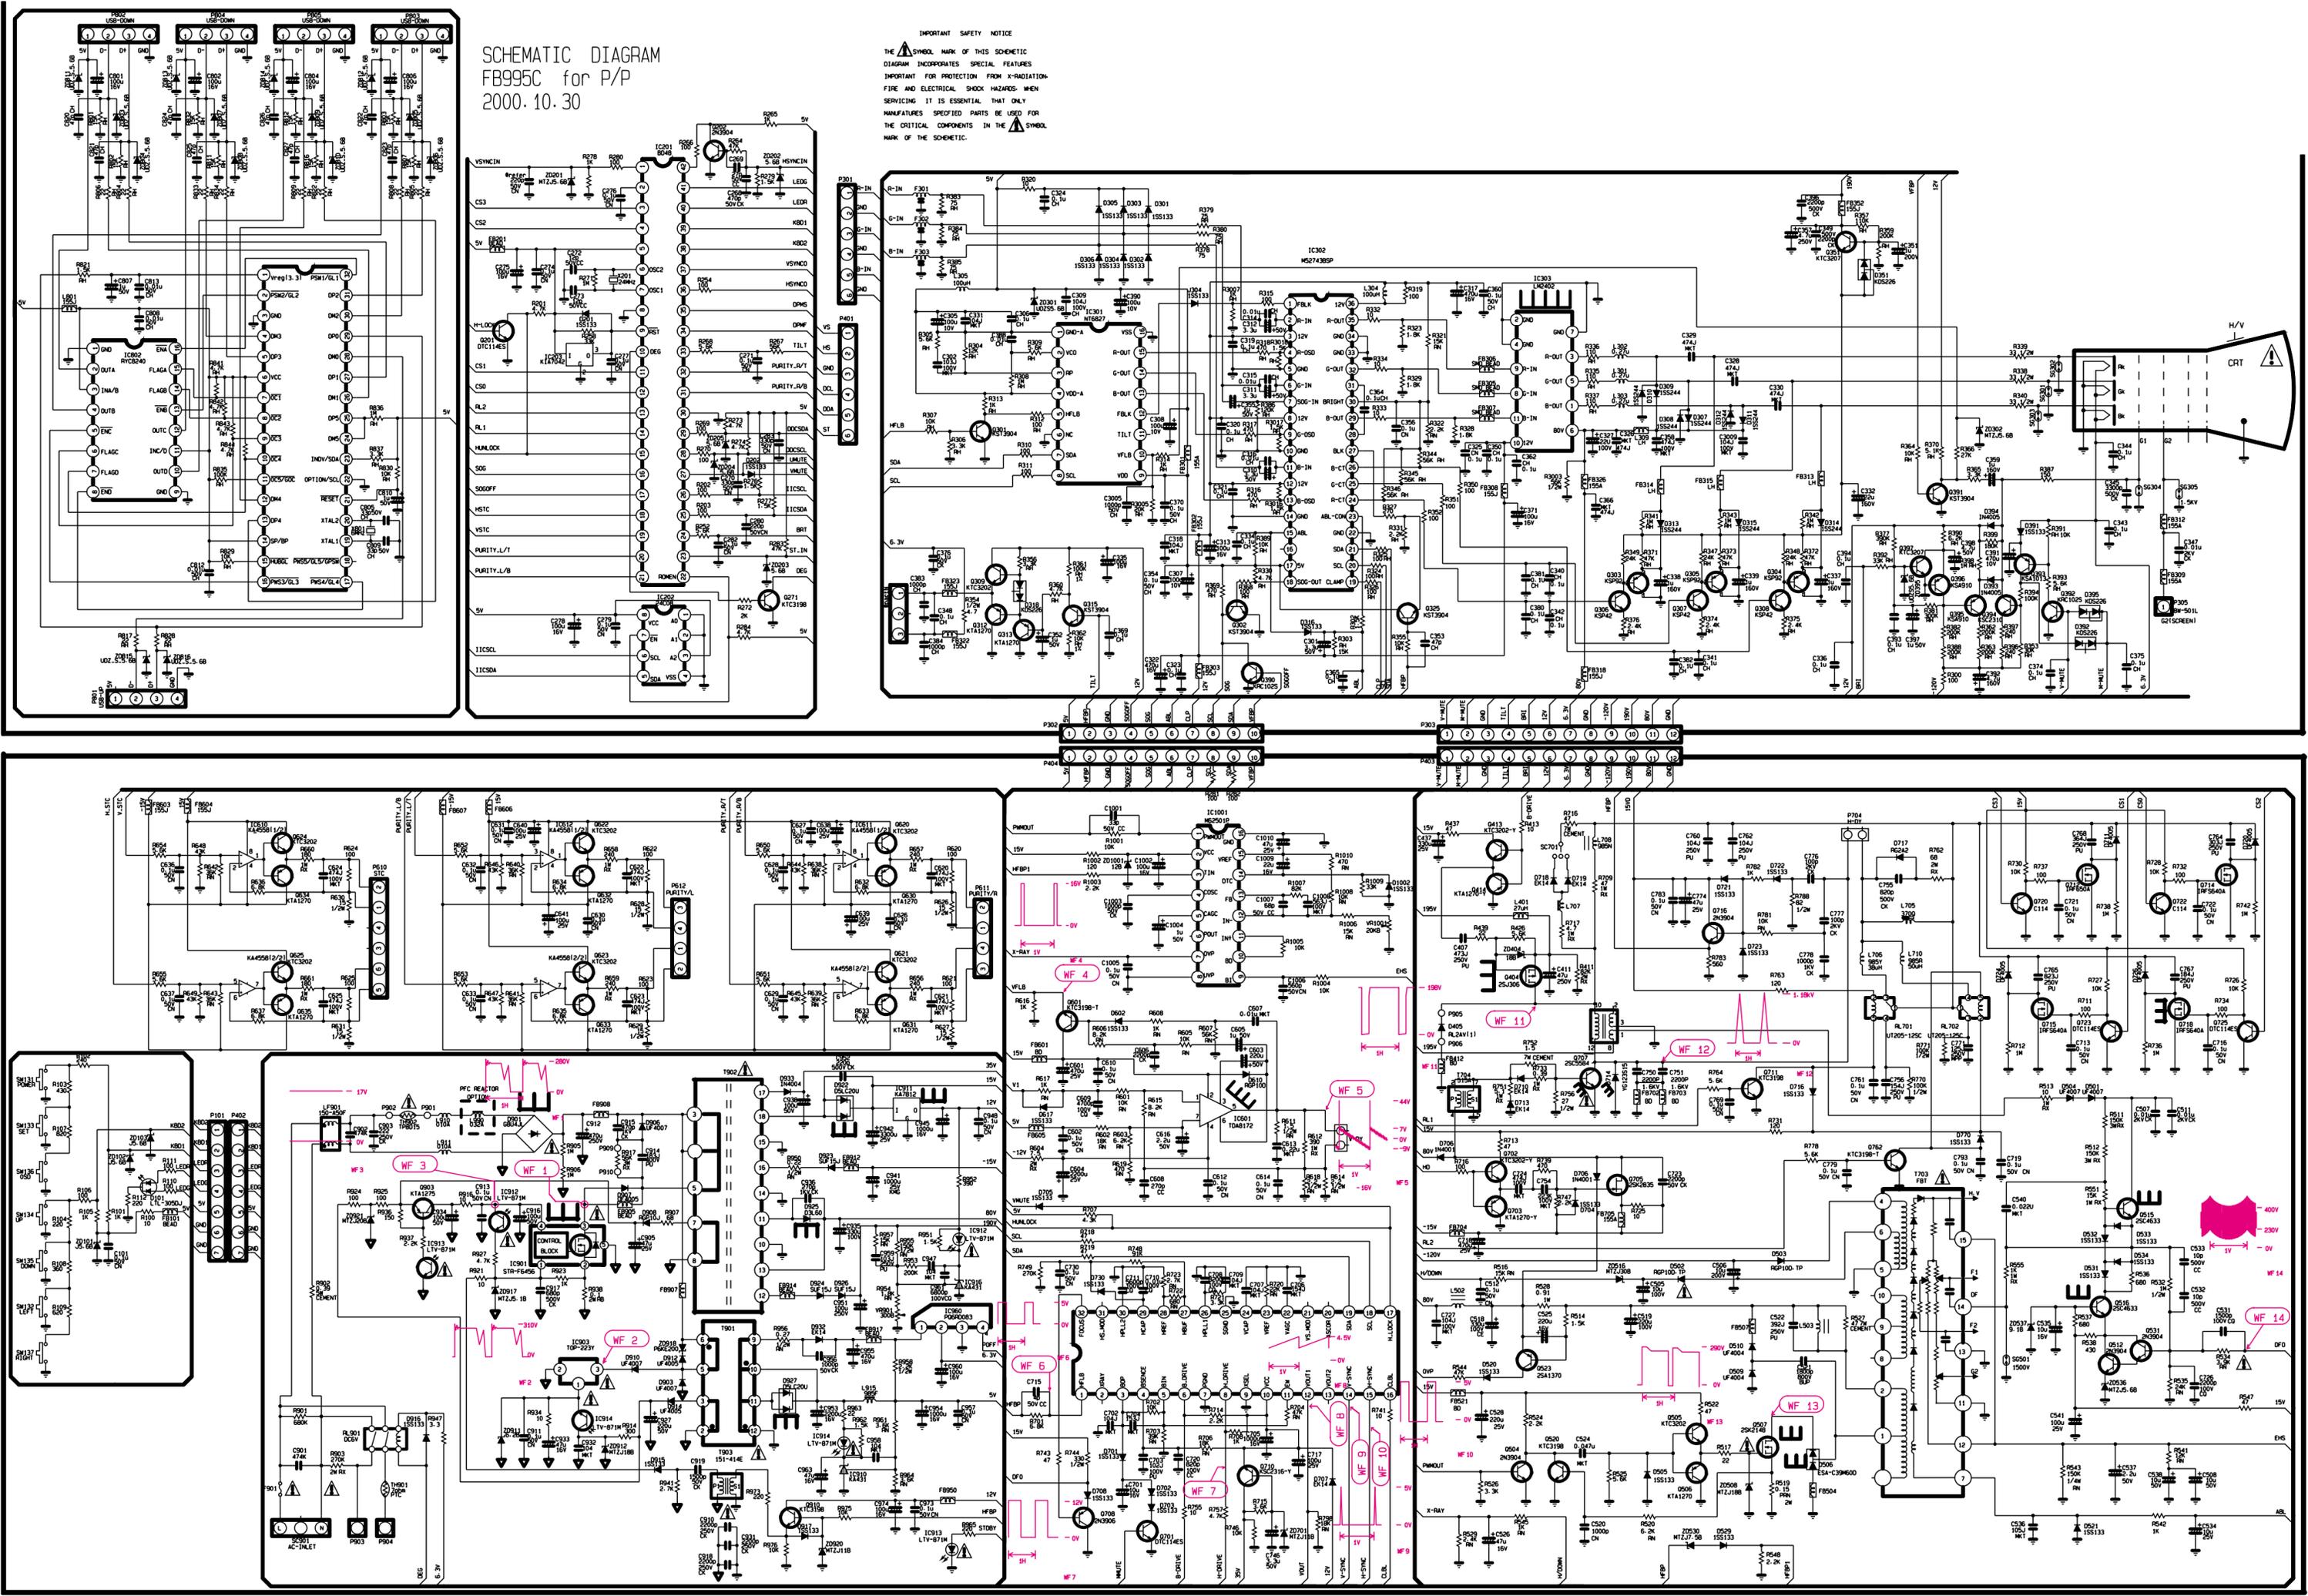

# WIRING DIAGRAM

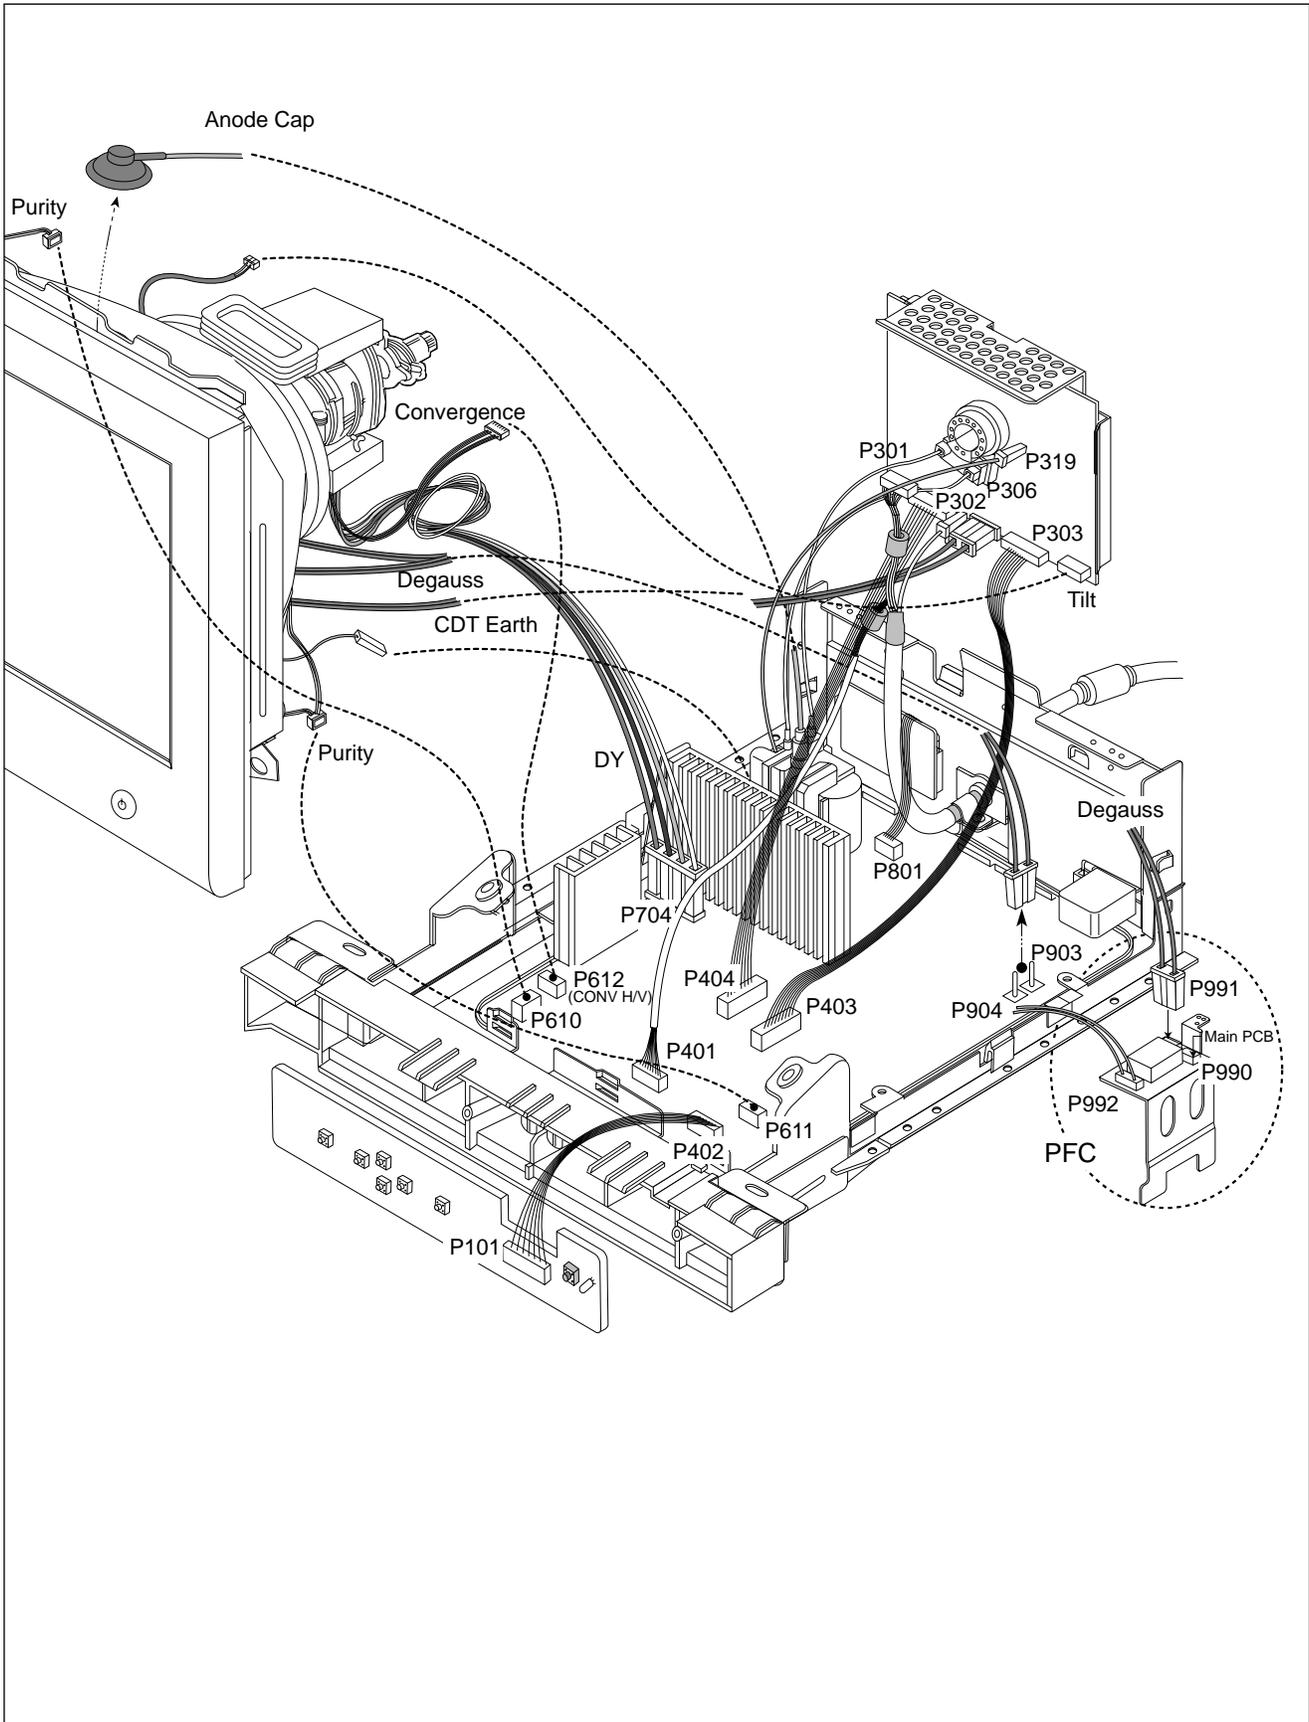

# BLOCK DIAGRAM

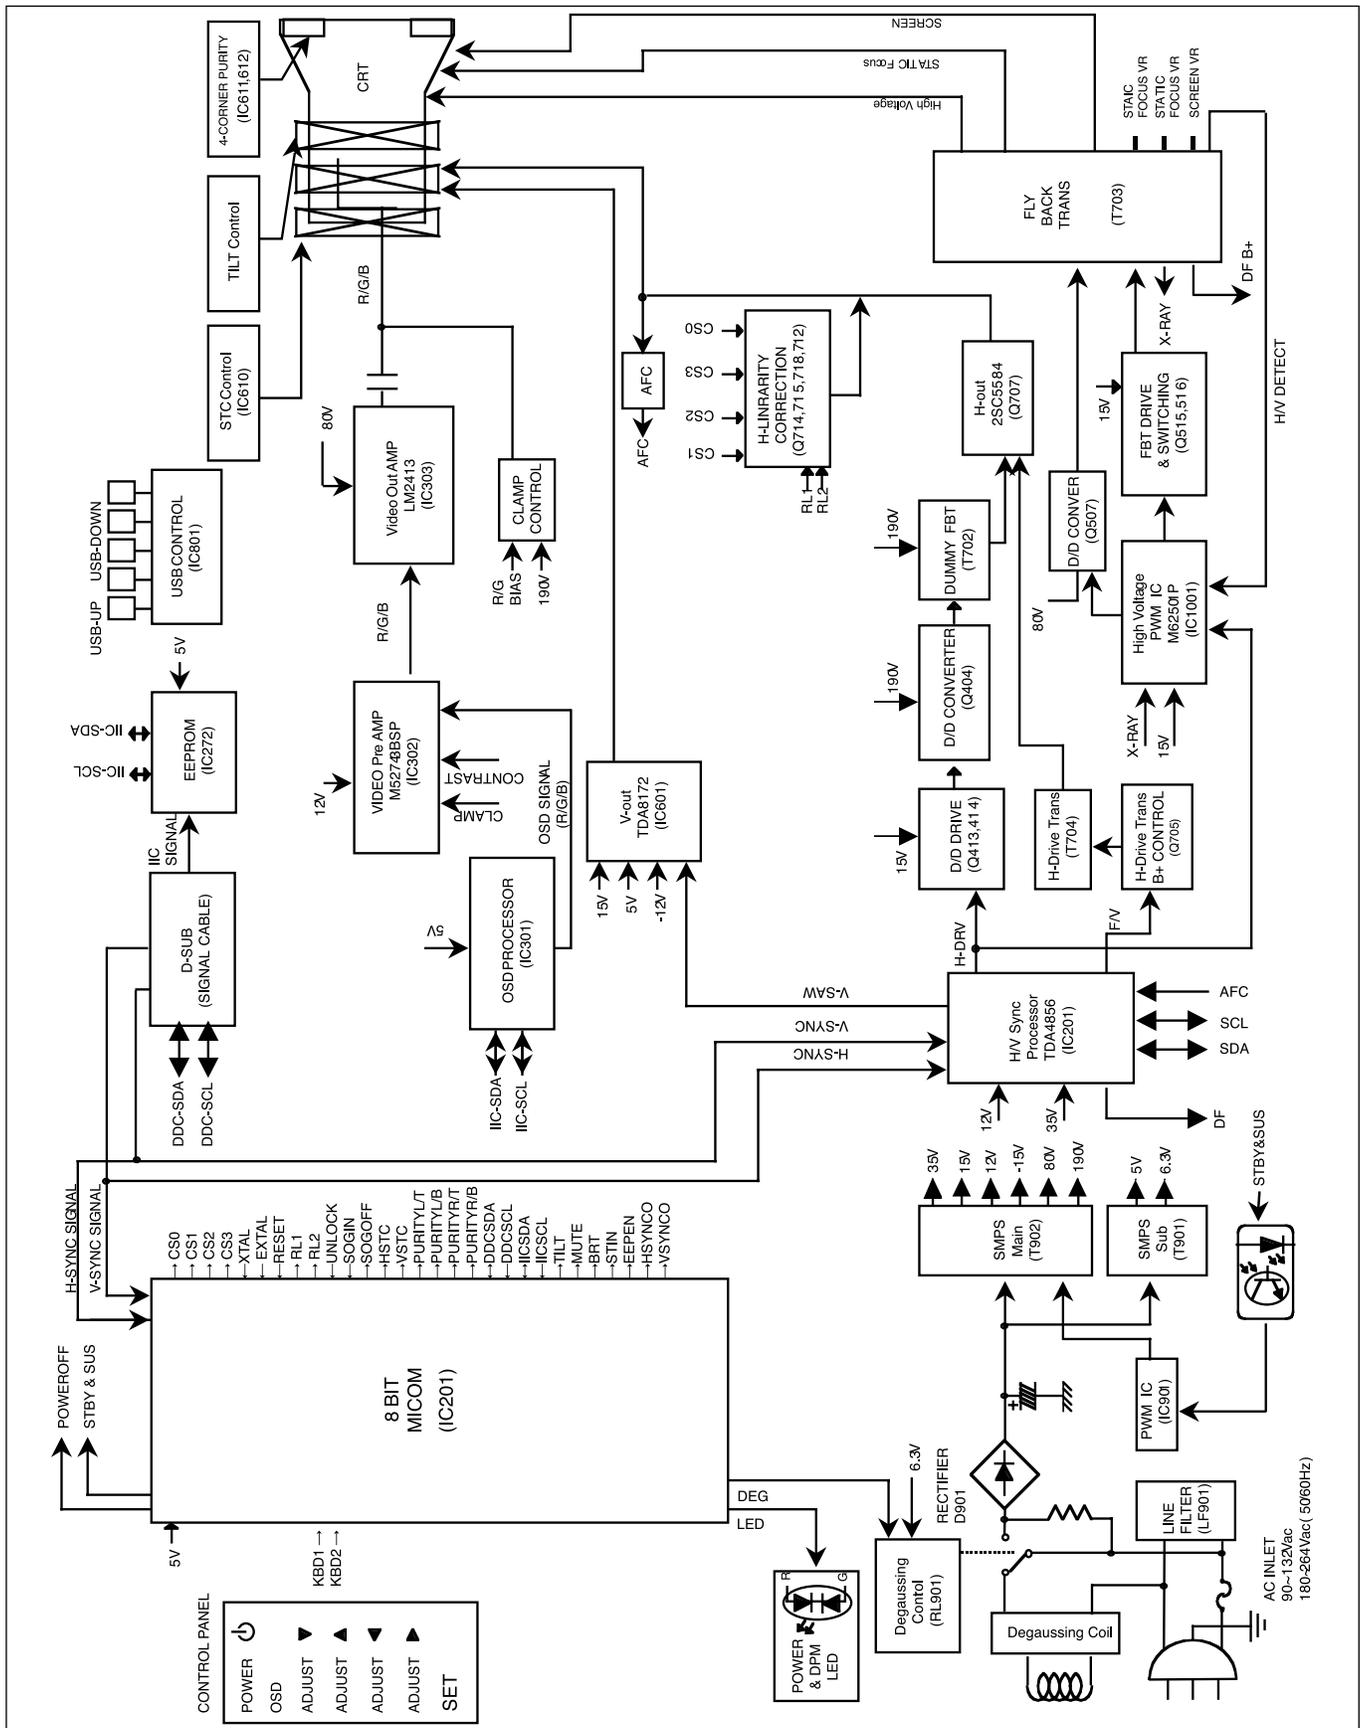

## DESCRIPTION OF BLOCK DIAGRAM

### 1. Line Filter & Associated Circuit

This is used for suppressing noise of power input line flowing into the monitor and/or some noise generated in this monitor flowing out through the power input line. That is to say, this circuit prevents interference between the monitor and other electric appliances.

### 2. Degauss Circuit & Coil

The Degauss circuit consists of the degaussing coil, the PTC (Positive Temperature Coefficient) thermistor (TH901), and the relay(RL901). This circuit eliminates abnormal color of the screen automatically by degaussing the slot mask in the CRT when turn on the power switch. When you need to degauss while using the monitor select DEGAUSS in the SPECIAL on the OSD menu.

### 3. SMPS(Switching Mode Power Supply).

This circuit works with power of 90~132Vac/ 196~264Vac (50/60Hz).

The operation procedure is as follows:

- 1) AC input voltage is rectified and smoothed by the bridge diode (D901) and capacitors (C912).
- 2) The rectified voltage (DC voltage) is applied to the primary coil of the transformer (T901,T902).
- 3) The control IC (IC901) generates switching pulse to turn on and off the primary coil of the transformer (T902) repeatedly.
- 4) Depending on the turn ratio of the transformer , the secondary voltages appear at the secondary coil of the transformer (T902).
- 5) These secondary voltages are rectified by each diode (D922,923,924,926,925,933) and operate the other circuits. (Deflection , Video Amplifier ,..... etc.).  
The switching IC (IC901) controls input-pulse-width and generates secondary voltages by sub-transformer (T901).

### 4. Display Power Management Circuit.

This circuit control power consumption of the monitor by detecting H and V sync signal.

There are Stand-by and suspend mode.

When no horizontal or vertical sync signal input, the circuit consists of Q903 and IC913 becomes stand-by and suspend mode. Its power consumption is below 8W.

### 5. X-ray Protection.

This circuit detects the rectified DC voltage comes from the FBT pin 6. If the high voltage of the FBT reaches up to about 30kV (abnormal state), high voltage control PWM IC (IC1001) detects it. And PWM IC (IC1001) prevent output voltage to the gate of switching FET (Q507). It stops operating primary circuit of the FBT (T703), and high voltage is not be generated.(In the normal state, the high voltage is about 27kV.)

### 6. Micom (Microprocessor) Circuit.

The operating procedure of Micom (Microprocessor) and its associated circuit is as follows:

- 1) H and V Sync signal is supplied from the D-sub to the Micom (IC201).
- 2) The Micom (IC201) distinguishes polarity and frequency of H and V sync.
- 3) The Micom controls each OSD function signals.(H-size, H-position, V-size, etc.)
- 4) The controlled data of each mode is stored in itself. User can adjust screen condition by each OSD function. The data of the adjust screen condition is stored automatically.

### 7. Horizontal and Vertical Synchronous Processor

This circuit generates the horizontal drive pulse and the vertical drive pulse by taking sync-signal from the signal cable. This circuit consists of the TDA4856 (IC701) and the associated circuit.

### 8. Oscillating Circuit for D/D Converter.

This circuit generates the saw-tooth wave which has the horizontal period by taking the output of the TDA4856 (IC701).

### 9. D/D (DC to DC) Converter.

This circuit supplies DC voltage to the horizontal deflection output circuit by decreasing DC 190V which is the secondary voltage of the SMPS in accordance with the input horizontal sync signal.

### 10. Side-Pincushion Correcting Circuit.

This circuit improves the side-pincushion of the screen by mixing east-west wave to the output of the horizontal deflection D/D converter which is used for the supply voltage source (B+) of the deflection circuit.

### 11. D/D Drive & Convert Circuit.

This circuit is used for supplying B+ voltage to horizontal deflection output transistor(Q707). This circuit makes to add side-pincushion correcting signal to B+ voltage.

### 12. Horizontal Deflection Output Circuit.

This circuit makes the horizontal deflection by supplying the saw-tooth current to the horizontal deflection yoke.

### 13. High Voltage Output & FBT (Fly Back Transformer).

The high voltage output circuit is used for generating pulse wave to the primary coil of the FBT (Fly Back Transformer (T703)). A boosted voltage (about 27kV) appears at the secondary of the FBT and it is supplied to the anode of the CRT. And there are another output voltages such as the dynamic focus frequency.

### 14. H-Linearity Correction Circuit.

This circuit corrects the horizontal linearity for each horizontal sync frequency.

**15. Vertical Output Circuit.**

This circuit takes the vertical ramp wave from the TDA4856(IC701) and performs the vertical deflection by supplying the saw-tooth wave current from the TDA8172 (IC601) to the vertical deflection yoke.

**16. Dynamic Focus Output circuit.**

This circuit takes H and V parabola wave from the TDA4856(IC701) and amplifies these waves to offer to the FBT(T703).

**17. H & V Blanking and Brightness Control.**

This circuit eliminates the retrace line by supplying a negative pulse to the G1 of the CRT. The brightness control circuit is used to control of the screen brightness by changing the DC level of G1.

**18. Tilt (Image Rotation) Circuit.**

This circuit corrects the tilt of the screen by supplying the image rotation signal to the tilt coil which is attached to the CRT near the deflection.

**19. Static Convergence Control Circuit.**

This circuit corrects the convergence of the screen by supplying the convergence signal to the 4H(STC) coil which is attached to the CRT near the deflection.

**20. Moiré Reduction Circuit.**

This circuit reduce interference between the periodical display pattern and the CRT's slot (or dot). The positions of every other one dot video signal beams (red, green and blue beam) are shifted finely, thus reducing interference.

**21. OSD Circuit.**

This circuit is used for performing the OSD (On Screen Display) function. When a user selects the OSD Select/ Adjustment control, the adjustment status displays on the screen.

**22. Video Pre-Amp Circuit.**


This circuit amplifies the analog video signal from 0-0.7V to 0-4V. This circuit is operated by taking the clamp, R, G, B drives, and contrast signals from the Micom (IC201).

**23. Video Output Amp Circuit.**


This circuit amplifies the video signal which comes from the video pre-amp circuit and amplified video signal is applied to the CRT cathode.

# TROUBLESHOOTING GUIDE


## 1. NO POWER

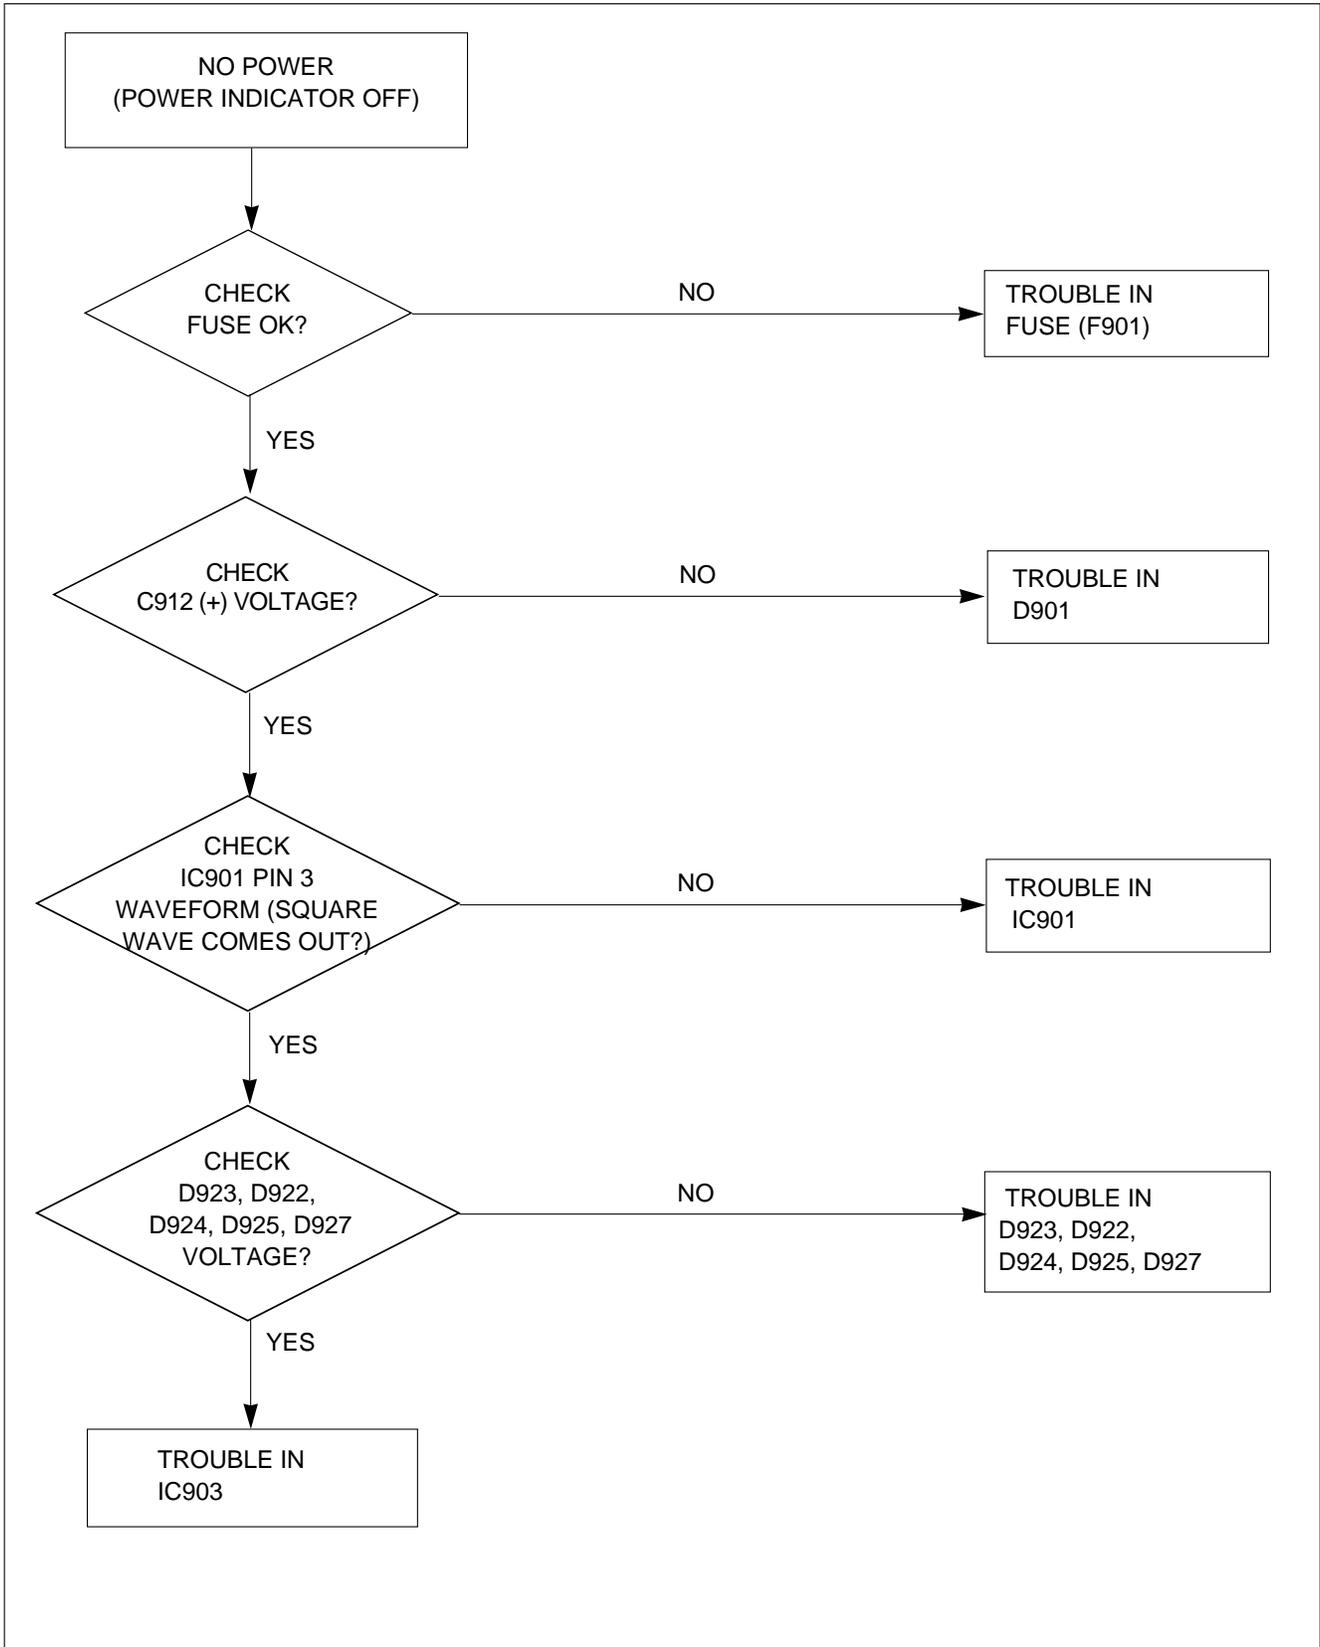


## 2. NO CHARACTER

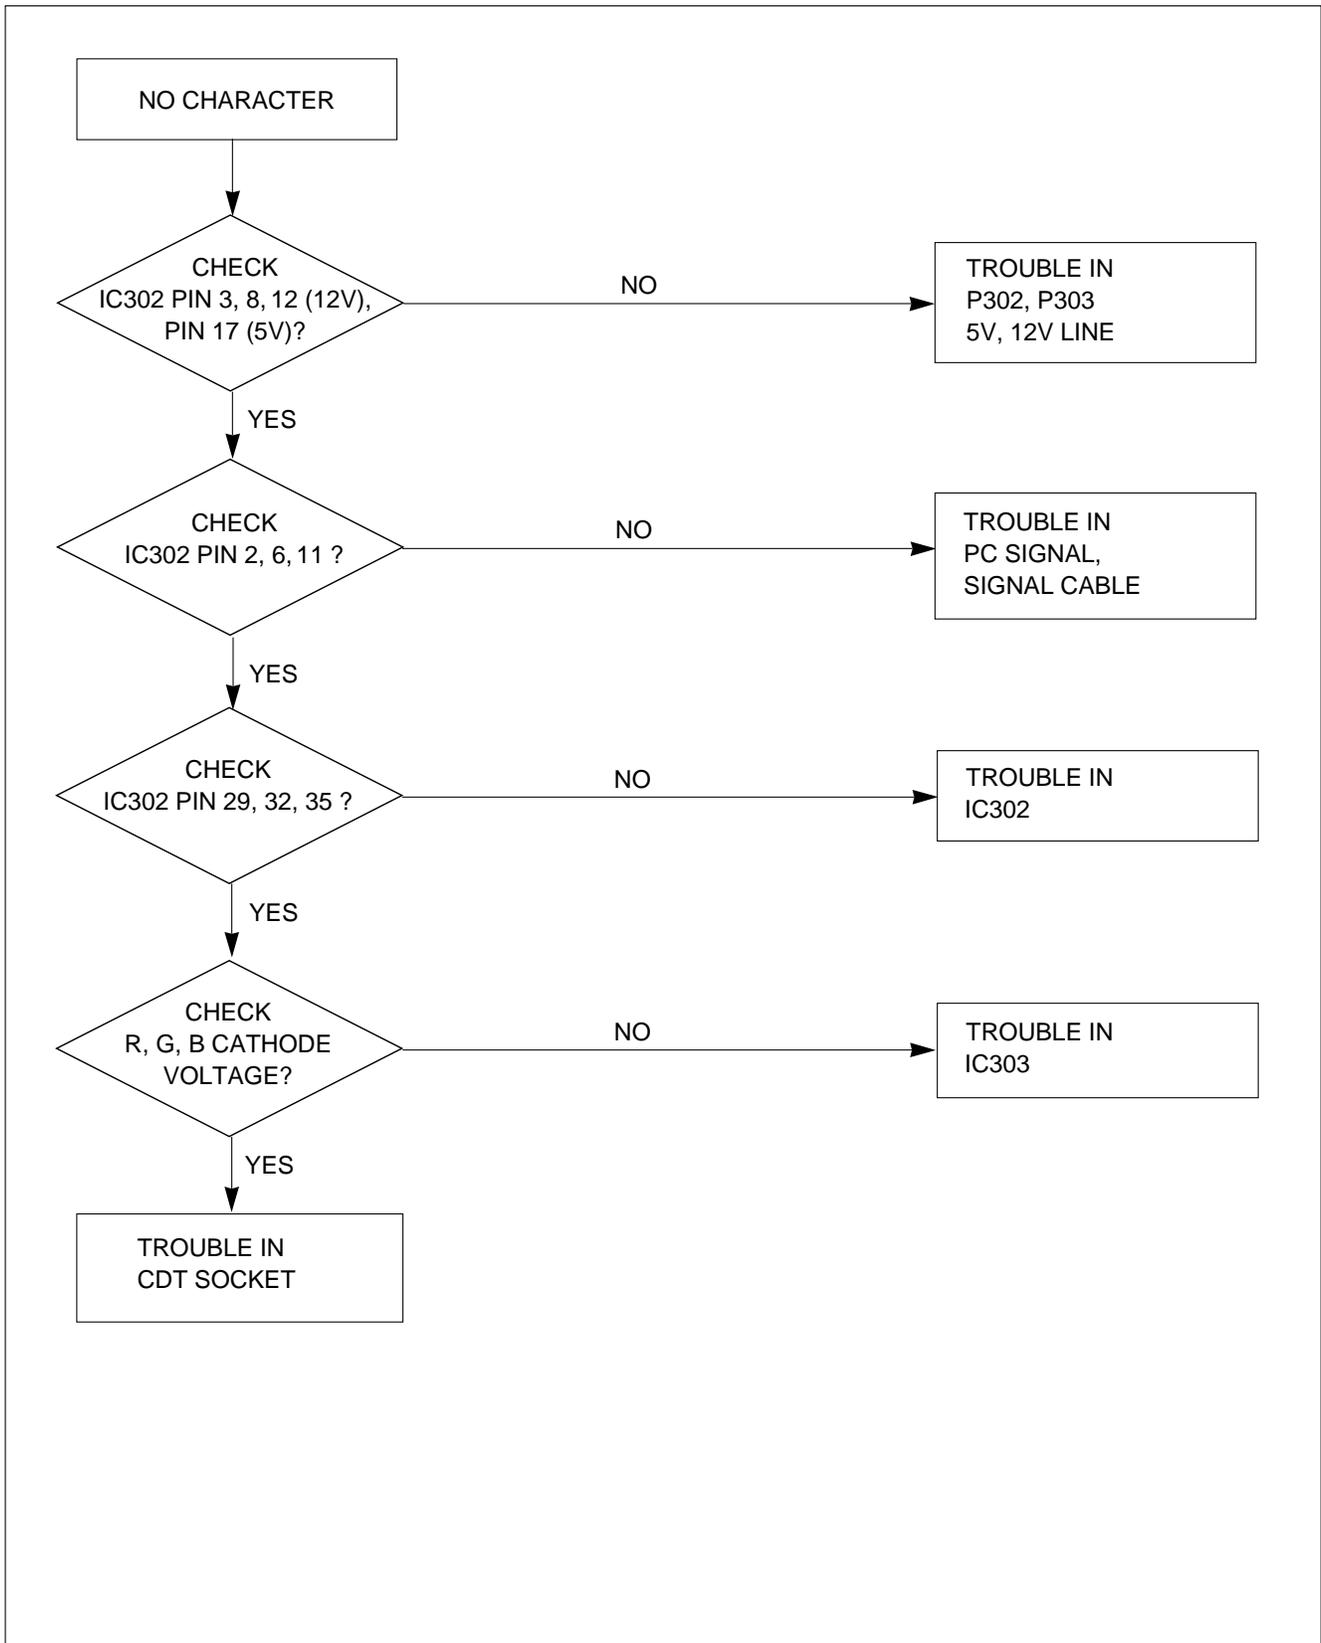


### 3. NO RASTER

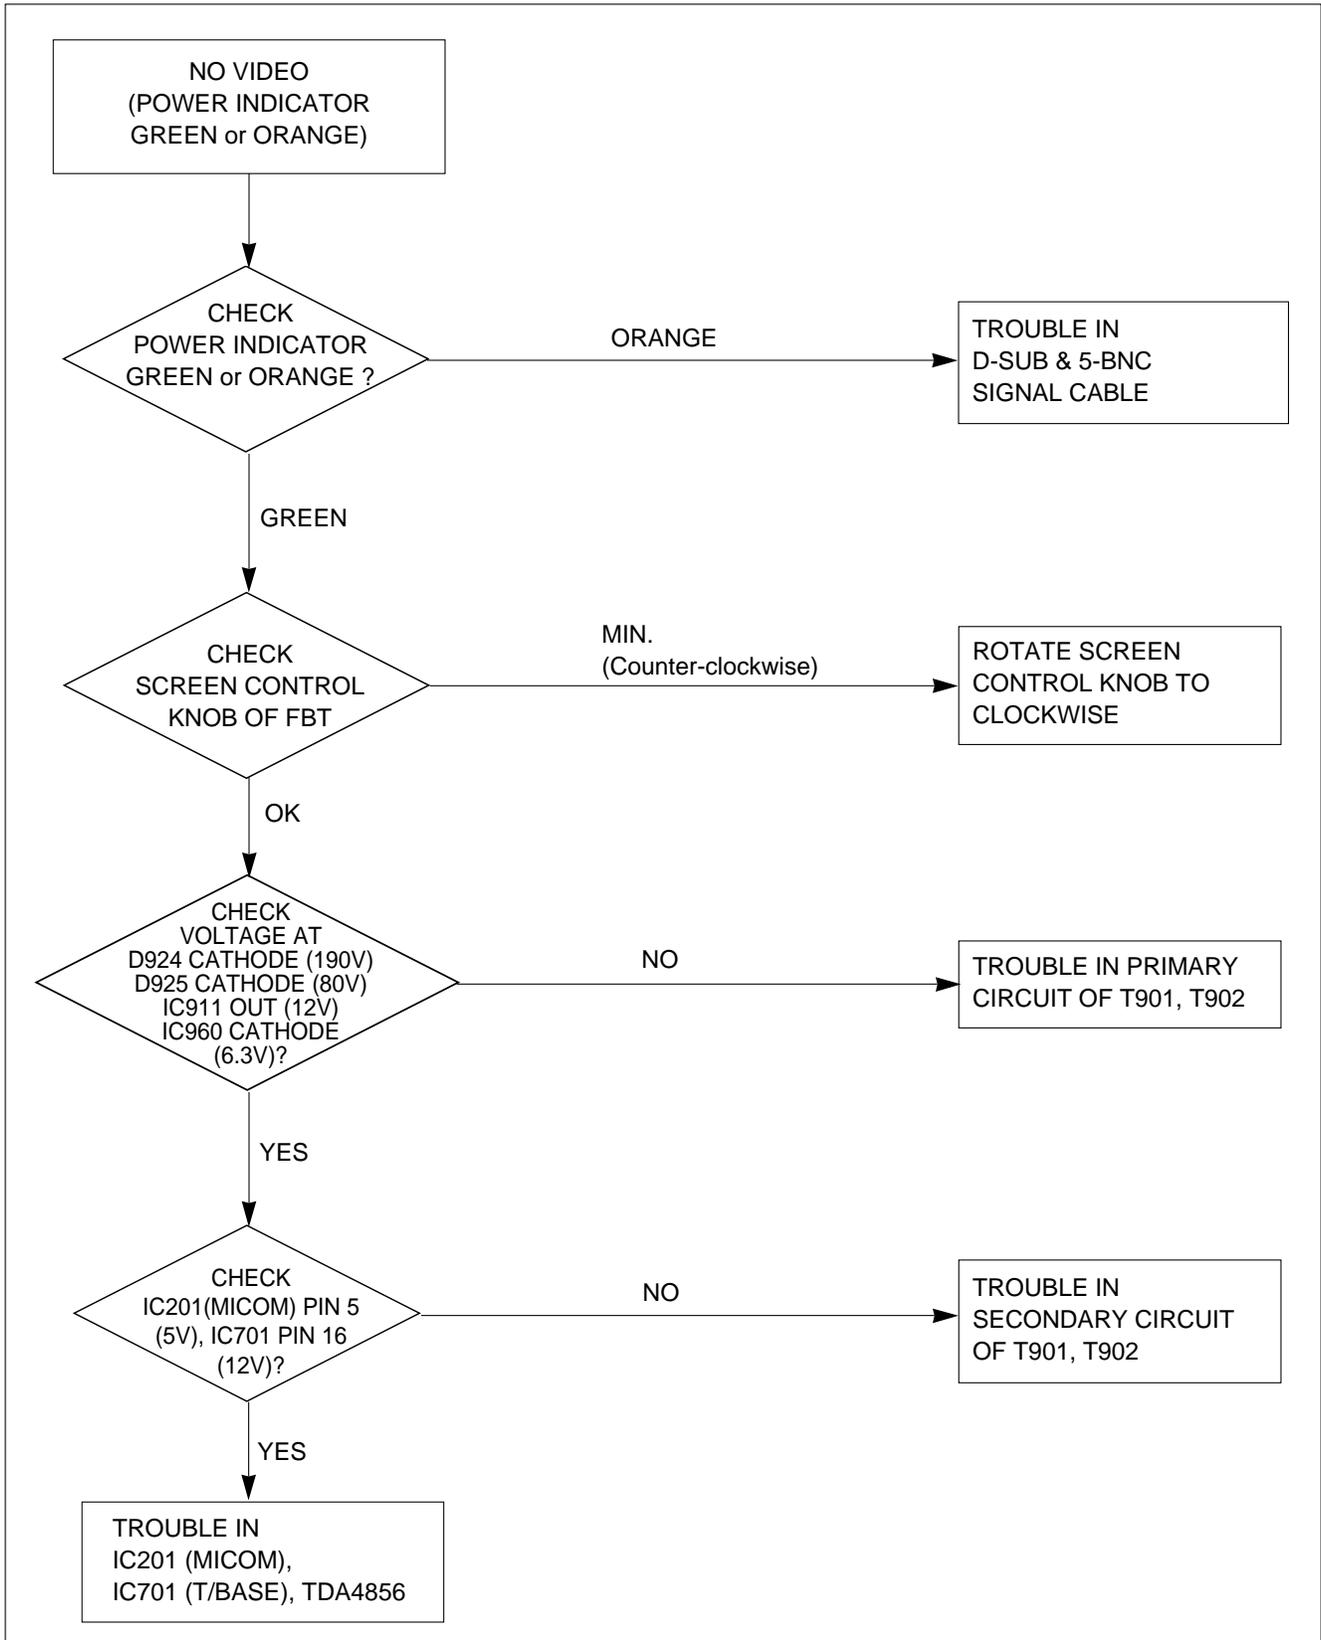

#### 4. NO VERTICAL DEFLECTION

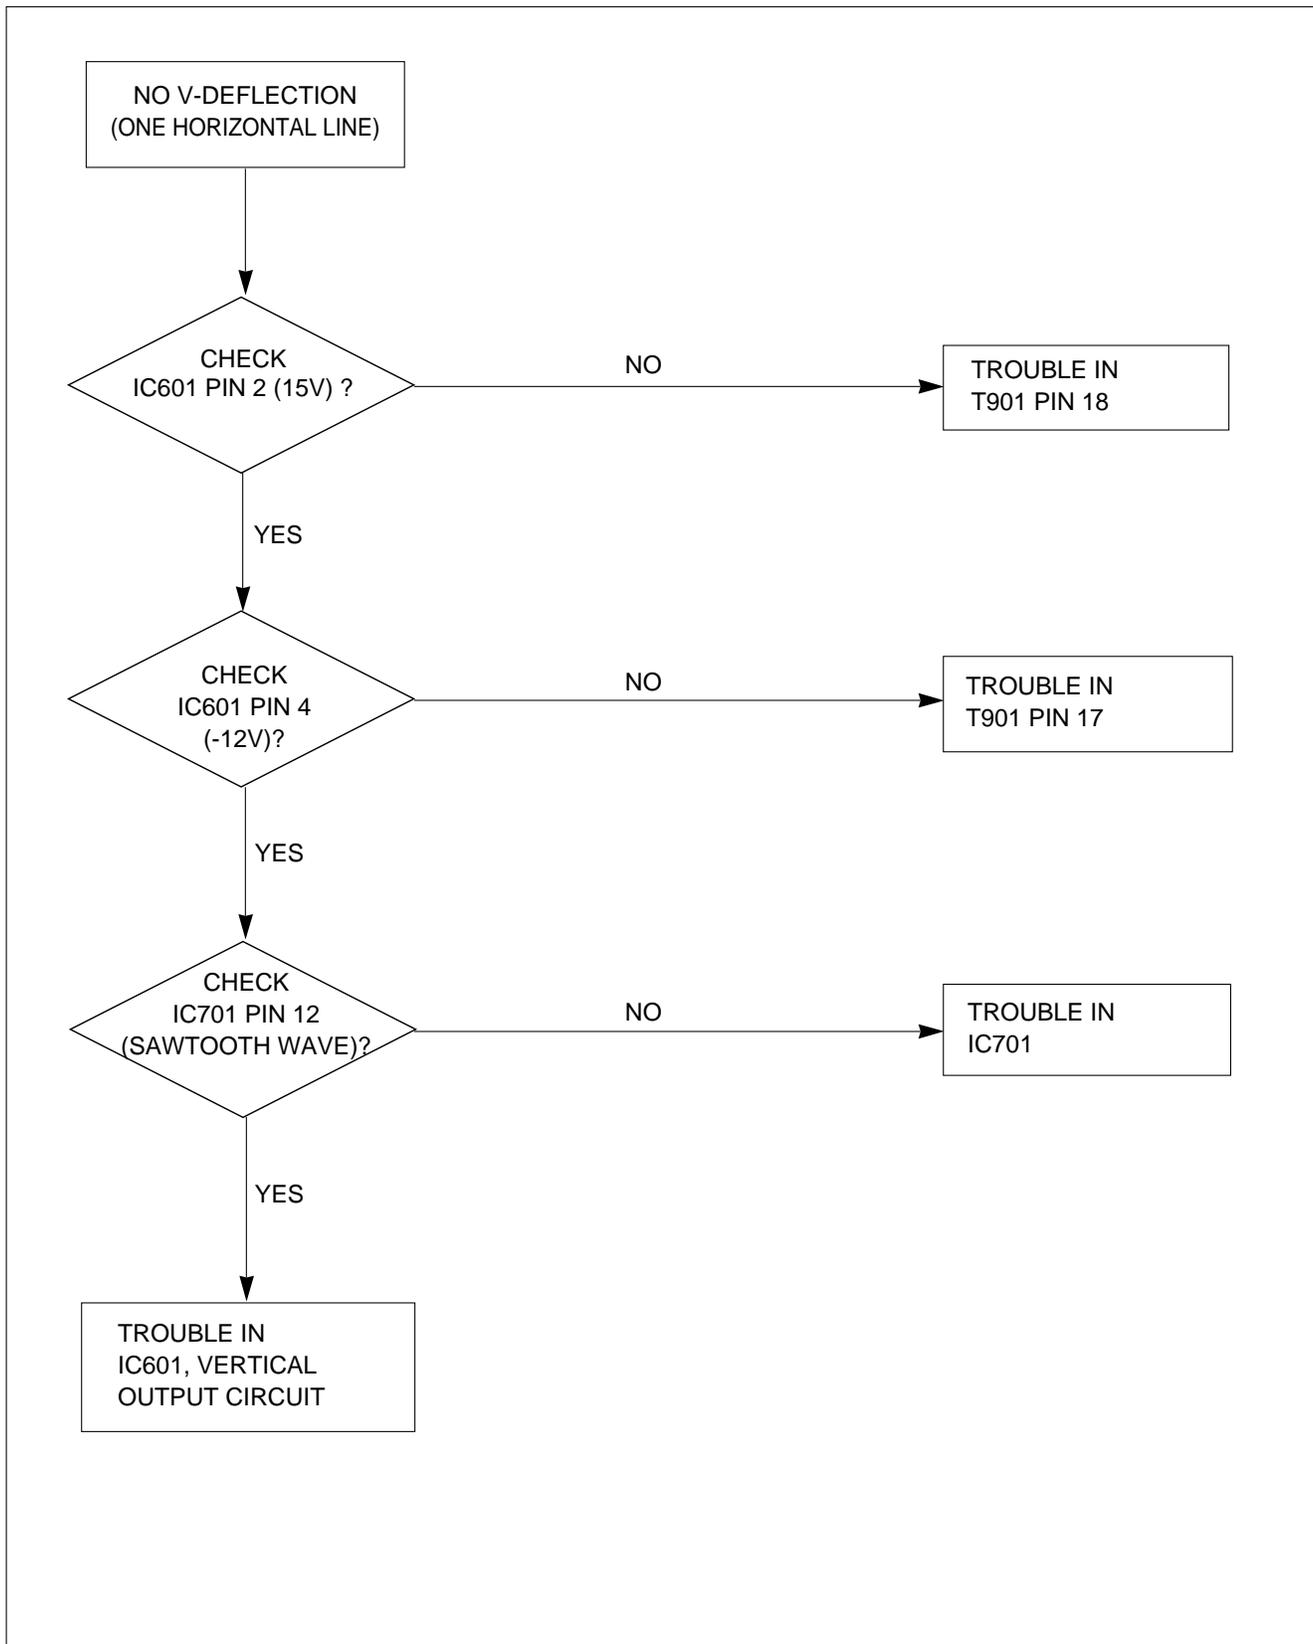


## 5. TROUBLE IN DPM

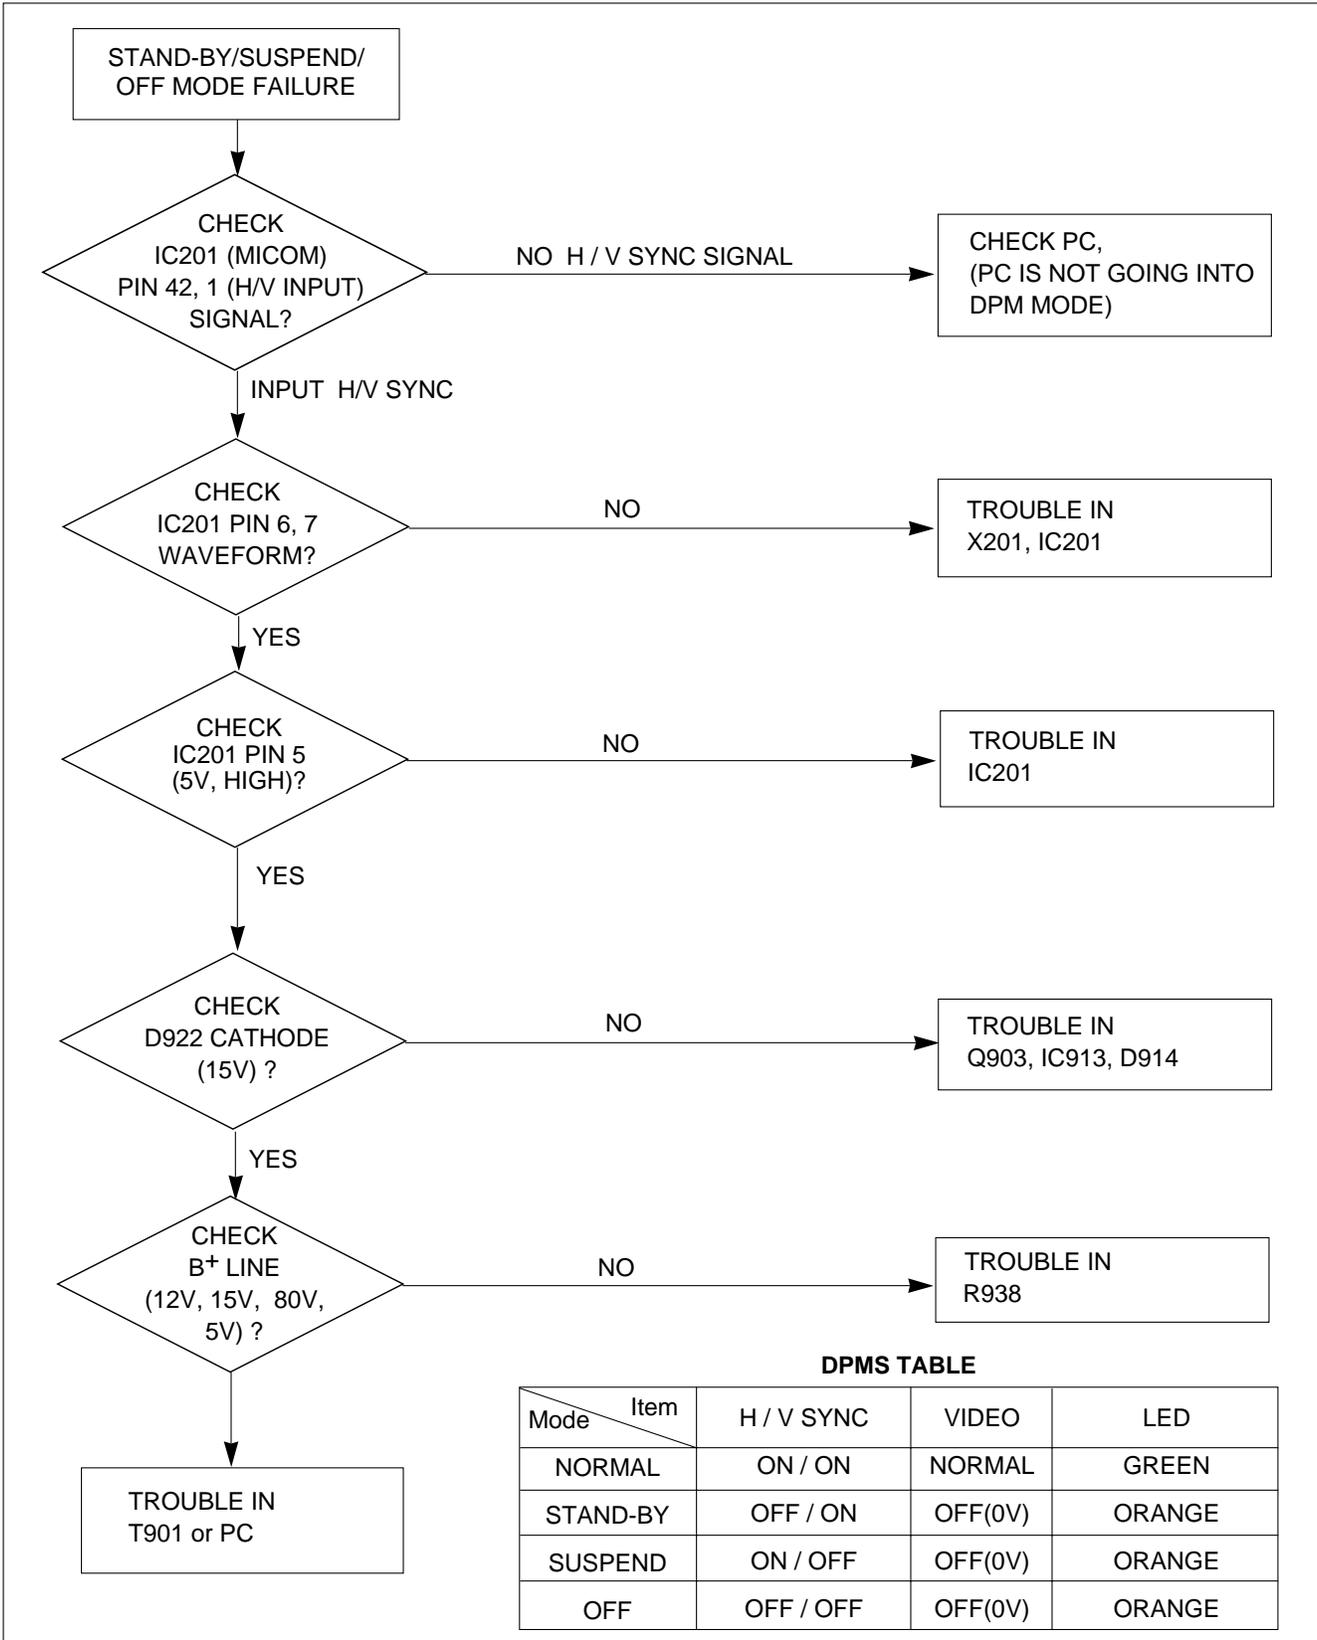


**DPMS TABLE**

Mode \ Item	H / V SYNC	VIDEO	LED
NORMAL	ON / ON	NORMAL	GREEN
STAND-BY	OFF / ON	OFF(0V)	ORANGE
SUSPEND	ON / OFF	OFF(0V)	ORANGE
OFF	OFF / OFF	OFF(0V)	ORANGE


## 6. NO DEGAUSSING

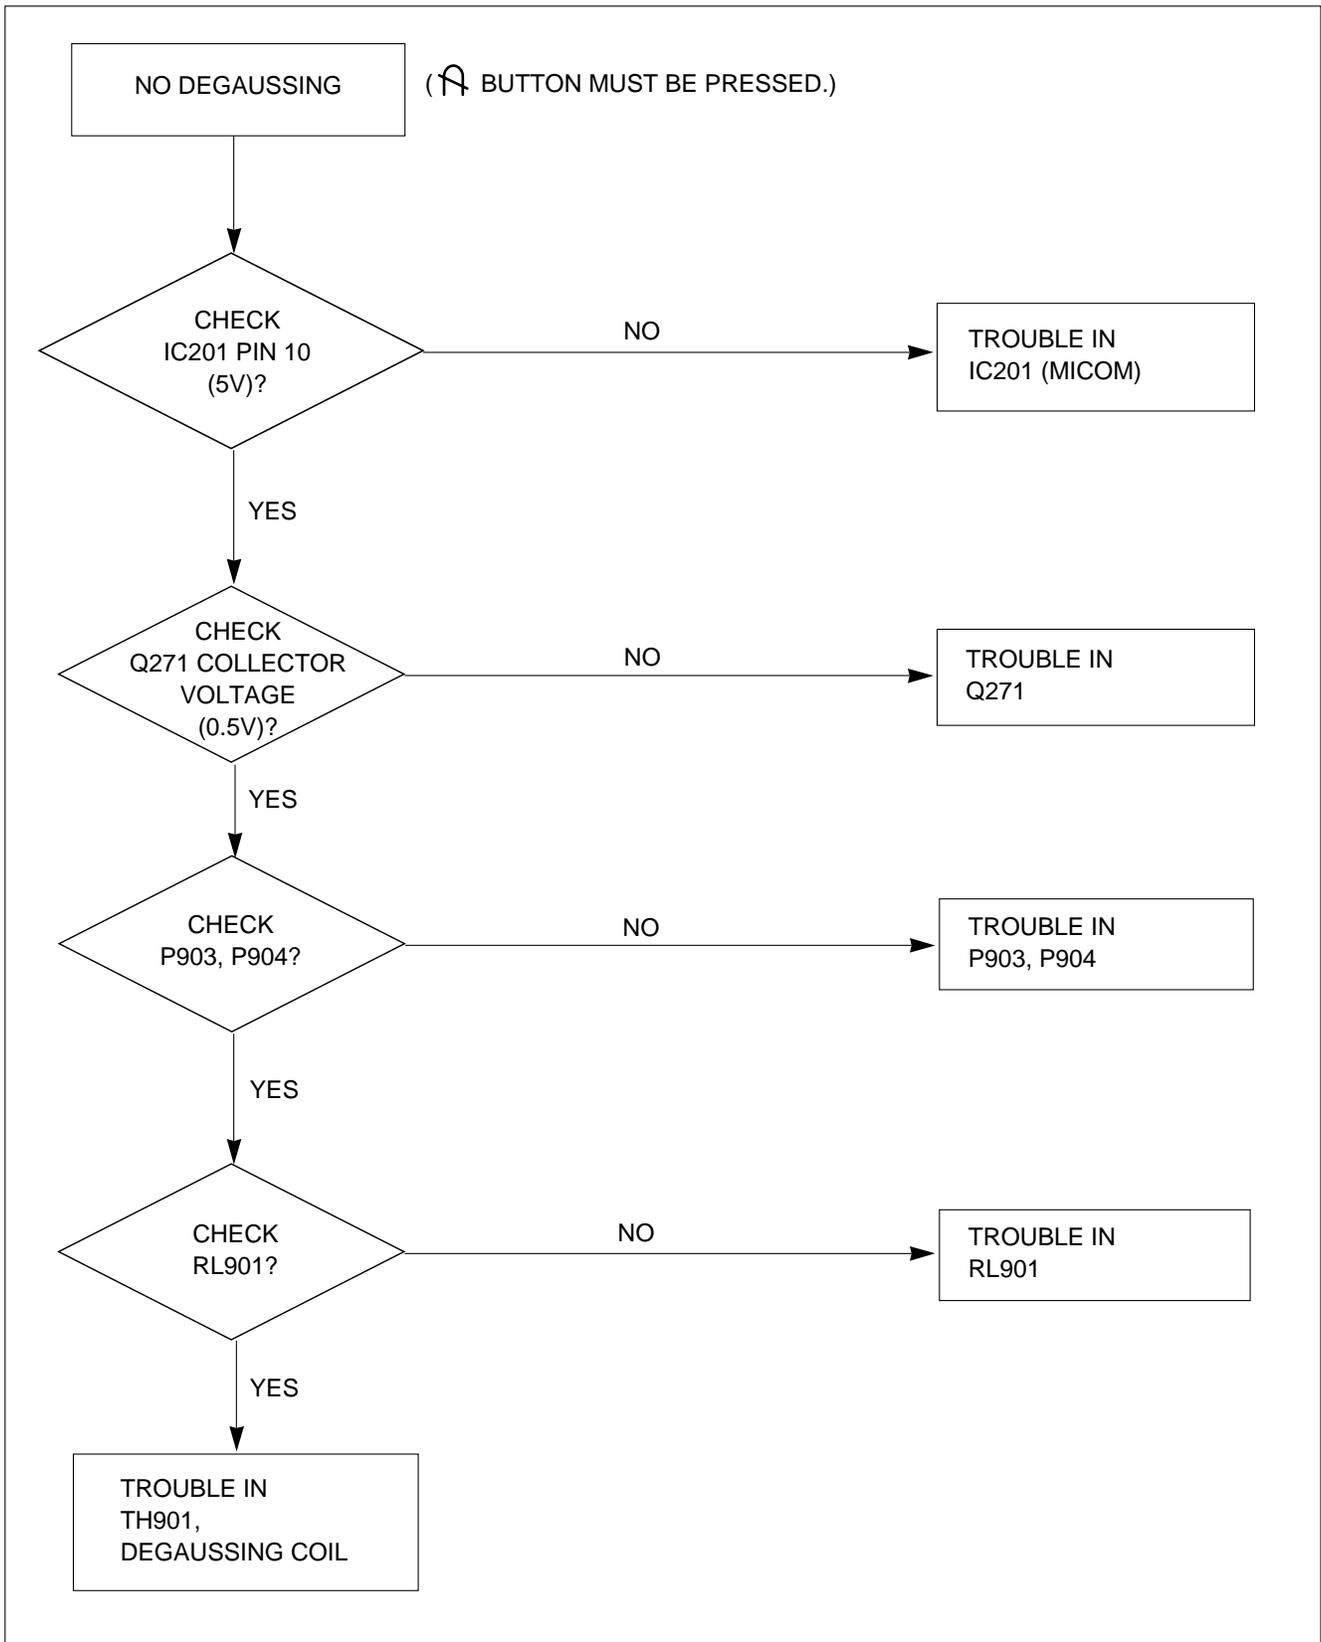

## 7. NO TILT (ROTATION)

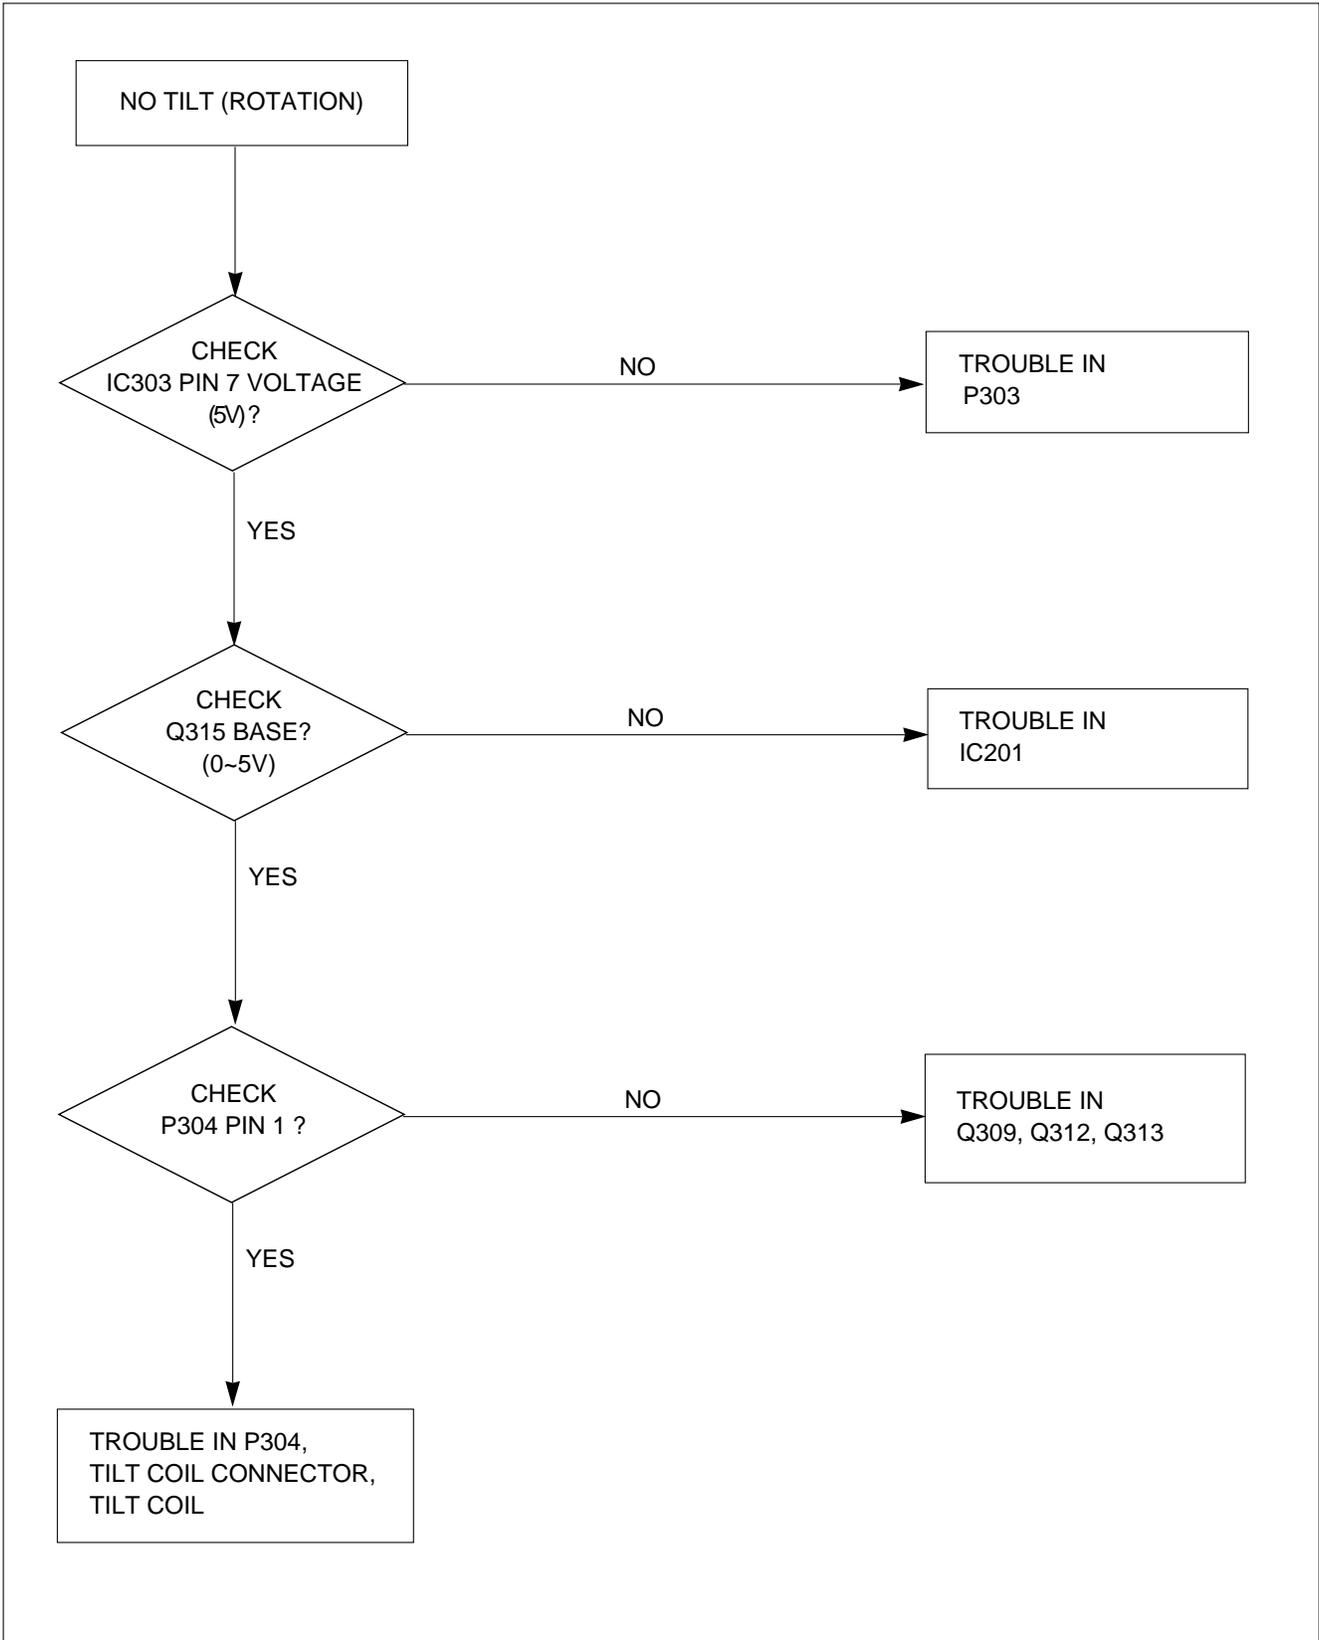

## 8. TROUBLE IN OSD

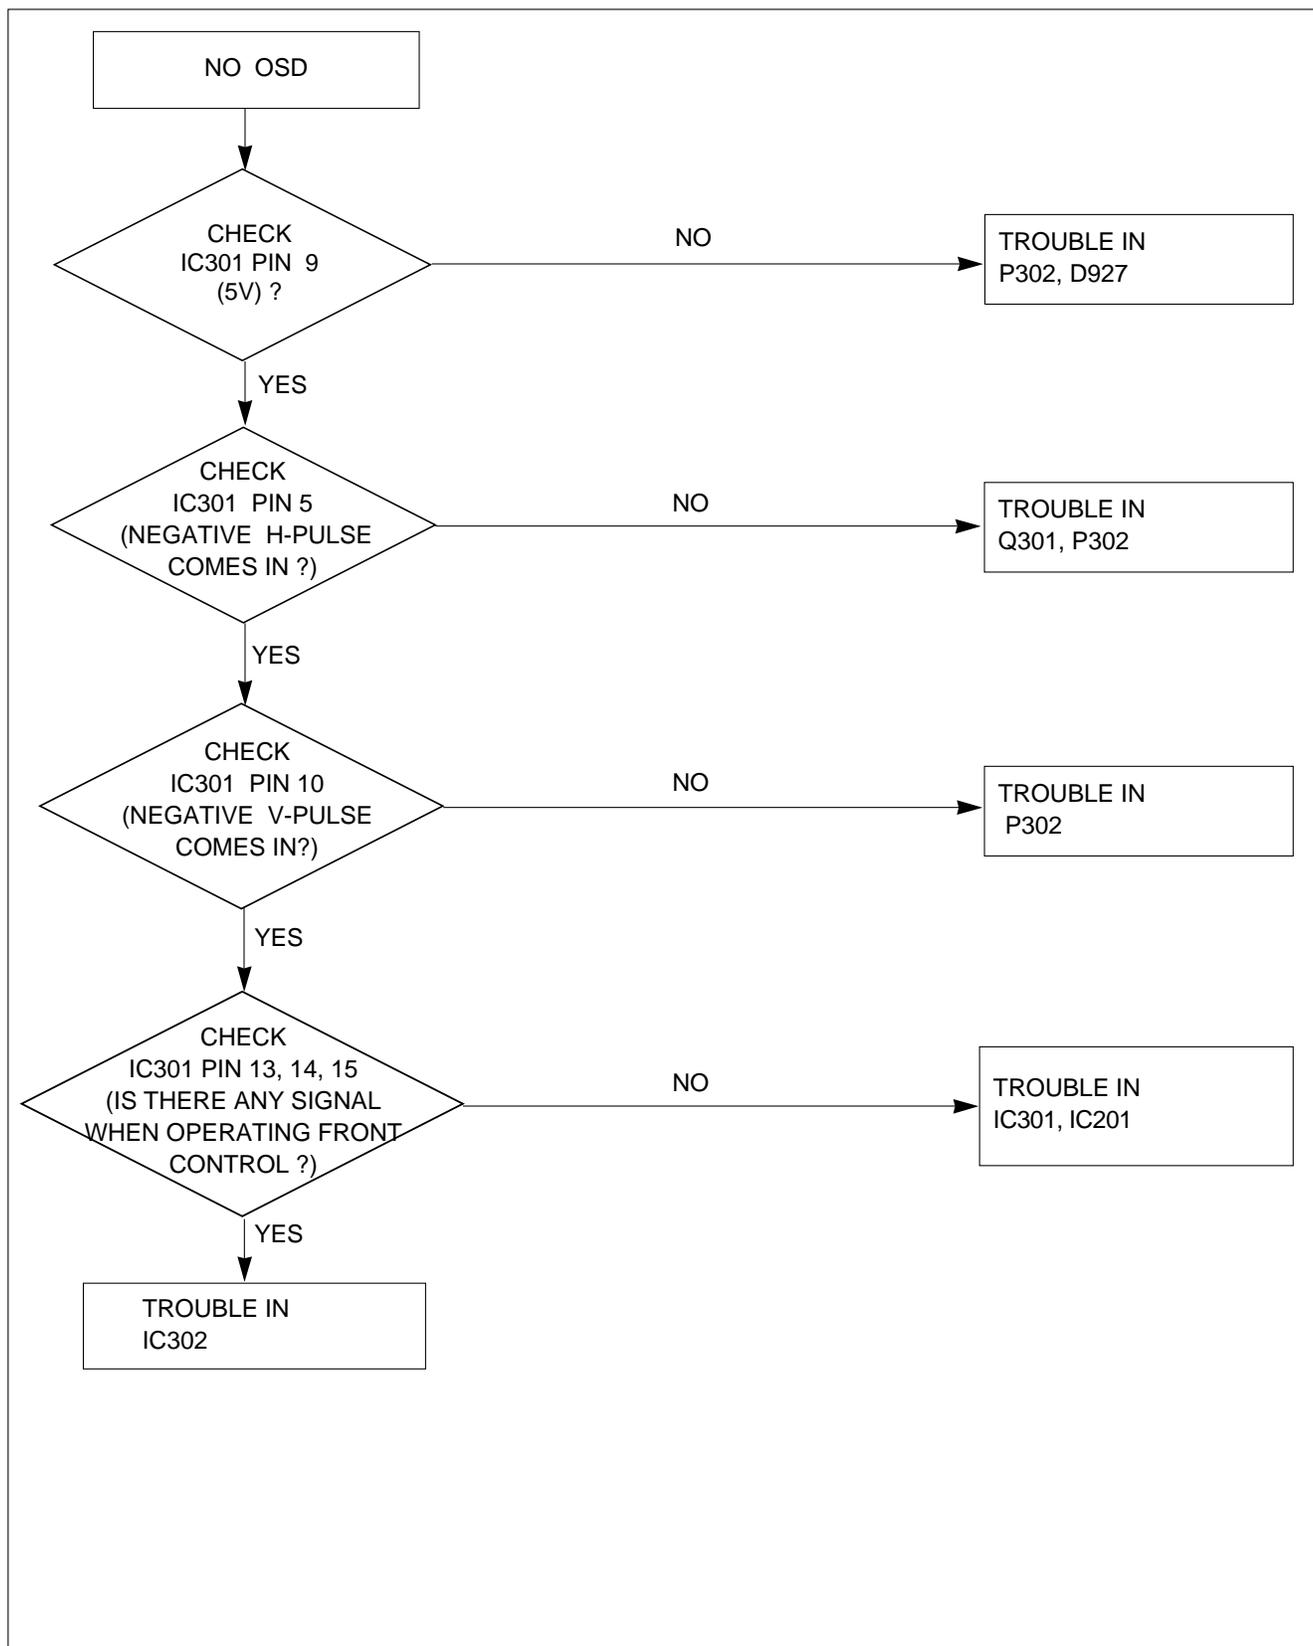

# ADJUSTMENT

## GENERAL INFORMATION

All adjustment are thoroughly checked and corrected when the monitor leaves the factory, but sometimes several adjustments may be required.

Adjustment should be following procedure and after warming up for a minimum of 30 minutes.

- Alignment appliances and tools.
  - IBM compatible PC.
  - Programmable Signal Generator.  
(eg. VG-819 made by Astrodesign Co.or equivalent)
  - EPROM or EEPROM with saved each mode data.
  - Alignment Adaptor and Software.
  - Digital Voltmeter.
  - White Balance Meter.
  - Luminance Meter.
  - High-voltage Meter.

## AUTOMATIC AND MANUAL DEGAUSSING

The degaussing coil is mounted around the CDT so that automatic degaussing when turn on the monitor. But a monitor is moved or faced in a different direction, become poor color purity cause of CDT magnetized, then press  (DEGAUSSING) on the OSD menu.

## ADJUSTMENT PROCEDURE & METHOD

- Install the cable for adjustment such as Figure 1 and run the alignment program on the DOS for IBM compatible PC.

### 1. Adjustment for B<sup>+</sup> Voltage.

- 1) Display cross hatch pattern at Mode 4.
- 2) Adjust C951 (+) voltage to 190±0.5V with **VR901**.

### 2. Adjustment for High-Voltage.

- 1) Display cross hatch pattern at Mode 4.
- 2) Adjust CDT Anode voltage to 27kV±500V with **VR1001**.

### 3. Adjustment for Factory Mode (Preset Mode).

- 1) Display cross hatch pattern at Mode 5.
- 2) Run alignment program for Flatron 995FT, FB995C on the IBM compatible PC.
- 3) EEPROM →MODE CLEAR→Y(Yes) command.  
**<Caution>** Do not run this procedure unless the EEPROM is changed. All data in EEPROM (mode data and color data) will be erased.
- 4) COMMAND →PRESET START→Y(Yes) command.
- 5) Adjust tilt as arrow keys to be the best condition.
- 6) DIST. ADJ. → BALANCE command.
- 7) Adjust balance of pin balance, key balance as arrow keys to be the best condition.
- 8) DIST. ADJ. → BALANCE command.
- 9) Adjust parallelogram as arrow keys to be the best condition.
- 10) DIST. ADJ. → FOS 1. ADJ command.
- 11) Adjust H-SIZE as arrow keys to 350±2mm.
- 12) Adjust H-POSITION as arrow keys to center of the screen.
- 13) Adjust V-SIZE as arrow keys to 262±1mm.
- 14) Adjust V-POSITION as arrow keys to center of the screen.
- 15) DIST. ADJ. → FOS 2. ADJ command.
- 16) Adjust S-PCC (Side-Pincushion) as arrow keys to be the best condition.
- 17) Adjust TRAPEZOID as arrow keys to be the best condition.
- 18) Display from Mode 1 to Mode 4 and repeat above from number 10) to 17).
- 19) PRESET EXIT → Y (Yes) command.

### 4. Adjustment for White Balance and Luminance.

- 1) Set the White Balance Meter.
- 2) Press the  (DEGAUSSING) on the OSD menu for demagnetization of the CDT.
- 3) Display color 0,0 pattern at Mode 4.
- 4) Set Brightness and Contrast to max position.
- 5) COLOR ADJ. → BIAS ADJ. command of the alignment program.
- 6) Check whether blue color or not at R-BIAS and G-BIAS to min position and B-BIAS to 150 (decimal) position at Sub-Brightness to 120 (decimal). If it's not blue color, the monitor must repair.

- 7) Adjust Screen control on the FBT to  $0.1 \pm 0.02$  FL of the raster luminance.
- 8) Adjust B-BIAS to 135 (decimal) and Sub-Brightness to 120 (decimal).
- 9) Adjust R-BIAS and G-BIAS command to  $x=0.283 \pm 0.006$  and  $y=0.298 \pm 0.006$  on the White Balance Meter with PC arrow keys.
- 10) Adjust SUB-Brightness command to  $0.5 \pm 0.1$  FL of the raster luminance.
- 11) Display color 15,0 box pattern (70x70mm) at Mode 4.
- 12) DRIVE ADJ command.
- 13) Set B-DRIVE to 150 (decimal) at DRIVE of the alignment program.
- 14) Adjust R-DRIVE and G-DRIVE command to white balance  $x=0.283 \pm 0.003$  and  $y=0.298 \pm 0.003$  on the White Balance Meter with PC arrow keys.

- 15) Adjust SUB-CONTRAST command to  $40 \pm 1$  FL of the raster luminance.
- 16) Display color 15,0 full white patten at Mode 4.
- 17) COLOR ADJ. → LUMINANCE → ABL command.
- 18) Adjust ABL to  $32 \pm 1$  FL of the luminance.
- 19) Exit from the program.

### 5. Adjustment for Focus.

- 1) Display H character in full screen at Mode 4.
- 2) Adjust two Focus control on the FBT so that focus should be the best condition.


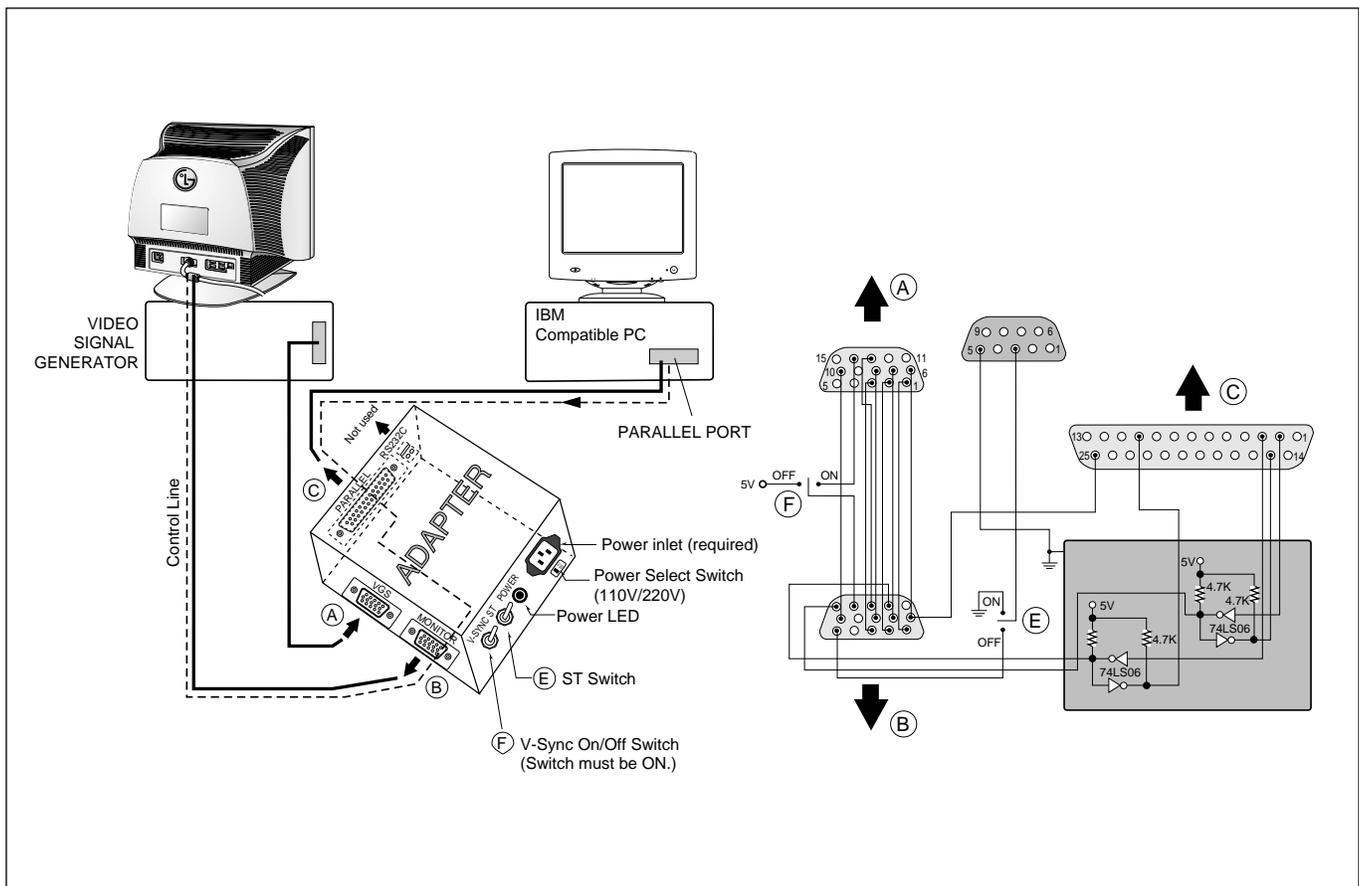


Figure 1. Cable Connection

# DISASSEMBLY


## 1. TILT/SWIVEL REMOVAL

- 1) Set the monitor face downward.
- 2) Remove screw (a).
- 3) Pressing the latch (b), carefully remove the Tilt/Swivel by pulling it upward.

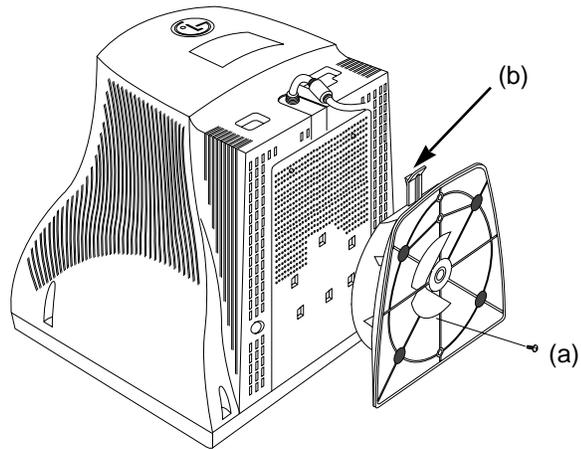


## 2. BACK COVER REMOVAL

- 1) Remove two screw covers (a).
- 2) Remove four screws (b) from the Back Cover.
- 3) Remove the Signal Cap (c).
- 4) Slide the Back Cover away from the Front Cabinet of the monitor.

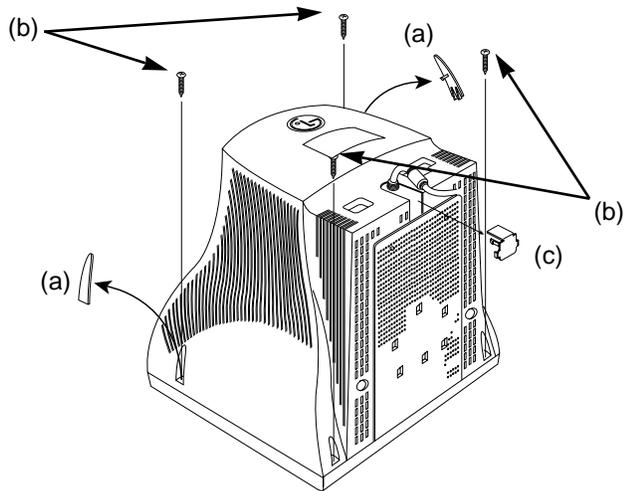


## 3. TOP SHIELD REMOVAL

- 1) Remove four screws (a).
- 2) Remove four screws (b).
- 3) Remove two screws (c).
- 4) Remove three screws (d).
- 5) Slide the Top Shield away from the monitor.

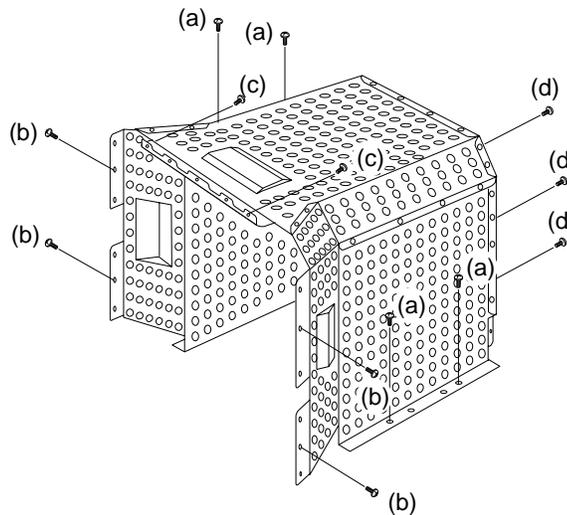


#### 4. TOTAL CHASSIS ASSEMBLY REMOVAL

- 1) Disconnect P903, P904 (Degaussing pin), P704 (DY pin), Tilt pin, P610,P611 (Purity pin) , P612(Convergence H/V), CDT Earth Pin from the Main PCB.
- 2) Disconnect P306 (GND Wire) from the Video PCB.
- 3) Carefully separate the CDT Board Assembly from the CDT neck.
- 4) Discharge the remaining static electricity by shorting between the Anode Cap and the CDT ground.
- 5) Disconnect the Anode Cap from the CDT.
- 6) Remove three screws (a).
- 7) Remove two screws (b).
- 8) Remove the Total Chassis Assembly from the Cabinet.

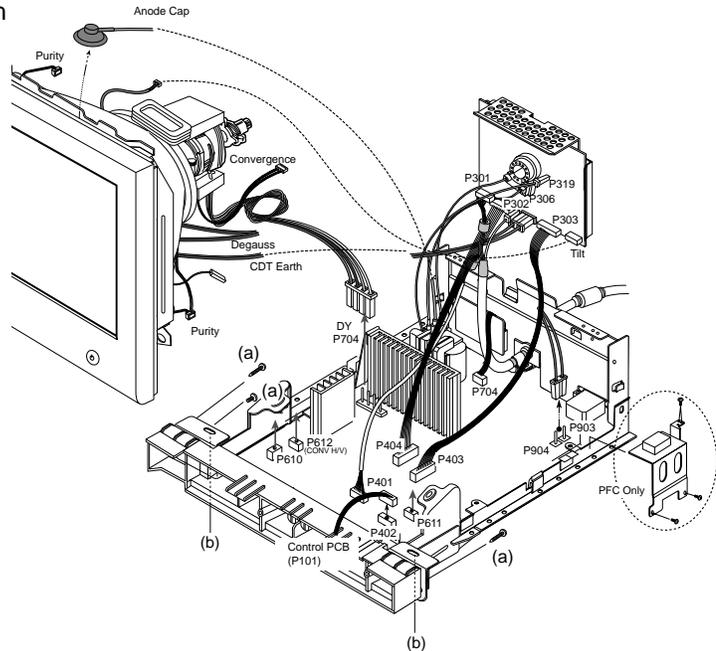


#### 5. VIDEO PCB ASSEMBLY & CONTROL PCB ASSEMBLY REMOVAL

- 1) Disconnect P301, P302, P303, P306, P319 from the Video PCB.
- 2) Remove two screws (a).
- 3) Remove the Video PCB Assembly from the main total Assembly.
- 4) Remove two screws (b).
- 5) Disconnect P402 from the Main PCB.

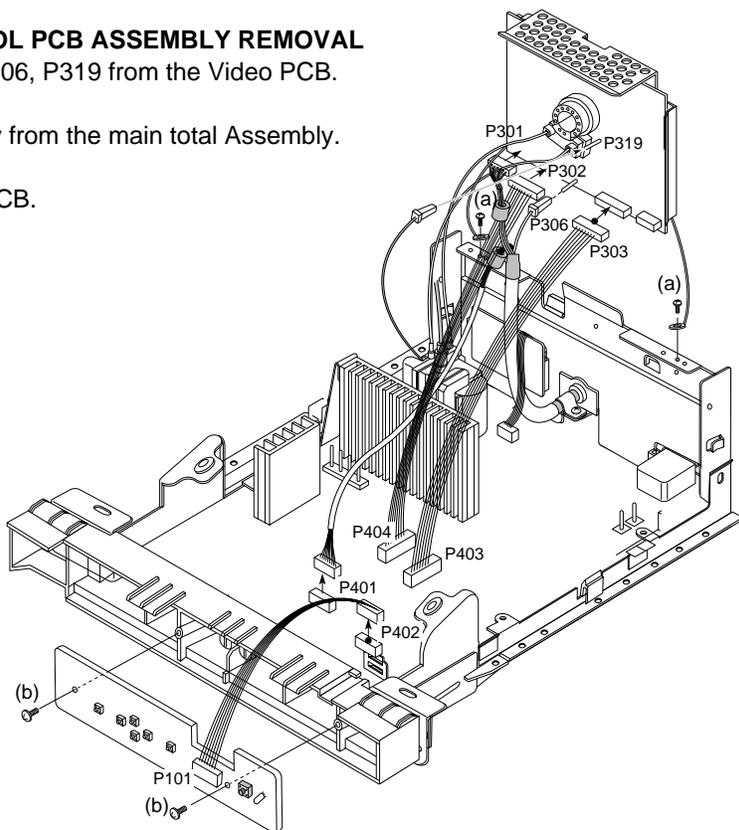


## 6. REAR SHIELD ASSEMBLY REMOVAL

- 1) Remove two screws (a).
- 2) Remove five screws (b).
- 3) Disconnect P801-P802.
- 4) Remove the Rear Shield from the Main PCB Board.

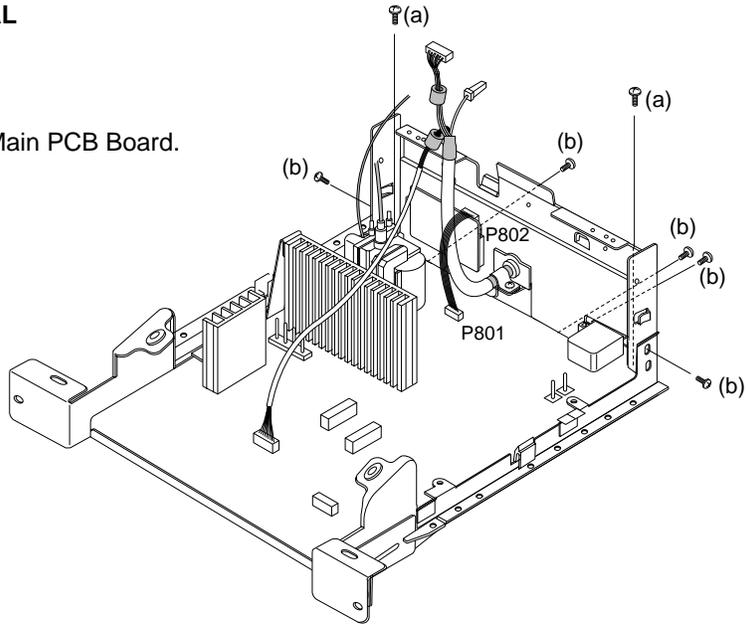


## 7. MAIN BOARD ASS'Y REMOVAL

- 1) Remove seven screws (a).
- 2) Remove screw (b).
- 3) Remove screw (c).
- 4) Remove two screws (d).
- 5) Remove the Main Bracket and the Bottom Shield.

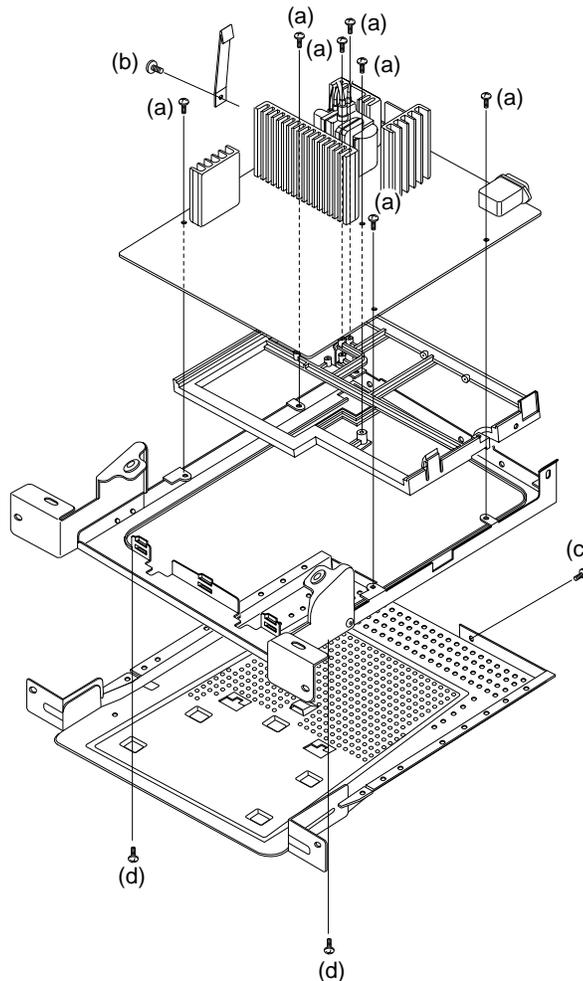


## CONTROL LOCATIONS

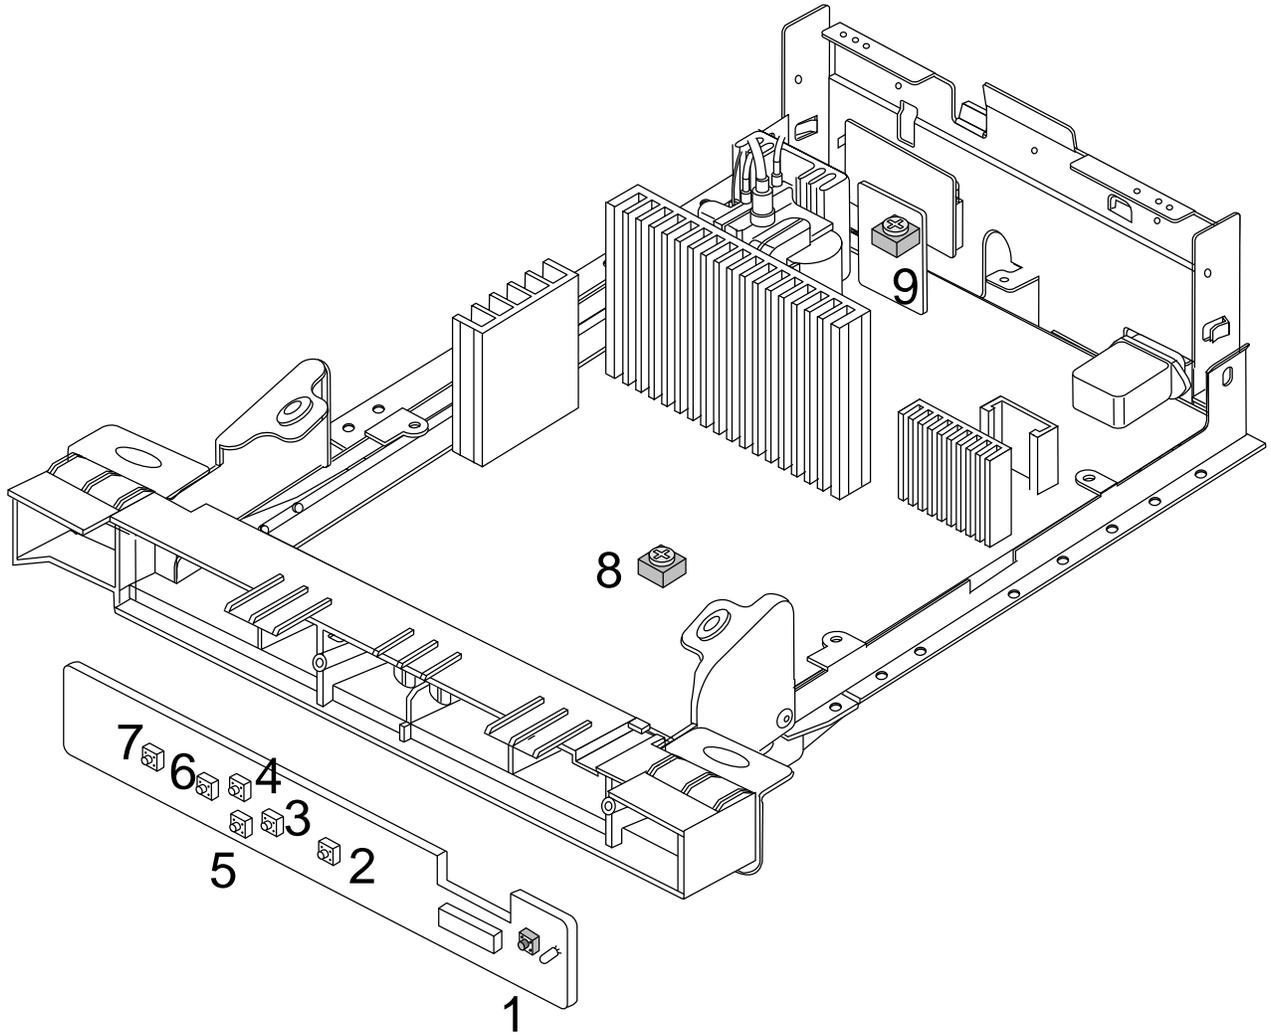


No.	Ref. No.	Control Function	No.	Ref. No.	Control Function
1	SW131	POWER SWITCH	6	SW132	OSD SELECT/ADJUSTMENT (LEFT)
2	SW133	SET BUTTON	7	SW136	OSD BUTTON
3	SW137	OSD SELECT/ADJUSTMENT (RIGHT)	8	VR901	B <sup>+</sup> ADJUSTMENT
4	SW134	OSD SELECT/ADJUSTMENT (UP)	9	VR1001	HIGH-VOLTAGE ADJUSTMENT
5	SW135	OSD SELECT/ADJUSTMENT (DOWN)			

# TIMING CHART

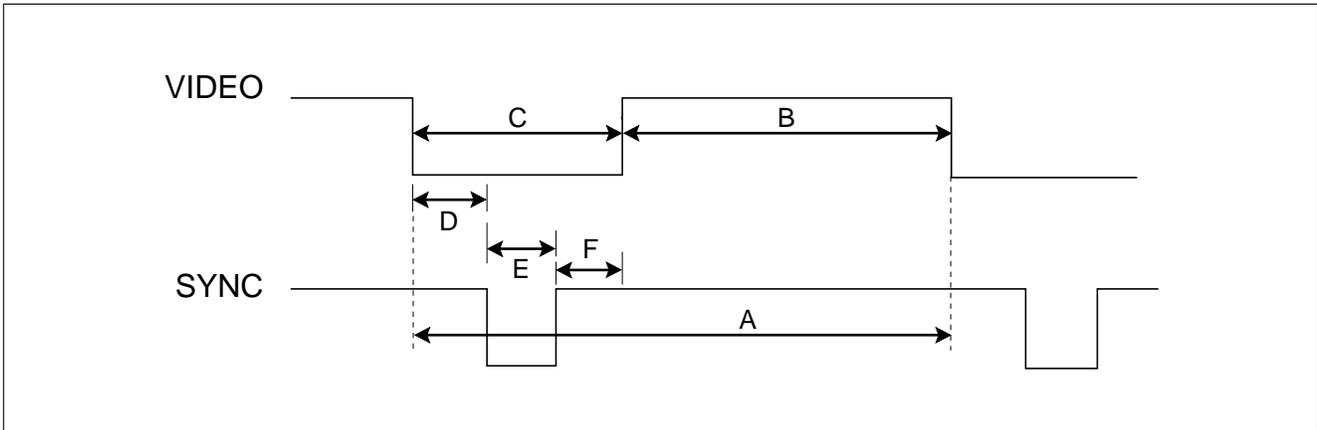

MODE			FACTORY PRESET MODE					
			MARK	MODE 1	MODE 2	MODE 3	MODE 4	MODE 5
H O R I Z O N T A L	Sync Polarity			—	+	+	+	+
	Frequency	kHz		43.269	53.674	68.677	91.146	93.750
	Total Period	μs	A	23.112	18.631	14.561	10.971	10.666
	Video Active Time	μs	B	17.778	14.222	10.836	8.127	7.901
	Blanking Time	μs	C	5.334	4.409	3.725	2.844	2.765
	Front Porch	μs	D	1.556	0.569	0.508	0.406	0.316
	Sync Duration	μs	E	1.556	1.138	1.016	1.016	0.948
	Back Porch	μs	F	2.222	2.702	2.201	1.422	1.501
V E R T I C A L	Sync Polarity			—	+	+	+	+
	Frequency	Hz		85.008	85.061	84.997	85.024	75.000
	Total Period	ms	A	11.763	11.756	11.765	11.762	13.333
	Video Active Time	ms	B	11.093	11.178	11.183	11.235	12.800
	Blanking Time	ms	C	0.670	0.578	0.582	0.527	0.533
	Front Porch	ms	D	0.023	0.019	0.015	0.011	0.011
	Sync Duration	ms	E	0.069	0.056	0.044	0.033	0.032
	Back Porch	ms	F	0.578	0.503	0.523	0.483	0.490
<b>Resolution</b>				<b>640 x 480 85Hz</b>	<b>800 x 600 85Hz</b>	<b>1024 x 768 85Hz</b>	<b>1280 x 1024 85Hz</b>	<b>1600 x 1200 75Hz</b>
<b>Recall</b>				Yes	Yes	Yes	Yes	Yes

# EXPLODED VIEW

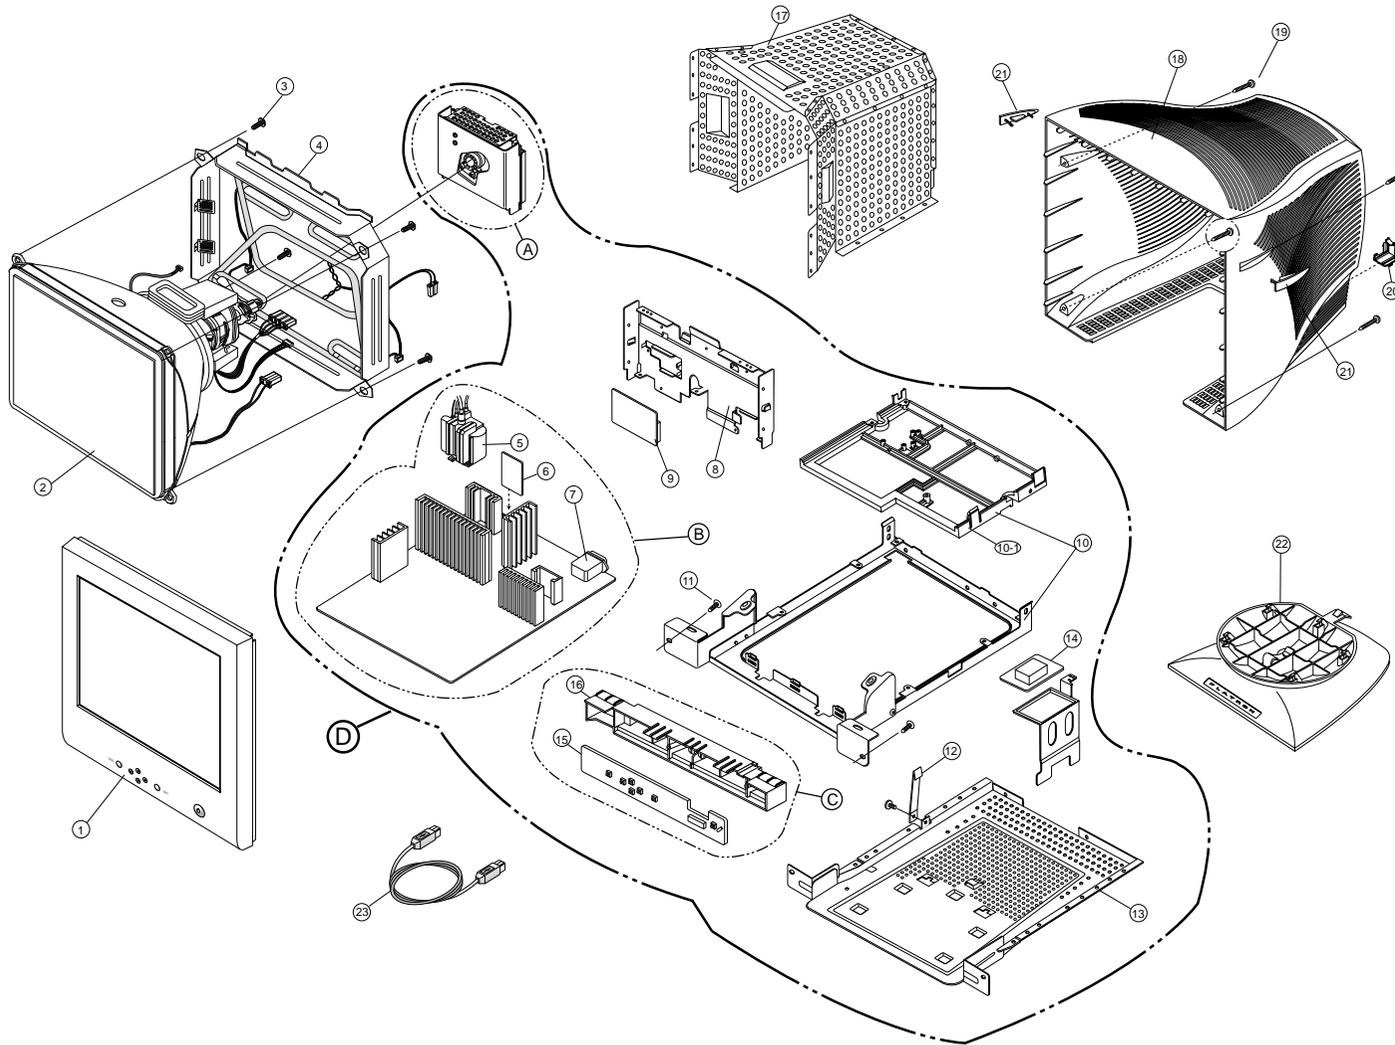

## EXPLODED VIEW PARTS LIST

Ref. No.	Part No.	Description
1	3091TKC050A	CABINET ASSY
2	2423GG3E41D	CDT SET, M46QDG423X 01NPLD
3	339-002J	SCREW ASSY, PHP+5x25(FZMW1)+GW18
4	4951TKS041B	METAL ASSY, FRAME
5	6174T11002B	FBT(FLY BACK TRANSFORMER), Y268068(HFL1127RD)
6	6871TST167A	PWB(PCB), ASS'Y, SUB FB995C XKGU H/V CONTROL TOTAL
7	6200TJB004A	FILTER(CIRC), EMI 03ME3G(3) DELTA
8	4950TKK245A	METAL RAER(FB995C)
9	6871TUT006A	PWB(PCB) ASSY, SUB FB995C USB TOTAL
10	4951TKS043A	METAL ASSY FRAME (FB915B)
10-1	4810TKM027E	BRACKET FB915B MAIN ("D"-CORE)
11	332-102E	SCREW, PTP+4x16(MSWR/FZMY)
12	4950TKK117A	METAL, FIX HEAT SINK
13	4951TKS042A	METAL ASSY, SHIELD BOTTOM
14	6871TPT104A	PWB(PCB) ASSY, POWER FB995C XPVU (FB995C-UP); EUROPE ONLY(PFC)
15	6871TCH085A	PWB(PCB) ASSY, COMPOSITE FB995C CONTROL BRAND CA-** HAND
16	4810TKV012A	BRACKET FB915 VOLUME
17	4815TKT009A	SHIELD ASSY, TOP
18	3809TKC021C	BACK COVER ASSY, FB995C (3808TKC022A) B-CORE (FB995C-UA)
	3809TKC021H	BACK COVER ASSY, FB995C C022 "B"CORE,PFC (FB995C-UP)
19	332-122B	SCREW, TP1+M4x16(FZMY1)
20	3550TKK141A	COVER FB995C PIECE REAR
21	3550TKK084A	COVER FB915B SCREW
22	3043TKK048C	TILT SWIVEL ASSY
23	6866TDU002D	SIGNAL CABLE, UL20276SB10P+2C AWG#30 DT 1870MM
A	6871TVT165A	PWB(PCB) ASSY, VIDEO FB995C XKGU BRAND CA-** TOTAL
B	6871TMT168C	PWB(PCB) ASSY,MAIN FB995C XLVU BRAND CA-81 TOTAL (FB995C-UA)
	6871TMT168D	PWB(PCB) ASSY,MAIN FB995C XLVU BRAND CA-81 TOTAL (FB995C-UP)
C	6871TCT085A	PWB(PCB) ASSY, COMPOSITE FB995C CONTROL BRAND CA-** TOTAL
	3313T19022C	MAIN TOTAL ASSY, FB995C XLVU BRAND CA-81 (FB995C-UA)
D	3313T19022D	MAIN TOTAL ASSY, FB995C BRAND CA-81 (FB995C-UP)