

ALS headphone driver

BA3570F/BA3570FS

The BA3570F and BA3570FS are stereo headphone amplifiers with ALS (Auto Loudness System) which have been designed for use as headphone drivers in audio equipment.


●Applications

Stereo headphones

●Features

- 1) The use of ALS (Auto Loudness System) makes it possible to obtain a dynamic sound regardless of the volume level.
- 2) Built-in power mute circuit.
- 3) Built-in bypass circuit.

●Block diagram

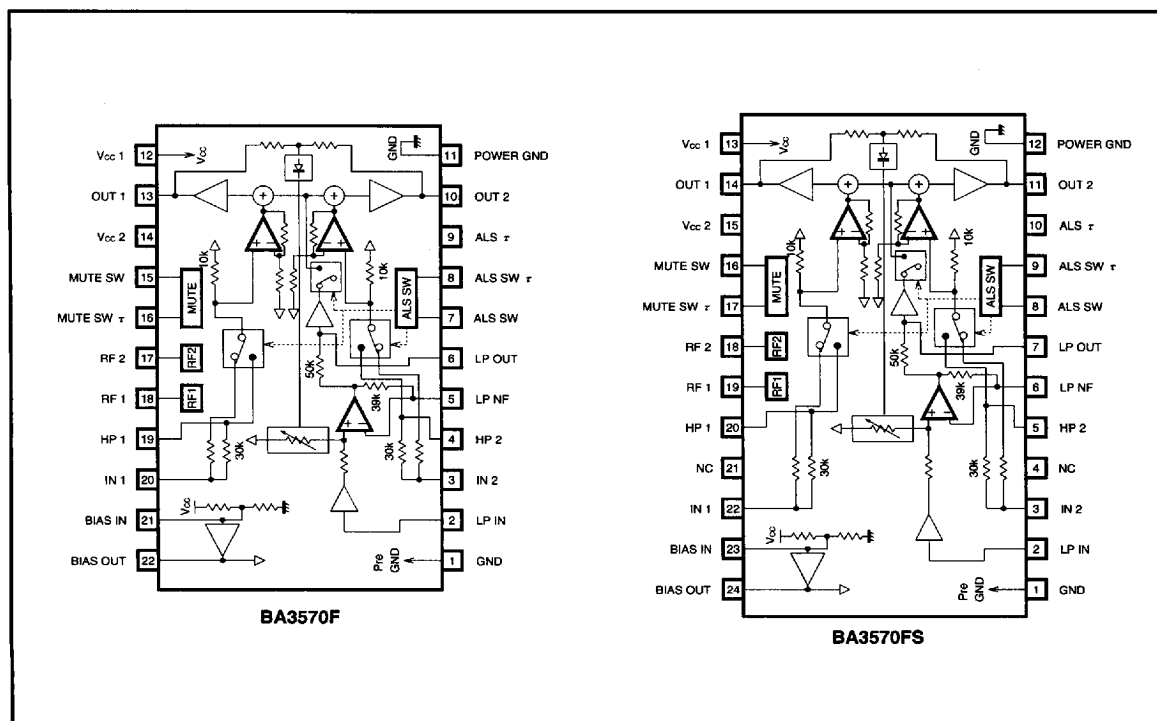

7828999 0019412 89T

ROHM

547

Bass boost systems

Audio accessory components

●Pin description (pin numbers are for 22-pin BA3570F)

Pin No.	Pin name	Function
1	GND	Pre-ground
2	LP IN	Positive input of bass amp
3	IN2	Input 2
4	HP2	Treble input 2
5	LP NF	Negative input of bass amp
6	LP OUT	Bass amp output
7	ALS SW	ALS ON/OFF switch pin
8	ALS SW τ	Pin for setting value for ALS ON/OFF
9	ALS τ	Pin for setting value for ALS
10	OUT2	Output 2
11	POWER GND	Substrate ground
12	V _{cc1}	Supply voltage 1
13	OUT1	Output 1
14	V _{cc2}	Supply voltage 2
15	MUTE SW	Mute ON/OFF switch pin
16	MUTE SW τ	Pin for setting value for mute ON/OFF
17	RF2	Ripple filter 2
18	RF1	Ripple filter 1
19	HP1	Treble input 1
20	IN1	Input 1
21	BIAS IN	Bias amp input
22	BIAS OUT	Bias amp output

●Absolute maximum ratings (Ta = 25°C)

Parameter		Symbol	Limits	Unit
Supply voltage		V _{cc}	9.0	V
Power dissipation	BA3570F	Pd	550*	mW
	BA3570FS		800*	
Operating temperature		Topr	−25~75	°C
Storage temperature		Tstg	−55~125	°C

When mounted on 70 x 70 x 1.6 mm glass epoxy board.

* When used above Ta = 25°C, the BA3570F value decreases 5.5 mW per degree and the BA3570FS value decreases 8.0 mW per degree.

●Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Range	Unit
Supply voltage	V _{cc}	2.0~7.2	V

7828999 0019413 726

- Electrical characteristics (unless otherwise indicated, $T_a = 25^\circ\text{C}$, $V_{CC} = 3.0\text{V}$, $R_L = 16\ \Omega$, $f = 1\text{kHz}$, and the Measurement circuit is as shown in Fig. 1)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent circuit current	I_Q	—	9	18	mA	$V_{IN}=0V_{rms}$
Voltage gain	G_V	13.5	15	16.5	dB	
Rated output power	P_{OUT}	20	30	—	mW	THD=10%
Total harmonic distortion	THD	—	0.15	1.0	%	$V_O=-16\text{dBm}$
Channel balance	CB	-1.5	0	1.5	dB	$V_O=-16\text{dBm}$
Output noise voltage 1	V_{No1}	—	-92	-88	dBm	IHF=A, ALS=OFF
Output noise voltage 2	V_{No2}	—	-88	-84	dBm	IHF=A, ALS=ON
Input resistance	R_{IN}	10.8	13.5	16.2	k Ω	3, 22Pin
Ripple rejection 1	RR1	29.5	41	—	dB	$f_{RR}=100\text{Hz}$, $V_{RR}=-30\text{dBm}$, ALS=ON
Ripple rejection 2	RR2	32	44	—	dB	$f_{RR}=100\text{Hz}$, $V_{RR}=-30\text{dBm}$, ALS=OFF
Boost 1	BB1	11	14	17	dB	$f=100\text{Hz}$, $V_{IN}=-42\text{dBm}$
Boost 2	BB2	6.5	9.5	12.5	dB	$f=100\text{Hz}$, $V_{IN}=-32\text{dBm}$
Boost 3	BB3	-3	0	3	dB	$f=100\text{Hz}$, $V_{IN}=-22\text{dBm}$
Channel separation	CS	52	62	—	dB	ALS=OFF, $f=1\text{kHz}$
Signal leak	SL	—	-67	-62	dBm	$R_g=0$, $V_{IN}=0\text{dBm}$ 3, 22Pin
Mute level	ML	—	-85	-79	dBm	16Pin= V_{CC} , $V_{IN}=-20\text{dBm}$ 3, 22Pin

7828999 0019414 662

ROHM

549

● Measurement circuit

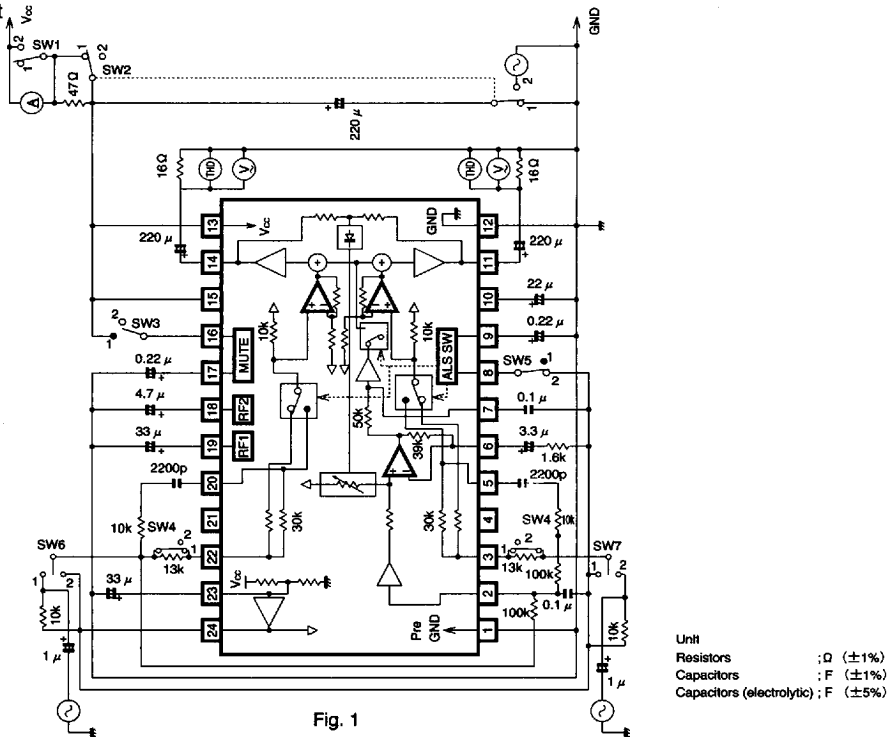


Fig. 1

● Explanation of ALS operation and external connections (pin numbers are for 22-pin BA3570F)

1. ALS ON

When ALS is on, the signal circuit (including external connections) is as shown in Fig. 2.

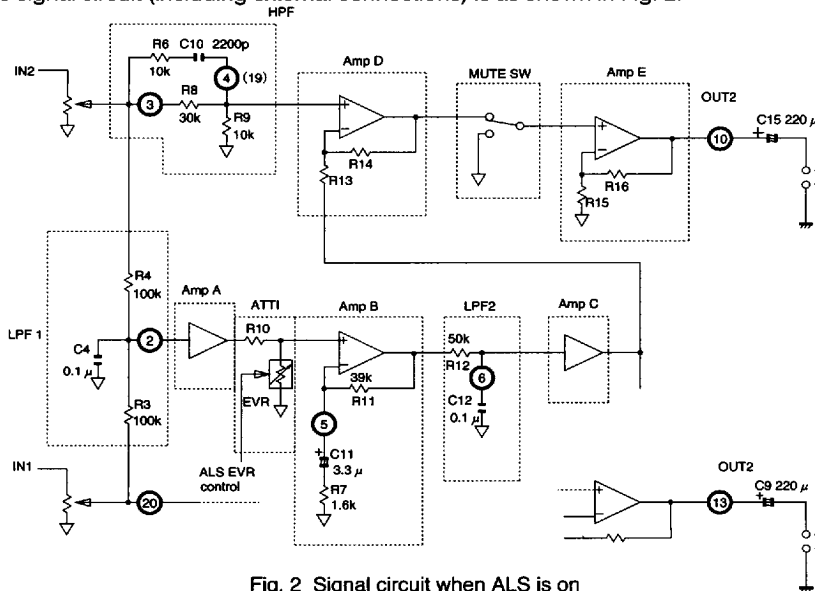


Fig. 2 Signal circuit when ALS is on

1-1. Bass signal transmission and gain vs. frequency

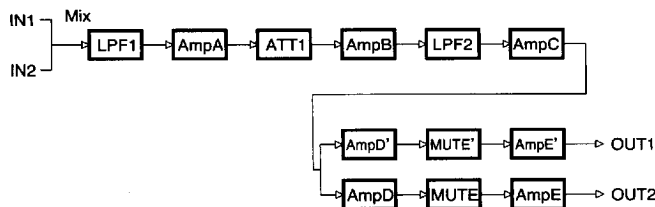


Fig. 3

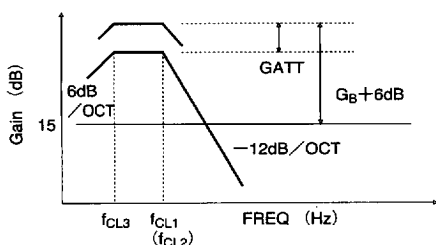


Fig. 4 Total frequency characteristics of bass signals

1-2. Treble signal transmission and gain vs. frequency

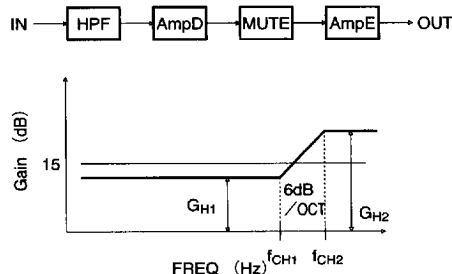


Fig. 5 Total frequency characteristics of treble signals

The gain and cutoff frequency of each block is as follows :

$$\text{LPF1 cutoff frequency} : f_{CL1} = \frac{1}{2\pi \cdot (R3/R4) \cdot C4} \text{ (Hz)}$$

Amp A gain : $G_{V(A)} = 0$ (dB)

$$\text{ATT attenuation} \quad : G_V (\text{ATT}) = 20 \log \frac{\text{EVR}}{R_{10} + \text{EVR}} \text{ (dB)}$$

Amp B gain : $G_{V(B)} = 20 \log \frac{R_7 + R_{11}}{R_7} \text{ (dB)}$

Amp B cutoff frequency : $f_{CL3} = \frac{1}{2\pi \cdot R_7 \cdot C_{11}}$ (Hz)

$$\text{LPF2 cutoff frequency} : f_{CL2} = \frac{1}{2\pi \cdot R_{12} \cdot C_{12}} \quad (\text{Hz})$$

Amp C gain : $G_{V(c)} = 0$ (dB)

$$\text{Amp D gain} : G_{V(D)} = 20 \log \frac{R_{14}}{R_{13}} \quad (\text{dB})$$

Mute switch gain : $G_{V(MUTE)} = 0$ (dB)

Amp E gain : $G_v(E) = 20 \log \frac{R_{15} + R_{16}}{R_{15}} \text{ (dB)} \leftarrow 15 \text{ dB}$

In this case, $R_3 = R_4 = 2 \cdot R_{12}$ ($= 100k\Omega$) and $C_4 = C_{12}$ ($= 0.1 \mu F$), therefore $f_{CL1} = f_{CL2}$ ($= 32Hz$), and the frequency characteristic is bass boost ($-12 dB/OCT$) as shown in Fig. 4. Also, $R_{14} = 2 \cdot R_{13}$, therefore $G_{V(D)} = 6$ (dB) and the EVR MAX total gain G_{LMAX} when signals are input from both channels is

$$\begin{aligned} \text{GLMAX} &= G_V(A) + G_V(B) + G_V(C) + G_V(D) \\ &\quad + G_V(\text{MUTE}) + G_V(E) \\ &= G_V(B) + 6 + 15 \text{ (dB)} \end{aligned}$$

The gain and cutoff frequency of each block is as follows :

$$\text{HPF cutoff frequency 1} : f_{CL3} = \frac{1}{2\pi \cdot (R_6 + R_8) \cdot C_{10}} \quad (\text{Hz})$$

HPF cutoff frequency 2 : $f_{CH2} = \frac{R_8 + R_9}{2\pi \cdot (R_8 R_9 + R_8 R_{10} + R_9 R_{10}) \cdot C_{10}}$ (Hz)

Amp D gain : $G_{V(D)} = 20 \log \frac{R_{13}}{R_{13} + R_{14}}$ (dB)
 Furthermore, as $R_{14} = 2R_{13}$,

$G_{V(D)} = +9.5$ (dB)

The total gain G_{H1} for the frequency band $f < f_{CH1}$ is

$G_{H1} = 20 \log \frac{R_9}{R_8 + R_9} + 9.5 + 15$ (dB)

and the total gain G_{H2} for the frequency band $f_{CH2} < f$ is

$G_{H2} = 20 \log \frac{R_9}{R_6 // R_8 + R_9} + 9.5 + 15$ (dB)

1-3. Combined frequency characteristics

As shown in Fig. 6, the ALS characteristics can be obtained from the bass characteristics (Fig. 4) and the treble characteristics (Fig. 6).



Fig. 6 ALS frequency characteristics

2. ALS OFF

The signal circuit when ALS is off is shown in Fig. 7.

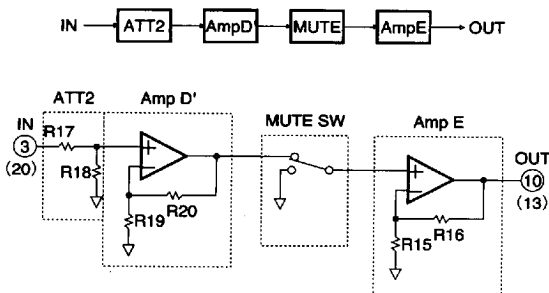


Fig. 7 Signal circuit when ALS is off

The gain and cutoff frequency of each block is as follows :

ATT2 attenuation : $G_{V(ATT2)} = 20 \log \frac{R_{18}}{R_{17} + R_{18}}$ (dB)

Amp D' gain : $G_{V(D)} = 20 \log \frac{R_{19} + R_{20}}{R_{19}}$ (dB)

As $R_{17} = R_{18}$ and $R_{19} = R_{20}$, the total gain $G_{V(OFF)}$ when ALS is off is

$G_{V(OFF)} = G_{V(ATT2)} + G_{V(D)} + G_{V(MUTE)} + G_{V(E)} = 15$ (dB)

and it is flat as shown in Fig. 8.

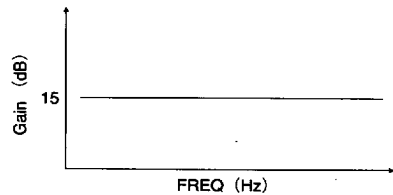


Fig. 8 Total frequency characteristics when ALS is off

● Explanation of ALS operation and external connections

1-4. ALS system control circuit

The ALS system control circuit is shown in Fig. 9.

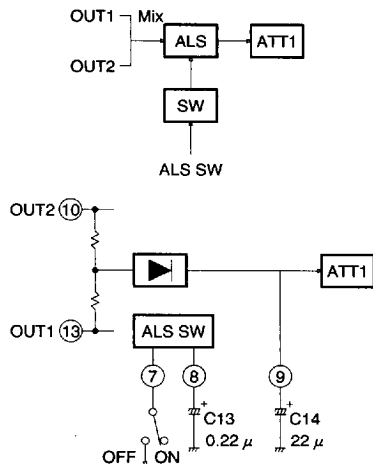


Fig. 9 ALS system control circuits

• ALS mode switching table

ALS mode	Pin ⑦ voltage
ALS ON	OPEN
ALS OFF	BIAS OUT

• ALS SW τ external connection value : C13

By increasing the capacitance of C13, the switching sound made when ALS is turned on or off can be reduced, however, the switching time will increase. Set the value appropriately for the application.

• ALS τ external connection value : C14

The ALS attack and recovery time for ALS is determined by C14 connected to the τ pin (Pin 9).

● Mute amplifier (pin numbers are for 22-pin BA3570F)
The output muting can be switched on or off.

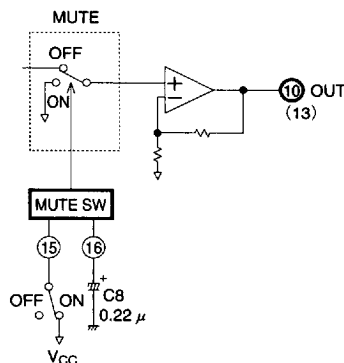


Fig. 10 Mute circuit

● Mute switching table

MUTE	Pin ⑮ voltage
ON	V _{CC}
OFF	OPEN

● MUTE SW τ external connection value : C8

By increasing the capacitance of C8, the switching sound made when the mute is turned on or off can be reduced, however, the switching time will increase. Set the value appropriately for the application.

●Application example

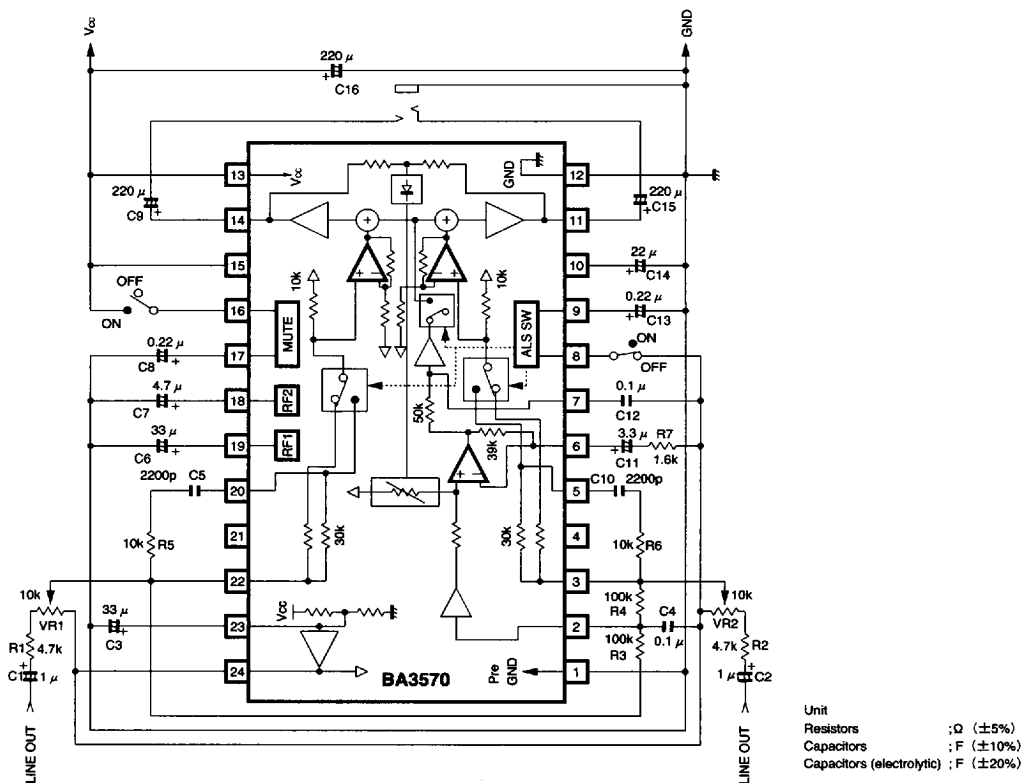


Fig. 11

●Electrical characteristic curves

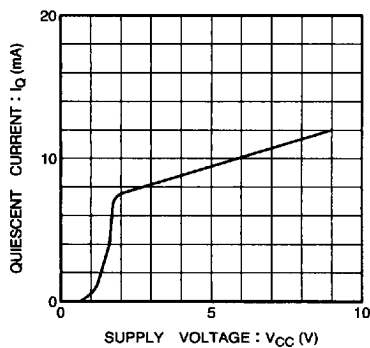


Fig.12 Quiescent current vs. supply voltage

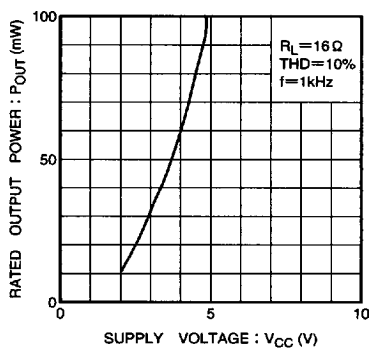


Fig.13 Rated output vs. supply voltage

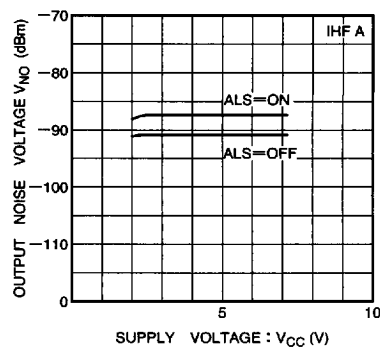


Fig.14 Output noise voltage vs. supply voltage

7828999 0019419 144

●Electrical characteristic curves

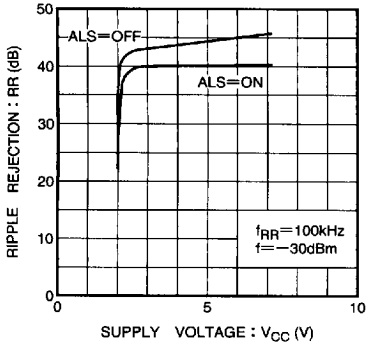


Fig.15 Ripple rejection rate vs. supply voltage

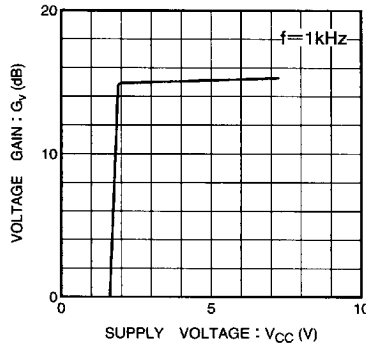


Fig.16 Supply voltage gain vs. supply voltage

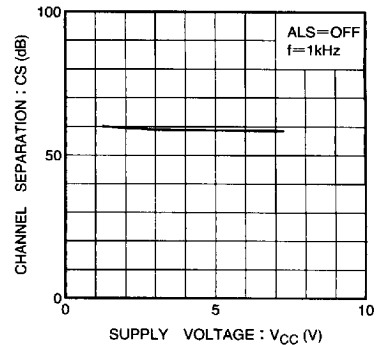


Fig.17 Channel separation vs. supply voltage

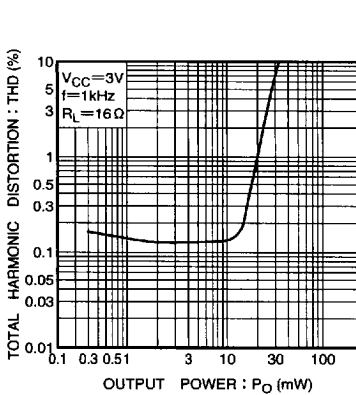


Fig.18 Total harmonic distortion vs. output power

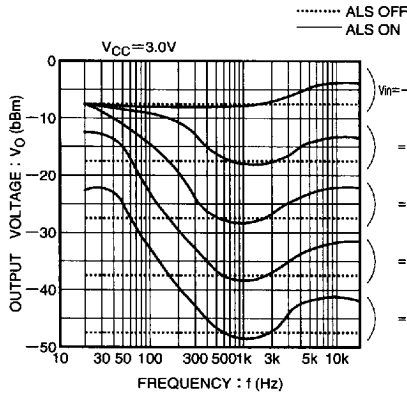


Fig.19 Output voltage vs. frequency

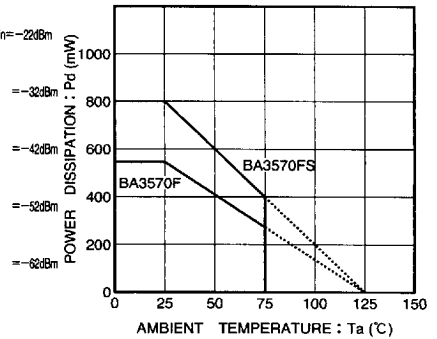


Fig.20 Thermal reduction curve

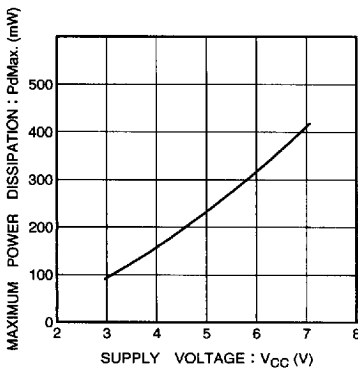



Fig.21 Maximum power dissipation

7828999 0019420 966

ROHM

555

● External dimensions (Unit: mm)

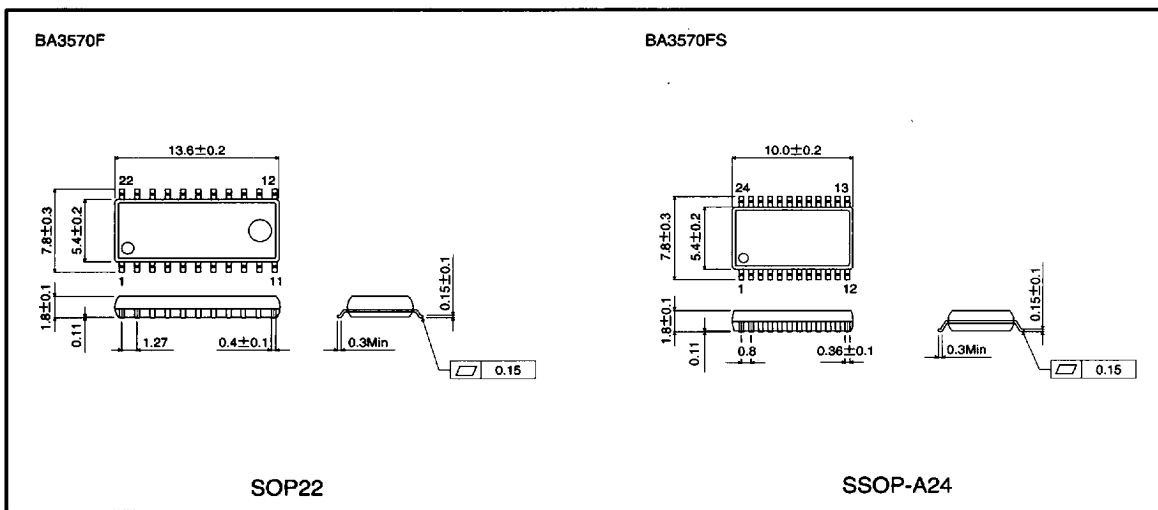

7828999 0019421 8T2