

TOSHIBA FIELD EFFECT TRANSISTOR SILICON N CHANNEL JUNCTION TYPE

2SK161

FM TUNER APPLICATIONS


VHF BAND AMPLIFIER APPLICATIONS

Unit in mm

- Low Noise Figure : $NF=2.5\text{dB}$ (Typ.)
($f=100\text{MHz}$)
- High Forward Transfer Admittance : $|Y_{fs}|=9\text{mS}$ (Typ.)
- Extremely Low Reverse Transfer Capacitance
: $C_{rss}=0.1\text{pF}$ (Typ.)

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Gate-Drain Voltage	V_{GDO}	-18	V
Gate Current	I_G	10	mA
Drain Power Dissipation	P_D	200	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55~125	$^\circ\text{C}$

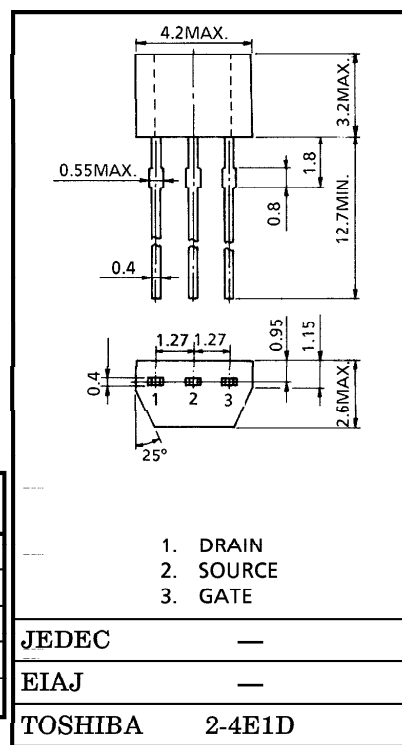

Weight : 0.13g

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)


CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Gate Leakage Current	I_{GSS}	$V_{GS} = -0.5\text{V}$, $V_{DS} = 0$	—	—	-10	nA
Gate-Drain Breakdown Voltage	$V_{(BR) GDO}$	$I_G = -100\mu\text{A}$	-18	—	—	V
Drain Current	I_{DSS} (Note)	$V_{GS} = 0$, $V_{DS} = 10\text{V}$	1.0	—	10	mA
Gate-Source Cut-off Voltage	$V_{GS(OFF)}$	$V_{DS} = 10\text{V}$, $I_D = 1\mu\text{A}$	-0.4	—	-4.0	V
Forward Transfer Admittance	$ Y_{fs} $	$V_{GS} = 0$, $V_{DS} = 10\text{V}$, $f = 1\text{kHz}$	—	9	—	mS
Input Capacitance	C_{iss}	$V_{DS} = 10\text{V}$, $V_{GS} = 0$, $f = 1\text{MHz}$	—	6.0	—	pF
Reverse Transfer Capacitance	C_{rss}	$V_{GD} = -10\text{V}$, $f = 1\text{MHz}$	—	0.10	0.15	pF
Power Gain	G_{PS}	$V_{DD} = 10\text{V}$, $f = 100\text{MHz}$ (Fig.)	—	18	—	dB
Noise Figure	NF	$V_{DD} = 10\text{V}$, $f = 100\text{MHz}$ (Fig.)	—	2.5	3.5	dB

(Note) I_{DSS} Classification O : 1.0~3.0mA, Y : 2.5~6.0mA, GR : 5.0~10.0mA

961001EAA2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

図1. 100MHz GpS, NF TEST CIRCUIT

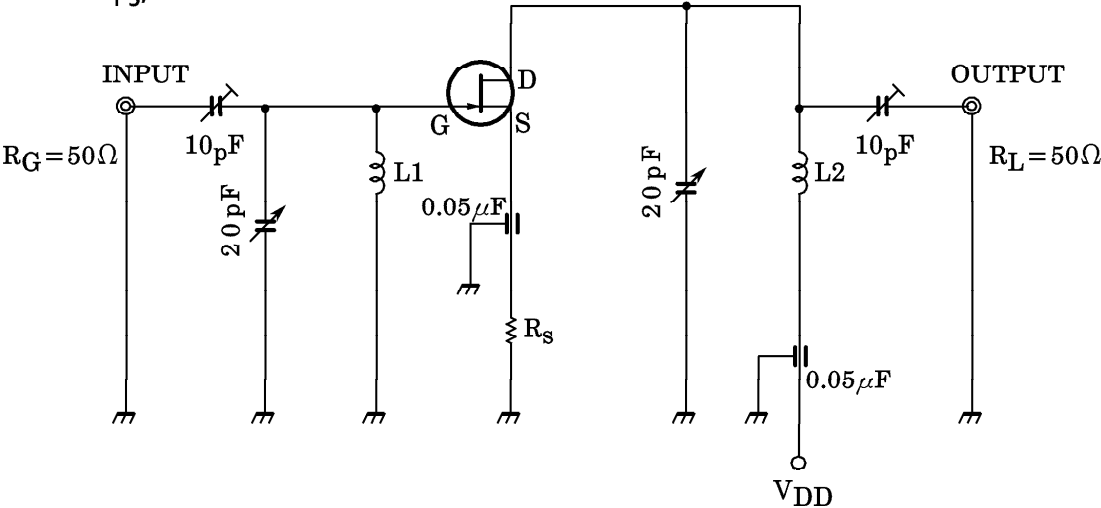

L₁ : 0.8mmφ A_g PLATED Cu WIRE, 3 TURNS, 10mm ID, 10mm LENGTH.

L₂ : 0.8mmφ A_g PLATED Cu WIRE, 3 TURNS, 10mm ID, 10mm LENGTH.

2SK161 is measured at each group by changing R_S

GROUP	R _S (Ω)
2SK161-O	0
2SK161-Y	18Ω ± 5%
2SK161-GR	100Ω ± 5%

