


Schottky PowerMod

FST10130 — FST10145

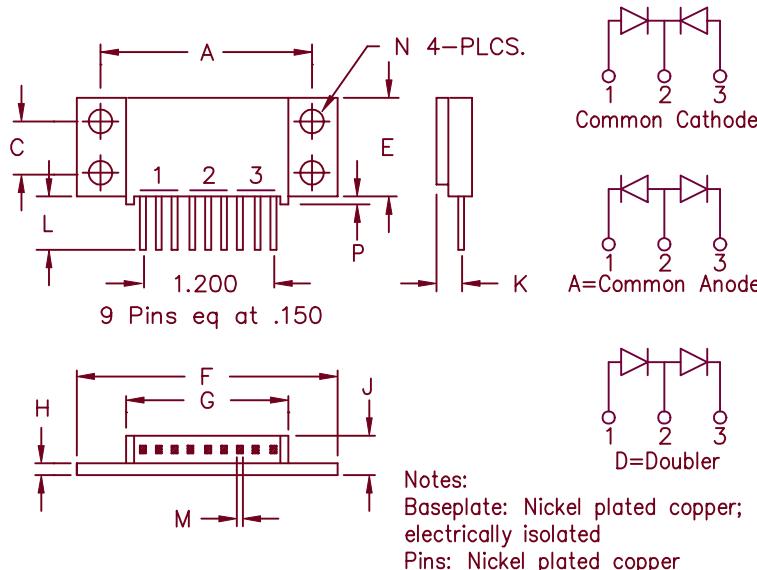

| Dim. | Inches | | Millimeter | | |
|------|---------|---------|------------|----------------|--------|
| | Minimum | Maximum | Minimum | Maximum | Notes |
| A | 1.995 | 2.005 | 50.67 | 50.93 | |
| C | 0.495 | 0.506 | 12.57 | 12.83 | |
| E | 0.990 | 1.010 | 25.15 | 25.65 | |
| F | 2.390 | 2.410 | 60.71 | 61.21 | |
| G | 1.490 | 1.510 | 37.85 | 38.35 | |
| H | 0.120 | 0.130 | 3.05 | 3.30 | |
| J | --- | 0.400 | --- | 10.16 | |
| K | 0.240 | 0.260 | 6.10 | 6.60 to Lead C | |
| L | 0.490 | 0.510 | 12.45 | 12.95 | |
| M | 0.040 | .050 | 1.02 | 1.27 | Square |
| N | 0.175 | 0.195 | 4.45 | 4.95 | Dia |
| P | 0.032 | 0.052 | 0.81 | 1.32 | |

| Microsemi Catalog Number | Working Reverse Voltage | Peak Reverse Voltage | Repetitive Peak Reverse Voltage |
|--------------------------|-------------------------|----------------------|---------------------------------|
| FST10130* | 30V | 30V | 30V |
| FST10135* | 35V | 35V | 35V |
| FST10140* | 40V | 40V | 40V |
| FST10145* | 45V | 45V | 45V |

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring for Reverse Protection
- Low forward voltage
- V_{RRM} 30 to 45 Volts
- Electrically isolated base
- Reverse Energy Tested
- Center tap

Electrical Characteristics

| | | |
|---------------------------------------------|----------------------|--------------------------------------------------------------------------------------|
| Average forward current per pkg | $I_{F(AV)}$ 100 Amps | $T_C = 85^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.5^\circ\text{C}/\text{W}$ |
| Average forward current per leg | $I_{F(AV)}$ 50 Amps | $T_C = 85^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C}/\text{W}$ |
| Maximum surge current per leg | I_{FSM} 1000 Amps | 8.3 ms, half sine $T_J = 175^\circ\text{C}$ |
| Max repetitive peak reverse current per leg | $I_{R(OV)}$ 2 Amps | $f = 1 \text{ KHz}, 25^\circ\text{C}, 1 \mu\text{sec Square wave}$ |
| Max peak forward voltage per leg | V_{FM} .48 Volts | $I_{FM} = 50\text{A}: T_J = 125^\circ\text{C}^*$ |
| Max peak forward voltage per leg | V_{FM} .53 Volts | $I_{FM} = 50\text{A}: T_J = 25^\circ\text{C}^*$ |
| Max peak reverse current per leg | I_{RM} 600 mA | $V_{RRM}, T_J = 125^\circ\text{C}^*$ |
| Max peak reverse current per leg | I_{RM} 2 mA | $V_{RRM}, T_J = 25^\circ\text{C}$ |
| Typical junction capacitance per leg | C_J 2700 pF | $V_R = 5.0\text{V}, T_J = 25^\circ\text{C}$ |

*Pulse test: Pulse width 300 μsec , Duty cycle 2%

Thermal and Mechanical Characteristics

| | | |
|--------------------------------------|-----------------|-----------------------------------------------|
| Storage temp range | T_{STG} | -55°C to 175°C |
| Operating junction temp range | T_J | -55°C to 125°C |
| Max thermal resistance per leg | $R_{\theta JC}$ | $1.0^\circ\text{C}/\text{W}$ Junction to case |
| Max thermal resistance per pkg. | $R_{\theta JC}$ | $0.5^\circ\text{C}/\text{W}$ Junction to case |
| Typical thermal resistance (greased) | $R_{\theta CS}$ | $0.1^\circ\text{C}/\text{W}$ Case to sink |
| Mounting torque | | 15–20 inch pounds |
| Weight | | 2.5 ounces (71 grams) typical |

FST10130 – FST10145

Figure 1
Typical Forward Characteristics – Per Leg

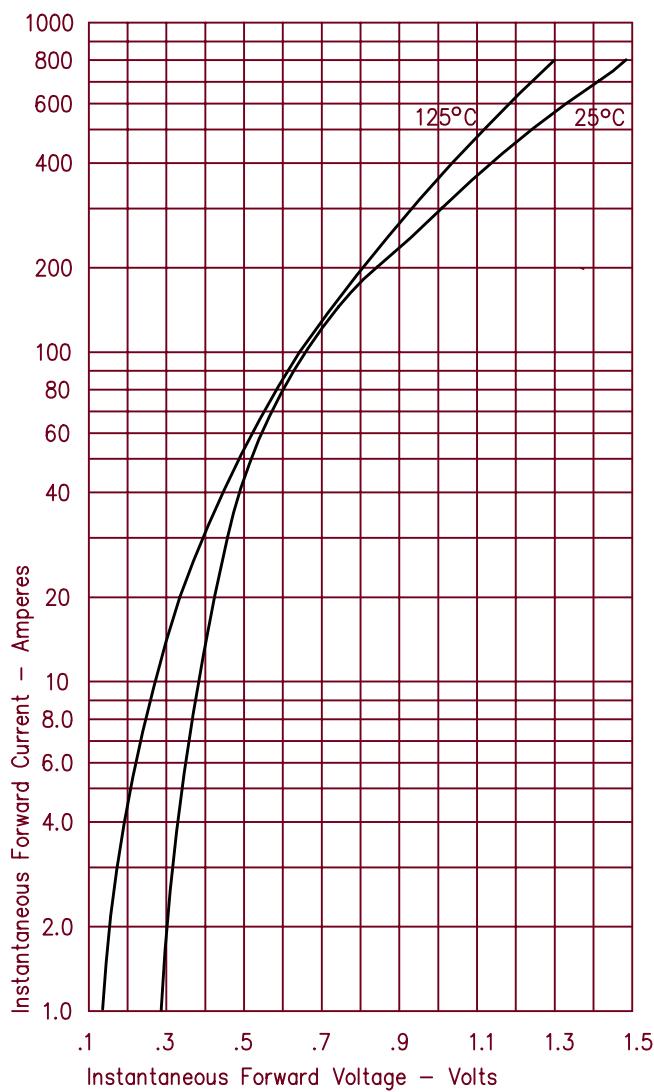


Figure 2
Typical Reverse Characteristics – Per Leg

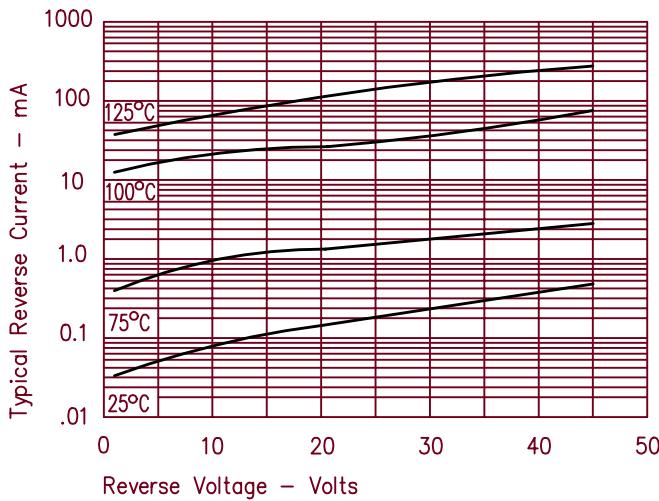


Figure 3
Typical Junction Capacitance – Per Leg

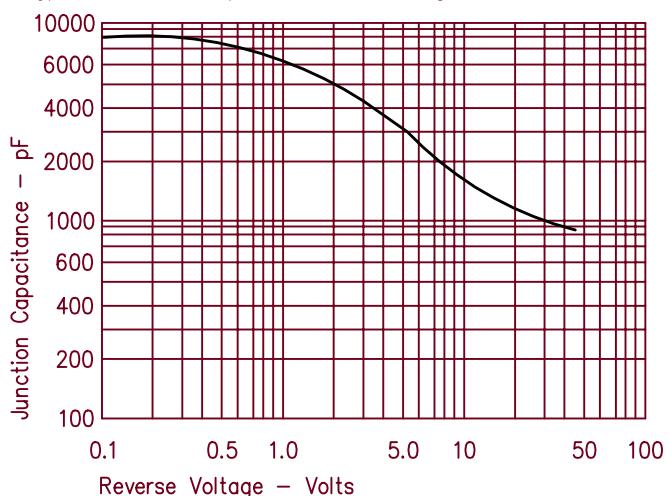


Figure 4
Forward Current Derating – Per Leg

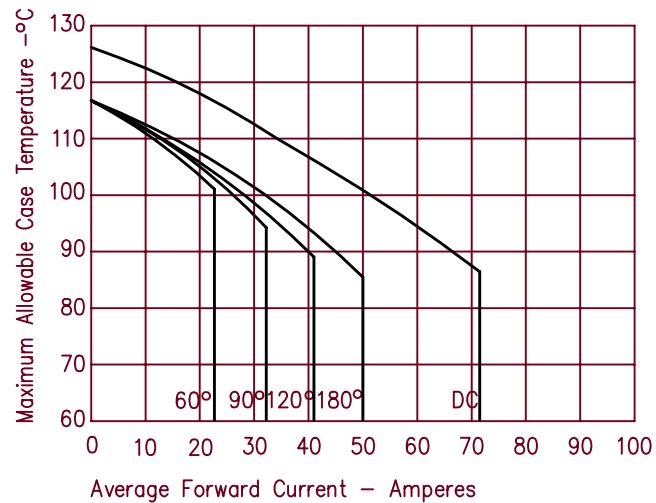


Figure 5
Maximum Forward Power Dissipation – Per Leg

