



DF005G THRU DF10G DF005S THRU DF10S



SINGLE PHASE 1.0 AMP GLASS PASSIVATED BRIDGE RECTIFIERS



FEATURES

- * Ideal for printed circuit board
- * Reliable low cost construction utilizing molded plastic technique
- * High surge current capability
- * Small size, simple installation
- * Leads solderable per MIL-STD-202, method 208

VOLTAGE RANGE
50 to 1000 Volts
CURRENT
1.0 Ampere

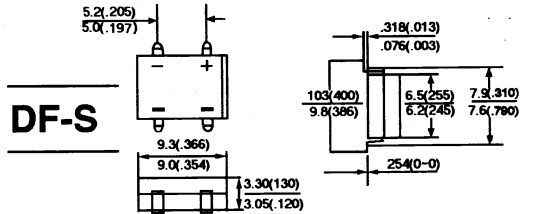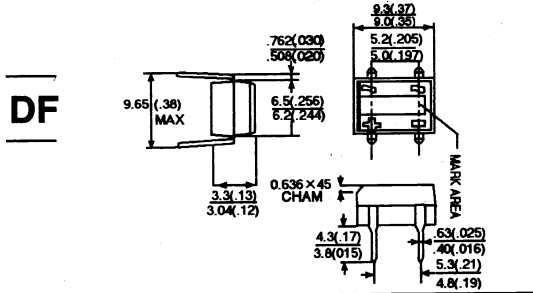

Dimensions in millimeters and (inches)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	DF005G	DF01G	DF02G	DF04G	DF06G	DF08G	DF10G	UNITS
		DF005S	DF01S	DF02S	DF04S	DF06S	DF08S	DF10S	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D. C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @ $T_A = 40^\circ\text{C}$	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30							A
Maximum Forward Voltage Drop per element @ 1.0A	V_F	1.10							V
Maximum Reverse Current at Rated @ $T_A = 25^\circ\text{C}$ D. C. Blocking Voltage per element @ $T_A = 125^\circ\text{C}$	I_R	10 500							μA μA
Operating Temperature Range	T_J	- 55 to + 125							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	- 55 to + 150							$^\circ\text{C}$

RATINGS AND CHARACTERISTIC CURVES (DF005G THRU DF10G) (DF005S THRU DF10S)

FIG. 1 - DERATING CURVE FOR OUTPUT CURRENT

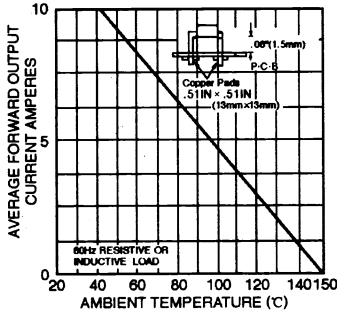


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

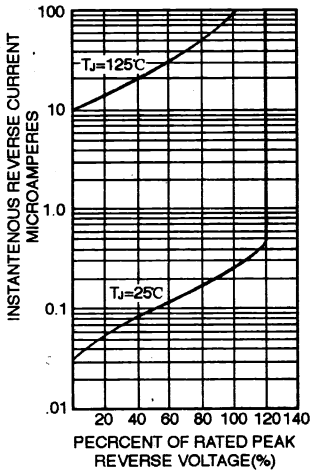


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

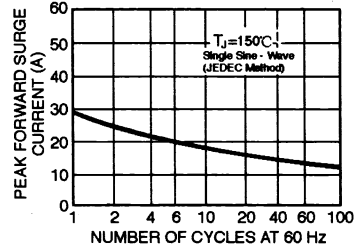


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

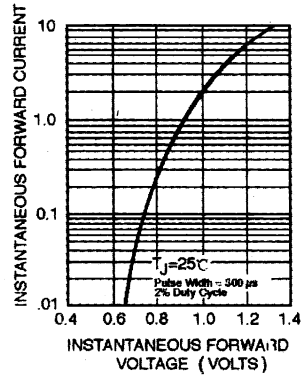


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

