


Features

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types: BC 856, BC 857,
BC 859, BC 860 (PNP)

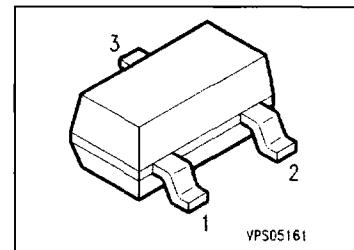

Type	Marking	Ordering Code (tape and reel)	Pin Configuration			Package ¹⁾
			1	2	3	
BC 846 A	1As	Q62702-C1772	B	E	C	SOT-23
BC 846 B	1Bs	Q62702-C1746				
BC 847 A	1Es	Q62702-C1884				
BC 847 B	1Fs	Q62702-C1687				
BC 847 C	1Gs	Q62702-C1715				
BC 848 A	1Js	Q62702-C1741				
BC 848 B	1Ks	Q62702-C1704				
BC 848 C	1Ls	Q62702-C1506				
BC 849 B	2Bs	Q62702-C1727				
BC 849 C	2Cs	Q62702-C1713				
BC 850 B	2Fs	Q62702-C1885				
BC 850 C	2Gs	Q62702-C1712				

¹⁾For detailed information see chapter Package Outlines.

Maximum Ratings

Parameter	Symbol	BC 846	Values		Unit	
			BC 847	BC 850		
Collector-emitter voltage	V_{CEO}	65	45	30	V	
Collector-base voltage	V_{CBO}	80	50	30		
Collector-emitter voltage	V_{CES}	80	50	30		
Emitter-base voltage	V_{EBO}	6	6	5		
Collector current	I_C	100			mA	
Peak collector current	I_{CM}	200				
Peak base current	I_{BM}	200				
Peak emitter current	I_{EM}	200				
Total power dissipation, $T_s = 71 \text{ }^\circ\text{C}$	P_{tot}	330			mW	
Junction temperature	T_j	150			°C	
Storage temperature range	T_{stg}	- 65 ... + 150				

Thermal Resistance

Junction - ambient ¹⁾	$R_{th JA}$	≤ 310	K/W
Junction - soldering point	$R_{th JS}$	≤ 240	

1) Package mounted on epoxy pcb 40 mm × 40 mm × 1.5 mm/6 cm² Cu.

Electrical Characteristicsat $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC characteristics					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}$	$V_{(\text{BR})\text{CE}0}$	65	—	—	V
BC 846		45	—	—	
BC 847, BC 850		30	—	—	
BC 848, BC 849					
Collector-base breakdown voltage $I_C = 10 \mu\text{A}$	$V_{(\text{BR})\text{CB}0}$	80	—	—	
BC 846		50	—	—	
BC 847, BC 850		30	—	—	
BC 848, BC 849					
Collector-emitter breakdown voltage $I_C = 10 \mu\text{A}, V_{BE} = 0$	$V_{(\text{BR})\text{CES}}$	80	—	—	
BC 846		50	—	—	
BC 847, BC 850		30	—	—	
BC 848, BC 849					
Emitter-base breakdown voltage $I_E = 1 \mu\text{A}$	$V_{(\text{BR})\text{EBO}}$	6	—	—	
BC 846, BC 847		5	—	—	
BC 848, BC 849, BC 850					
Collector cutoff current $V_{CB} = 30 \text{ V}$	I_{CBO}	—	—	15	nA
$V_{CB} = 30 \text{ V}, T_A = 150^\circ\text{C}$		—	—	5	μA
DC current gain $I_C = 10 \mu\text{A}, V_{CE} = 5 \text{ V}$	h_{FE}				—
BC 846 A, BC 847 A, BC 848 A		—	140	—	
BC 846 B ... BC 850 B		—	250	—	
BC 847 C, BC 848 C, BC 849 C, BC 850 C		—	480	—	
$I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$					
BC 846 A, BC 847 A, BC 848 A		110	180	220	
BC 846 B ... BC 850 B		200	290	450	
BC 847 C, BC 848 C, BC 849 C, BC 850 C		420	520	800	
Collector-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	$V_{CE\text{sat}}$	—	90	250	mV
$I_C = 100 \text{ mA}, I_B = 5 \text{ mA}$		—	200	600	
Base-emitter saturation voltage ¹⁾ $I_C = 10 \text{ mA}, I_B = 0.5 \text{ mA}$	$V_{BE\text{sat}}$	—	700	—	
$I_C = 100 \text{ mA}, I_B = 5 \text{ mA}$		—	900	—	
Base-emitter voltage $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}$	$V_{BE(\text{on})}$	580	660	700	
$I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}$		—	—	770	

¹⁾Pulse test: $t \leq 300 \mu\text{s}, D = 2\%$.

Electrical Characteristicsat $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	

AC characteristics

Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}, f = 100 \text{ MHz}$	f_T	—	250	—	MHz
Output capacitance $V_{CE} = 10 \text{ V}, f = 1 \text{ MHz}$	C_{OBO}	—	3	—	pF
Input capacitance $V_{CE} = 0.5 \text{ V}, f = 1 \text{ MHz}$	C_{IB}	—	8	—	
Short-circuit input impedance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 846 A ... BC 848 A BC 846 B ... BC 850 B BC 847 C ... BC 850 C	h_{11e}	—	2.7	—	kΩ
Open-circuit reverse voltage transfer ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 846 A ... BC 848 A BC 846 B ... BC 850 B BC 847 C ... BC 850 C	h_{12e}	—	1.5	—	10^{-4}
Short-circuit forward current transfer ratio $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 846 A ... BC 848 A BC 846 B ... BC 850 B BC 847 C ... BC 850 C	h_{21e}	—	200	—	—
Open-circuit output admittance $I_C = 2 \text{ mA}, V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ BC 846 A ... BC 848 A BC 846 B ... BC 850 B BC 847 C ... BC 850 C	h_{22e}	—	18	—	μS
Noise figure $I_C = 0.2 \text{ mA}, V_{CE} = 5 \text{ V}, R_S = 2 \text{ kΩ}$ $f = 30 \text{ Hz} \dots 15 \text{ kHz}$ BC 849 BC 850 $f = 1 \text{ kHz}, \Delta f = 200 \text{ Hz}$ BC 849 BC 850	F	—	1.4	4	dB
Equivalent noise voltage $I_C = 0.2 \text{ mA}, V_{CE} = 5 \text{ V}, R_S = 2 \text{ kΩ}$ $f = 10 \text{ Hz} \dots 50 \text{ Hz}$ BC 850	V_n	—	1.4	3	—
		—	1.2	4	—
		—	1.0	4	—
		—	0.135	μV	—


Total power dissipation $P_{\text{tot}} = f(T_A^*; T_S)$

* Package mounted on epoxy

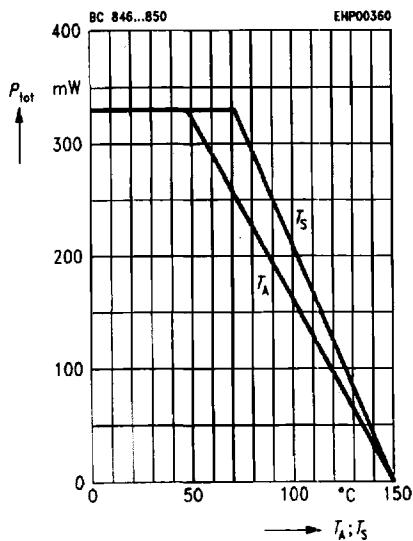


Collector-base capacitance $C_{CBO} = f(V_{CBO})$

Emitter-base capacitance $C_{EBO} = f(V_{EBO})$

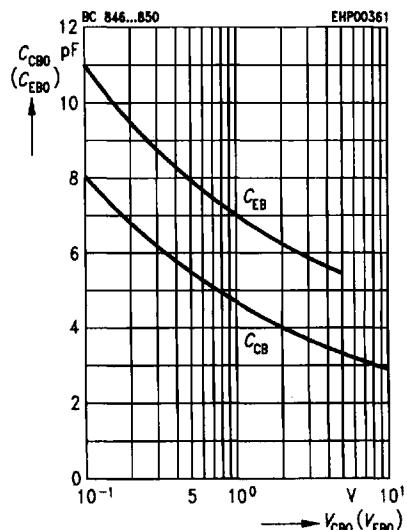


Permissible pulse load $P_{\text{tot max}}/P_{\text{tot DC}} = f(t_p)$

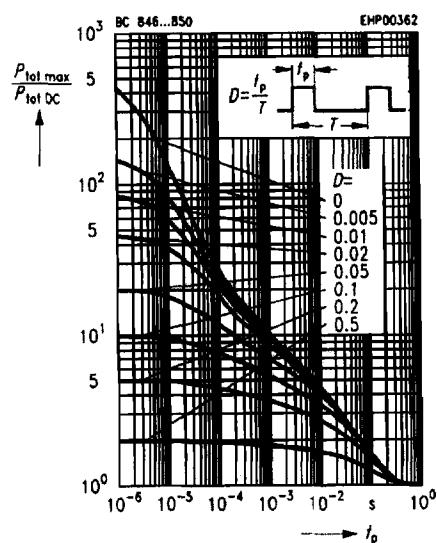


Transition frequency $f_T = f(I_C)$


$V_{CE} = 5$ V

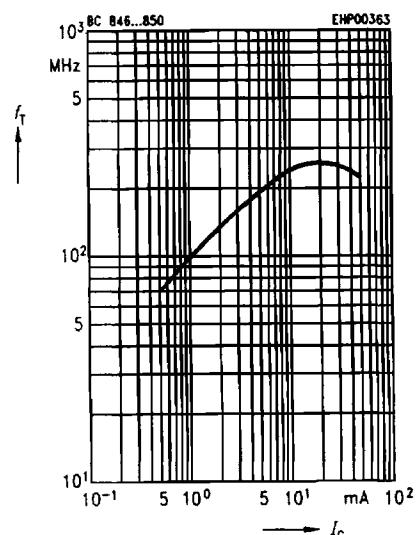


Collector cutoff current $I_{CBO} = f(T_A)$
 $V_{CE} = 30 \text{ V}$

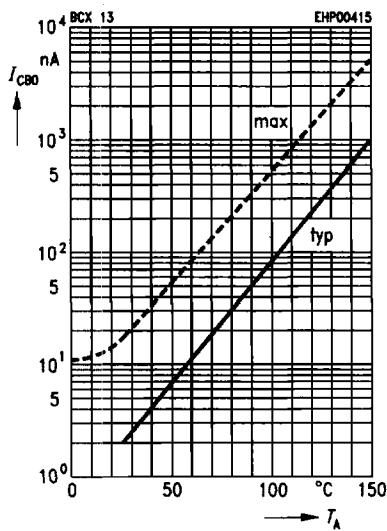


DC current gain $h_{FE} = f(I_C)$
 $V_{CE} = 5 \text{ V}$

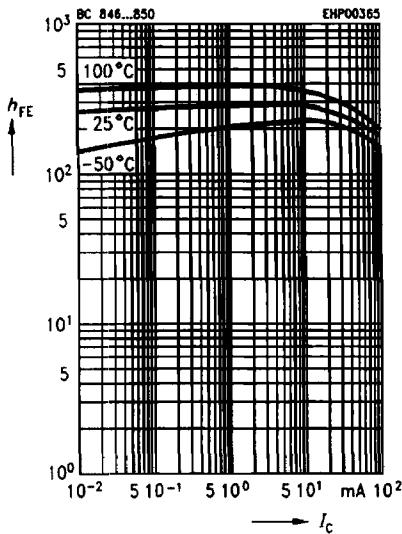


Collector-emitter saturation voltage $I_C = f(V_{CEsat})$, $h_{FE} = 20$

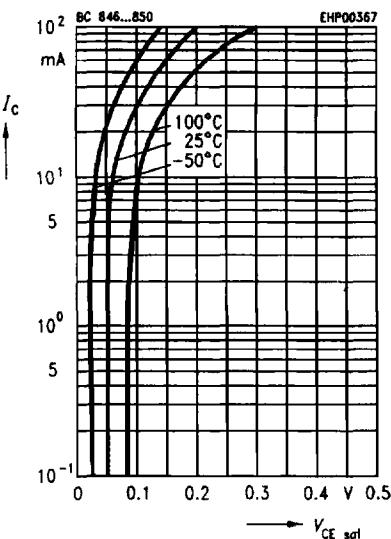


Base-emitter saturation voltage $I_C = f(V_{BESat})$, $h_{FE} = 20$

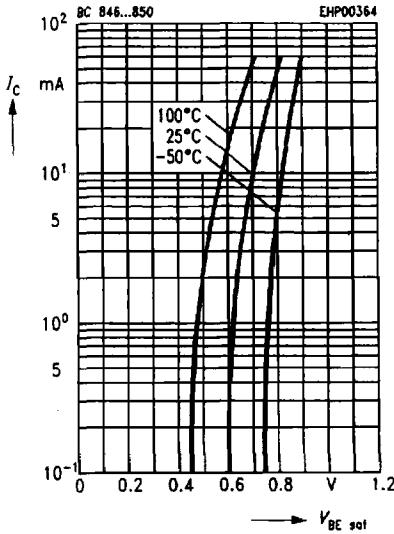


h parameter $h_{\text{e}} = f(I_{\text{C}})$ normalized
 $V_{\text{CE}} = 5 \text{ V}$

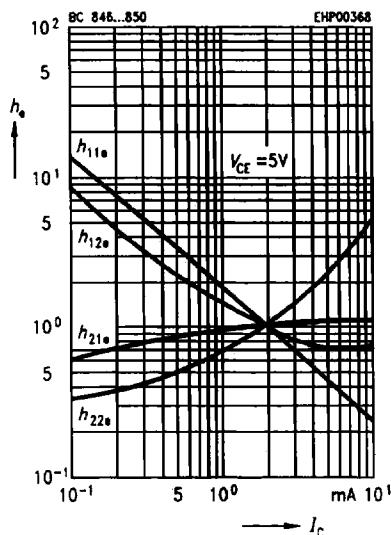


Noise figure $F = f(V_{\text{CE}})$
 $I_{\text{C}} = 0.2 \text{ mA}, R_s = 2 \text{ k}\Omega, f = 1 \text{ kHz}$


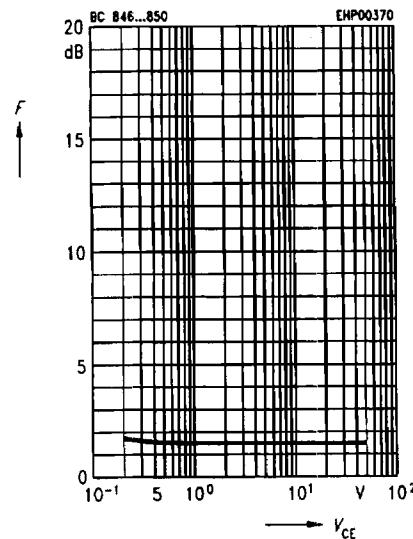


h parameter $h_{\text{e}} = f(V_{\text{CE}})$ normalized
 $I_{\text{C}} = 2 \text{ mA}$

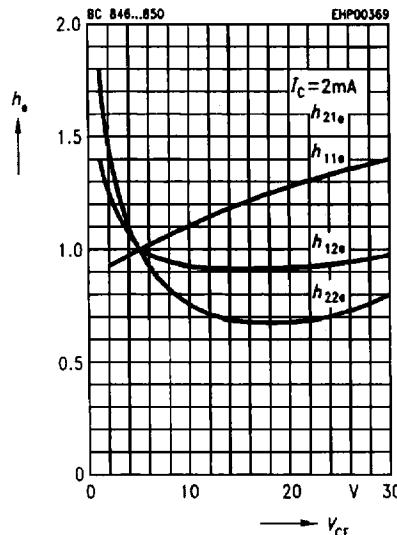

Noise figure $F = f(f)$
 $I_{\text{C}} = 0.2 \text{ mA}, V_{\text{CE}} = 5 \text{ V}, R_s = 2 \text{ k}\Omega$

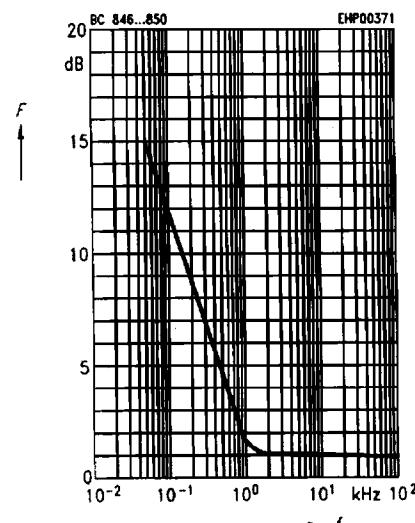

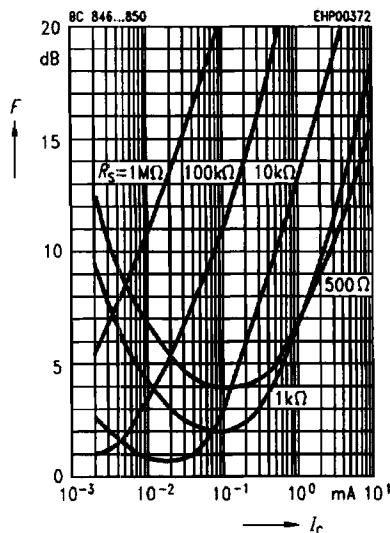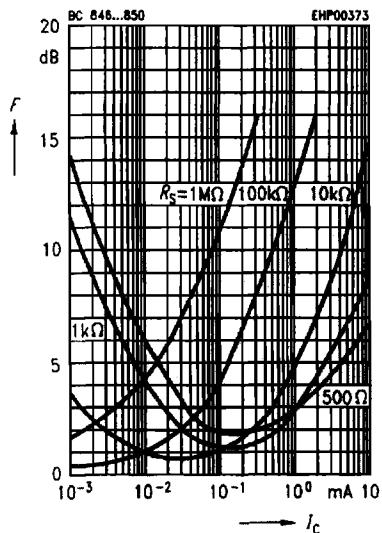Noise figure $F = f(I_c)$ $V_{CE} = 5 \text{ V}, f = 120 \text{ Hz}$ **Noise figure $F = f(I_c)$** $V_{CE} = 5 \text{ V}, f = 1 \text{ kHz}$ **Noise figure $F = f(I_c)$** $V_{CE} = 5 \text{ V}, f = 10 \text{ kHz}$ 