

Low power VHF, UHF and hyperband mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

FEATURES

- Balanced mixer with a common emitter input for band A (single input)
- 2-pin oscillator for bands A and B
- Balanced mixer with a common base input for bands B and C (balanced input)
- 3-pin oscillator for band C
- Local oscillator buffer output for external synthesizer
- SAW filter preamplifier with a low output impedance to drive the SAW filter directly
- Band gap voltage stabilizer for oscillator stability
- Electronic band switch.

DESCRIPTION

The TDA5630CT is a monolithic integrated circuit that performs the bands A, B and C mixer/oscillator functions in TV and VCR tuners. This low-power mixer/oscillator requires a power supply of 9 V and is available in a very small package.

The device gives the designer the capability to design an economical and physically small 3-band tuner.

The tuner development time can be drastically reduced by using this device. In addition, when hyperband is not necessary, the TDA5630CT may be used in a VHF/UHF tuner with an appropriate tuned circuit for VHF I and VHF III in band A, and the tuned circuit of band C for UHF.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_P	supply voltage		–	9.0	–	V
I_P	supply current		–	35	–	mA
f_{RA}	frequency range; band A	RF input	45	–	180	MHz
f_{RB}	frequency range; band B	RF input	160	–	470	MHz
f_{RC}	frequency range; band C	RF input	430	–	860	MHz
N_A	noise figure; band A		–	7.5	–	dB
N_B	noise figure; band B		–	8	–	dB
N_C	noise figure; band C		–	9	–	dB
V_{IA}	input voltage; band A	1% cross-modulation	–	93	–	$\text{dB}\mu\text{V}$
V_{IB}	input voltage; band B	1% cross-modulation	–	82	–	$\text{dB}\mu\text{V}$
V_{IC}	input voltage; band C	1% cross-modulation	–	82	–	$\text{dB}\mu\text{V}$
G_v	voltage gain	band A	–	25	–	dB
		band B	–	36	–	dB
		band C	–	36	–	dB

ORDERING INFORMATION

TYPE NUMBER	PACKAGE		
	NAME	DESCRIPTION	VERSION
TDA5630CT	SO20M	plastic small outline package; 20 leads; body width 7.5 mm	SOT336-1

**Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners**

TDA5630CT

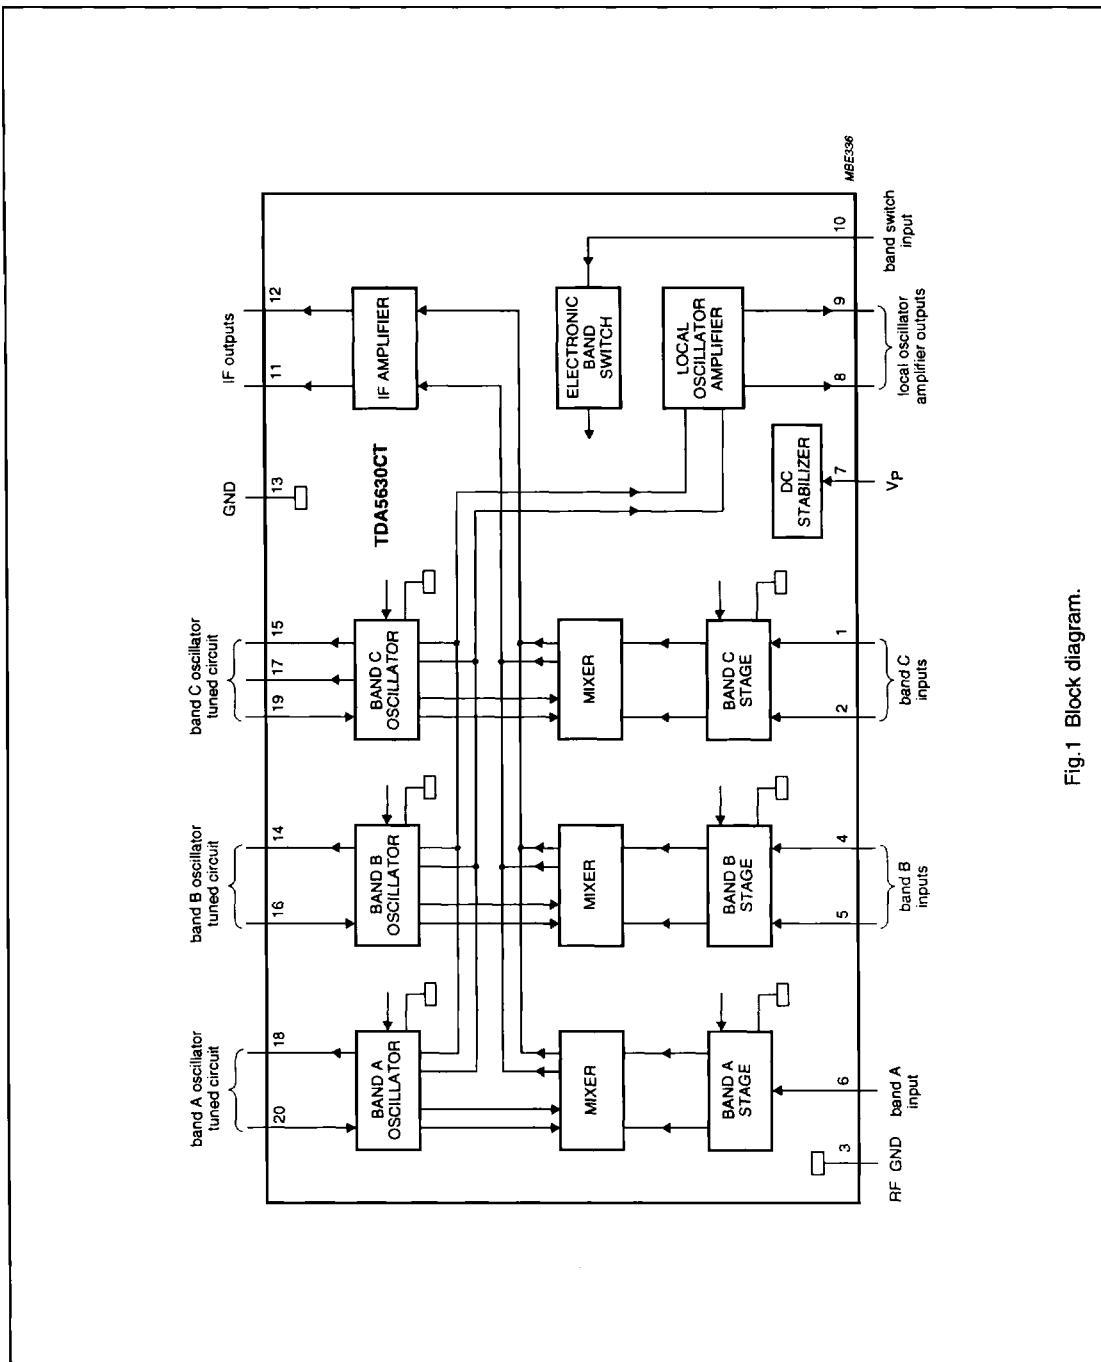
BLOCK DIAGRAM

Fig.1 Block diagram.

**Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners**

TDA5630CT

PINNING

SYMBOL	PIN	DESCRIPTION
CIN1	1	band C input 1
CIN2	2	band C input 2
RFGND	3	ground for RF inputs
BIN1	4	band B input 1
BIN2	5	band B input 2
AIN	6	band A input
V _P	7	supply voltage
LOOUT1	8	local oscillator amplifier output 1
LOOUT2	9	local oscillator amplifier output 2
BS	10	electronic band switch input
IFOUT1	11	IF amplifier output 1
IFOUT2	12	IF amplifier output 2
GND	13	ground (0 V)
BOSCOC	14	band B oscillator output collector
COSCOC1	15	band C oscillator output collector 1
BOSCIB	16	band B oscillator input base
COSCOC2	17	band C oscillator output collector 2
AOSCOC	18	band A oscillator output collector
COSCIB	19	band C oscillator input base
AOSCIB	20	band A oscillator input base

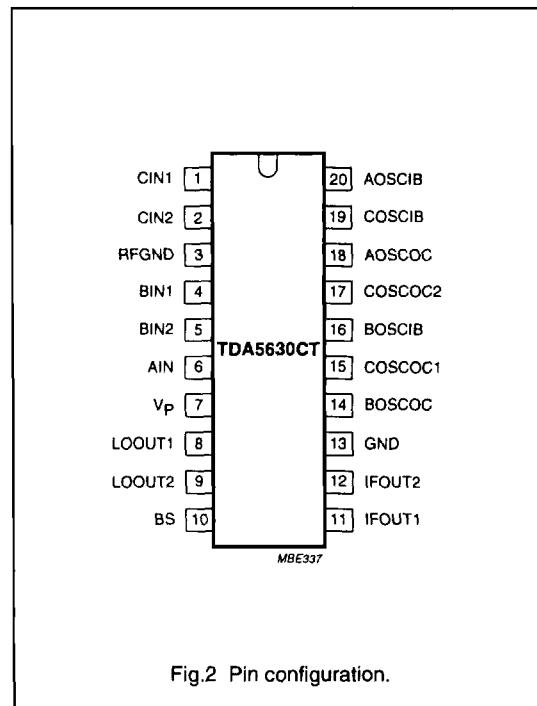


Fig.2 Pin configuration.

Low power VHF, UHF and hyperband mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V_P	supply voltage range	-0.3	+10.5	V
V_{SW}	switching voltage	0	10.5	V
I_O	output current of each pin to ground	-	-10	mA
t_{SC}	maximum short-circuit time (all pins)	-	10	s
T_{STG}	storage temperature	-55	+150	°C
T_{AMB}	operating ambient temperature	-10	+80	°C
T_J	junction temperature	-	150	°C

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	VALUE	UNIT
$R_{th\ j-a}$	thermal resistance from junction to ambient in free air	102	K/W

HANDLING

Human body model: the IC withstands 2250 V in accordance with UZW-BO-FQ-A302 (stress reference pins 3, 7 and 13 shorted together).

Machine model: the IC withstands 200 V in accordance with UZW-BO-FQ-B302 (stress reference pins 3, 7 and 13 shorted together).

IF AMPLIFIER CHARACTERISTICS $V_P = 9$ V; $T_{AMB} = 25$ °C; measured at 36 MHz; measured in circuit of Fig.4; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.		MAX	UNIT
				MOD.	PHASE		
S_{22}	output reflection coefficient	see Fig.9	-	-10	9	-	dB/^
Z_o	output impedance ($R_s + jL_s\Omega$)	R_s	-		95	-	Ω
		L_s	-		45	-	nH

Low power VHF, UHF and hyperband mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

CHARACTERISTICS $V_P = 9 \text{ V}$; $T_{\text{amb}} = 25^\circ\text{C}$; measured in circuit of Fig.4; unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Supply						
V_P	supply voltage		8.1	9.0	9.9	V
I_P	supply current		—	35	45	mA
V_{sw}	switching voltage	band A	0	—	1.1	V
		band B	1.6	—	2.4	V
		band C	3.0	—	5.0	V
I_{sw}	switching current	band A	—	—	2	μA
		band B	—	—	5	μA
		band C	—	—	10	μA
Band A mixer (including IF amplifier; pin 6)						
f_R	frequency range		45	—	180	MHz
N	noise figure	50 MHz; see Fig.3	—	7.5	9	dB
		180 MHz; see Fig.3	—	9	10	dB
g_{os}	optimum source conductance for noise figure	50 MHz	—	0.5	—	mS
		180 MHz	—	1.1	—	mS
g_i	input admittance ($G_P//C_P$)	50 MHz; see Fig.5	—	0.26	—	mS
		180 MHz; see Fig.5	—	0.35	—	mS
		50 to 180 MHz	—	2	—	pF
V_i	input voltage	1% cross modulation; in channel $f = 180 \text{ MHz}$	90	93	—	$\text{dB}\mu\text{V}$
		10 kHz pulling, in channel; 180 MHz	—	100	—	$\text{dB}\mu\text{V}$
G_v	voltage gain	20 log (V_{12-11}/V_6); 50 MHz	22.5	25	27.5	dB
		20 log (V_{12-11}/V_6); 180 MHz	22.5	25	27.5	dB
Band A oscillator						
f_R	frequency range		80	—	216	MHz
f_{shift}	frequency shift	$\Delta V_P = 10\%$; note 1	—	—	200	kHz
f_{drift}	frequency drift	$\Delta T = 25^\circ\text{C}$ with no compensation; NP0 capacitors; note 2	—	—	500	kHz
		5 s to 15 min after switch on; note 2	—	—	200	kHz

**Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners**

TDA5630CT

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Band B mixer (pins 4 and 5; including IF amplifier) measurements using hybrid; see Fig.4; note 3						
f_R	frequency range		160	—	470	MHz
N	noise figure (not corrected for image)	170 MHz	—	8	10	dB
		470 MHz	—	8	10	dB
Z_I	input impedance ($R_S + jL_S\Omega$)	R_S ; see Fig.6	—	30	—	Ω
		L_S ; see Fig.6	—	8	—	nH
V _i	input voltage	1% cross-modulation; in channel; 170 MHz	79	82	—	$dB\mu V$
		1% cross-modulation; in channel; 470 MHz	79	82	—	$dB\mu V$
		10 kHz pulling; in channel; 470 MHz	—	87	—	$dB\mu V$
		N + 5 – 1 MHz pulling; 430 MHz; note 4	—	81	—	$dB\mu V$
G _v	voltage gain	170 MHz; note 5	33	36	39	dB
		470 MHz; note 5	33	36	39	dB
Band B oscillator						
f_R	frequency range		200	—	500	MHz
f_{shift}	frequency shift	$\Delta V_P = 10\%$; note 1	—	—	400	kHz
f_{drift}	frequency drift	$\Delta T = 25^\circ C$ with no compensation: NP0 capacitors; note 2	—	—	2	MHz
		5 s to 15 min after switch on; note 2	—	—	300	kHz
Band C mixer (pins 1 and 2; including IF amplifier) measurements using hybrid; see Fig.4; note 3						
f_R	frequency range		430	—	860	MHz
N	noise figure (not corrected for image)	430 MHz	—	9	11	dB
		860 MHz	—	9	11	dB
Z_I	input impedance ($R_S + jL_S\Omega$)	R_S ; 430 MHz; see Fig.7	—	40	—	Ω
		R_S ; 860 MHz; see Fig.7	—	53	—	Ω
		L_S ; 430 to 860 MHz	—	9	—	nH
V _i	input voltage	1% cross-modulation; in channel; 430 MHz	79	82	—	$dB\mu V$
		1% cross-modulations channel; 860 MHz	79	82	—	$dB\mu V$
		10 kHz pulling; in channel; 860 MHz	—	90	—	$dB\mu V$
		N + 5 – 1 MHz pulling; 820 MHz; note 4	—	61	—	$dB\mu V$
G _v	voltage gain	430 MHz; note 5	33	36	39	dB
		860 MHz; note 5	33	36	39	dB

Low power VHF, UHF and hyperband mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT


SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Band C oscillator						
f_R	frequency range		470	—	900	MHz
f_{shift}	frequency shift	$\Delta V_P = 10\%$; note 1	—	—	400	kHz
f_{drift}	frequency drift	$\Delta T = 25^\circ C$ with no compensation; NP0 capacitors; note 2	—	—	2.5	MHz
		5 s to 15 min after switching on; note 2	—	—	600	kHz
LO output (pins 8 and 9; $R_L = 100 \Omega$)						
Y_O	output admittance ($G_P//C_P$)	80 MHz; see Fig.8		2.5		mS
				0.9		pF
		900 MHz; see Fig.8		3.5		mS
				0.7		pF
V_O	output voltage		83	91	100	$dB\mu V$
SRF	spurious signal on LO output w.r.t. LO output signal	note 6	—	—	-10	dB
SHD	LO signal harmonics w.r.t. LO signal		—	—	-10	dB

Notes

1. The frequency shift is defined for a variation of power supply, first from $V_P = 9$ to 8.1 V, then from $V_P = 9$ to 9.9 V. In both cases, the frequency shift is below the specified value.
2. The frequency drift is defined for a variation of ambient temperature, first from $T_{amb} = 25^\circ C$ to $T_{amb} = 0^\circ C$, then from $T_{amb} = 25^\circ C$ to $T_{amb} = 50^\circ C$. In both cases, the frequency drift is below the specified value with NP0 capacitors. Capacitor types C1 to C11, as specified in Fig.4 for non-PLL applications, must be changed to series with other temperature coefficients (e.g. N330, N750 etc.).
3. The values have been corrected for hybrid and cable losses. The symmetrical output impedance of the circuit is 100Ω .
4. The input level of a $N + 5 - 1$ MHz signal which gives a signal 30 dB below the oscillator carrier at the LO output.
5. The gain is defined as the transducer gain (measured in Fig.4) plus the voltage transformation ratio of L6 to L7 (6 : 1, 15.4 dB).
6. Measured at 50Ω , with RF input voltage:
 - a) RF voltage = 120 $dB\mu V$ at $f_i < 180$ MHz
 - b) RF voltage = 107.5 $dB\mu V$ at $f_i = 180$ to 225 MHz
 - c) RF voltage = 97 $dB\mu V$ at $f_i = 225$ to 860 MHz.

Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

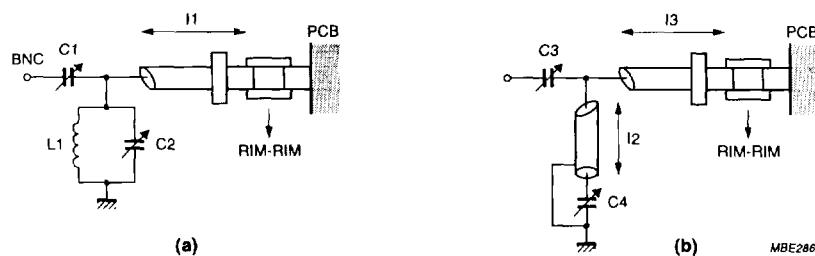

(a) For $f_R \approx 50$ MHz:

mixer A frequency response measured = 57 MHz, loss = 0 dB
image suppression ≈ 16 dB

G1 = 9 dB

C2 = 15 nF

L1 = 7 turns (Δ 5.5 mm, wire dia. = 0.5 mm)

I1 = rigid cable (RIM): 5 cm long (rigid cable (RIM); 33 dB/100 m; 50 Ω , 96 pF/m).

(b) For $f_B = 180 \text{ MHz}$:

mixer A frequency response measured = 150.3 MHz, loss = 1.3 dB
image suppression = 13 dB

C3 = 5 pF

C4 = 25 nF

12 = rigid cable (BIM): 30 cm long

I2 = rigid cable (RIM); 50 cm long
 I3 = rigid cable (RIM); 5 cm long (rigid cable (RIM); 33 dB/100 m; 50Ω ; 96 pF/m).

Fig.3 Input circuit for optimum noise figure.

Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

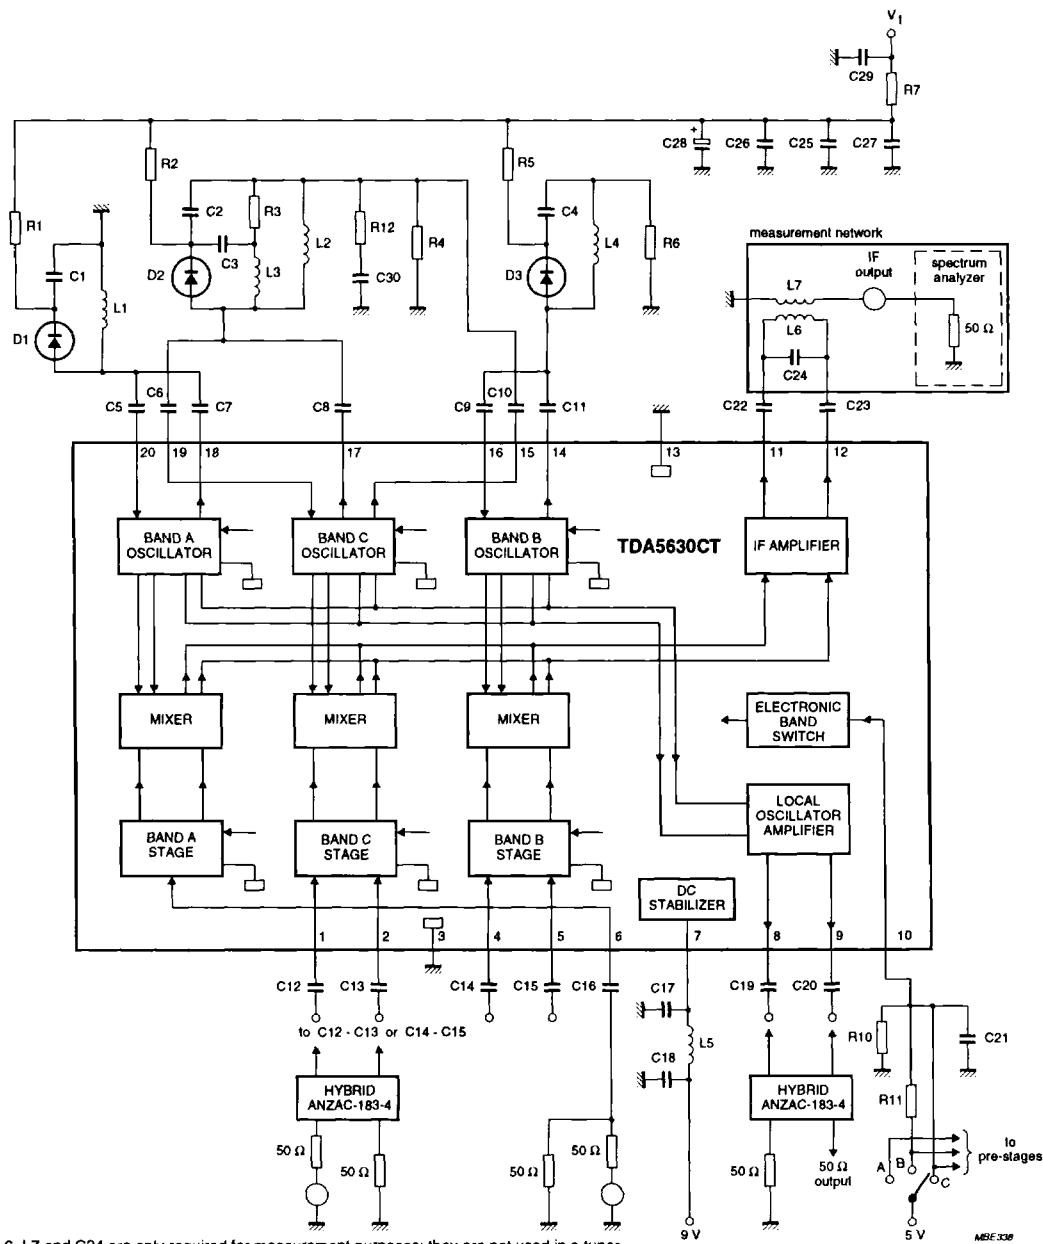


Fig.4 Measurement circuit.

**Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners**

TDA5630CT

Component values for measurement circuit**Table 1** Capacitors (all SMD and NPO except C28)

COMPONENT	VALUE
C1	82 pF
C2	5.6 pF
C3	100 pF
C4	150 pF
C5	2.2 pF
C6	1 pF
C7	2.2 pF
C8	1 pF
C9	1.8 pF
C10	2.2 pF
C11	3.9 pF
C12	1 nF
C13	1 nF
C14	1 nF
C15	1 nF
C16	1 nF
C17	1.5 nF
C18	1.5nF
C19	1 nF
C20	1 nF
C21	1.5 nF
C22	1 nF
C23	1 nF
C24	18 pF
C25	1.5 nF
C26	1.5 nF
C27	1.5 nF
C28	1 μ F; 40 V electrolytic
C29	1.5 nF
C30	0.56 pF

Table 2 Resistors (all SMD)

COMPONENT	VALUE
R1	47 k Ω
R2	22 k Ω
R3	2.2 k Ω
R4	22 k Ω
R5	47 k Ω
R6	22 Ω
R7	1 k Ω
R10	15 k Ω
R11	22 k Ω
R12	470 Ω

Table 3 Diodes and IC

COMPONENT	VALUE
D1	BB911
D2	BB405/215
D3	BB909/219
IC	TDA5630CT

Table 4 Coils (wire size 0.4 mm)

COMPONENT	VALUE
L1	7.5 turns; dia. 3 mm
L2	2.5 turns; dia. 3 mm
L3	1.5 turns; dia. 2.5 mm
L4	1.5 turns; dia. 4 mm
L5	4.7 μ H; choke coil

Table 5 Transformers; note 1

COMPONENT	VALUE
L6	2 \times 5 turns
L7	2 turns

Note

1. Coil type: TOKO 7 kN; material: 113 kN; screw core 03-0093; pot core 04-0026.

Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

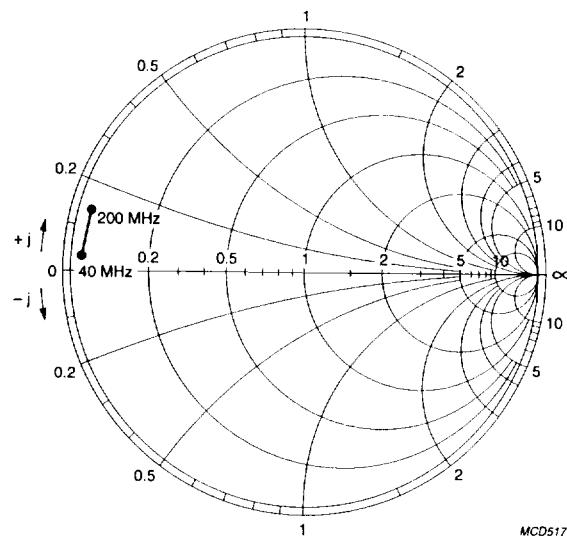


Fig.5 Input admittance (S_{11}) of the band A mixer input (40 to 200 MHz) (Y chart).

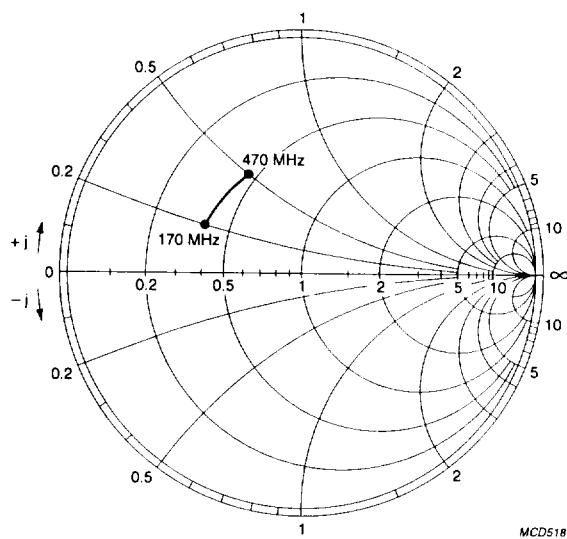


Fig.6 Input impedance (S_{11}) of the band B mixer input (170 to 470 MHz) (Z chart).

Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

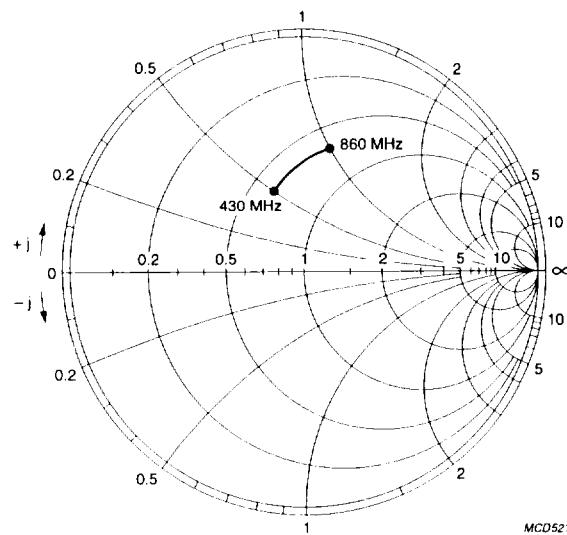


Fig.7 Input impedance (S_{11}) of the band C mixer input (430 to 860 MHz) (Z chart).


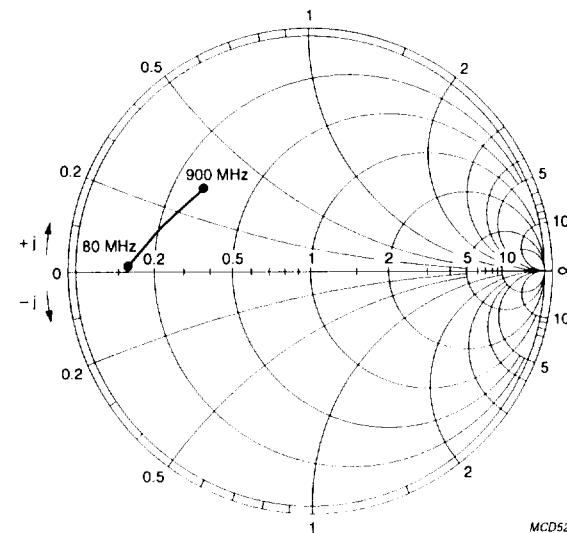


Fig.8 Output admittance (S_{11}) of the LO output (80 to 900 MHz) (Y chart).

Low power VHF, UHF and hyperband
mixer/oscillator for TV and VCR 3-band tuners

TDA5630CT

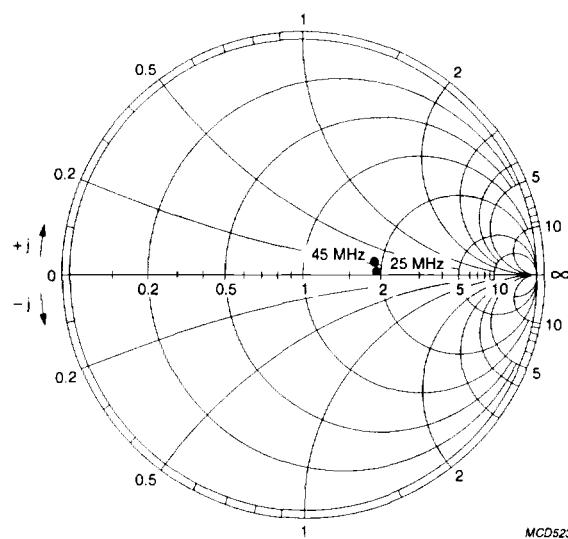

MCD523

Fig.9 Output reflection coefficient (S_{22}) of the IF amplifier (25 to 45 MHz) (Z chart).