

*ASSP Mobile Communication Systems***SAW Filter
(700 to 1000 MHz)****F5CM Series (B2)****DESCRIPTION**


The F5CM series of SAW filters have balanced in/unbalanced out or unbalanced in/balanced out of I/O ports. Therefore these filters are suitable for the design using balanced type of IC. By using these filters, any transforming devices, such as balun is not required.

The F5CM series filters apply to the frequency range 700 to 1000MHz. High performance has been realized with high reliability and small size by using original materials and original design.

The F5CM series filters are suitable for RF interstage filter in mobile communication systems and standard parts are available for GSM and AMPS/TDMA/CDMA standards.


FEATURES

- Balanced/unbalanced I/O ports
- Ultra compact and light package (3.0 mm sq. package)
- Any external matching network is not required
- Excellent stopband attenuation
- Small inband ripple
- Surface mount package (SMT)

PACKAGE

F5CM Series (B2)

■ PIN ASSIGNMENT

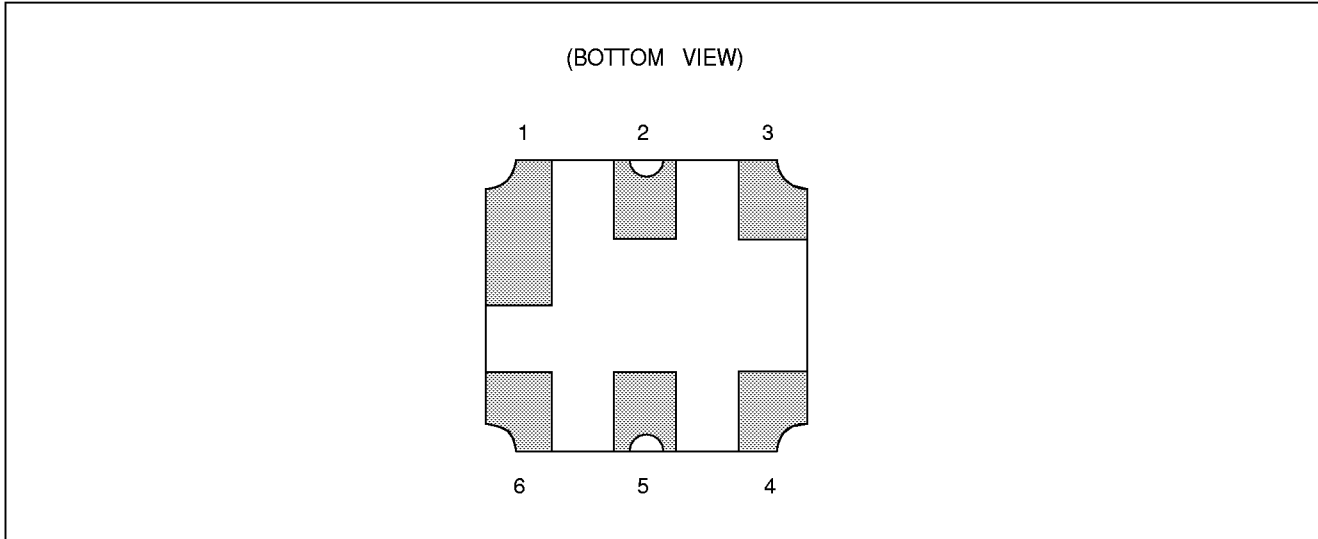

■ PIN DESCRIPTION

- BALANCED IN/UNBALANCED OUT type (Tx filter)

Pin no.	Pin name	Description
1	GND	Ground Pin
2	OUT	Unbalanced output
3	GND	Ground Pin
4	IN	Balanced Input
5	GND	Ground Pin
6	IN	Balanced Input

- UNBALANCED IN/BALANCED OUT type (Rx filter)

Pin no.	Pin name	Description
1	GND	Ground Pin
2	IN	Unbalanced Input
3	GND	Ground Pin
4	OUT	Balanced Output
5	GND	Ground Pin
6	OUT	Balanced Output

F5CM Series (B2)

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating		Unit
		Min.	Max.	
Operating temperature	Ta	-30	+85	°C
Storage temperature	Tstg	-40	+100	°C
Input power	Pin	—	+15	dBm
Input DC Voltage	DCin	-5	+5	V

WARNING: Piezoelectric devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

■ RECOMMENDED OPERATING CONDITION

Parameter	Symbol	Value		Unit
		Min.	Max.	
Operating temperature	Ta	-30	+85	°C

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the piezoelectric device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use piezoelectric devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

■ STANDARD FREQUENCIES

Applications	Frequency (MHz)	Band width (MHz)	Input type /Impedance	Output type /Impedance	Part number	Part symbol	
GSM	Tx	902.5	25	Balance 50 Ω	Unbalance 50 Ω	FAR-F5CM-902M50-B263	63
				Balance 100 Ω		FAR-F5CM-902M50-B264	64
				Balance 150 Ω		FAR-F5CM-902M50-B265	65
	Rx	947.5	25	Unbalance 50 Ω	Balance 50 Ω	FAR-F5CM-947M50-B260	60
					Balance 100 Ω	FAR-F5CM-947M50-B261	61
					Balance 150 Ω	FAR-F5CM-947M50-B262	62
AMPS/ TDMA/ CDMA	Tx	836.5	25	Balance 50 Ω	Unbalance 50 Ω	FAR-F5CM-836M50-B268	68
	Rx	881.5	25	Unbalance 50 Ω	Balance 50 Ω	FAR-F5CM-881M50-B266	66

F5CM Series (B2)

■ ELECTRICAL CHARACTERISTICS

1. GSM (Tx) 50 ohms Balanced IN/50 ohms Unbalanced OUT

Part number: FAR-F5CM-902M50-B263

(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	890 to 915 MHz	—	3.2	3.5	dB	
Inband ripple	—	890 to 915 MHz	—	1.2	1.5	dB	
Absolute attenuation	—	D.C to 845 MHz	45	58	—	dB	
	—	845 to 870 MHz	25	50	—	dB	
	—	935 to 980 MHz	25	30	—	dB	
	—	980 to 2000 MHz	40	58	—	dB	
	—	2000 to 3000 MHz	30	37	—	dB	

2. GSM (Tx) 100 ohms Balanced IN/50 ohms Unbalanced OUT

Part number: FAR-F5CM-902M50-B264

(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	890 to 915 MHz	—	3.0	4.0	dB	
Inband ripple	—	890 to 915 MHz	—	1.0	2.0	dB	
Absolute attenuation	—	D.C to 845 MHz	45	56	—	dB	
	—	845 to 870 MHz	25	45	—	dB	
	—	935 to 980 MHz	25	30	—	dB	
	—	980 to 2000 MHz	35	41	—	dB	
	—	2000 to 3000 MHz	30	33	—	dB	

3. GSM (Tx) 150 ohms Balanced IN/50 ohms Unbalanced OUT

Part number: FAR-F5CM-902M50-B265

(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	890 to 915 MHz	—	3.6	4.2	dB	
Inband ripple	—	890 to 915 MHz	—	1.4	2.0	dB	
Absolute attenuation	—	D.C to 845 MHz	45	53	—	dB	
	—	845 to 870 MHz	25	46	—	dB	
	—	935 to 980 MHz	25	31	—	dB	
	—	980 to 2000 MHz	35	46	—	dB	
	—	2000 to 3000 MHz	30	38	—	dB	

F5CM Series (B2)

4. GSM (Rx) 50 ohms Unbalanced IN/50 ohms Balanced OUT

Part number: FAR-F5CM-947M50-B260

(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	935 to 960 MHz	—	3.0	3.3	dB	
Inband ripple	—	935 to 960 MHz	—	0.9	1.2	dB	
Absolute attenuation	—	D.C to 890 MHz	45	56	—	dB	
	—	890 to 915 MHz	25	31	—	dB	
	—	980 to 1025 MHz	25	30	—	dB	
	—	1025 to 2000 MHz	40	50	—	dB	
	—	2000 to 3000 MHz	30	45	—	dB	

5. GSM (Rx) 50 ohms Unbalanced IN/100 ohms Balanced OUT

Part number: FAR-F5CM-947M50-B261

(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	935 to 960 MHz	—	2.8	3.5	dB	
Inband ripple	—	935 to 960 MHz	—	0.6	1.2	dB	
Absolute attenuation	—	D.C to 890 MHz	45	58	—	dB	
	—	890 to 915 MHz	25	51	—	dB	
	—	980 to 1025 MHz	25	29	—	dB	
	—	1025 to 2000 MHz	40	46	—	dB	
	—	2000 to 3000 MHz	35	39	—	dB	

6. GSM (Rx) 50 ohms Unbalanced IN/150 ohms Balanced OUT

Part number: FAR-F5CM-947M50-B262

(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	935 to 960 MHz	—	3.3	3.8	dB	
Inband ripple	—	935 to 960 MHz	—	0.8	1.3	dB	
Absolute attenuation	—	D.C to 890 MHz	45	55	—	dB	
	—	890 to 915 MHz	25	48	—	dB	
	—	980 to 1025 MHz	23	29	—	dB	
	—	1025 to 2000 MHz	40	50	—	dB	
	—	2000 to 3000 MHz	35	39	—	dB	

F5CM Series (B2)

7. AMPS/TDMA/CDMA (Tx) 50 ohms Balanced IN/50 ohms Unbalanced OUT

Part number: FAR-F5CM-836M50-B268

(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	824 to 849 MHz	—	2.8	3.5	dB	
Inband ripple	—	824 to 849 MHz	—	0.9	1.6	dB	
Absolute attenuation	—	D.C to 800 MHz	40	52	—	dB	
	—	869 to 920 MHz	25	33	—	dB	
	—	920 to 2000 MHz	35	46	—	dB	
	—	2000 to 3000 MHz	25	33	—	dB	

8. AMPS/TDMA/CDMA (Rx) 50 ohms Unbalanced IN/50 ohms Balanced OUT

Part number: FAR-F5CM-881M50-B266


(Ta = -30 to + 85°C)

Parameter	Symbol	Conditions	Value			Unit	Remarks
			Min.	Typ.	Max.		
Insertion loss	IL	869 to 894 MHz	—	2.8	3.5	dB	
Inband ripple	—	869 to 894 MHz	—	0.8	1.5	dB	
Absolute attenuation	—	D.C to 800 MHz	45	55	—	dB	
	—	800 to 849 MHz	30	47	—	dB	
	—	940 to 1000 MHz	30	38	—	dB	
	—	1000 to 2000 MHz	35	47	—	dB	
	—	2000 to 3000 MHz	25	32	—	dB	


F5CM Series (B2)

■ TYPICAL CHARACTERISTICS

1. GSM (Tx) 50 ohms Balanced IN/50 ohms Unbalanced OUT
Part number: FAR-F5CM-902M50-B263

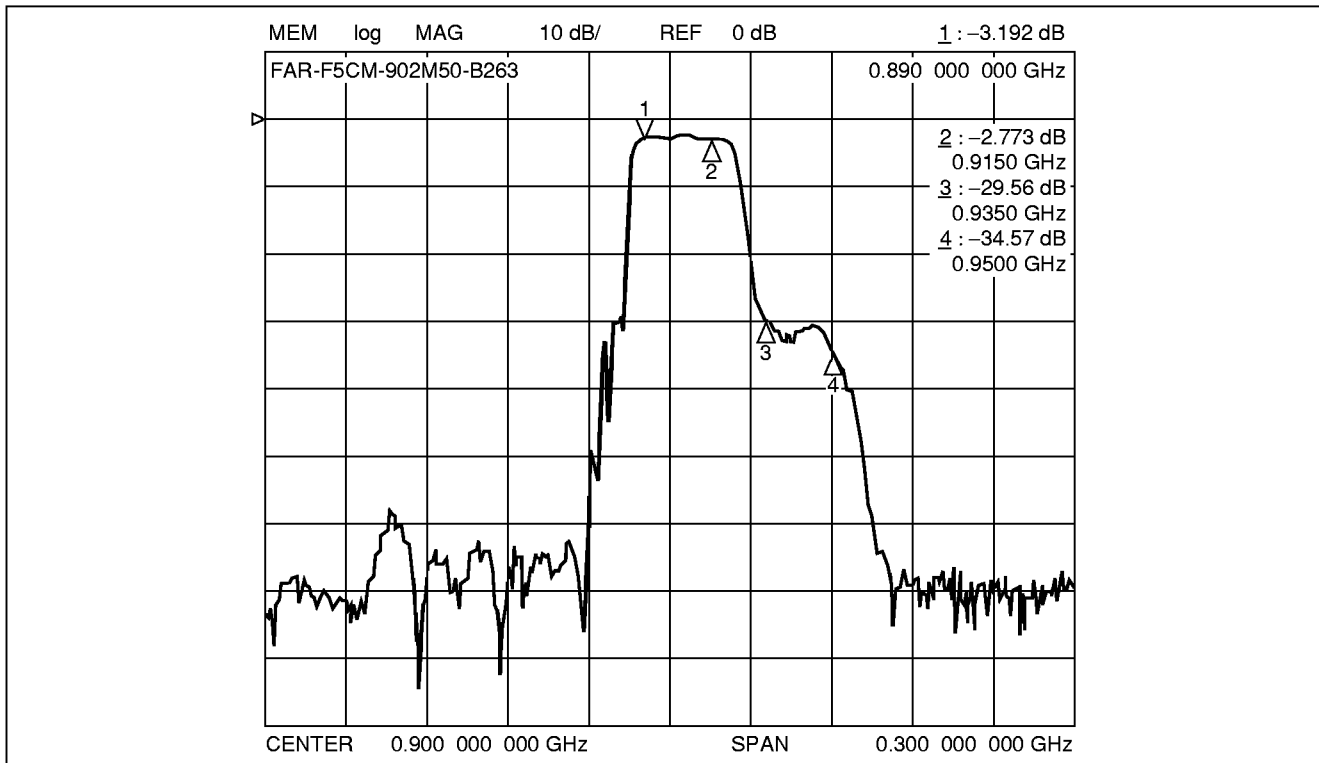


2. GSM (Tx) 100 ohms Balanced IN/50 ohms Unbalanced OUT
Part number: FAR-F5CM-902M50-B264

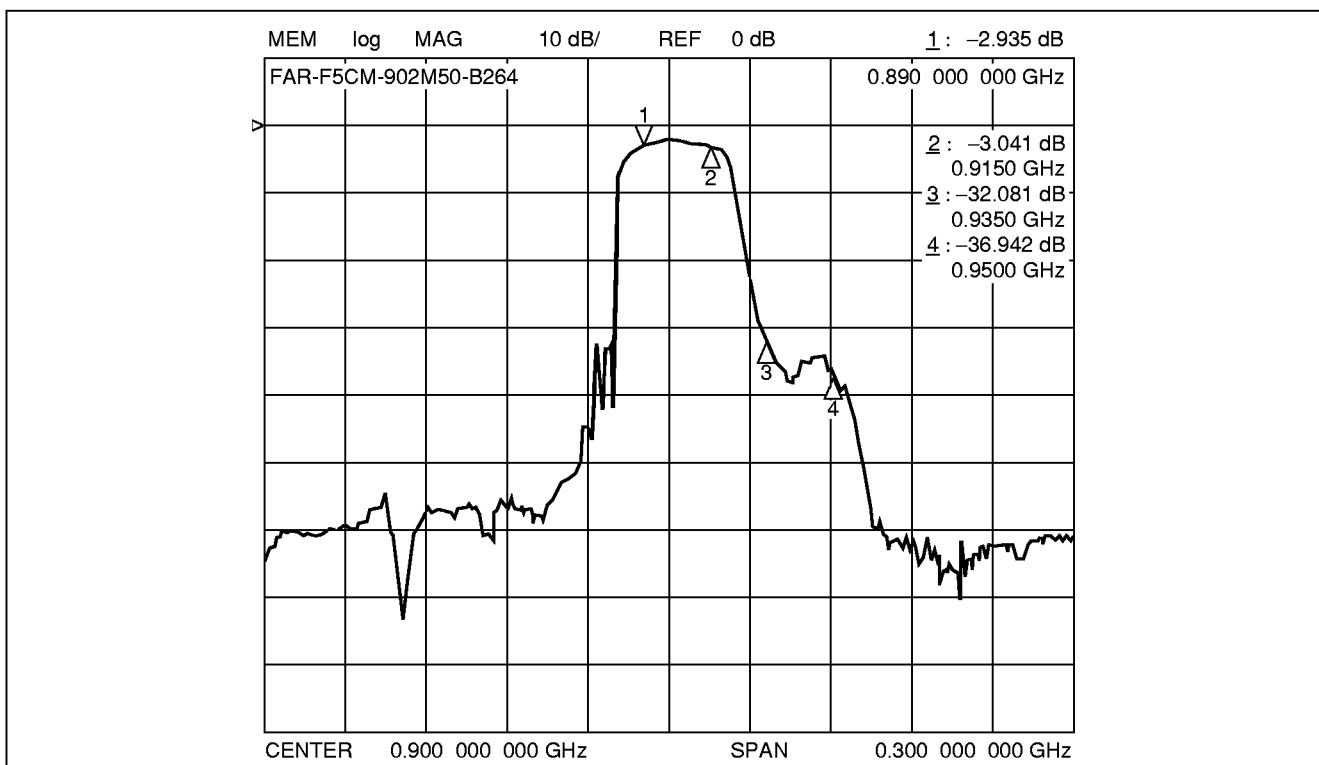

F5CM Series (B2)


3. GSM (Tx) 150 ohms Balanced IN/50 ohms Unbalanced OUT

Part number: FAR-F5CM-902M50-B265

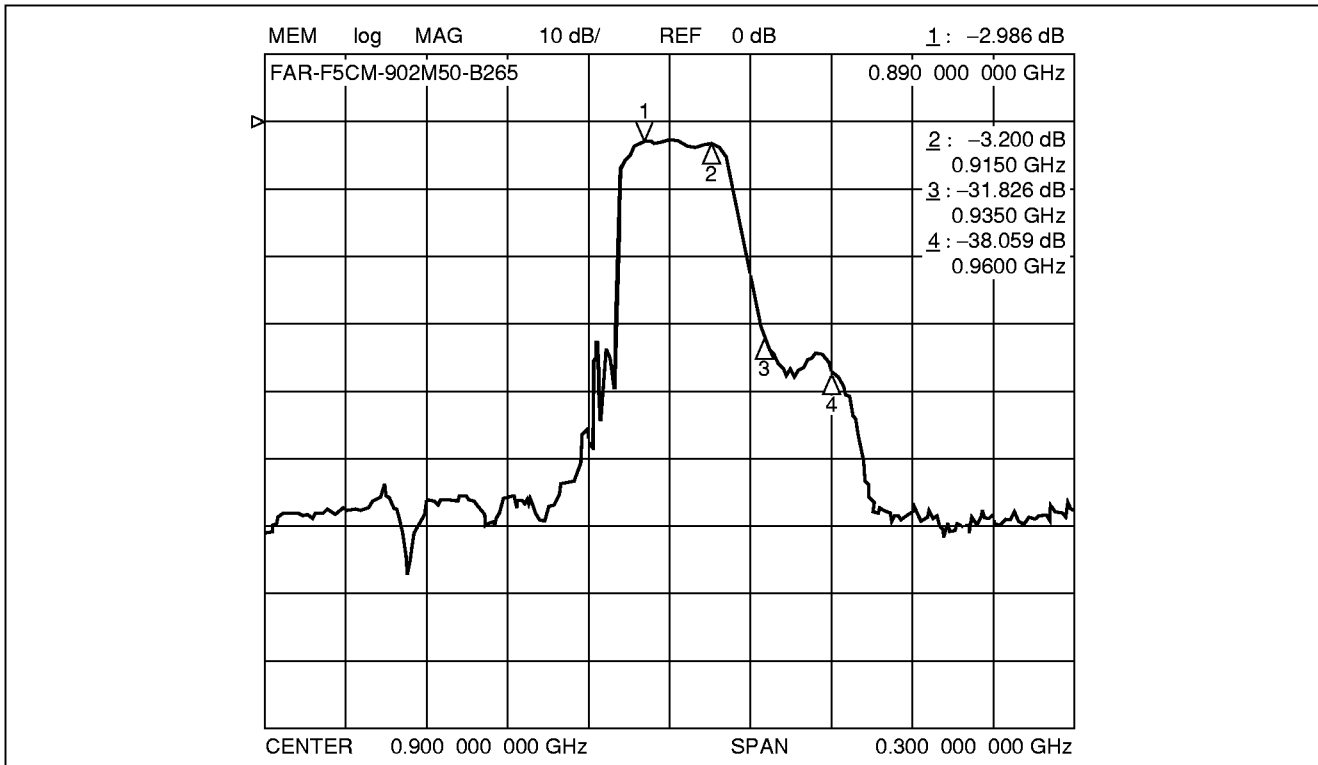


4. GSM (Rx) 50 ohms Unbalanced IN/50 ohms Balanced OUT

Part number: FAR-F5CM-947M50-B260

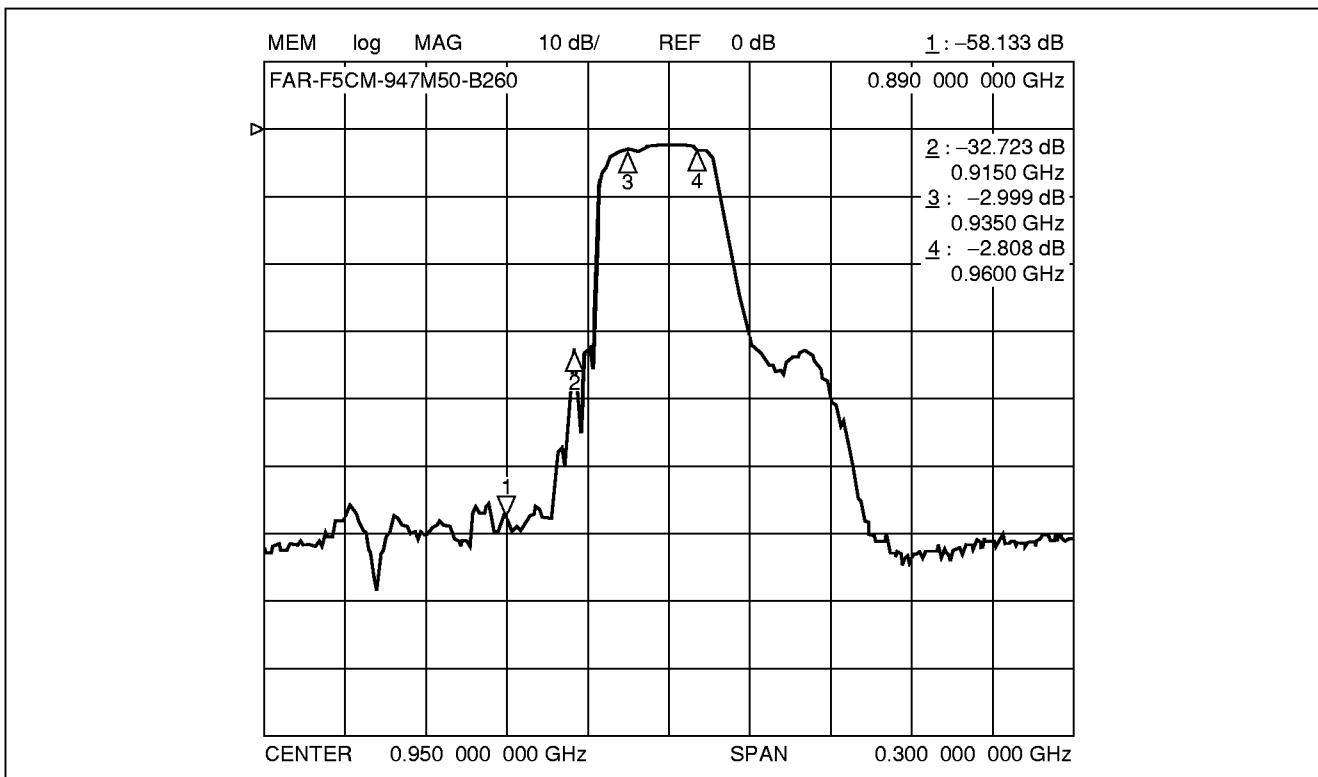


F5CM Series (B2)

5. GSM (Rx) 50 ohms Unbalanced IN/100 ohms Balanced OUT Part number: FAR-F5CM-947M50-B261

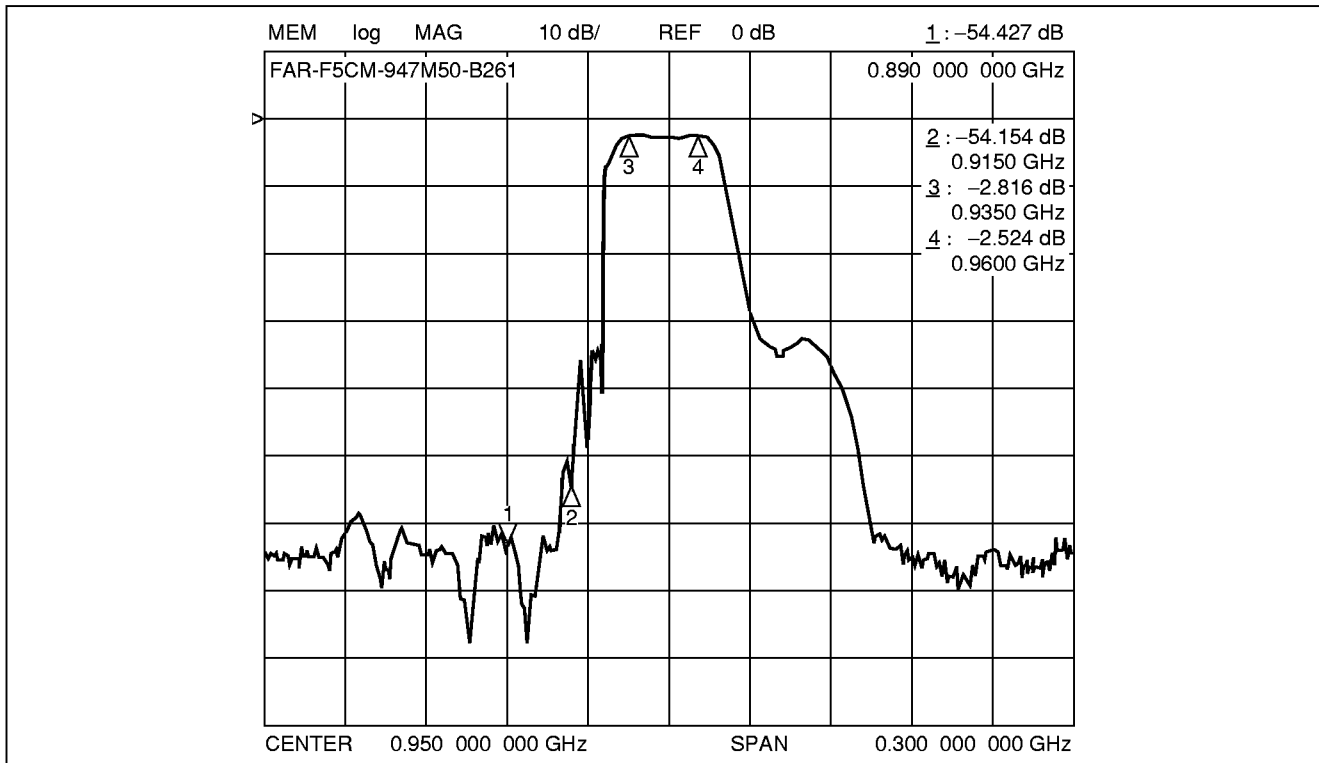


6. GSM (Rx) 50 ohms Unbalanced IN/150 ohms Balanced OUT Part number: FAR-F5CM-947M50-B262

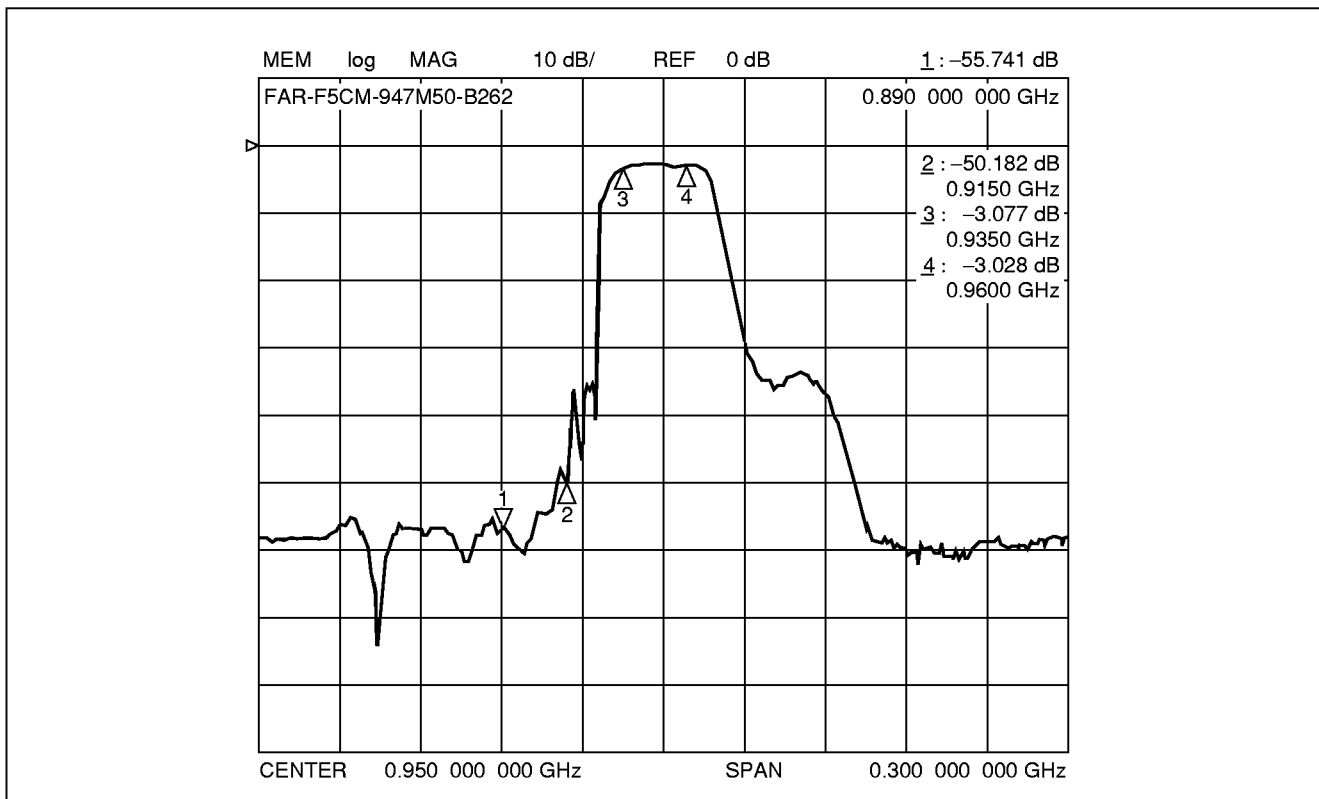

F5CM Series (B2)


7. AMSP/TDMA/CDMA (Tx) 50 ohms Balanced IN/50 ohms Unbalanced OUT

Part number: FAR-F5CM-836M50-B268

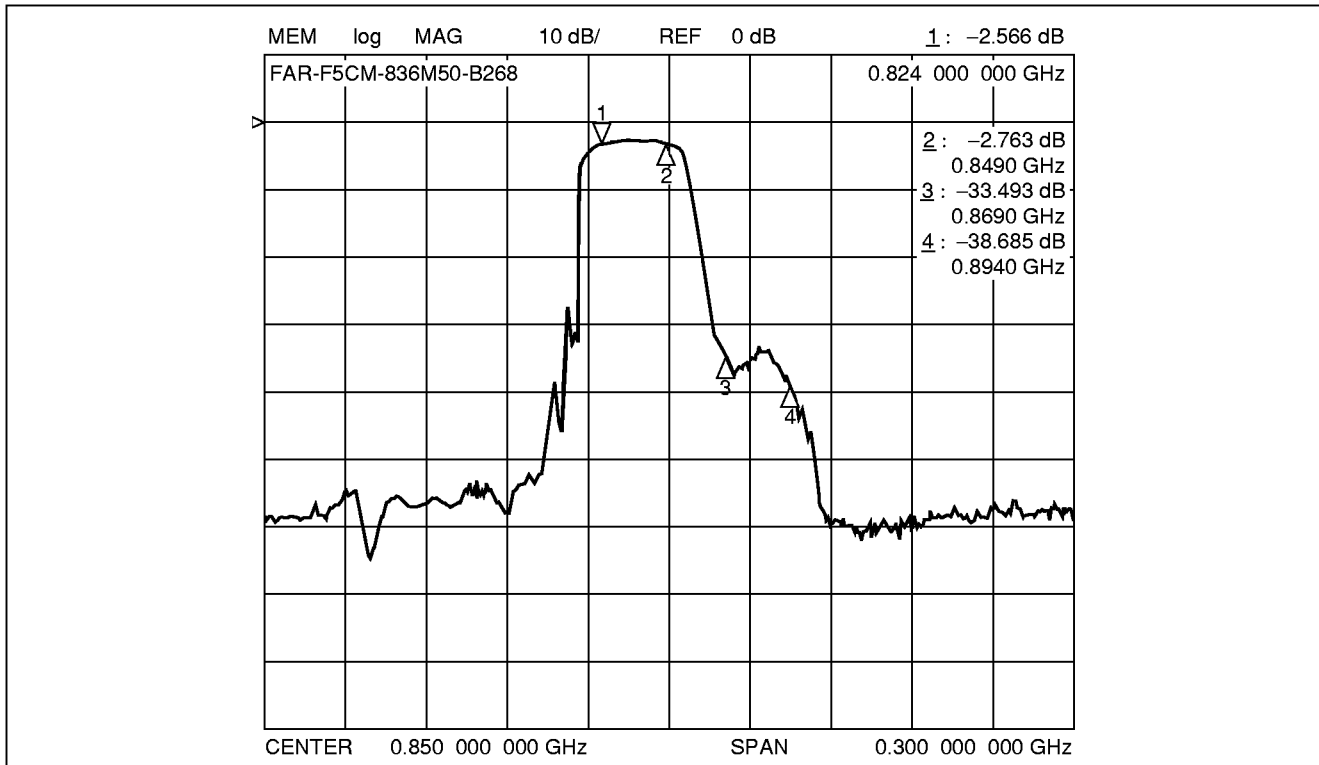


8. AMSP/TDMA/CDMA (Rx) 50 ohms Unbalanced IN/50 ohms Balanced OUT

Part number: FAR-F5CM-881M50-B266

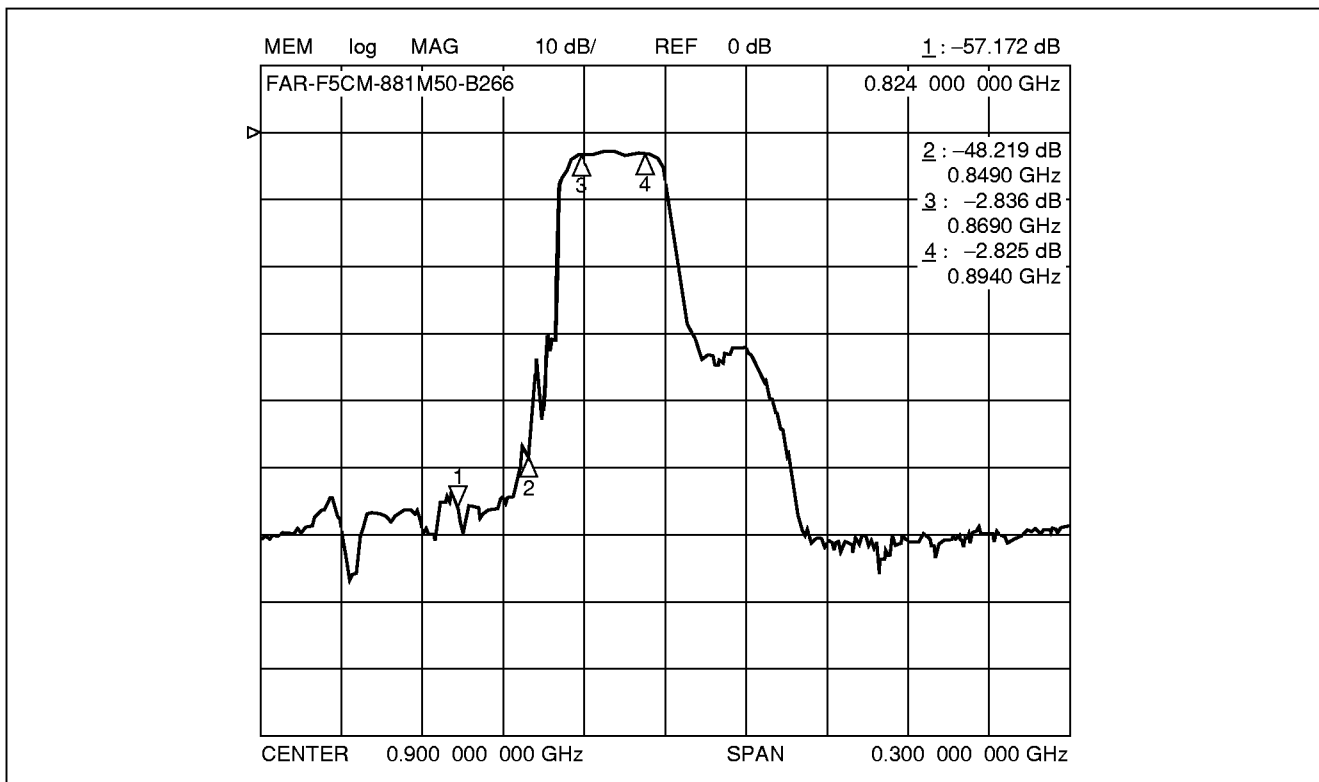

F5CM Series (B2)

MEASUREMENT CIRCUIT

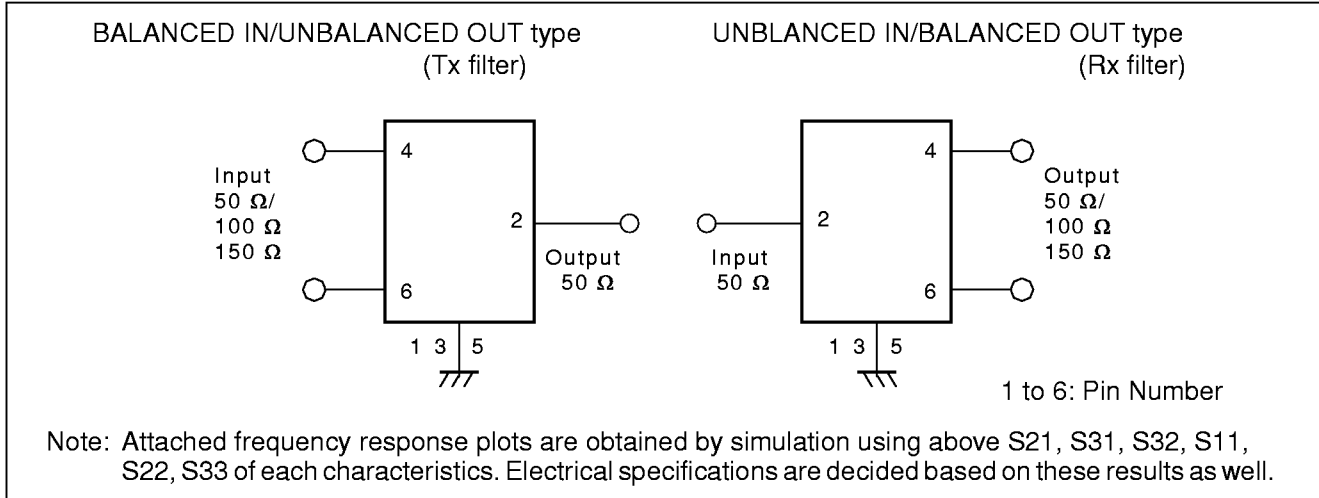

PART NUMBER DESIGNATION

[Designation example]


FAR-F5CM-□□□□□□-B2□□-□
 (1) (2) (3)

- (1) Frequency: Center frequency is specified in six alphanumeric. Enter M (for MHz) at the decimal point. Refer to below example.

[Example] 902.5 MHz ⇒ 902M50


- (2) Part symbol: Specified characters from 60 to 79.
- (3) Packing: W: 1000 pcs/reel
 (Reeled tape) V: 3000 pcs/reel
 U: 5000 pcs/reel

MARKING

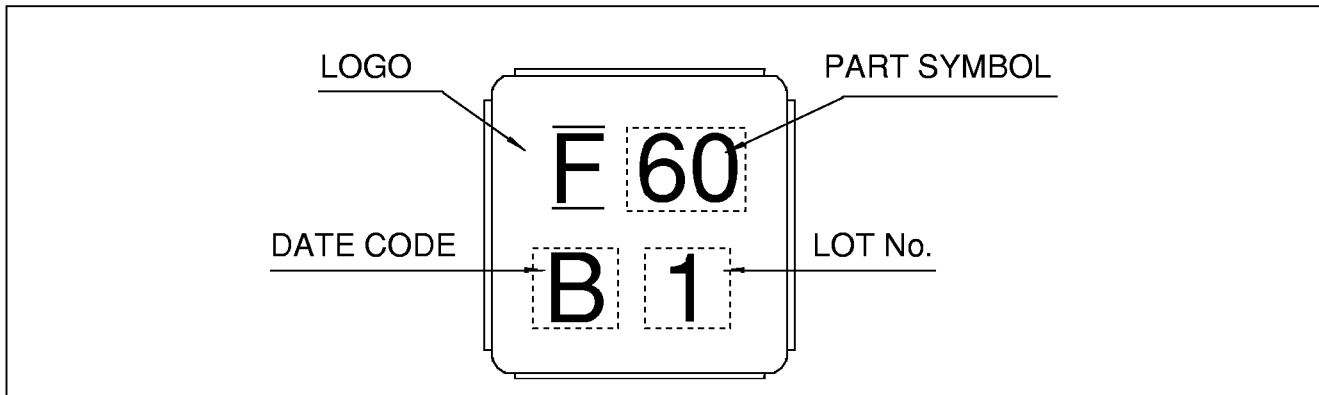

F5CM Series (B2)

PACKAGE DIMENSION

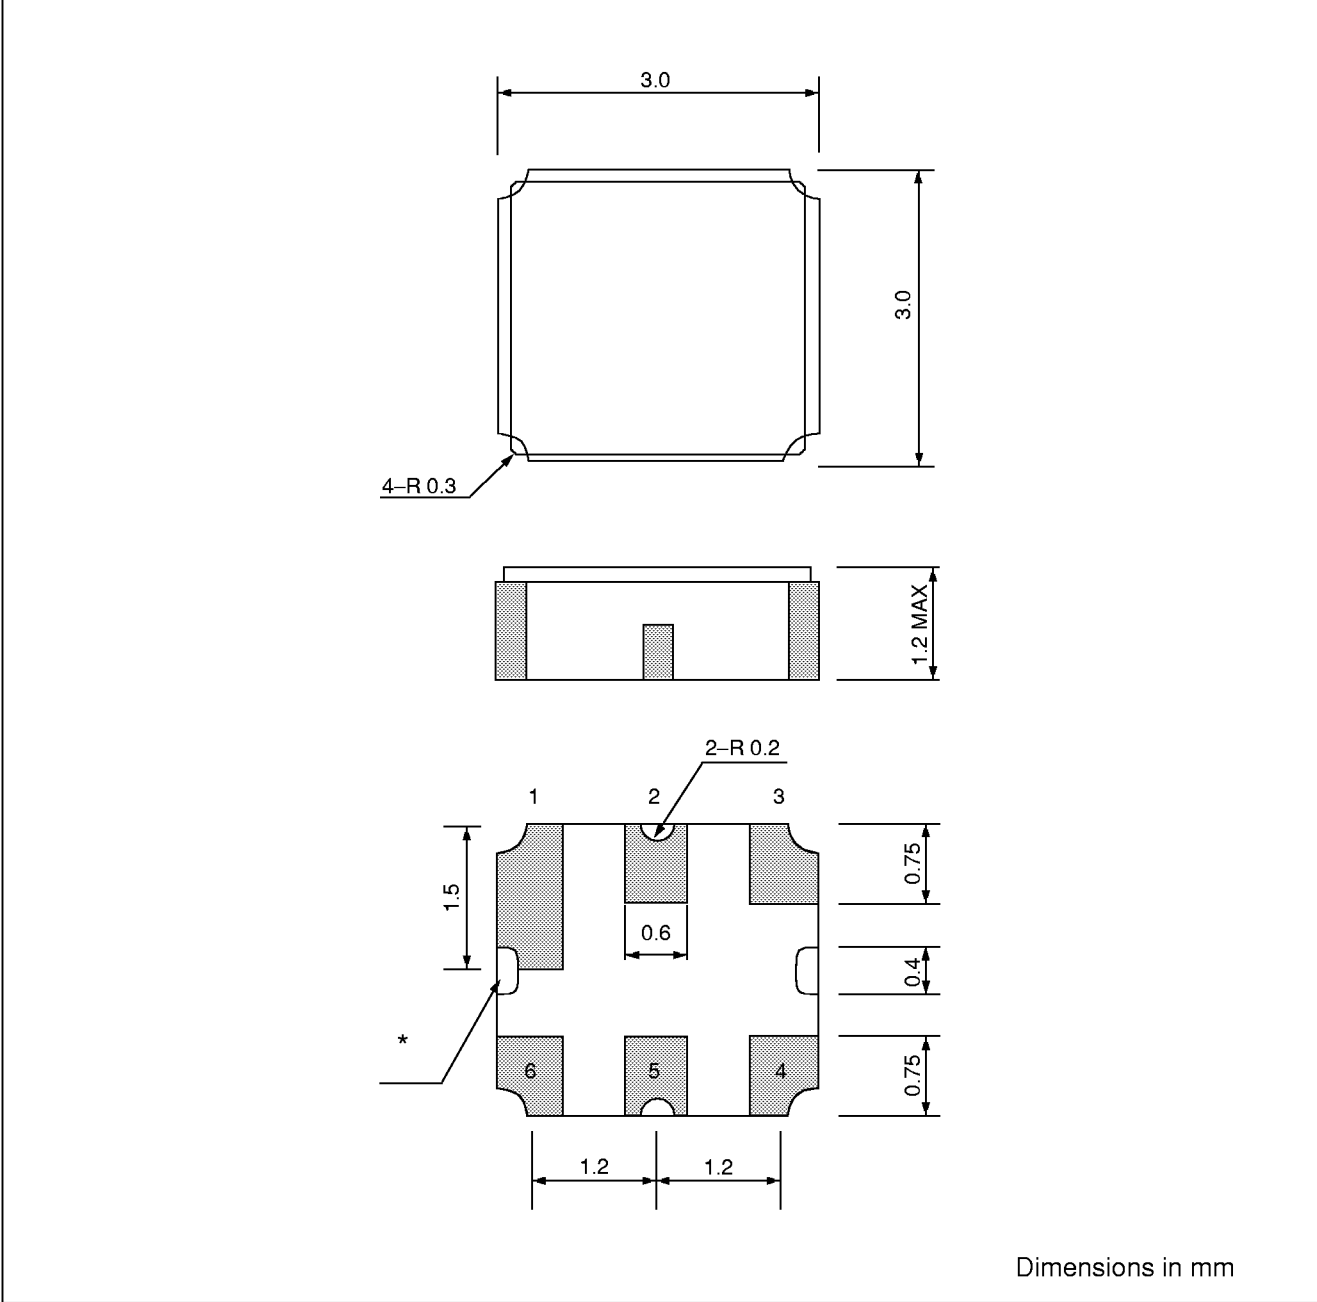


* : Two types of package are available.
One of them may be supplied without these two cut outs.


F5CM Series (B2)

■ PACKING: Reel type


1. Reel Dimensions

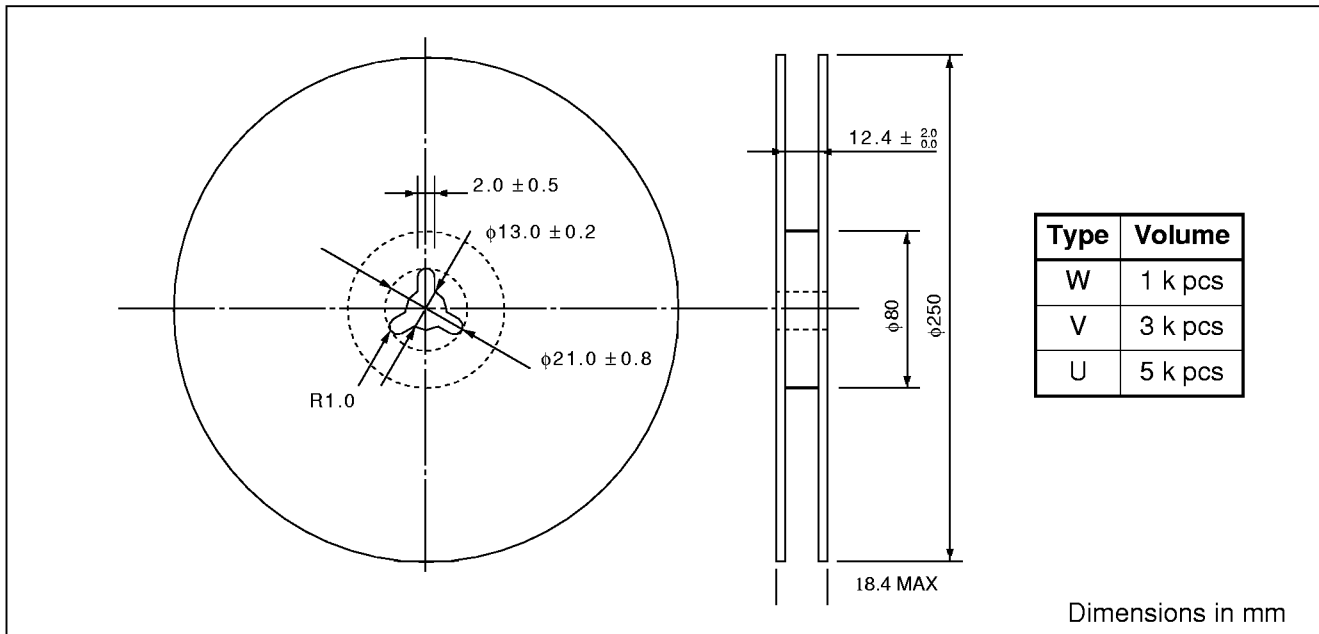

2. Packing Style

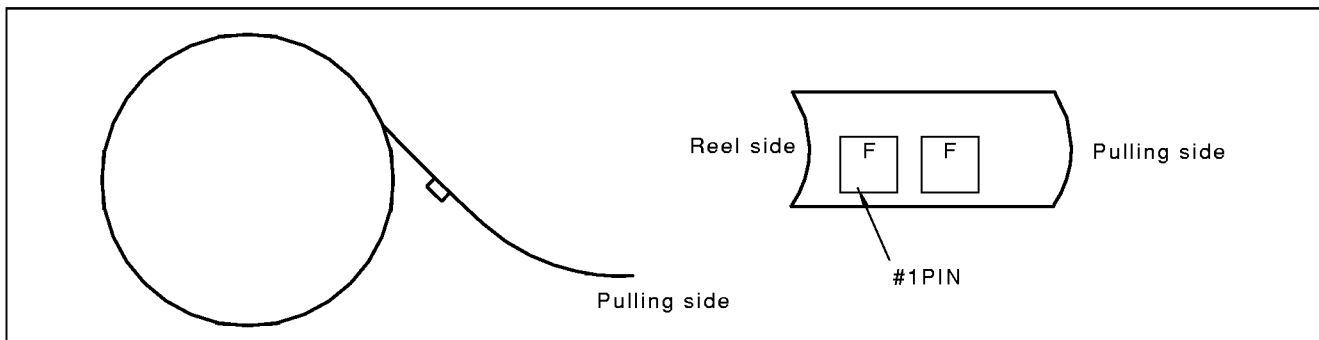

3. Tape Dimensions

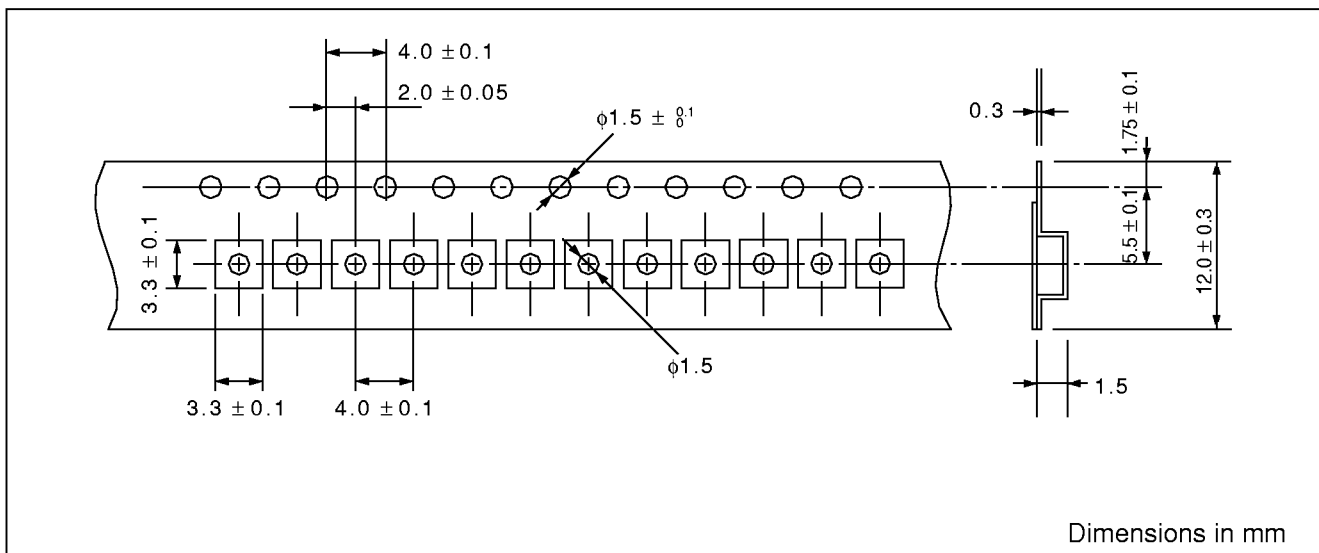

F5CM Series (B2)

FUJITSU LIMITED

For further information please contact:

Japan

FUJITSU LIMITED
Corporate Global Business Support Division
Electronic Devices
KAWASAKI PLANT, 4-1-1, Kamikodanaka
Nakahara-ku, Kawasaki-shi
Kanagawa 211-8588, Japan
Tel: 81 (44) 754-3763
Fax: 81 (44) 754-3329

<http://www.fujitsu.co.jp/>

North and South America

FUJITSU MICROELECTRONICS, INC.
Semiconductor Division
3545 North First Street
San Jose, CA 95134-1804, USA
Tel: (408) 922-9000
Fax: (408) 922-9179

Customer Response Center
Mon. - Fri.: 7 am - 5 pm (PST)
Tel: (800) 866-8608
Fax: (408) 922-9179

<http://www.fujitsumicro.com/>

Europe

FUJITSU MIKROELEKTRONIK GmbH
Am Siebenstein 6-10
D-63303 Dreieich-Buchsschlag
Germany
Tel: (06103) 690-0
Fax: (06103) 690-122

<http://www.fujitsu-edc.com/>

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE LTD
#05-08, 151 Lorong Chuan
New Tech Park
Singapore 556741
Tel: (65) 281-0770
Fax: (65) 281-0220

<http://www.fmap.com.sg/>

F9807

© FUJITSU LIMITED Printed in Japan

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information and circuit diagrams in this document are presented as examples of semiconductor device applications, and are not intended to be incorporated in devices for actual use. Also, FUJITSU is unable to assume responsibility for infringement of any patent rights or other rights of third parties arising from the use of this information or circuit diagrams.

FUJITSU semiconductor devices are intended for use in standard applications (computers, office automation and other office equipment, industrial, communications, and measurement equipment, personal or household devices, etc.).

CAUTION:

Customers considering the use of our products in special applications where failure or abnormal operation may directly affect human lives or cause physical injury or property damage, or where extremely high levels of reliability are demanded (such as aerospace systems, atomic energy controls, sea floor repeaters, vehicle operating controls, medical devices for life support, etc.) are requested to consult with FUJITSU sales representatives before such use. The company will not be responsible for damages arising from such use without prior approval.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.