



website:<http://biz.LGservice.com>
e-mail:<http://www.LGservice.com/techsup.html>

PLASMA TV

SERVICE MANUAL

CHASSIS : MF-056C

MODEL : 42PX3RVA
42PX3RVA-ZC

CAUTION

BEFORE SERVICING THE CHASSIS,
READ THE SAFETY PRECAUTIONS IN THIS MANUAL.



CONTENTS

| | |
|---------------------------------------|-----------|
| SAFETY PRECAUTIONS | 3 |
| DESCRIPTION OF CONTROLS | 4 |
| SPECIFICATIONS | 9 |
| ADJUSTMENT INSTRUCTIONS | 11 |
| TROUBLE SHOOTING GUIDE | 15 |
| BLOCK DIAGRAM | 24 |
| EXPLODED VIEW | 26 |
| EXPLODED VIEW PARTS LIST | 27 |
| REPLACEMENT PARTS LIST | 28 |
| SCHEMATIC DIAGRAM | |
| PRINTED CIRCUIT BOARD | |

SAFETY PRECAUTIONS

IMPORTANT SAFETY NOTICE

Many electrical and mechanical parts in this chassis have special safety-related characteristics. These parts are identified by Δ in the Schematic Diagram and Replacement Parts List.

It is essential that these special safety parts should be replaced with the same components as recommended in this manual to prevent X-RADIATION, Shock, Fire, or other Hazards.

Do not modify the original design without permission of manufacturer.

General Guidance

An **isolation Transformer should always be used** during the servicing of a receiver whose chassis is not isolated from the AC power line. Use a transformer of adequate power rating as this protects the technician from accidents resulting in personal injury from electrical shocks.

It will also protect the receiver and its components from being damaged by accidental shorts of the circuitry that may be inadvertently introduced during the service operation.

If any fuse (or Fusible Resistor) in this monitor is blown, replace it with the specified.

When replacing a high wattage resistor (Oxide Metal Film Resistor, over 1W), keep the resistor 10mm away from PCB.

Keep wires away from high voltage or high temperature parts.

Due to high vacuum and large surface area of picture tube, extreme care should be used in **handling the Picture Tube**. Do not lift the Picture tube by its Neck.

Leakage Current Cold Check(Antenna Cold Check)

With the instrument AC plug removed from AC source, connect an electrical jumper across the two AC plug prongs. Place the AC switch in the on position, connect one lead of ohm-meter to the AC plug prongs tied together and touch other ohm-meter lead in turn to each exposed metallic parts such as antenna terminals, phone jacks, etc.

If the exposed metallic part has a return path to the chassis, the measured resistance should be between $1M\Omega$ and $5.2M\Omega$.

When the exposed metal has no return path to the chassis the reading must be infinite.

An other abnormality exists that must be corrected before the receiver is returned to the customer.

Leakage Current Hot Check (See below Figure)

Plug the AC cord directly into the AC outlet.

Do not use a line Isolation Transformer during this check.


Connect 1.5K/10watt resistor in parallel with a 0.15uF capacitor between a known good earth ground (Water Pipe, Conduit, etc.) and the exposed metallic parts.

Measure the AC voltage across the resistor using AC voltmeter with 1000 ohms/volt or more sensitivity.

Reverse plug the AC cord into the AC outlet and repeat AC voltage measurements for each exposed metallic part. Any voltage measured must not exceed 0.75 volt RMS which is corresponds to 0.5mA.

In case any measurement is out of the limits specified, there is possibility of shock hazard and the set must be checked and repaired before it is returned to the customer.


Leakage Current Hot Check circuit

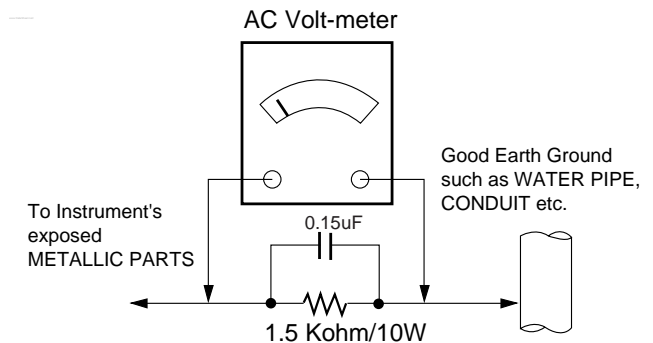

DESCRIPTION OF CONTROLS


Remote Control Key Functions

- When using the remote control aim it at the remote control sensor of the set.
- There's maybe a defect in consecutive operation of remote control in specified brightness according to this set feature.

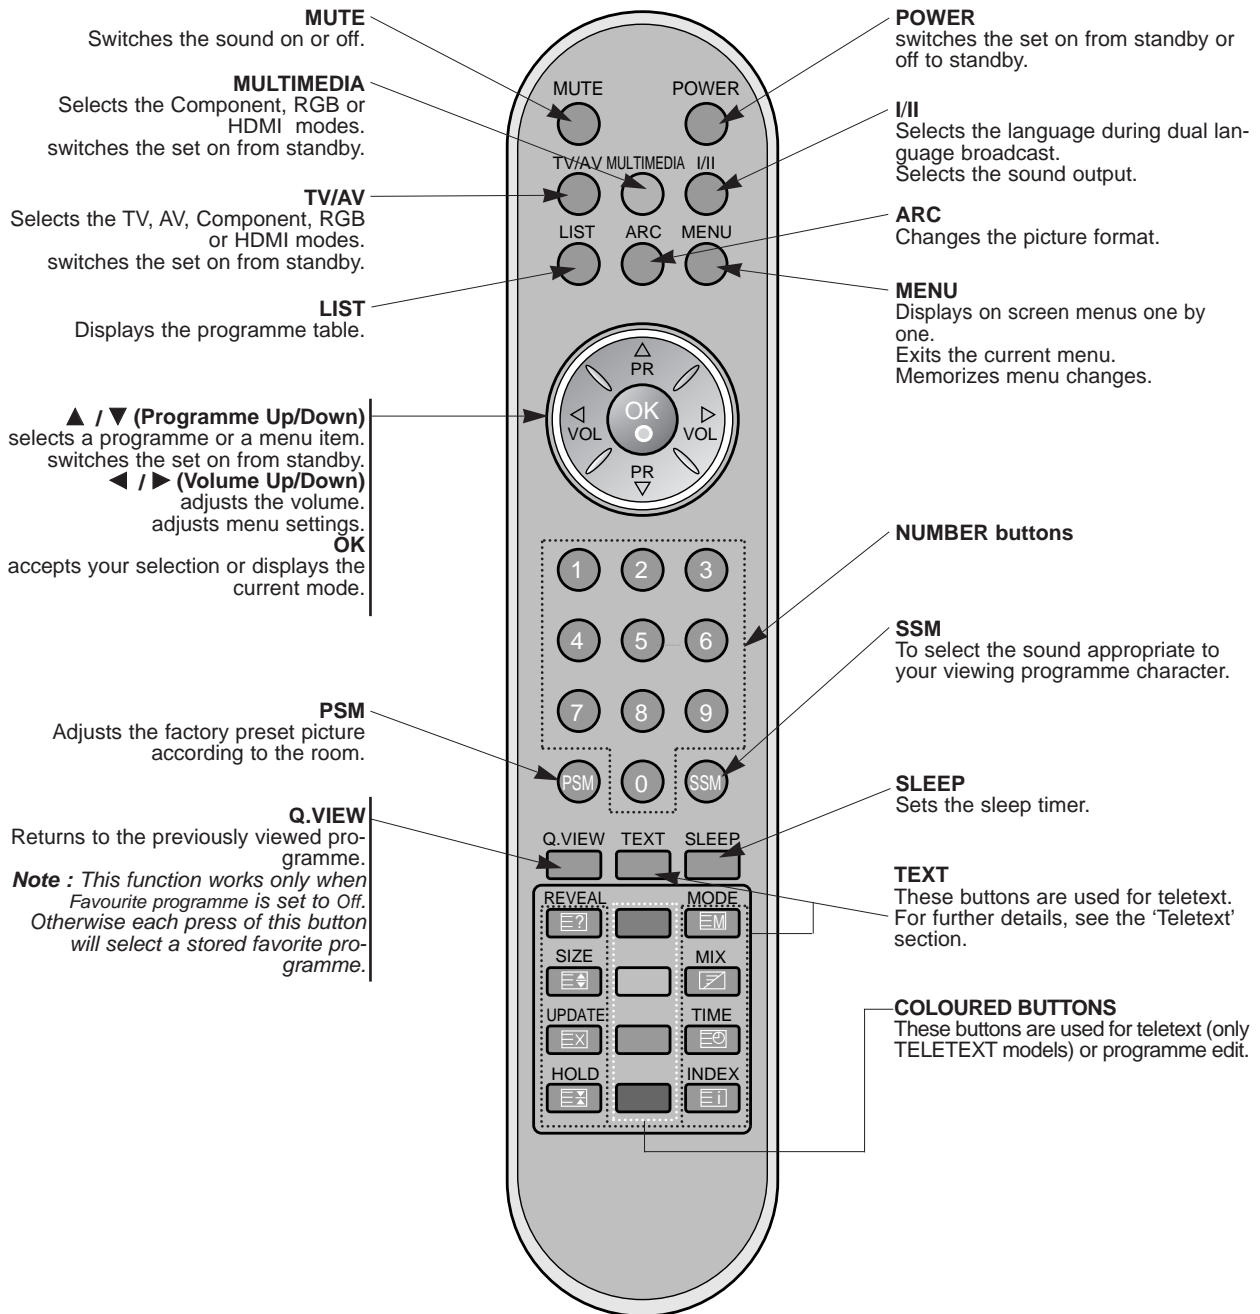

Location and Function of Controls


<Front Panel Controls>

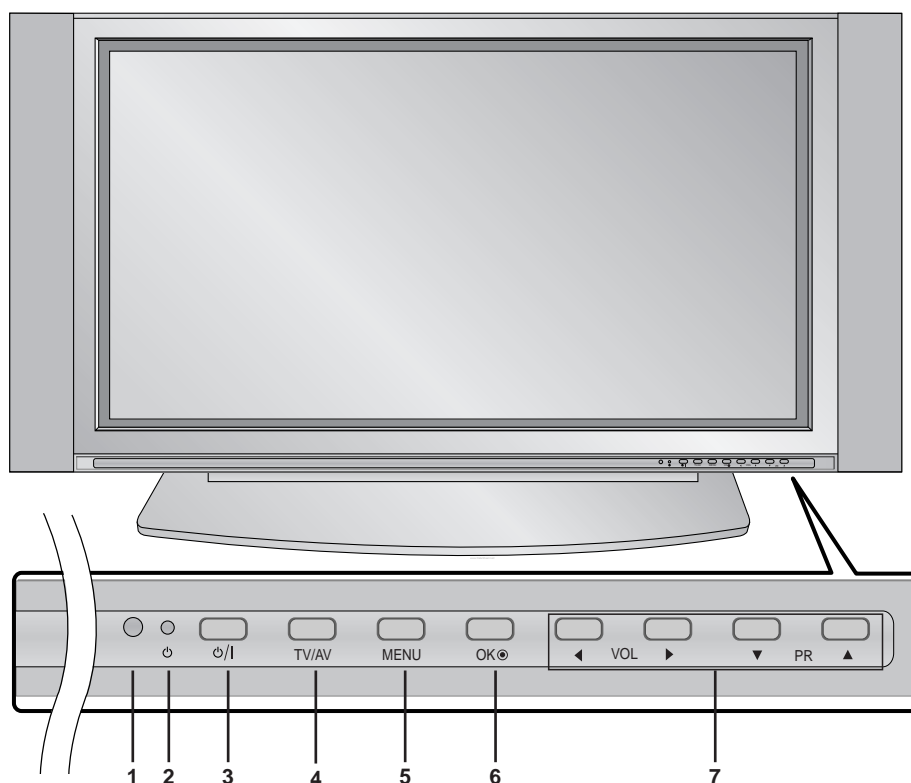

- 1. Remote Control Sensor**
- 2. Power Indicator**
Illuminates red in standby mode, Illuminates green when the set is turned on.
- 3. Power Button**
Switches the set on from standby or off to standby.
- 4. TV/AV Button**
Selects the TV, AV, Component, RGB or HDMI modes.
Switches the set on from standby.
- 5. MENU**
Displays on screen menus one by one.
Exits the current menu.
Memorizes menu changes.
- 6. OK**
Accepts your selection or displays the current mode.
- 7. ▲ / ▼ (Programme Up/Down)**
Selects a programme or a menu item.
Switches the set on from standby.
◀ / ▶ (Volume Up/Down)
Adjusts the volume.
Adjusts menu settings.

Location and Function of Controls

- Shown is a simplified representation of the set.
- Here shown may be somewhat different from your set.

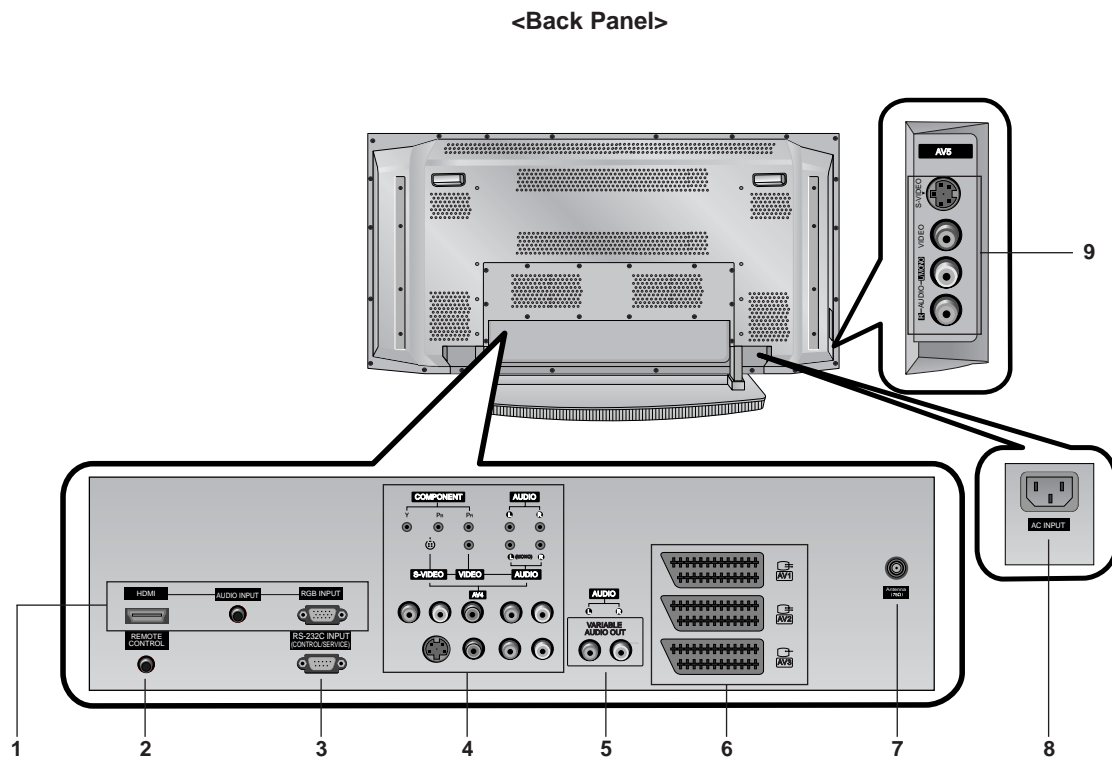

1. HDMI(DVI VIDEO) / AUDIO INPUT / RGB INPUT

Connect the monitor output socket of the PERSONAL COMPUTER, DVD or STB to this socket.

Note: If you want to use RGB/DVI audio, we strongly recommend that you use the cable that has a core, or the EMI Filter core along with separate cable.

2. CONTROL LOCK / REMOTE CONTROL

3. RS-232C INPUT(CONTROL/SERVICE) PORT

Connect to the RS-232C port on a PC.

4. COMPONENT INPUT

Connect DVD video outputs to Y, P_B, P_R of COMPONENT INPUT and audio outputs to Audio sockets of AUDIO INPUT.

AUDIO/VIDEO IN SOCKETS (AV4)

Connect the audio/video out sockets of external equipment to these sockets.

S-VIDEO/AUDIO IN SOCKETS

Connect the S-VIDEO out socket of an VCR to the **S-VIDEO** socket.

Connect the audio out sockets of the VCR to the audio sockets as in **AV4**.

5. VARIABLE AUDIO OUTPUT

6. EURO SCART SOCKET

Connect the euro scart socket of the VCR to these sockets.

Note: If you want to use the EURO scart cable, you have to use the signal shielded Euro scart cable.

7. ANTENNA INPUT

8. POWER CORD SOCKET

This set operates on an AC power. The voltage is indicated on the Specifications page. Never attempt to operate the set on DC power.

9. AUDIO/VIDEO INPUT (AV5) S-VIDEO/AUDIO IN SOCKETS

Displayable Monitor Specification

RGB / HDMI mode

| Resolution | Horizontal Frequency(KHz) | Vertical Frequency(Hz) |
|------------|---------------------------|------------------------|
| 640x350 | 31.468 | 70.09 |
| | 37.861 | 85.08 |
| 720x400 | 31.469 | 70.08 |
| | 37.927 | 85.03 |
| 640x480 | 31.469 | 59.94 |
| | 35.000 | 66.66 |
| | 37.861 | 72.80 |
| | 37.500 | 75.00 |
| 848x480 | 43.269 | 85.00 |
| | 31.500 | 60.00 |
| | 37.799 | 70.00 |
| | 39.375 | 75.00 |
| 852x480 | 31.500 | 60.00 |
| | 37.799 | 70.00 |
| | 39.375 | 75.00 |
| 800x600 | 35.156 | 56.25 |
| | 37.879 | 60.31 |
| | 48.077 | 72.18 |
| | 46.875 | 75.00 |
| 832x624 | 53.674 | 85.06 |
| | 49.725 | 74.55 |
| | 48.363 | 60.00 |
| 1024x768 | 56.476 | 70.06 |
| | 60.023 | 75.02 |
| | 68.677 | 85.00 |
| | 54.348 | 60.05 |
| 1152x864 | 63.995 | 70.01 |
| | 67.500 | 75.00 |
| 1152x870 | 68.681 | 75.06 |
| 1280x960 | 60.023 | 60.02 |
| 1280x1024 | 63.981 | 60.02 |

42PX3RV series

RGB / HDMI mode

| Resolution | Horizontal Frequency(KHz) | Vertical Frequency(Hz) |
|------------|---------------------------|------------------------|
| 640x350 | 31.468 | 70.09 |
| | 37.861 | 85.08 |
| 720x400 | 31.469 | 70.08 |
| | 37.927 | 85.03 |
| 640x480 | 31.469 | 59.94 |
| | 35.000 | 66.66 |
| | 37.861 | 72.80 |
| | 37.500 | 75.00 |
| 848x480 | 43.269 | 85.00 |
| | 31.500 | 60.00 |
| | 37.799 | 70.00 |
| | 39.375 | 75.00 |
| 852x480 | 31.500 | 60.00 |
| | 37.799 | 70.00 |
| | 39.375 | 75.00 |
| 800x600 | 35.156 | 56.25 (RGB) |
| | 37.879 | 60.31 |
| | 48.077 | 72.18 |
| | 46.875 | 75.00 |
| 832x624 | 53.674 | 85.06 |
| | 49.725 | 74.55 |
| | 48.363 | 60.00 |
| 1024x768 | 56.476 | 70.06 |
| | 60.023 | 75.02 |
| | 68.677 | 85.00 |
| | 47.700 | 60.00 |
| 1360x768 | 59.625 | 75.02 |
| | 68.500 | 85.00 |
| 1366x768 | 47.700 | 60.00 |
| | 59.625 | 75.02 |
| 1152x864 | 69.500 | 85.00 |
| | 54.348 | 60.05 |
| | 63.995 | 70.01 |
| 1152x870 | 67.500 | 75.00 |
| | 77.487 | 85.00 |
| 1152x870 | 68.681 | 75.06 |
| 1280x768 | 47.693 | 60.00 |
| | 60.091 | 75.00 |
| 1280x960 | 68.504 | 85.00 |
| | 60.023 | 60.02 |
| 1280x1024 | 63.981 | 60.02 |

50PX3R series

Accessories




Owner's Manual



Remote Control handset



2-Eye Bolts



Alkaline batteries




Power Cord




2-Wall brackets

Joining the set assembly to the wall to protect the set tumbling

- Secure the set assembly by joining it to a wall by using the Eye Bolts/Wall brackets.




- After the set must be mounted on a desktop, install the Eye Bolts on the set as shown. Insert the 2 Eye Bolts and tighten securely, in the holes on the bracket. Install the wall brackets on the wall with 2 bolts, (not supplied with the product), as shown. Match the height of the Eye Bolts and the wall brackets. Check to be sure the brackets are tightened securely.




- Secure the set assembly to the wall with strong strings or wound wire cables, (not supplied with the product), as shown.

Optional Extras

- Optional extras can be changed or modified for quality improvement without any notification new optional extras can be added.
- Contract your dealer for buying these items.



Tilt wall mounting bracket



Ceiling mounting bracket



Video cables



Audio cables

SPECIFICATIONS

NOTE : Specifications and others are subject to change without notice for improvement.

■ Application Range

This spec is applied to the 42"PDP TV used MF-056C Chassis.

■ Specification

Each part is tested as below without special appointment.

- 1) Temperature : 25±5°C (77±9°F), CST : 40±5
- 2) Relative Humidity: 65±10%
- 3) Power Voltage: Standard Input voltage (100-240V~, 50/60Hz)
* Standard Voltage of each product is marked by models.
- 4) Specification and performance of each parts are followed each drawing and specification by part number in accordance with BOM.
- 5) The receiver must be operated for about 20 minutes prior to the adjustment.

■ Test Method

- 1) Performance : LGE TV test method followed.
- 2) Demanded other specification
Safety: CE, IEC specification
EMC : CE, IEC

| Model Name | Market | Remark |
|-------------|--------|----------------------------------------------------|
| 42PX3RVA-ZC | EU | Safety : IEC/EN60065, EMI : EN55013, EMS : EN55020 |

■ General Specification

1. General Specification

| No | Item | Specification | Remark |
|----|-----------------------|---------------------------------------------|----------------------|
| 1 | Display Screen Device | 42 inch wide Color Display Module | PDP |
| 2 | Aspect Ratio | 16:9 | |
| 3 | PDP Module | PDP42V7xxxx RGB Closed Type, Film Filter | |
| 4 | Operating Environment | 1) Temp : 0~40 deg 2) Humidity : 0~85% | LGE SPEC |
| 5 | Storage Environment | 1) Temp : -20~60 deg 2) Humidity : 0~85% | |
| 6 | Input Voltage | 100-240V~, 50/60Hz | Maker : SONY/ Sanken |

2. Model Specification(42PX3RVA-ZA)

| No | Item | Specification | | | Remark |
|----|----------------------|-----------------------------------|--------|-------|-----------------------------------|
| 1 | Market | EU | | | |
| 2 | Broadcasting system | PAL B/G/I/D/K, SECAM L/L' | | | |
| 3 | Available channel | BRAND | PAL | SECAM | |
| | | VHF/UHF | C1~C69 | | |
| | | CATV | S1~S47 | | |
| 4 | Receiving system | Upper Heterodyne | | | |
| 5 | Scart Jack(3EA) | PAL, SECAM | | | |
| 6 | Video input(2EA) | PAL, SECAM, NTSC | | | 4 System : PAL, SECAM, NTSC,PAL60 |
| 7 | S-Video Input(2EA) | PAL, SECAM, NTSC | | | 4 System : PAL, SECAM, NTSC,PAL60 |
| 8 | Component Input(2EA) | Y/Cb/Cr, Y/Pb/Pr | | | |
| 9 | RGB Input(1EA) | RGB-PC | | | |
| | | RGB-DTV | | | |
| 10 | HDMI Input(1EA) | HDMI-PC | | | |
| | | HDMI-DTV | | | |
| 11 | Audio Input(4EA) | PC Audio(1EA), Component, AV(2EA) | | | L/R Input |
| 12 | Audio Output(1EA) | Variable Audio Out | | | L/R Output |
| 13 | Wired Control | Discrete IR | | | |

ADJUSTMENT INSTRUCTIONS

1. Application Object

These instructions apply to the MF-056C Chassis.

2. Specification

- (1) Because this is not a hot chassis, it is not necessary to use an isolation transformer. However, the use of isolation transformer will help protect test instrument.
- (2) Adjustment must be done in the correct order.
- (3) The adjustment must be performed in the circumstance of 25±5°C of temperature and 65±10% of relative humidity if there is no specific designation.
- (4) The input voltage of the receiver must keep 100-220V, 50/60Hz.
- (5) The receiver must be operated for about 15 minutes prior to the adjustment.

- After RGB Full white HEAT-RUN Mode, the receiver must be operated prior to adjustment.
- Enter into HEAT-RUN MODE
 - 1) Press the POWER ON KEY on R/C for adjustment.
 - 2) OSD display and screen display 100% full WHITE PATTERN.


- * Set is activated HEAT-RUN without signal generator in this mode.
- * Single color pattern(RED/BLUE/GREEN) of HEAT-RUN mode uses to check PANEL.

Caution) If you turn on a still screen more than 20 minutes (Especially digital pattern, cross hatch pattern), after image may occur in the black level part of the screen.

3. Channel memory

3-1. Setting up the LGIDS

- 1) Install the LGIDS. (idsinst.exe)
- 2) After installation, restart your PC.
- 3) Extract [files.zip] to folder [c:\LGIDS\files].
- 4) Start LGIDS.

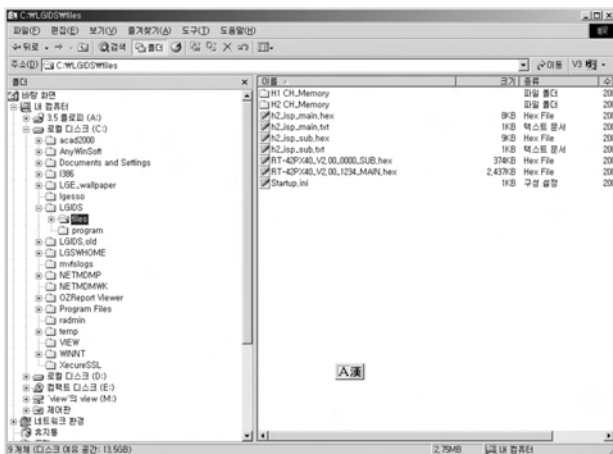


(Fig. 1)

3-2. Channel memory Method


- 1) Select "PDP" and "Hurricane" on Model dialog. And check your connection in Communication dialog. (If your connection is 'NG', then set your PORT(COM1,2,3,...) correctly.)
- 2) Connect RS-232C cable and turn on the power. (If your connection has completed, you can see "Ready".)

* If your set is not an end products but only a board, you have to make your board to Stand-by state (LED_R). And you have to Download in Stand_by power state.

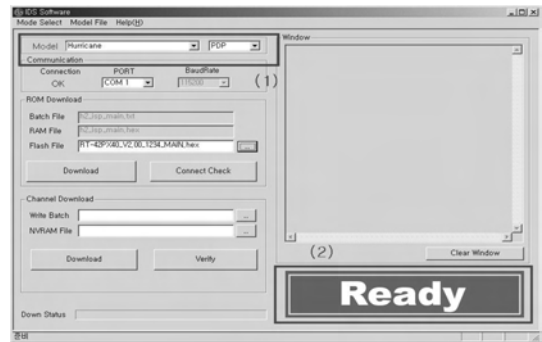

(Fig. 2)

- 3) Select proper CH_memory file(*.nvm) for each model at [NVRAM Download] → [Write Batch] Next, select proper binary file(*.bin) including the CH information for each model at [NVRAM File].
- 4) Click the [Download] button. It means the completion of the CH memory download if all items show 'OK' and Status is changed by 'PASS' at the lower right corner of the window.
- 5) If you want to check whether the CH information is memorized correctly or not, click the [Verify] button. And then compare NVRAM File(*.bin) with the CH information downloaded.

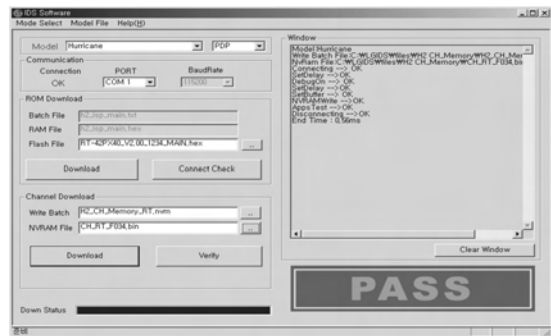

(Fig. 3)

Each PCB assembly must be checked by check JIG set.
(Because power PCB Assembly damages to PDP Module, especially be careful)

4. POWER PCB Assy Voltage Adjustments (Va, Vs Voltage Adjustments)

4-1. Test Equipment : D.M.M. 1EA


4-2. Adjustment Method [P/No 3501V00220A(Sanken) B/D, P/No 6709V00010A(LGIT) B/D]

(1) Va Adjustment

- 1) After receiving 100% Full White Pattern, HEAT RUN.
- 2) Connect + terminal of D.M.M to Va pin of P807, connect - terminal to GND pin of P807.
- 3) After turning RV501, voltage of D.M.M adjustment as same as Va voltage which on label of panel right/top. (Deviation; $\pm 0.5V$)

(2) Vs Adjustment

- 1) Connect + terminal of D.M.M to Vs pin of P807, connect - terminal to GND pin of P807.
- 2) After turning RV401, voltage of D.M.M adjustment as same as Vs voltage which on label of panel right/top. (Deviation; $\pm 0.5V$)

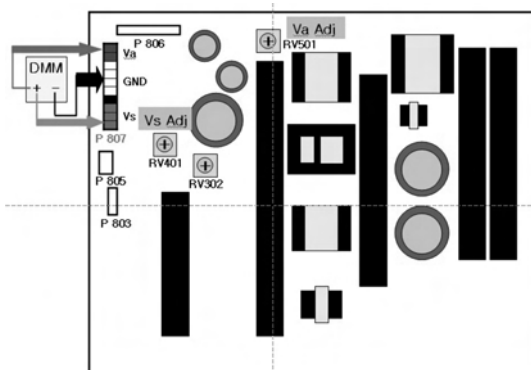


(Fig. 4) Connection diagram of power adjustment for measuring

5. EDID (The Extended Display Identification Data)/ DDC (Display Data Channel) download

5-1. Required Test Equipment

- 1) Adjusting PC with S/W for writing EDID Data.(S/W : EDID TESTER Ver.2.5)
- 2) A Jig for EDID Download
- 3) Cable : Serial(9Pin or USB) to D-sub 15Pin cable, D-sub 15Pin cable, DVI to HDMI cable.

5-2. Setting of device

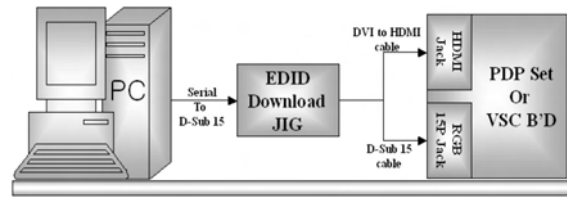

(Fig. 5) Connection Diagram of DDC download


5.3. Preparation for Adjustment

- 1) As above Fig. 5, Connect the Set, EDID Download Jig, PC & Cable.
- 2) Turn on the PC & EDID Download Jig. And Execute the S/W : EDID TESTER Ver,2.5
- 3) Set up S/W option
Repeat Number : 5
Device Address : A0
PageByte : 8
- 4) Power on the Set

5.4. Sequence of Adjustment


(1) DDC data of Analog-RGB

- 1) Init the data

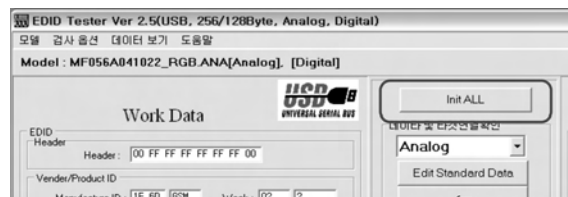

- 2) Load the EDID data.(Open File)
[Analog-RGB : TYPE_VGA.ANA]
[Digital(HDMI) : TYPE_VGA.DVI]

- 3) Set the S/W as below.

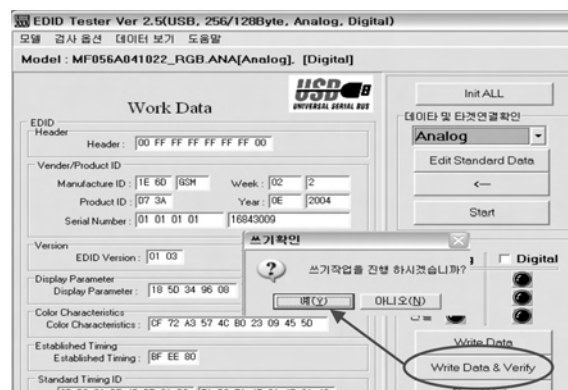

- 4) Push the "Write Data & Verify"button. And confirm "Yes".
- 5) If the writing is finished, you will see the "OK" message.

6. Auto AV(CVBS) Color Balance

6-1. Requirement


- This AV color balance adjustment should be performed before White Balance Adjustment.

6-2. Required Equipme

- 1) Remote controller for agdjustment
- 2) AV Pattern Generator : 802F Pattern Generator, Master (MSPG-925FA), etc (Which has PAL Composite Video format output with standard (1.0 Vpp) Vertical 100% Color Bar Pattern as Fig.6)

6-3 Method of Auto RGB Color Balance

- 1) Input the PAL Composite Video (Fig.6.100% Color Bar Pattern) into video input. (RZ-42PX30 : AV4/AV5 Input 50Hz)
- 2) Set the PSM to Standard mode in Picture menu.
- 3) Press INSTART key on R/C for adjustment.
- 4) Press the ► (Vol. +) key operat to set, then it becomes automatically.
- 5) Auto-RGB OK means completed adjustment.

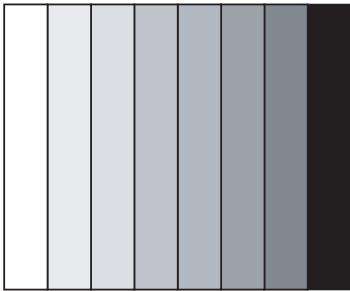


(Fig. 6) Auto AV(CVBS) Color Balance Test Pattern

7. Adjustment of White Balance

7-1. Required Equipment

- 1) Remote controller for adjustment
- 2) Color Analyzer (CA-100 or same product)
- 3) Auto W/B adjustment instrument(only for auto adjustment)
- 4) AV Pattern Generator

7-2. Connecting diagram of equipment for measuring (For Auto Adjustment)

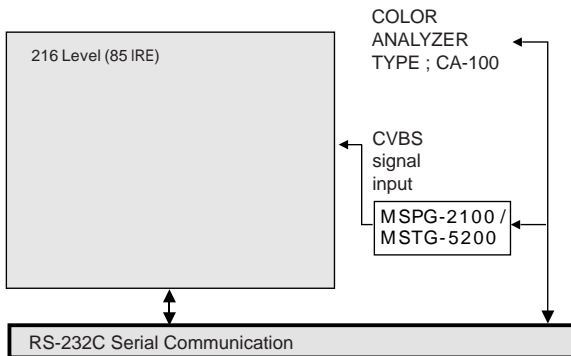

(Fig. 7) Connection Diagram of Auto W/B Adjustment


◆ Auto adjustment Map(RS-232C)

| MF-056C : RZ-42PX30 | | | | | | |
|---------------------|----------|----------|--------|------|-----------|-----------|
| Type | RS232 | | | | | |
| Baud Rate | Data bit | Stop bit | Parity | | | |
| 115200 | 8 | 1 | NONE | | | |
| Protocol Setting | Index | Cmd1 | Cmd2 | Data | Min Value | Max Value |
| | R Gain | j | a | | 00(00) | 255(FF) |
| | G Gain | j | b | | 00(00) | 255(FF) |
| | B Gain | j | c | | 00(00) | 255(FF) |
| | R Offset | j | d | | 00(00) | 255(FF) |
| | G Offset | j | e | | 00(00) | 255(FF) |
| | B Offset | j | f | | 00(00) | 255(FF) |

7-3. Adjustment of White Balance

- Operate the zero-calibration of the CA-100, then stick sensor to PDP module surface when you adjust.
- For manual adjustment, it is also possible by the following sequence.

- 1) Select white pattern of heat-run mode by pressing power on key on remote control for adjustment then operate heat run more than 15 minutes.
- 2) As below Fig.7, Supply Window or Gray step pattern to Video input (RZ-42PX30 : AV4/AV5 INPUT 50Hz)
- 3) Press the TV/AV KEY on R/C for converting input mode.
- 4) Set the PSM to Standard mode in Picture menu.
- 5) Enter the White Balance adjustment mode by pressing the INSTART key twice(White Balance) on R/C
- 6) Stick sensor to center of the screen and select each items (Red/Green/Blue Gain and offset) using ▲/▼(CH +/-) key on R/C.
- 7) Adjust High Light with R Gain/ B Gain and Low light with G Offset/ B Offset using ◀/▶(VOL +/-) key on R/C.
- 8) Adjust it until color coordination becomes as below.
(G Gain:7A/ R Offset:7F/ G Offset:7E/ B offset:80 is Fixed)
[MF-056C : RZ-42PX30] - VGA 42"
Bright : High Light : 60 ± 20 Cd/m²
Color-Coordinate : High Light : X : 0.285 ± 0.003
Y : 0.290 ± 0.003
Color Temperature : $9,300^{\circ}\text{K} \pm 500^{\circ}\text{K}$
- 9) When adjustment is completed, Exit adjustment mode using EXIT key on R/C

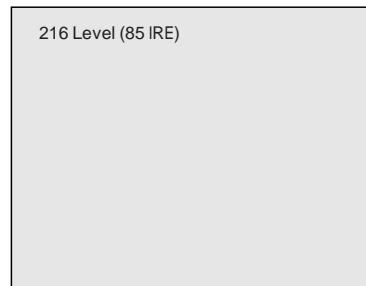

(Fig. 8) Position and Pattern for Manual Adjustment of White Balance


8. Auto Component Color Balance

8-1. Required Test Equipment

- 1) Remote controller for adjustment
- 2) 802F Pattern Generator
(Which has 720p Ypbpr output & PC 1024x768 60Hz with Standard(0.7Vpp) Vertical 100% Color Bar Pattern as Fig.8)

8-2. Method of Auto Component Color Balance

- 1) Input the Component 720p 100% Color Bar signal into Component1 or Component2.
- 2) Set the PSM to Standard mode in Picture menu.
- 3) Press INSTART key on R/C for adjustment.
- 4) Press the ►(Vol. +) key operate To set, then it becomes automatically.
- 5) Auto-RGB OK means complete adjustment



(Fig. 9) Auto Component Color Balance Test Pattern


9. Auto RGB Color Balance

9-1. Required Test Equipment

- 1) Remote controller for adjustment
- 2) 802F Pattern Generator, Master (MSPG-925FA), etc.
(Which has XGA 60Hz PC Format output with standard (0.7Vpp) horizontal black and white pattern as Fig.10)

9-2. Method of Auto RGB Color Balance

- 1) Input the PC 1024x768 60Hz horizontal black and white pattern into RGB.
- 2) Set the PSM to Standard mode in Picture menu.
- 3) Press ADJ key on R/C for adjustment.
- 4) Press the ►(Vol. +) key operate To set, then it becomes automatically.
- 5) Auto-RGB OK means completed adjustment.

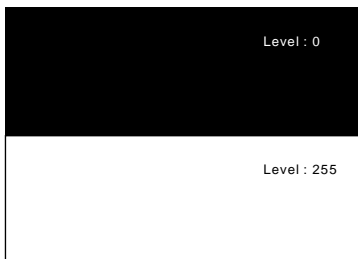

(Fig. 10) Auto RGB Color Balance Test Pattern

10. Default Value in Adjustment mode

10-1. Auto Color Balance(Component/RGB)

| Auto Color Balance(Hex) | | |
|-------------------------|----------|----|
| Auto-RGB | ► To Set | |
| Red | Offset1 | 22 |
| Green | Offset1 | 24 |
| Blue | Offset1 | 23 |
| Red | Offset2 | 45 |
| Green | Offset2 | 43 |
| Blue | Offset2 | 37 |
| Red | Gain | 14 |
| Green | Gain | 31 |
| Blue | Gain | 11 |
| Reset | ► To Set | |

(Fig. 11) Default Value on OSD

10-2. White Balance


| White Balance(Hex) | | |
|--------------------|----------|----|
| Red | Gain | 82 |
| Red | Offset | 7A |
| Green | Gain | 86 |
| Green | Offset | 7F |
| Blue | Gain | 7E |
| Blue | Offset | 80 |
| Reset | ► To Set | |

(Fig. 12) Default Value on OSD


TROUBLE SHOOTING GUIDE

1. Power Board


1-1. The whole flowchart which it follows in voltage output state

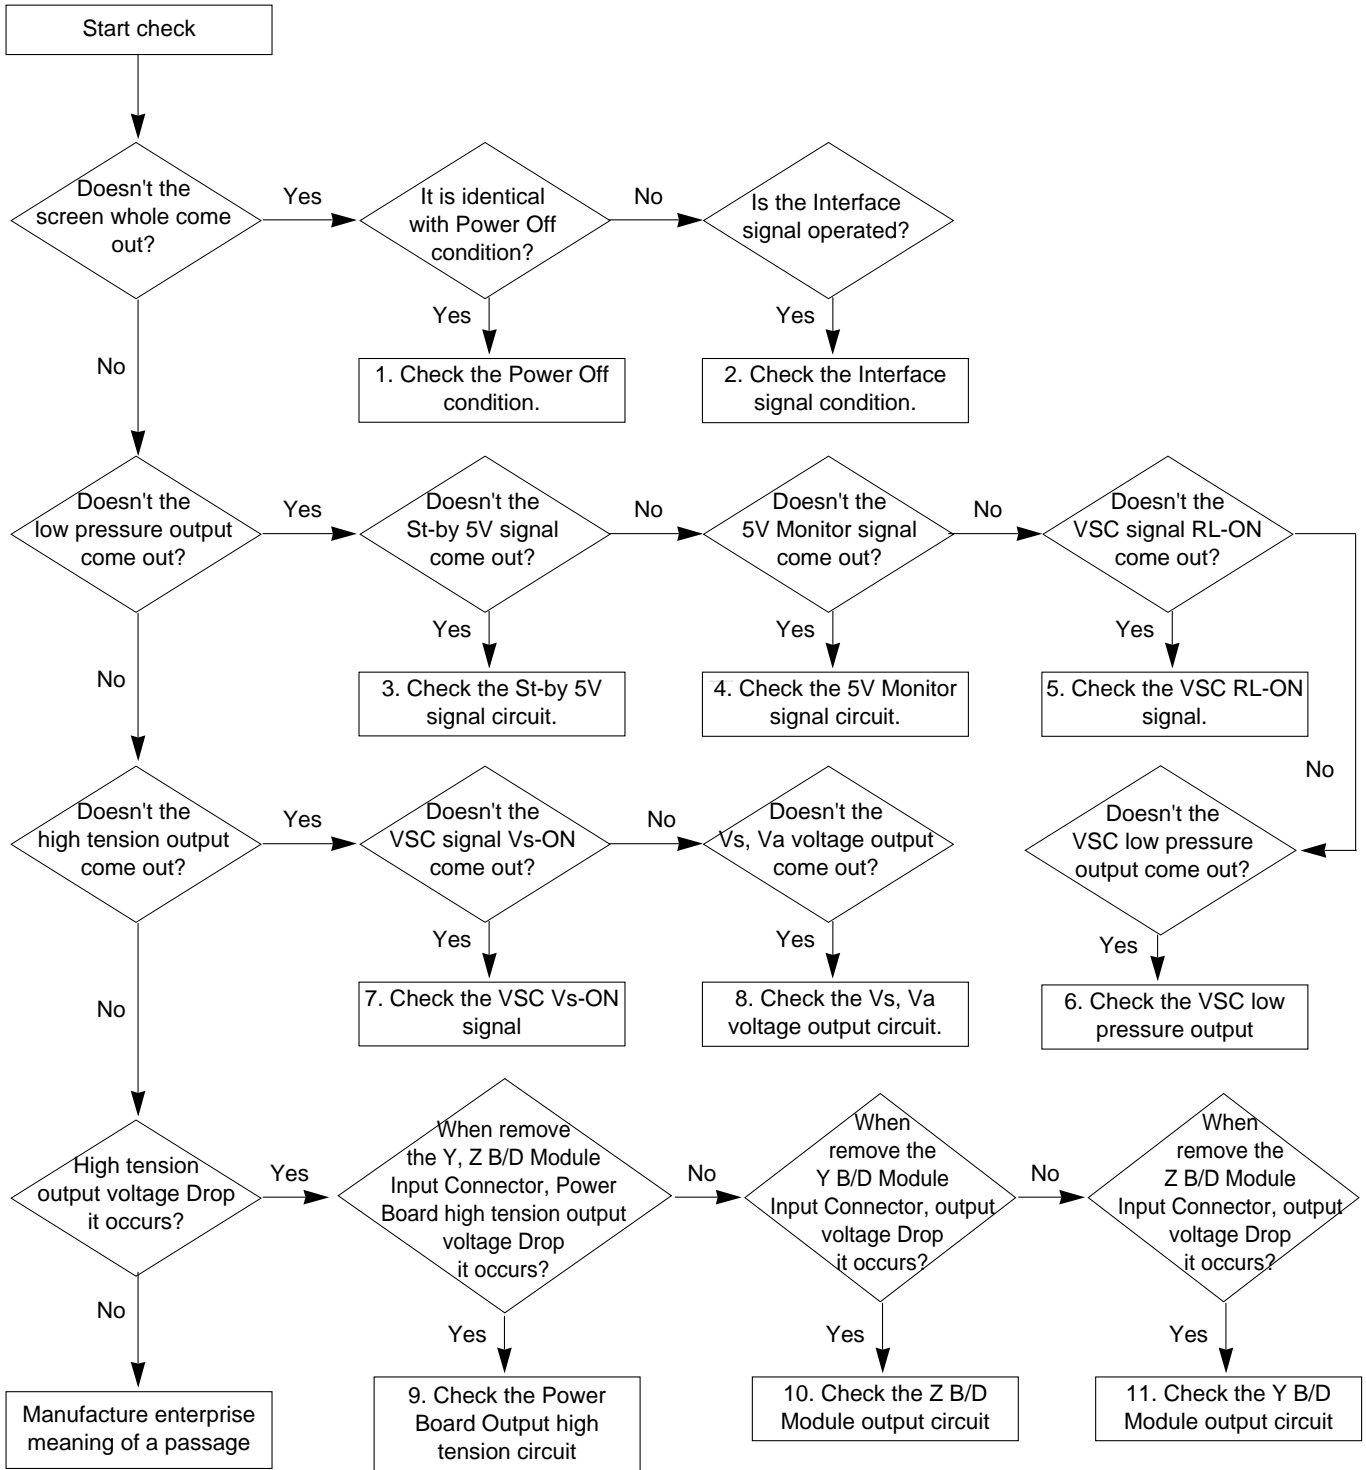

1-2. Sony Power Board Structure

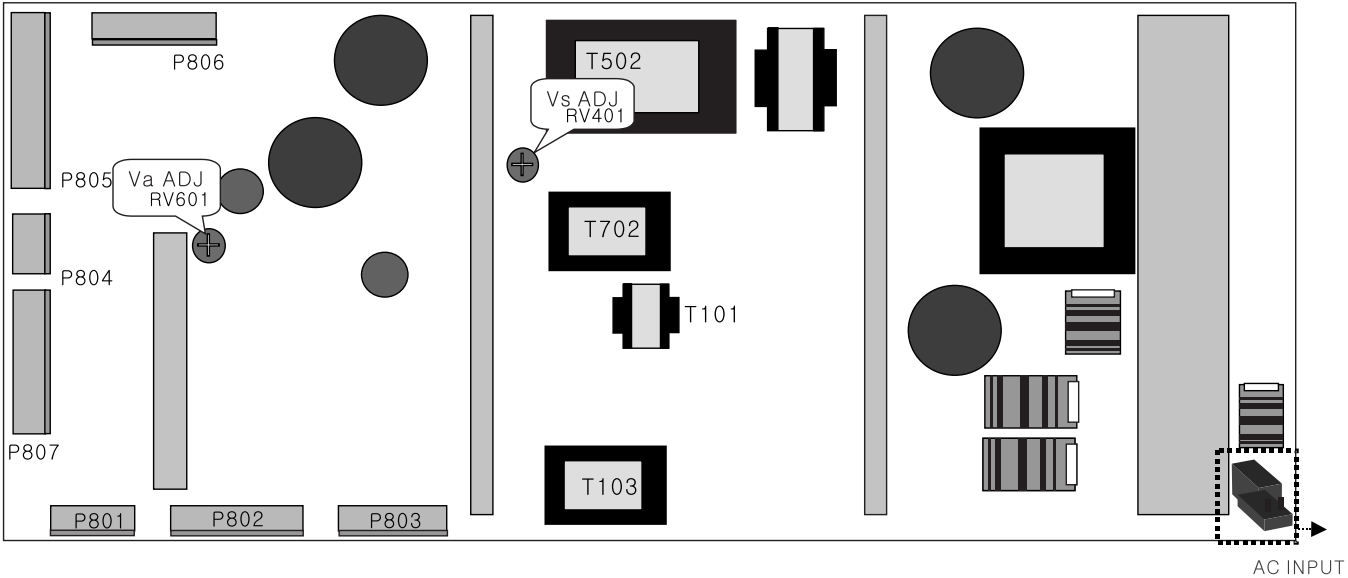


| PIN No | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|--------|-----|--------|-------|------|--------|-------|------|-----|-----|-----|------|------|
| P801 | POD | 5V-MNT | VS-ON | GND | STBY5V | RL-ON | A-ON | | | | | |
| P802 | GND | GND | 12V | 12V | GND | GND | 6V | 6V | GND | GND | 3.4V | 3.4V |
| P803 | GND | 12V | GND | 3.4V | GND | 6V | GND | GND | 25V | 25V | | |
| P804 | GND | GND | 5V | 5V | | | | | | | | |
| P805 | Vs | Vs | Vs | NC | GND | GND | GND | GND | Va | Va | | |
| P806 | 5V | GND | Va | GND | GND | NC | Vs | Vs | | | | |
| P807 | 5V | 5V | 5V | 5V | GND | GND | GND | GND | | | | |

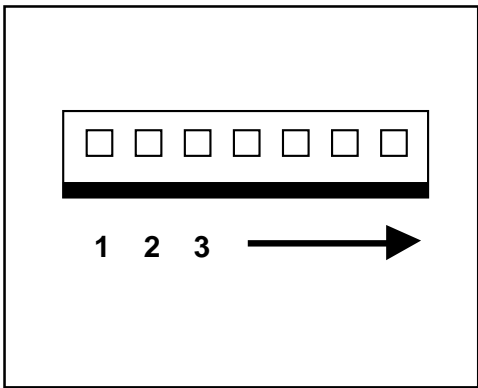


- T502: Vs Trans
- T702: Va Trans
- T101: St-by Trans
- T103: Low Voltage Trans

1-3. Sanken Power Board Structure

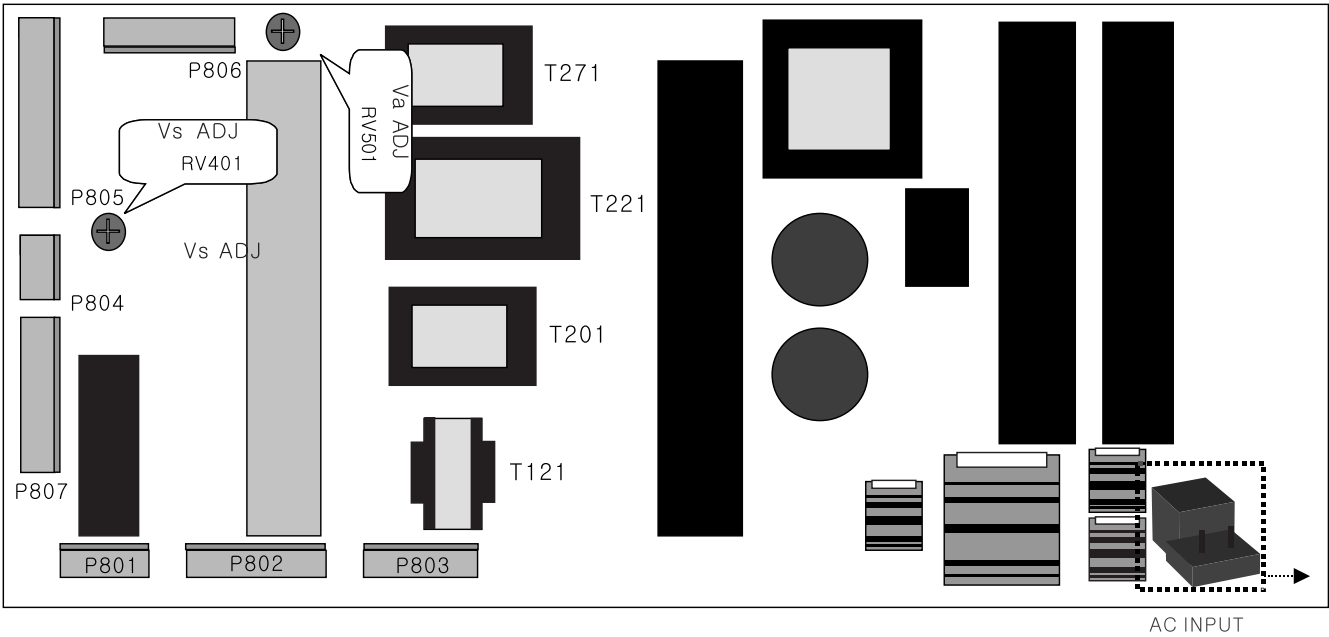

| PIN No | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|--------|-----|--------|-------|------|--------|-------|------|-----|-----|-----|------|------|
| P801 | NC | 5V-MNT | VS-ON | GND | STBY5V | RL-ON | A-ON | | | | | |
| P802 | GND | GND | 12V | 12V | GND | GND | 6V | 6V | GND | GND | 3.4V | 3.4V |
| P803 | GND | 12V | GND | 3.4V | GND | 6V | GND | GND | 19V | 19V | | |
| P804 | GND | GND | 5V | 5V | | | | | | | | |
| P805 | Vs | Vs | Vs | NC | GND | GND | GND | GND | Va | Va | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

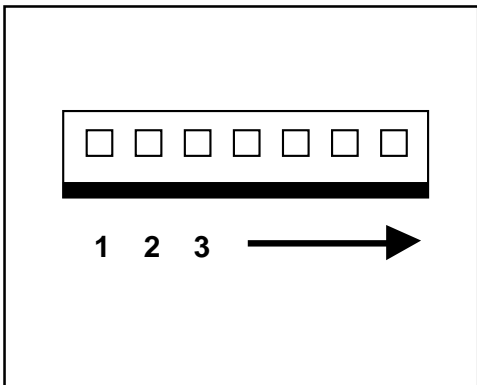


- T221: Vs Trans
- T271: Va Trans
- T121: St-by Trans
- T201: Low Voltage Trans


2. No Power

(1) Symptom

- Does't minute discharge at module.
- Non does not come in into the front LED.




(2) Check follow

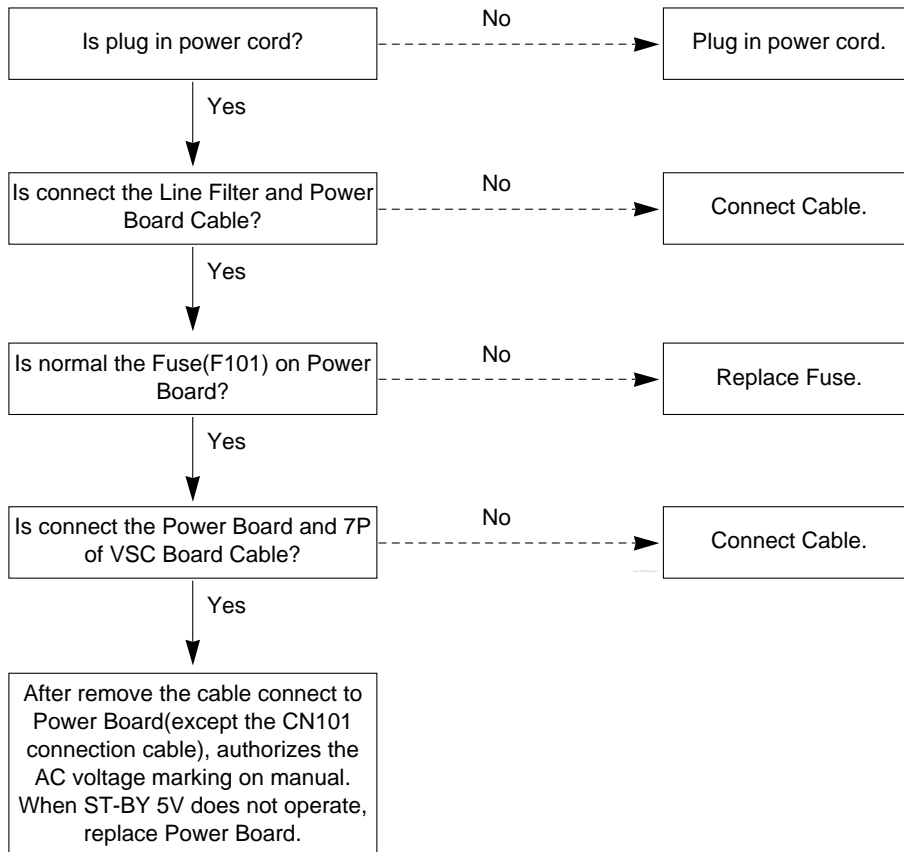


3. Protect Mode

(1) Symptom

- After once shining, it does not discharge minutely from module
- The Relay falls(The sound is audible “click”)
- It is converted with the color where the front LED is red from green.

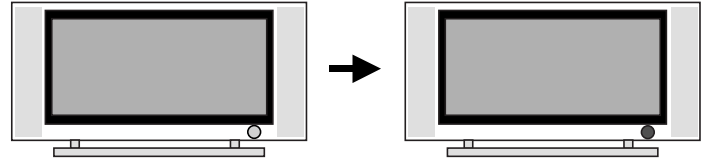


(2) Check follow

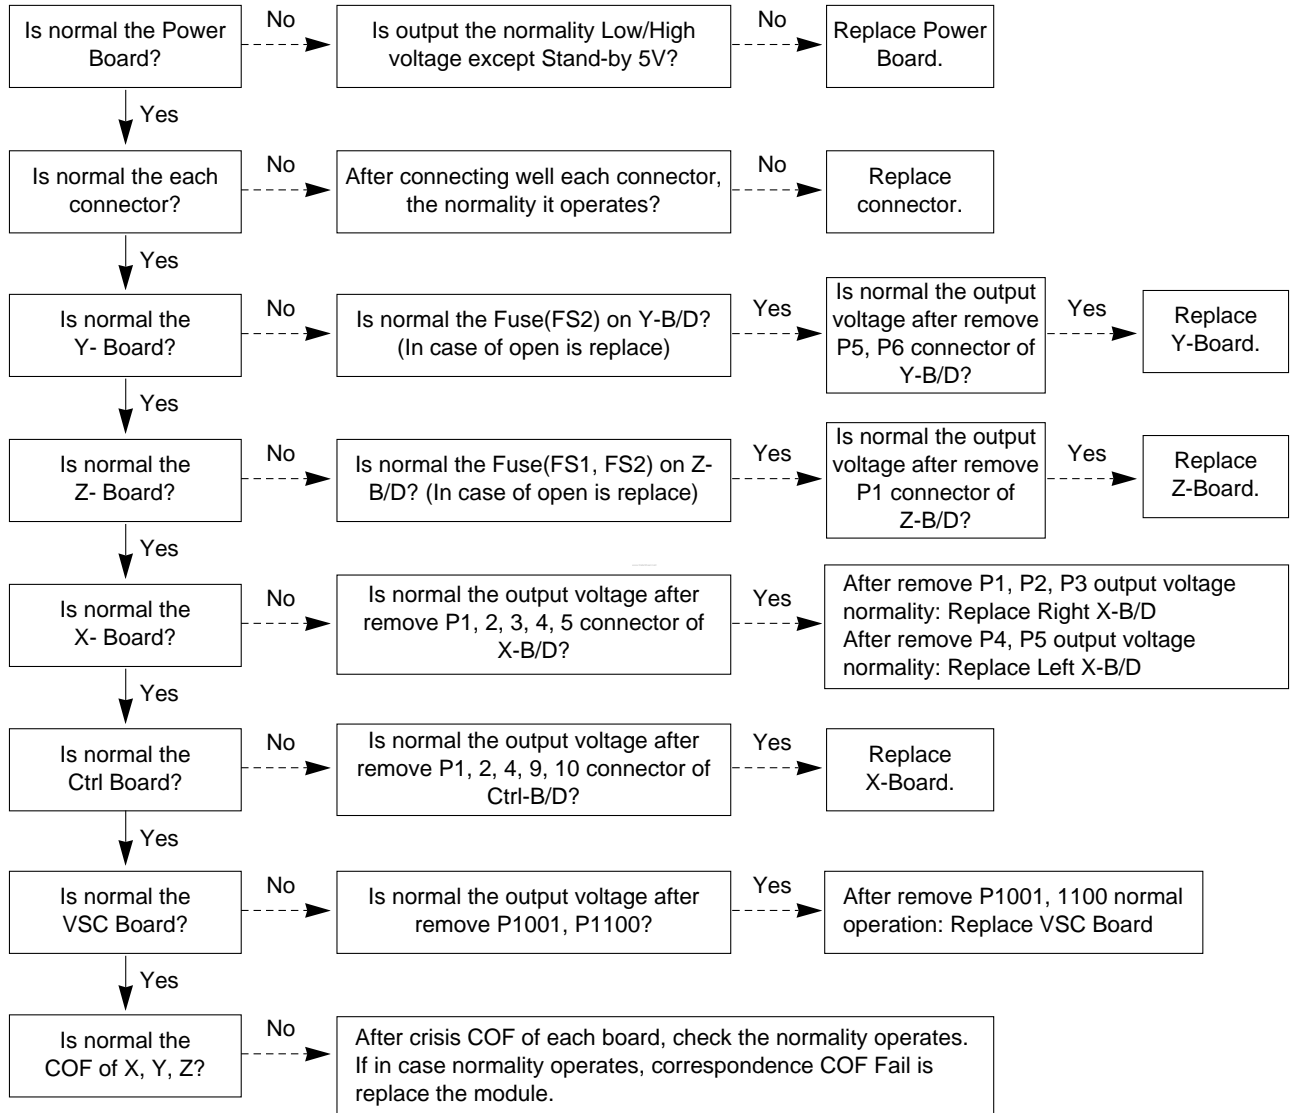


4. No Raster

(1) Symptom

- Does't minute discharge at module.
- It maintains the condition where the front LED is green.



(2) Check follow

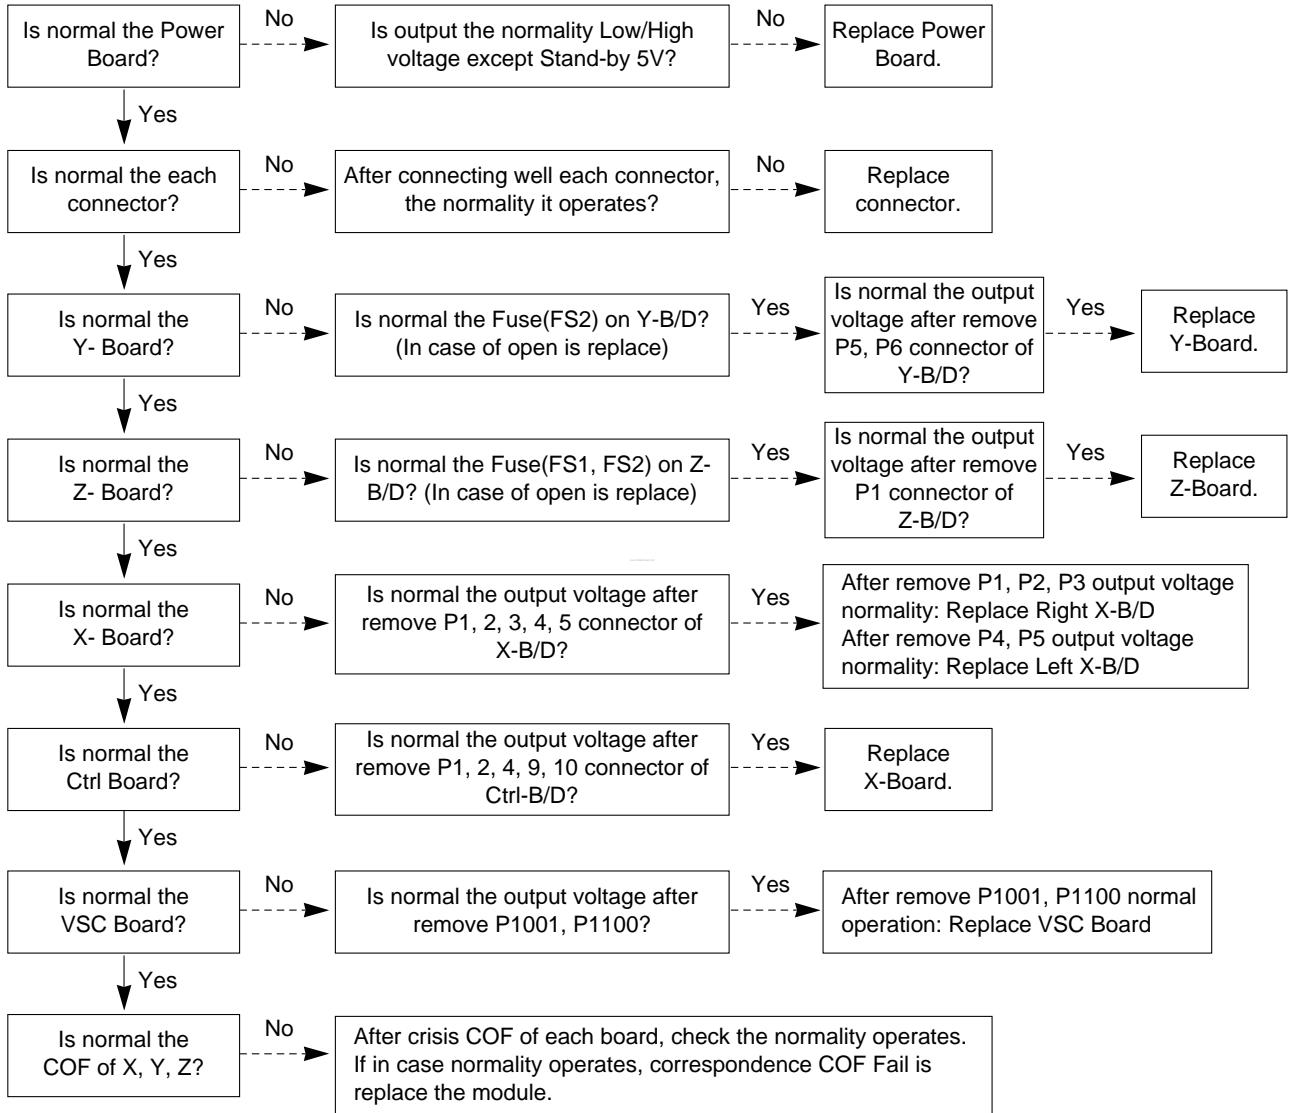


5. In case of occur strange screen into specific mode


5-1. In case of does't display the OSD

(1) Symptom

- LED is green
- The minute discharge continuously becomes accomplished from module




(2) Check follow

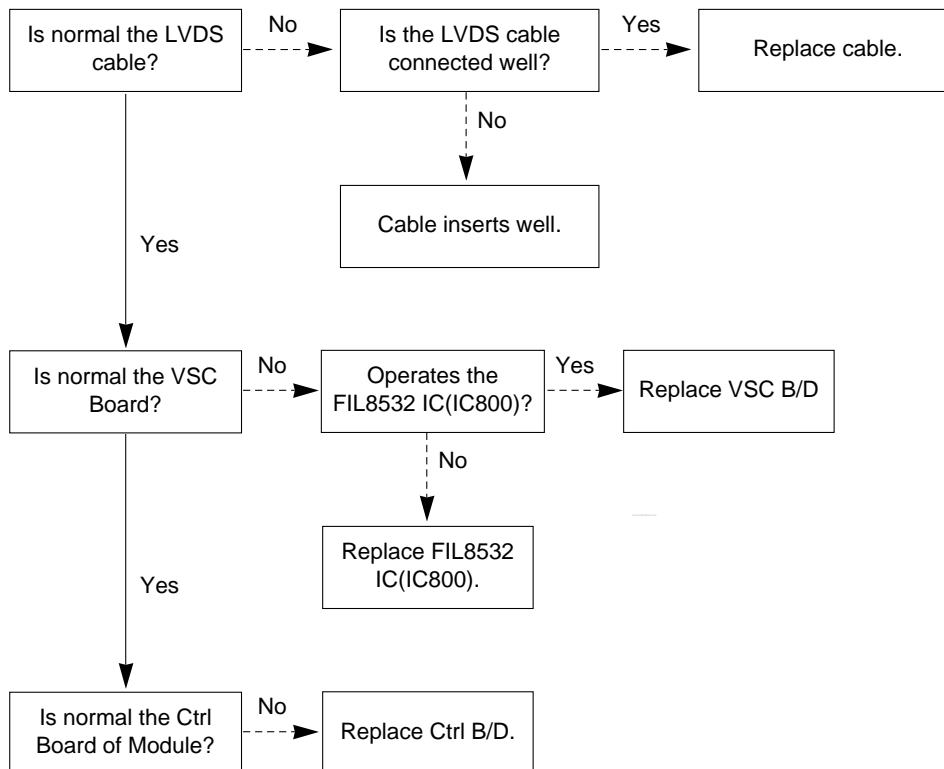

5-2. In case of does't display the screen into specific mode


(1) Symptom

- The screen does not become the display from specific input mode (RF, AV, Component, RGB, DVI).




(2) Check follow


- Check the all input mode should become normality display.
- Check the Video(Main)/Data(Sub), Video(Main)/Video(Sub) should become normality display from the PIP mode or DW mode. (Re-Check it Swap)




(3) In case of becomes unusual display from RF mode

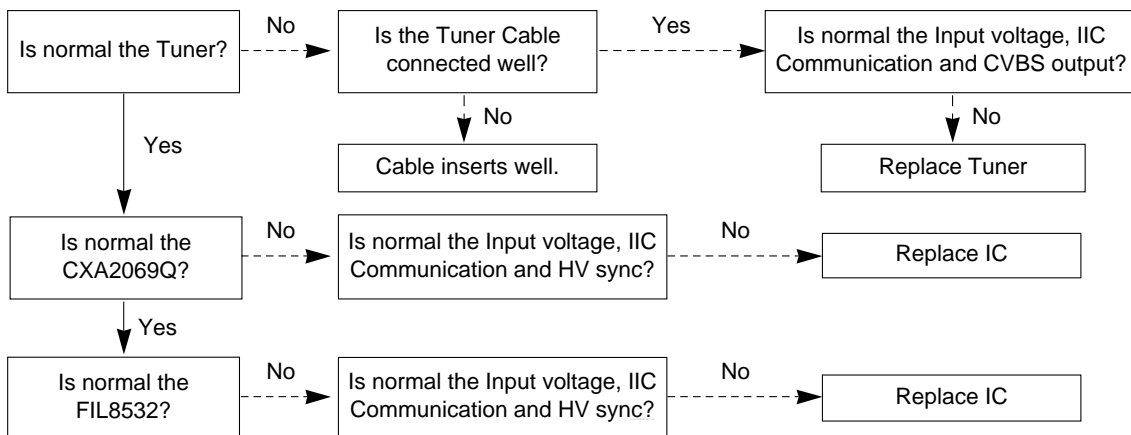


(4) In the case of becomes unusual display from RF, AV mode

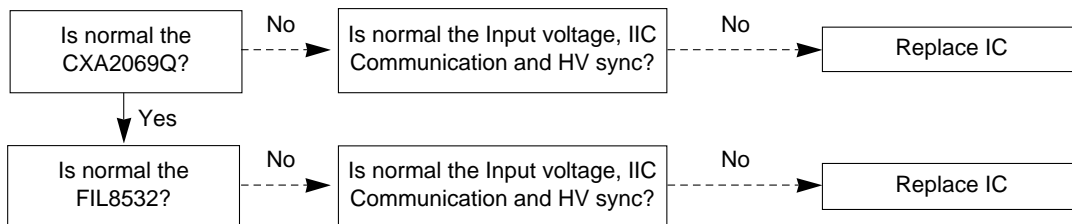

(5) In the case of becomes unusual display from Component, RGB mode




(6) In the case of becomes unusual display from HDMI mode

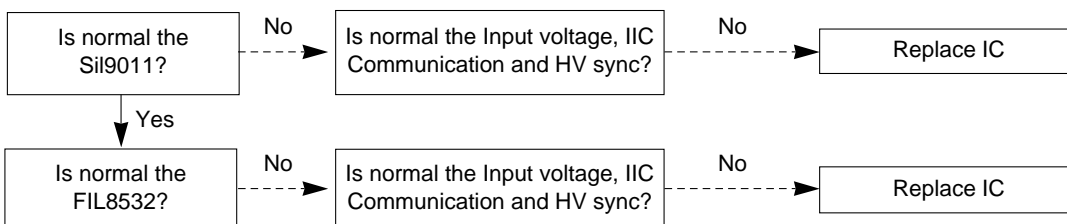


6. In case of no sound

(1) Symptom

- LED is green
- Screen display but sound is not output




(2) Check follow

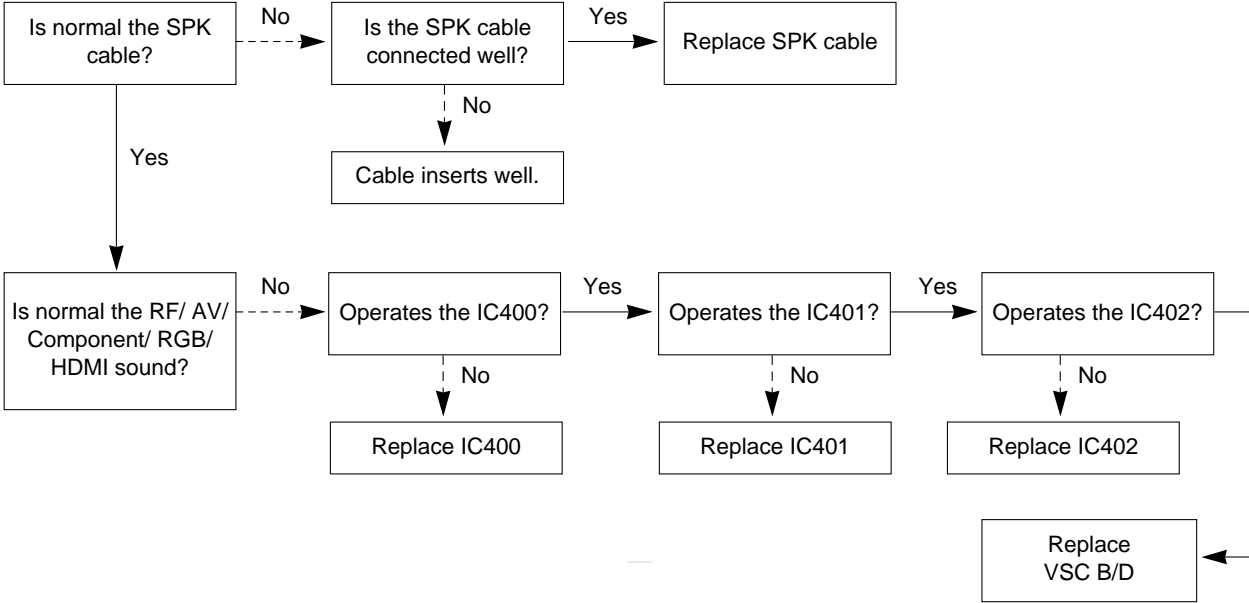

MEMO

EXPLODED VIEW

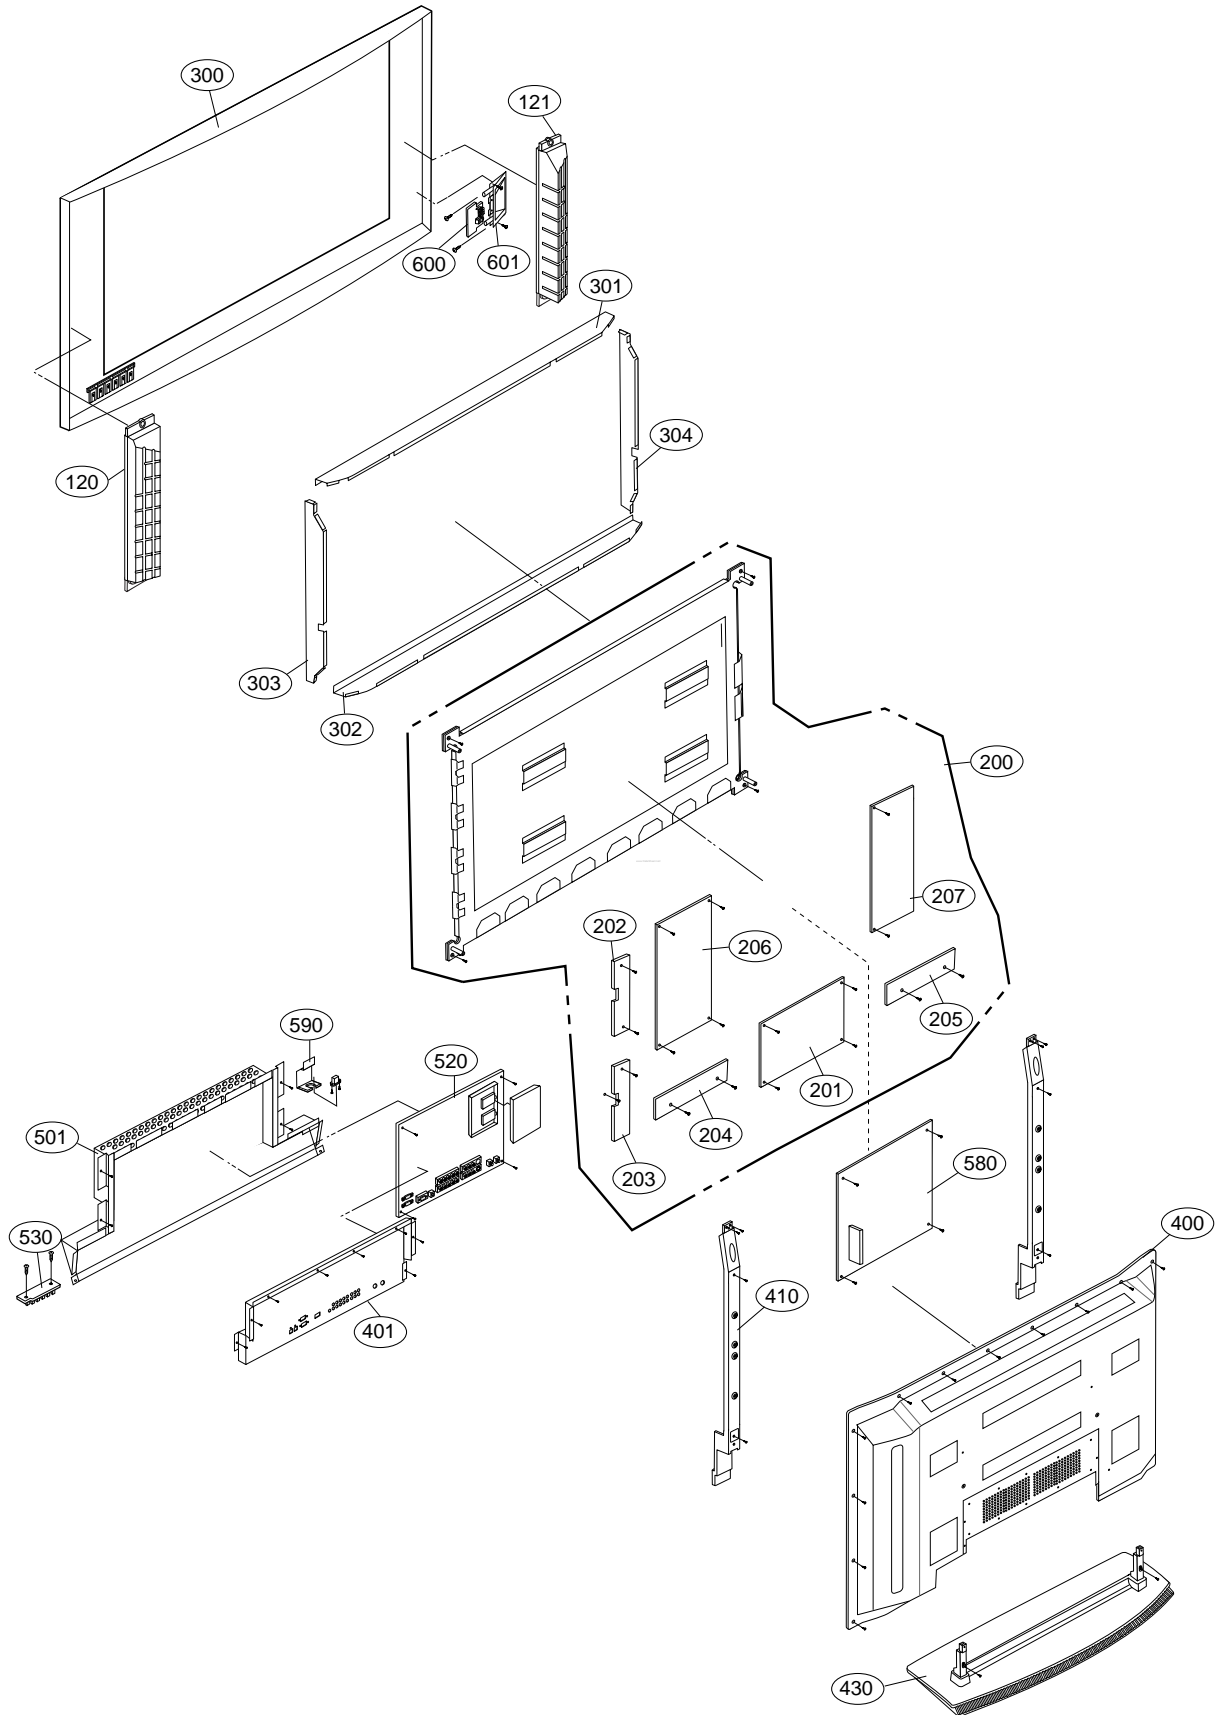

EXPLODED VIEW PARTS LIST

| No. | Part No. | Descriptions |
|-----|-------------|------------------------------------------------------------------------------|
| 120 | 6401VD0032A | SPEAKER ASSEMBLY, FULL RANGE(R) RZ-42PX30 FILM TYPE |
| 121 | 6401VD0033A | SPEAKER ASSEMBLY, FULL RANGE(L) RZ-42PX30 FILM TYPE |
| 200 | 6348Q-E080W | PDP, 42" 852*480 PDP42V70102.ADLGB |
| 201 | 6871QCH053A | PWB(PCB) ASSEMBLY,DISPLAY CTRL ASSY HAND INSERT 42V7 FPGA |
| 202 | 6871QDH084A | PWB(PCB) ASSEMBLY,DISPLAY YDRV ASSY HAND INSERT 42V7 YDRV TOP B/D |
| 203 | 6871QDH085A | PWB(PCB) ASSEMBLY,DISPLAY YDRV ASSY HAND INSERT 42V7 YDRV BTM B/D |
| 204 | 6871QLH047A | PWB(PCB) ASSEMBLY,DISPLAY XRLT ASSY HAND INSERT 42V7 XL B/D |
| 205 | 6871QRH055A | PWB(PCB) ASSEMBLY,DISPLAY XRRT ASSY HAND INSERT 42V7 XR B/D |
| 206 | 6871QYH036A | PWB(PCB) ASSEMBLY,DISPLAY YSUS ASSY HAND INSERT 42V7 |
| 207 | 6871QZH041A | PWB(PCB) ASSEMBLY,DISPLAY ZSUS ASSY HAND INSERT 42V7 ZSUS HAND INSERT ASSY |
| 300 | 3091V00816C | CABINET ASSEMBLY, RZ-42PX30 STEREO MF056C FILM TYPE SKD |
| 301 | 4980V01203B | SUPPORTER, ASSY AL FILTER TOP RZ-42PX30 C/SKD |
| 302 | 4980V01204B | SUPPORTER, ASSY AL FILTER BOTTOM RZ-42PX30 C/SKD |
| 303 | 4980V01205B | SUPPORTER, ASSY AL FILTER RIGHT RZ-42PX30 C/SKD |
| 304 | 4980V01206B | SUPPORTER, ASSY AL FILTER LEFT RZ-42PX30 C/SKD |
| 400 | 3809V00605B | BACK COVER ASSEMBLY, 42PX17/30 CHASSIS CHANGE C/SKD |
| 401 | 3301V00085A | PLATE ASSEMBLY, ASSY 3300V00552A RZ-42PX30 PLATE TUNER COVER |
| 410 | 4980V01071B | SUPPORTER, ASSY AL VERTICAL RZ-42PX10 SKD |
| 430 | 3501V00216E | BOARD ASSEMBLY, ASSY AP-42DX30 MF056C C/SKD |
| 501 | 3301V00083A | PLATE ASSEMBLY, ASSY 3300V00550A 3301V00084A 42PX17/30 PLATE TUNER |
| 520 | 6871VMMF61A | PWB(PCB) ASSEMBLY,MAIN MF-056C H2, RZ-42PX30 |
| 530 | 6871VSMS36B | PWB(PCB) ASSEMBLY,SUB CONT MF056C RZ-42PX30 SKD NO VINYL |
| 580 | 6709V00010A | POWER SUPPLY ASSEMBLY, PDP 42INCH MF056A 350W YPSU-J006A LG INNOTEK PSU ASSY |
| 600 | 6871VSMS18B | PWB(PCB) ASSEMBLY,SUB A/V MF056A RT/RZ-42PX40 SIDE A/V SUSAB |
| 601 | 4811V00118A | BRACKET ASSEMBLY, DECO RZ-42PX10 RF043B SIDE AV |

REPLACEMENT PARTS LIST

| LOCA. NO | PART NO | DESCRIPTION | LOCA. NO | PART NO | DESCRIPTION |
|-------------------|-------------|------------------------------------------|--------------|-------------|---------------------------------------|
| IC | | | | | |
| IC1000 | 0IPRPM001A | MIC39100 3P SOT223 R/TP LDO TYPE 2.5V | Q202 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC1001 | 0IMCRRH001A | BA033FP-E2 ROHM 3P-SOP,TO252-3 R/TP 3.3V | Q203 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| IC1002 | 0IMCRFA010A | KA7809R, FAIRCHILD 2P D-PAK, R/TP IC | Q204 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| IC1003 | 0IPMG00027A | SC156515M-1.8TR SEMTECH 5P/TO-263-5 R/TP | Q205 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC1004 | 0IMCRRH001A | BA033FP-E2 ROHM 3P-SOP,TO252-3 R/TP 3.3V | Q206 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| IC1005 | 0IMCRRH001A | BA033FP-E2 ROHM 3P-SOP,TO252-3 R/TP 3.3V | Q207 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| IC1100 | 0IMCRRH001A | BA033FP-E2 ROHM 3P-SOP,TO252-3 R/TP 3.3V | Q300 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC1101 | 0IPRPM001A | MIC39100 MICREL 3P SOT223 R/TP LDO TYPE | Q303 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC1102 | 0IPMG00027A | SC156515M-1.8TR SEMTECH 5P/TO-263-5 | Q304 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC1103 | 0IPMGKE030A | KIA78R05F KEC 5PIN DPAK R/TP 1A,5V | Q305 | 0TR150400BA | CHIP 2SA1504S(ASY) KEC |
| IC1104 | 0IPMG00027A | SC156515M-1.8TR SEMTECH 5P/TO-263-5 | Q400 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC1200 | 0IPRPS5005A | SII9011CLU(PB FREE) SILICON IMAGE 128P | Q401 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC1201 | 0IMMRAL014B | AT24C02N-10SI-2.7 ATMEL 8P SOIC R/TP | Q402 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC202 | 0IPMGON013B | MC34063ADR2G ON SEMI SO-8P R/TP | Q403 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC300 | 0ISO206900A | CXA2069Q QFP64 BK I2C BUS AV S/W | Q404 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC301 | 0ISA721700C | LA7217M MFP14 TP SYNC SEPARATOR ML-00BA | Q405 | 0TR102008AA | KRA102S R/TP KEC SOT23 CHIP TR |
| IC400 | 0IMCRMN028B | MSP4410K MICRONAS 80P/PQFP | Q406 | 0TR102008AA | KRA102S R/TP KEC SOT23 CHIP TR |
| IC401 | 0ILNR00015A | NSP-2100A,LF NEOFIDELITY TQFP 64P | Q407 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC402 | 0IMCRTI028C | TAS5122DCAR 56P/TSSOP R/TP 30W STEREO | Q408 | 0TR102008AA | KRA102S R/TP KEC SOT23 CHIP TR |
| IC403 | 0ISS455880A | KA4558D 8SOP OP AMP | Q409 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC404 | 0IPH741400E | 74HC14D 14SOP TP SHITTER TRIGGER | Q410 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC500 | 0IMMRAL014B | AT24C02N-10SI-2.7 ATMEL 8P SOIC | Q411 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC |
| IC502 | 0IPH741400E | 74HC14D 14SOP TP SHITTER TRIGGER | DIODE | | |
| IC600 | 0IPRP00009A | ICL3232CBNZ INTERSIL 16P/SOP R/TP | D1005 | 0DD226239AA | KDS226 TP KEC |
| IC800 | 0IMCR02005A | FLI8532BC-LF GENESIS 416P/PBGA | D1006 | 0DD226239AA | KDS226 TP KEC |
| IC802 | 0IMP242560A | 24LC256-I/SM 8P,SOP TP 256K IIC SERIAL | D1007 | 0DD226239AA | KDS226 TP KEC |
| IC900 | 0IMMRAL016D | AT49BV160-70TI ATMEL 48P TSOP | D1008 | 0DD226239AA | KDS226 TP KEC |
| IC901 | 0IMMR00002A | K4D261638F-LC50,LF TSOPII 66P | D1009 | 0DD226239AA | KDS226 TP KEC |
| IC902 | 0IMMR00002A | K4D261638F-LC50,LF TSOPII 66P | D1010 | 0DD226239AA | KDS226 TP KEC |
| TRANSISTOR | | | D1012 | 0DD200009AF | RU2M V(1) TP SANKEN |
| IC1202 | 0TR830009BA | BSS83 TP PHILIPS N-CHANNEL S/W TR | D1013 | 0DD200009AF | RU2M V(1) TP SANKEN |
| IC1203 | 0TR830009BA | BSS83 TP PHILIPS N-CHANNEL S/W TR | D102 | 0DD226239AA | KDS226 TP KEC |
| IC200 | 0TR830009BA | BSS83 TP PHILIPS N-CHANNEL S/W TR | D103 | 0DD226239AA | KDS226 TP KEC |
| IC201 | 0TR830009BA | BSS83 TP PHILIPS N-CHANNEL S/W TR | D104 | 0DD226239AA | KDS226 TP KEC |
| IC503 | 0TR830009BA | BSS83 TP PHILIPS N-CHANNEL S/W TR | D105 | 0DD226239AA | KDS226 TP KEC |
| IC504 | 0TR830009BA | BSS83 TP PHILIPS N-CHANNEL S/W TR | D106 | 0DD226239AA | KDS226 TP KEC |
| Q100 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D108 | 0DD226239AA | KDS226 TP KEC |
| Q1000 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D1100 | 0DD226239AA | KDS226 TP KEC |
| Q1001 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D1105 | 0DD226239AA | KDS226 TP KEC |
| Q1002 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D1109 | 0DD226239AA | KDS226 TP KEC |
| Q1003 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D112 | 0DD226239AA | KDS226 TP KEC |
| Q1004 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D113 | 0DD226239AA | KDS226 TP KEC |
| Q101 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D114 | 0DD226239AA | KDS226 TP KEC |
| Q101 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D1200 | 0DD184009AA | KDS184 TP KEC - 85V - 300MA |
| Q102 | 0TR102008AA | KRA102S R/TP KEC SOT23 CHIP TR | D1201 | 0DS113379BA | 1SS133 T-72 TP ROHM KOREA DO34 90V |
| Q102 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D300 | 0DD226239AA | KDS226 TP KEC |
| Q103 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D500 | 0DD226239AA | KDS226 TP KEC |
| Q104 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D501 | 0DD226239AA | KDS226 TP KEC |
| Q1200 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D502 | 0DD226239AA | KDS226 TP KEC |
| Q201 | 0TR387500AA | CHIP 2SC3875S(ALY) KEC | D504 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |
| | | | D505 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |
| | | | D506 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |

For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows;

CC, CX, CK, CN : Ceramic
CQ : Polyester
CE : Electrolytic

RD : Carbon Film
RS : Metal Oxide Film
RN : Metal Film
RF : Fusible

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---------------------------------------|
| ZD100 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |
| ZD101 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |
| ZD107 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |
| ZD300 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |
| ZD301 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |
| ZD400 | 0DZRM00248A | RLZ8.2B-TE11 ROHM R/TP LLDS(LL-34) |
| ZD600 | 0DR050008AA | SD05.TC R/TP SEMTECH SOD323 5V 5A 15A |

CAPACITOR

| | | |
|-------|-------------|---------------------------------|
| C1000 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1005 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1007 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1009 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1010 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1019 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1022 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C103 | 0CE4763F618 | 47UF SRE 16V M FL TP5 |
| C1030 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1043 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1046 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1047 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1050 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1051 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1064 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1065 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1066 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1067 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1068 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1069 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1071 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1073 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C108 | 0CE227SF6DC | 220UF MVG 16V 20% R/TP(SMD) SMD |
| C1082 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1083 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1084 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1085 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1087 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1098 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1099 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1102 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1105 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1107 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1108 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1110 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1115 | 0CE477DJ618 | 470UF STD 35V 20% FL TP 5 |
| C1116 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1117 | 0CE227SF6DC | 220UF MVG 16V 20% R/TP(SMD) SMD |
| C1117 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C1118 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C1119 | 0CE477DJ618 | 470UF STD 35V 20% FL TP 5 |
| C1120 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C1126 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|---------------------------------|
| C1135 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1136 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1137 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1138 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1148 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1154 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C117 | 0CE227SF6DC | 220UF MVG 16V 20% R/TP(SMD) SMD |
| C118 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1185 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C119 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1199 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C120 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1200 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1201 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C121 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1225 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1230 | 0CK105DF64A | 1UF 2012 16V 20% R/TP F(Y5V) |
| C1231 | 0CK105DF64A | 1UF 2012 16V 20% R/TP F(Y5V) |
| C1245 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1247 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C129 | 0CE227SF6DC | 220UF MVG 16V 20% R/TP(SMD) SMD |
| C130 | 0CE227SF6DC | 220UF MVG 16V 20% R/TP(SMD) SMD |
| C130 | 0CE227VF6DC | 220UF MV 16V 20% R/TP(SMD) SMD |
| C131 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1311 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1312 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1314 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1315 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C1316 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1317 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1318 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C135 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C1406 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1414 | 0CE475SK6DC | 4.7UF MVG 50V 20% SMD R/TP |
| C1415 | 0CE475SK6DC | 4.7UF MVG 50V 20% SMD R/TP |
| C1419 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1420 | 0CK105DF64A | 1UF 2012 16V 20% R/TP F(Y5V) |
| C1424 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C1425 | 0CE106SH6DC | 10UF MVG 25V 20% SMD R/TP |
| C1428 | 0CE106SH6DC | 10UF MVG 25V 20% SMD R/TP |
| C1438 | 0CE106SH6DC | 10UF MVG 25V 20% SMD R/TP |
| C1441 | 0CE106SH6DC | 10UF MVG 25V 20% SMD R/TP |
| C1506 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C204 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C210 | 0CE475SK6DC | 4.7UF MVG 50V 20% SMD R/TP |
| C211 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C214 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C215 | 0CE475SK6DC | 4.7UF MVG 50V 20% SMD R/TP |
| C221 | 0CE477SF6DC | 470UF MVG 16V 20% R/TP(SMD) SMD |
| C238 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C241 | 0CE476SK6D8 | 47UF MVG,MC 50V 20% SMD TAPPING |
| C300 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |





| | | |
|--------------------------------------------------------------------------------------------------------|--------------------------|-----------------------|
| For Capacitor & Resistors, the characters at 2nd and 3rd digit in the P/No. means as follows; | CC, CX, CK, CN : Ceramic | RD : Carbon Film |
| | CQ : Polyester | RS : Metal Oxide Film |
| | CE : Electrolytic | RN : Metal Film |
| | | RF : Fusible |

| LOCA. NO | PART NO | DESCRIPTION |
|----------|-------------|-------------------------------------|
| C304 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C305 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C307 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C310 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C315 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C318 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C319 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C321 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C325 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C328 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C330 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C338 | 0CK225DFK4A | 2.2UF 2012 16V 20%,-20% F(Y5V) R/TP |
| C340 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C342 | 0CE105SK6DC | 1UF MVG 50V 20% SMD R/TP |
| C347 | 0CE105SK6DC | 1UF MVG 50V 20% SMD R/TP |
| C402 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C403 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C413 | 0CE335VK6DC | 3.3UF MV 50V 20% R/TP(SMD) SMD |
| C418 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C422 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C425 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C437 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C444 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C451 | 0CK105DF64A | 1UF 2012 16V 20% R/TP F(Y5V) |
| C456 | 0CK105DF64A | 1UF 2012 16V 20% R/TP F(Y5V) |
| C457 | 0CE335VK6DC | 3.3UF MV 50V 20% R/TP(SMD) SMD |
| C462 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C463 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C464 | 0CE106SF6DC | 10UF MVG 16V 20% R/TP(SMD) SMD |
| C465 | 0CE106SK6DC | 10UF MVG 50V 20% SMD R/TP |
| C480 | 0CE108DJ618 | 1000UF STD 35V 20% FL TP 5 |
| C481 | 0CE475SK6DC | 4.7UF MVG 50V 20% SMD R/TP |
| C482 | 0CE475SK6DC | 4.7UF MVG 50V 20% SMD R/TP |
| C483 | 0CF4741L438 | 0.47UF D 63V 5% TP 5 M/PE NI |
| C484 | 0CF4741L438 | 0.47UF D 63V 5% TP 5 M/PE NI |
| C495 | 0CE108DJ618 | 1000UF STD 35V 20% FL TP 5 |
| C527 | 0CE476SF6DC | 47UF MVG 16V 20% SMD R/TP |
| C610 | 0CE107SF6DC | 100UF MVG 16V 20% SMD R/TP |
| C832 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C833 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C834 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C835 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C836 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C837 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C838 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C839 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C840 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C851 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C853 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C884 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C896 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C901 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |


| LOCA. NO | PART NO | DESCRIPTION |
|-----------------|-------------|-----------------------------------------|
| C904 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C905 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C930 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| C950 | 0CE226SF6DC | 22UF MVG 16V 20% SMD R/TP |
| COIL | | |
| L1000 | 6140VB0004B | 26UH 1UEWPHY 22.5TURN YL-9N 0.4 |
| L1101 | 6140VB0004B | 26UH 1UEWPHY 22.5TURN YL-9N 0.4 |
| L1102 | 6140VB0004B | 26UH 1UEWPHY 22.5TURN YL-9N 0.4 |
| L1103 | 6140VB0004B | 26UH 1UEWPHY 22.5TURN YL-9N 0.4 |
| L1104 | 6140VB0004B | 26UH 1UEWPHY 22.5TURN YL-9N 0.4 |
| L404 | 6140VB0032A | DBF-1015A 15.5UH 10PIE DIGITAL AUDIO |
| L405 | 6140VB0032A | DBF-1015A 15.5UH 10PIE DIGITAL AUDIO |
| L406 | 6140VB0032A | DBF-1015A 15.5UH 10PIE DIGITAL AUDIO |
| L407 | 6140VB0032A | DBF-1015A 15.5UH 10PIE DIGITAL AUDIO |
| RESISTOR | | |
| AR1200 | 0RRZVTA001D | 22 OHM 1 / 16 W 1608 5% R/TP 4P |
| AR1201 | 0RRZVTA001D | 22 OHM 1 / 16 W 1608 5% R/TP 4P |
| AR1202 | 0RRZVTA001D | 22 OHM 1 / 16 W 1608 5% R/TP 4P |
| AR1203 | 0RRZVTA001D | 22 OHM 1 / 16 W 1608 5% R/TP 4P |
| AR1204 | 0RRZVTA001D | 22 OHM 1 / 16 W 1608 5% R/TP 4P |
| AR1205 | 0RRZVTA001D | 22 OHM 1 / 16 W 1608 5% R/TP 4P |
| AR806 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR807 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR808 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR809 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR810 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR811 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR812 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR813 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR814 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR815 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR816 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| AR817 | 0RRZVTA001B | MNR14-E0A-J-510 R OHM 51 OHM 5% |
| R230 | 0RD0331H609 | 3.3 OHM 1/2 W 5.00% TA52 |
| LED | | |
| D1003 | 0DL233309AC | SAM2333 GREEN/RED GREEN:10MCD, RED:6MCD |
| D1103 | 0DL233309AC | SAM2333 GREEN/RED GREEN:10MCD, RED:6MCD |
| LD101 | 0DL200000CA | SAM5670(DL-2LRG) BK Y-GREEN - |
| SWITCH | | |
| SW101 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW102 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW103 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW104 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW105 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW106 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW107 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW108 | 140-315A | TACT SKHV17910B LG C&D 12V |
| SW800 | 6600VR1004A | SKHMPW 5P CHIP TACT J-ALPS |

| LOCA. NO | PART NO | DESCRIPTION |
|-----------------------------|-------------|----------------------------------|
| FILTER & CRYSTAL | | |
| L100 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1004 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1005 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1006 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1007 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1009 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L101 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1010 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1011 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1012 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1013 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1014 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1015 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1016 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1017 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1018 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1019 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1020 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1021 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1022 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1023 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1024 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1025 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L110 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1105 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1106 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1107 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1108 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L111 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1125 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1126 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1127 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1128 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1129 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1130 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L114 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L115 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L119 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L120 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L1204 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1205 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1206 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1207 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1208 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L1209 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L121 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L122 | 6210VC0005A | BK2125 HS 750 2X1.25X0.85MM R/TP |
| L123 | 6210VC0005A | BK2125 HS 750 2X1.25X0.85MM R/TP |
| L124 | 6210VC0005A | BK2125 HS 750 2X1.25X0.85MM R/TP |
| L125 | 6210VC0005A | BK2125 HS 750 2X1.25X0.85MM R/TP |


| LOCA. NO | PART NO | DESCRIPTION |
|----------------------|-------------|--------------------------------------------|
| L126 | 6210VC0005A | BK2125 HS 750 2X1.25X0.85MM R/TP |
| L202 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L203 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L204 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L300 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L301 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L302 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L400 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L401 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L402 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L403 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L408 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L408 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L409 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L409 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L410 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L500 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L502 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L503 | 6200JB8010L | MLB-201209-1000L-N2 MAG LAYERS |
| L506 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| L604 | 6200J000013 | MLB-321611-0500P-N2 MAG LAYERS |
| X1200 | 6212AB2845A | RESONATOR,CRYSTALABLS-27.000MHZ |
| X300 | 166-E02F | RESONATOR,CERAMICCSBLA500KECF09-B0 |
| X400 | 156-A02M | RESONATOR,CRYSTALHC49U 18.432MHZ |
| X800 | 6212AB2844A | RESONATOR,CRYSTALABLS-19.6608MHZ |
| JACK | | |
| JK100 | 6612J00043C | UPJ-R1-031 UGCOM S/T,SCART,SHIELD,SPRING |
| JK101 | 6612J00043C | UPJ-R1-031 UGCOM S/T,SCART,SHIELD,SPRING |
| JK101 | 6613V00026A | UJB-03-28A UGCOM |
| JK102 | 6612J00043C | UPJ-R1-031 UGCOM S/T,SCART,SHIELD,SPRING |
| JK103 | 6612J10012A | UJB-05-02C UGCOM COMPONENT |
| JK104 | 6612J00038B | UJB-03-25B UGCOM 6612J00038A+RED |
| JK1200 | 6612B00015B | DC1R019WDH JAE 0.5MM,19PIN+2PIN,HDMI S/T |
| JK400 | 6612J00037A | UJB-02-12A UGCOM 2P RCA VERTICAL+SHIELD |
| JK502 | 6612F00087A | UEJ-CV-032 UGCOM EAR JACK 10MM |
| JK600 | 6612F00087A | UEJ-CV-032 UGCOM EAR JACK 10MM |
| ACCESSORIES | | |
| A1 | 3828VA0541F | MANUAL,OWNERS MF056C EU/42PX3RVA |
| A2 | 6710V00138M | REMOTE CONTROLLER, RZ-42PX30 SPEC. |
| A3 | 6410VEH003C | POWER CORD, M2511A-001 VDE/SEMKO 2800MM |
| MISCELLANEOUS | | |
| C1 | 6850VA0004J | CABLE,COAXIAL UL1365#26 150MM UCA-EX-069 |
| C2 | 6850J00005B | CABLE,DVI LVDS UL20276 AWG30 500MM |
| JK500 | 6630G70016A | CONNECTOR, A03-7071-094 SPG 15P 2.29MM RGB |
| JK601 | 6630G70017A | CONNECTOR, A02-0915-101 SPG 9P 2.54MM |
| PA101 | 6712000002B | REMOTE CONTROLLER RECEIVER,KSM-603SM12E-1 |
| TU201 | 6700MF0010A | TUNER, TAUM-W501P MINI 4 SYSTEM MAIN |

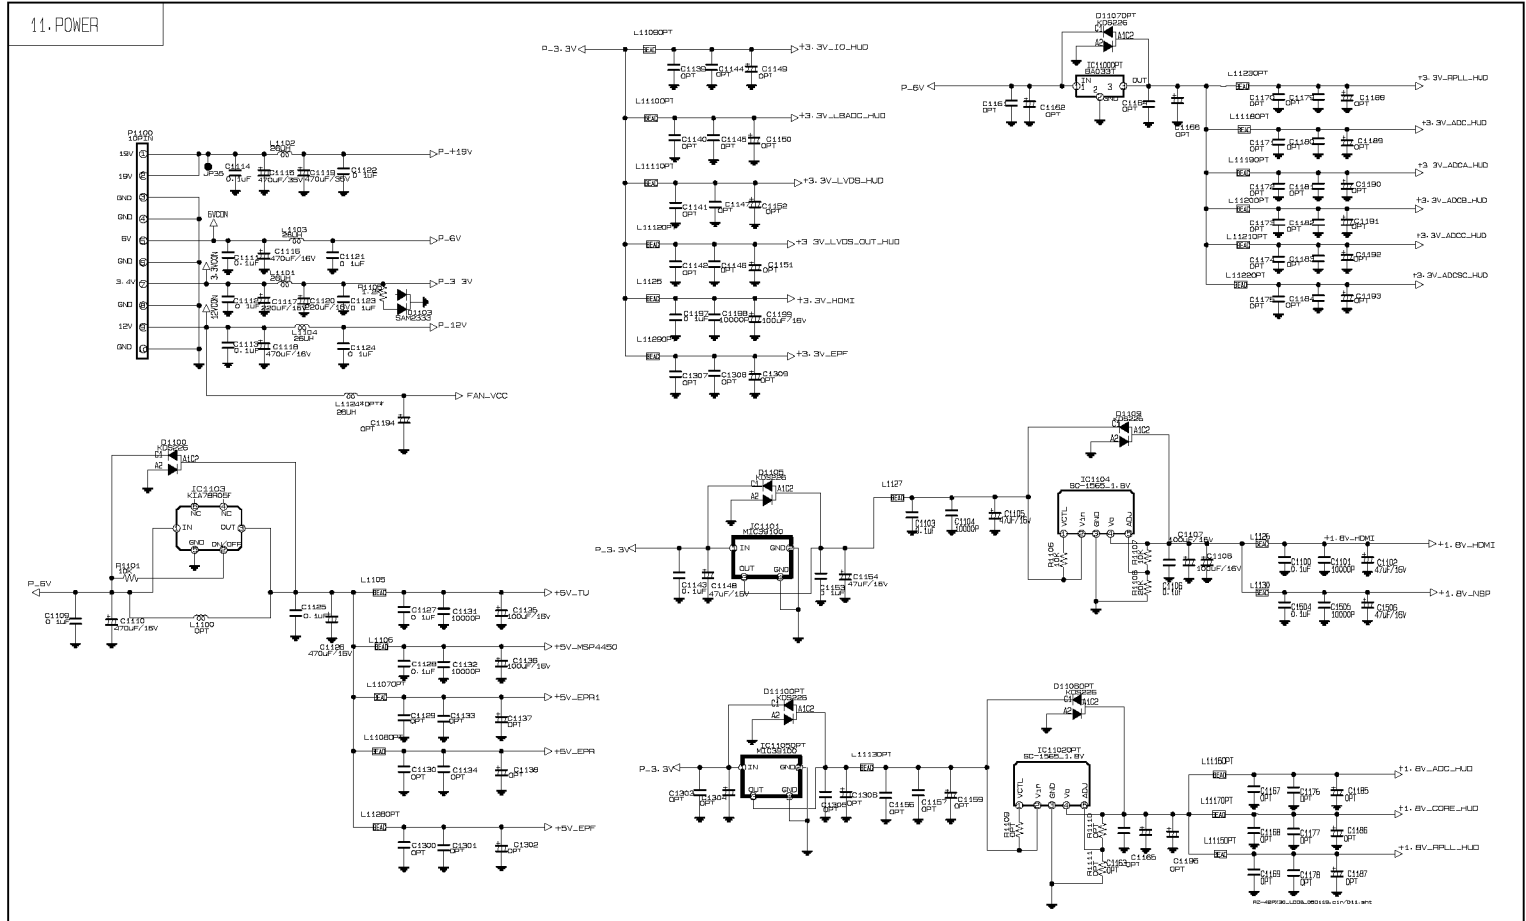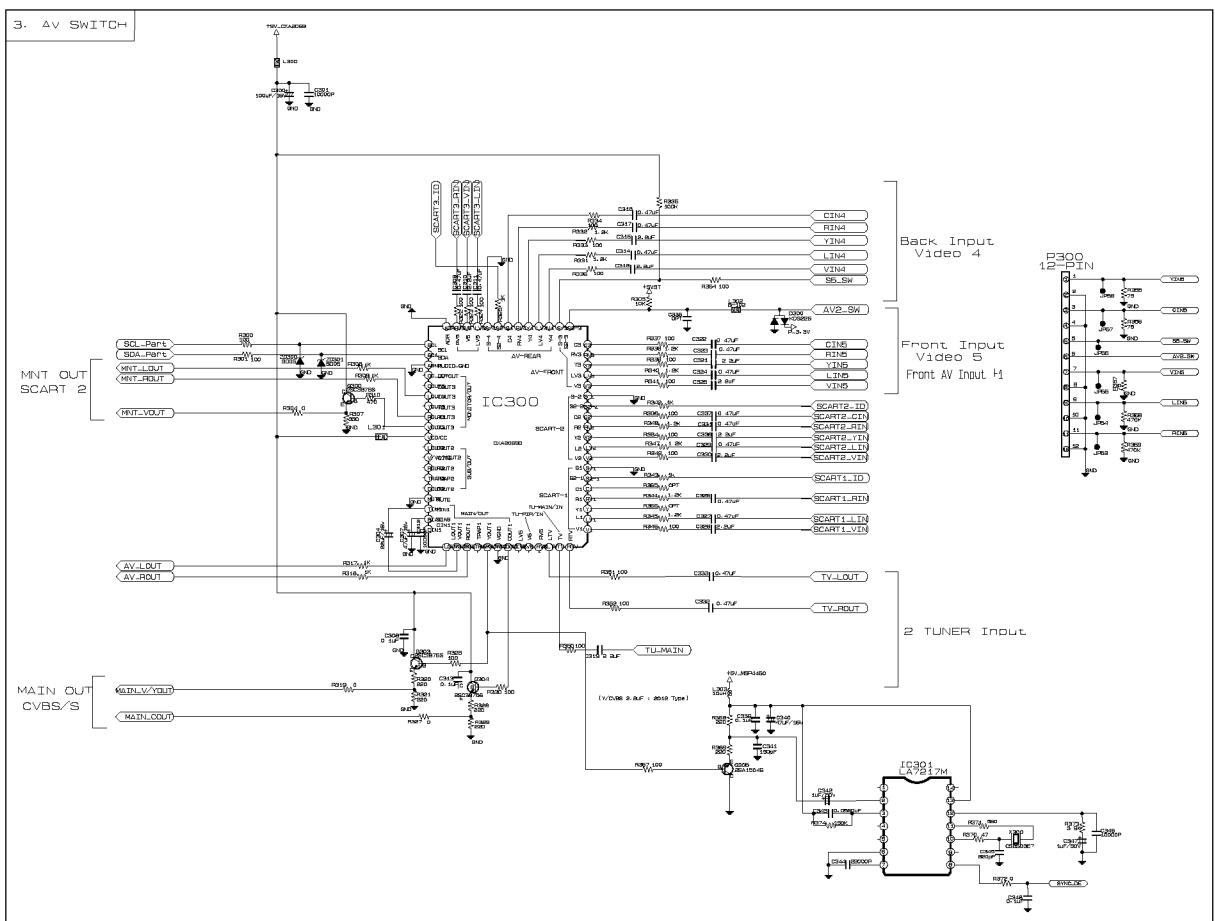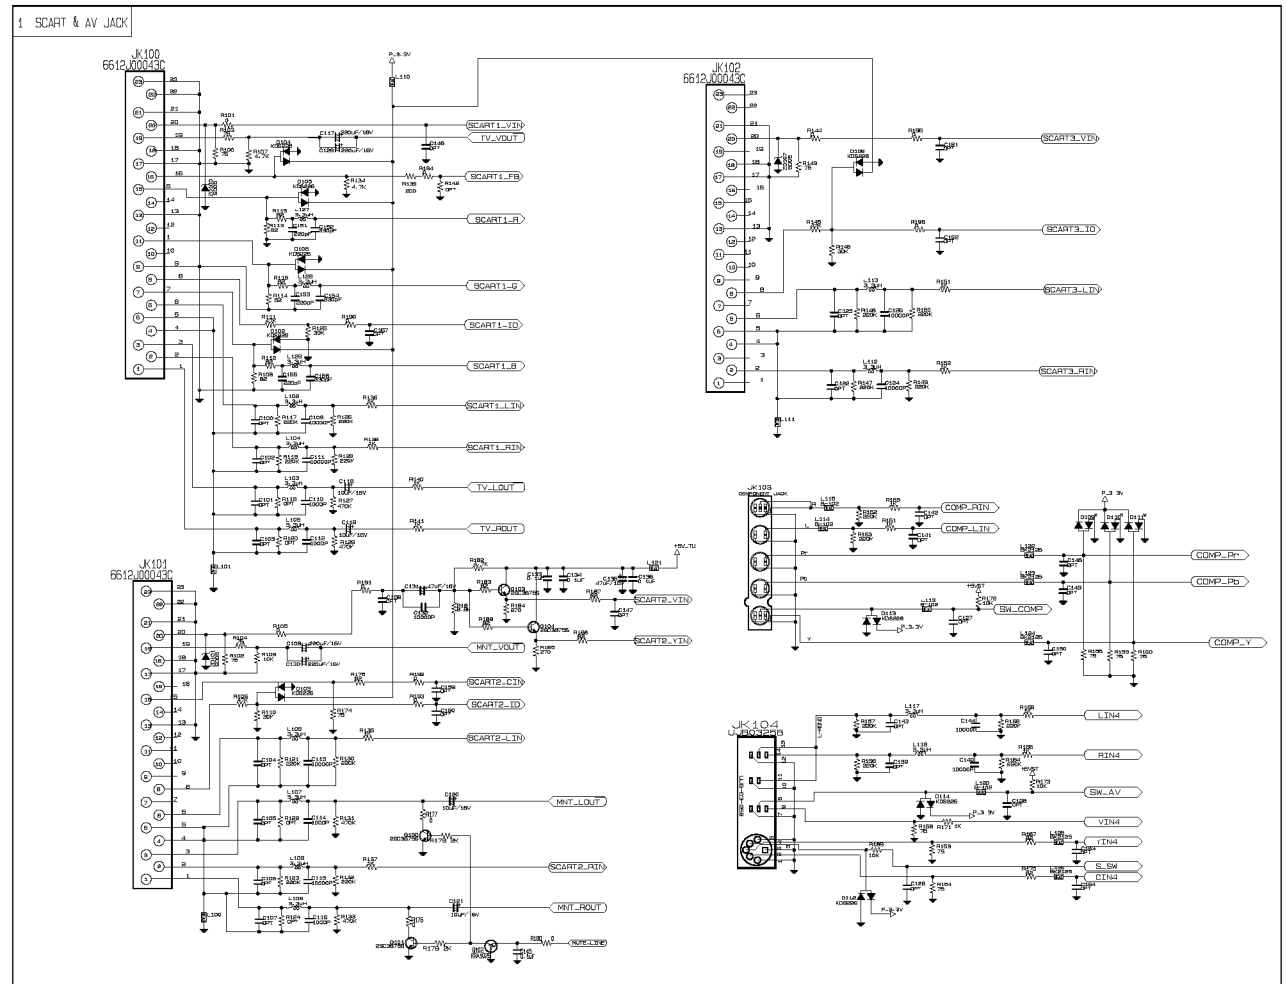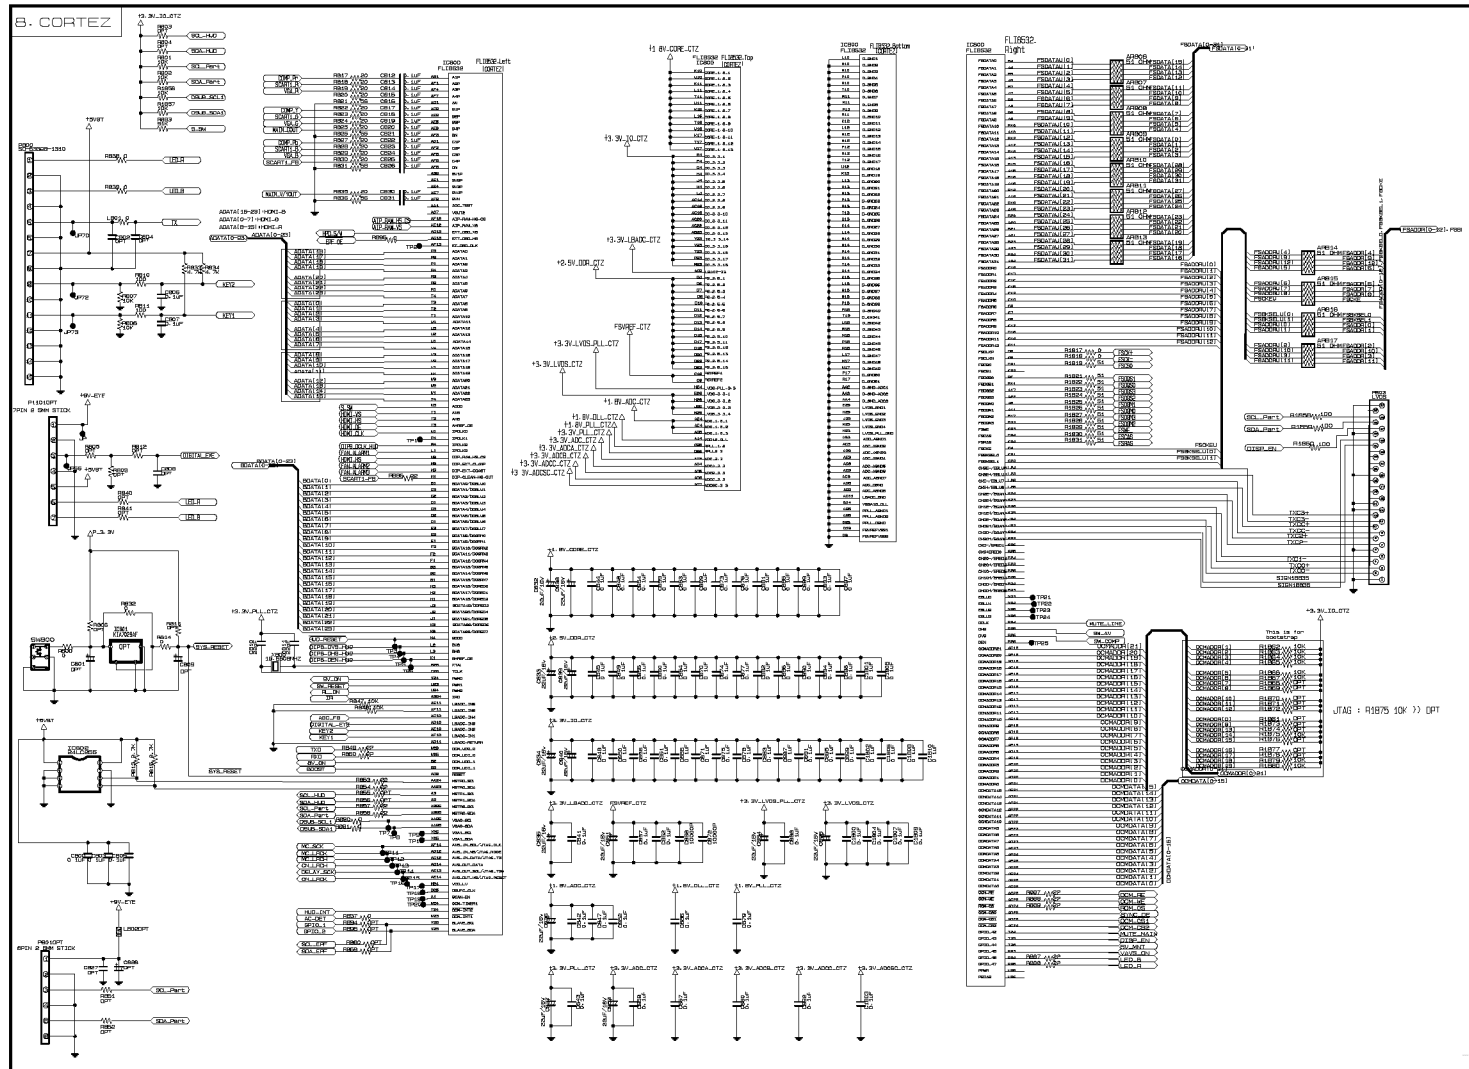


4. AUDIO BLOCK

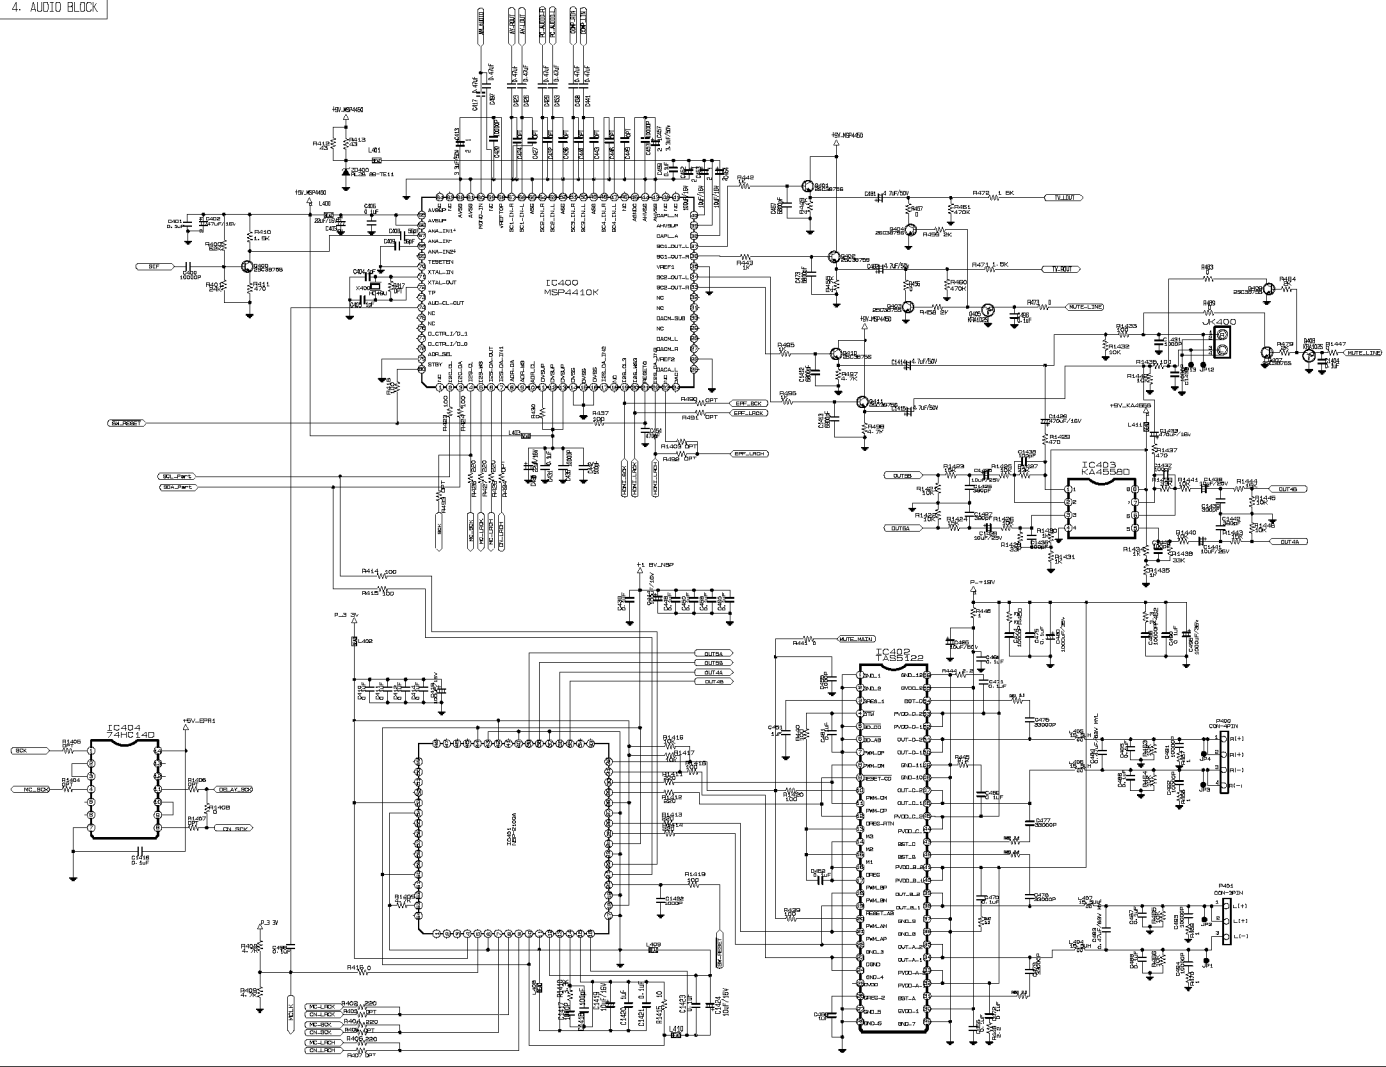


10. POWER

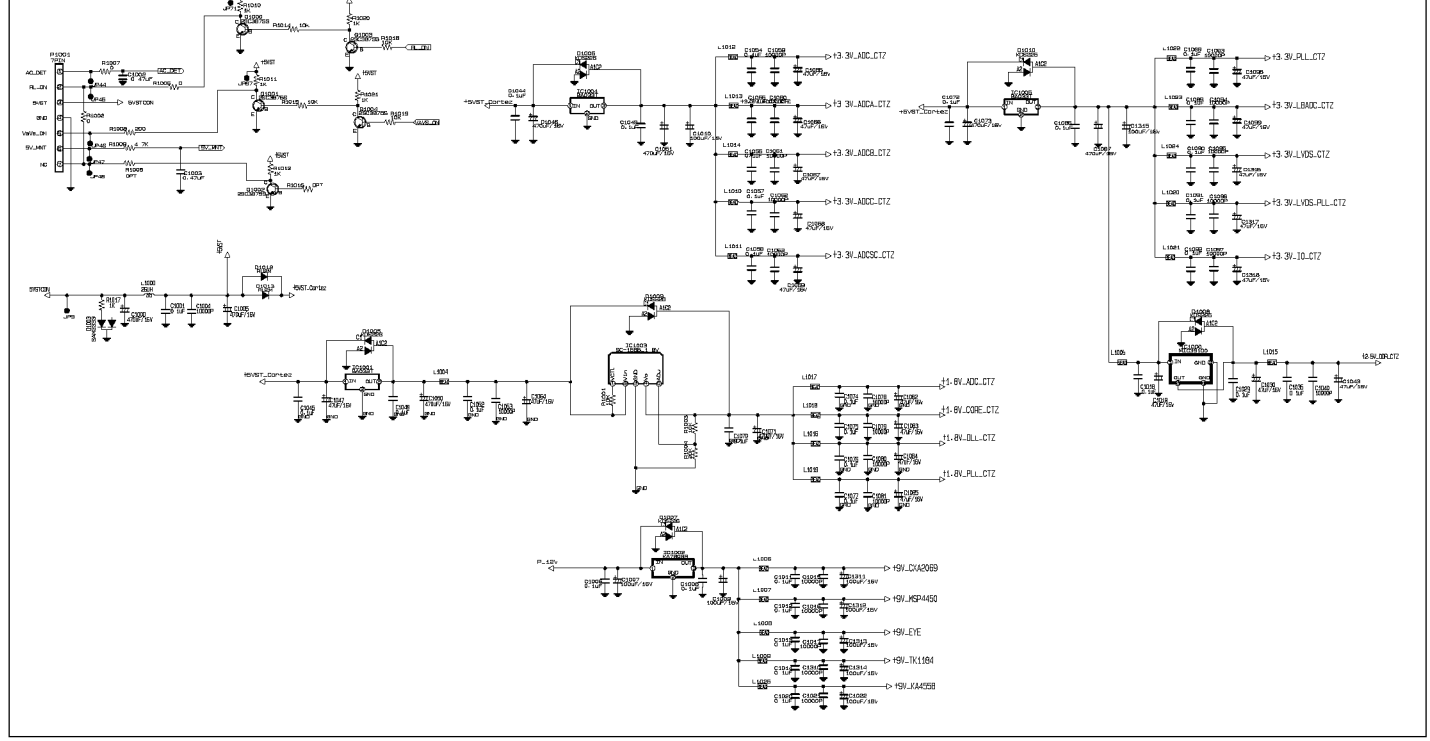

5. RGB INPUT

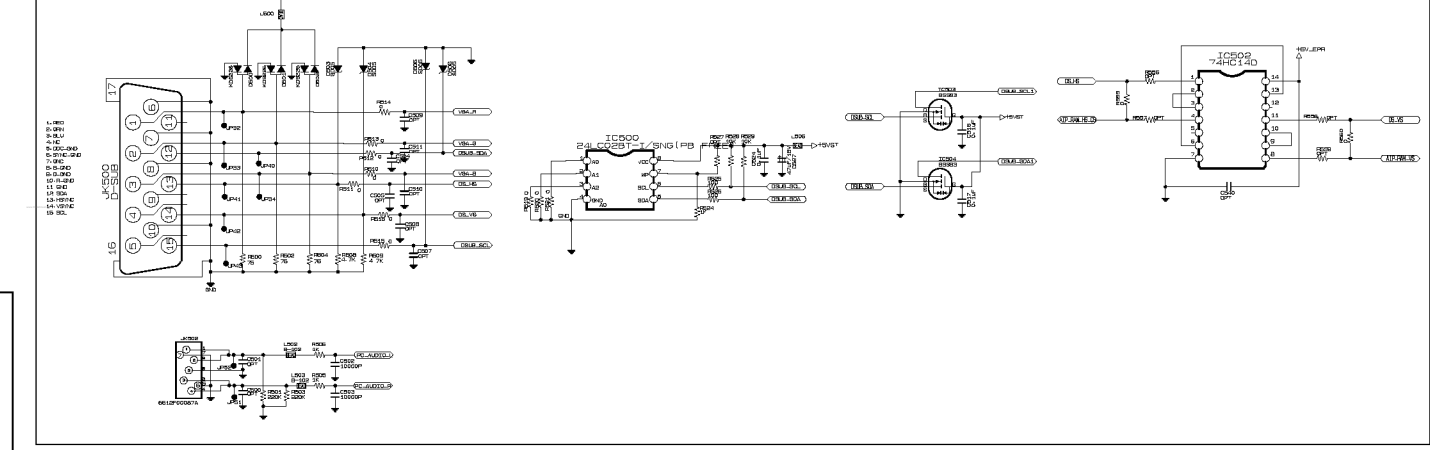




9. DDR MEMORY

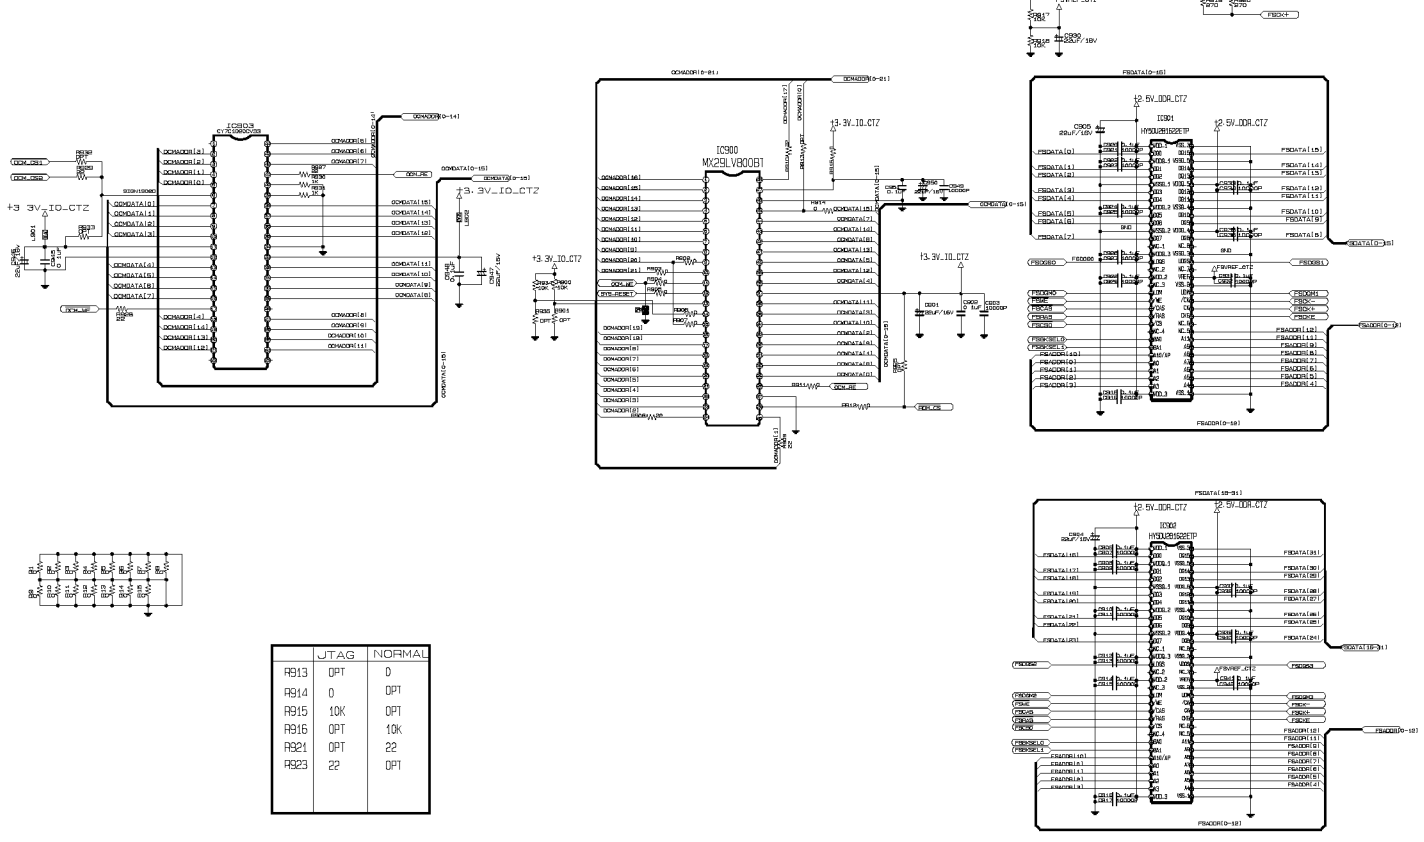

| | JTAG | NORMAL |
|------|------|--------|
| R#13 | OPT | 0 |
| R#14 | 0 | OPT |
| R#15 | 10K | OPT |
| R#16 | OPT | 10K |
| R#21 | OPT | 22 |
| R#23 | 22 | OPT |

6. PS232C & FAN

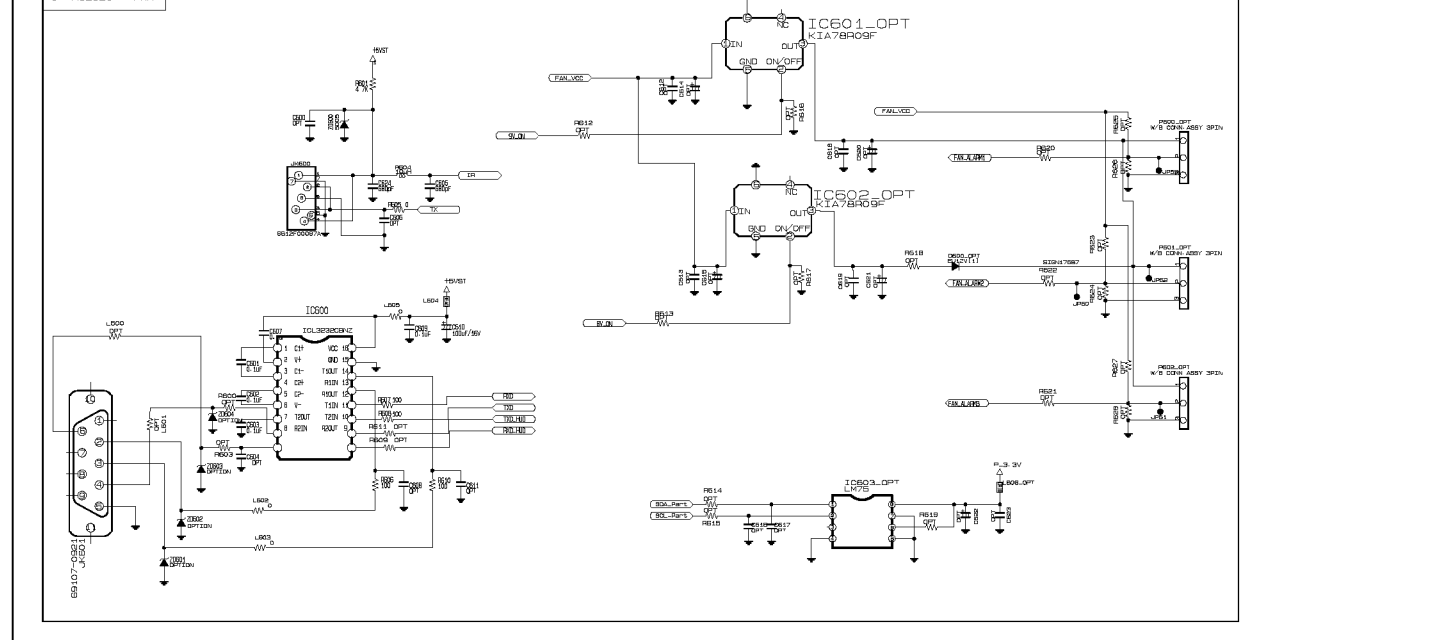

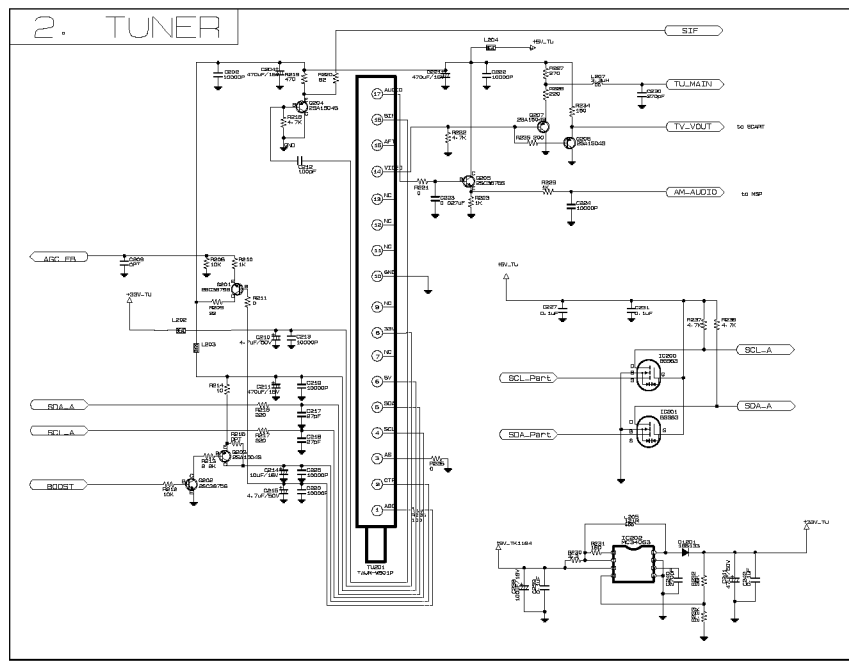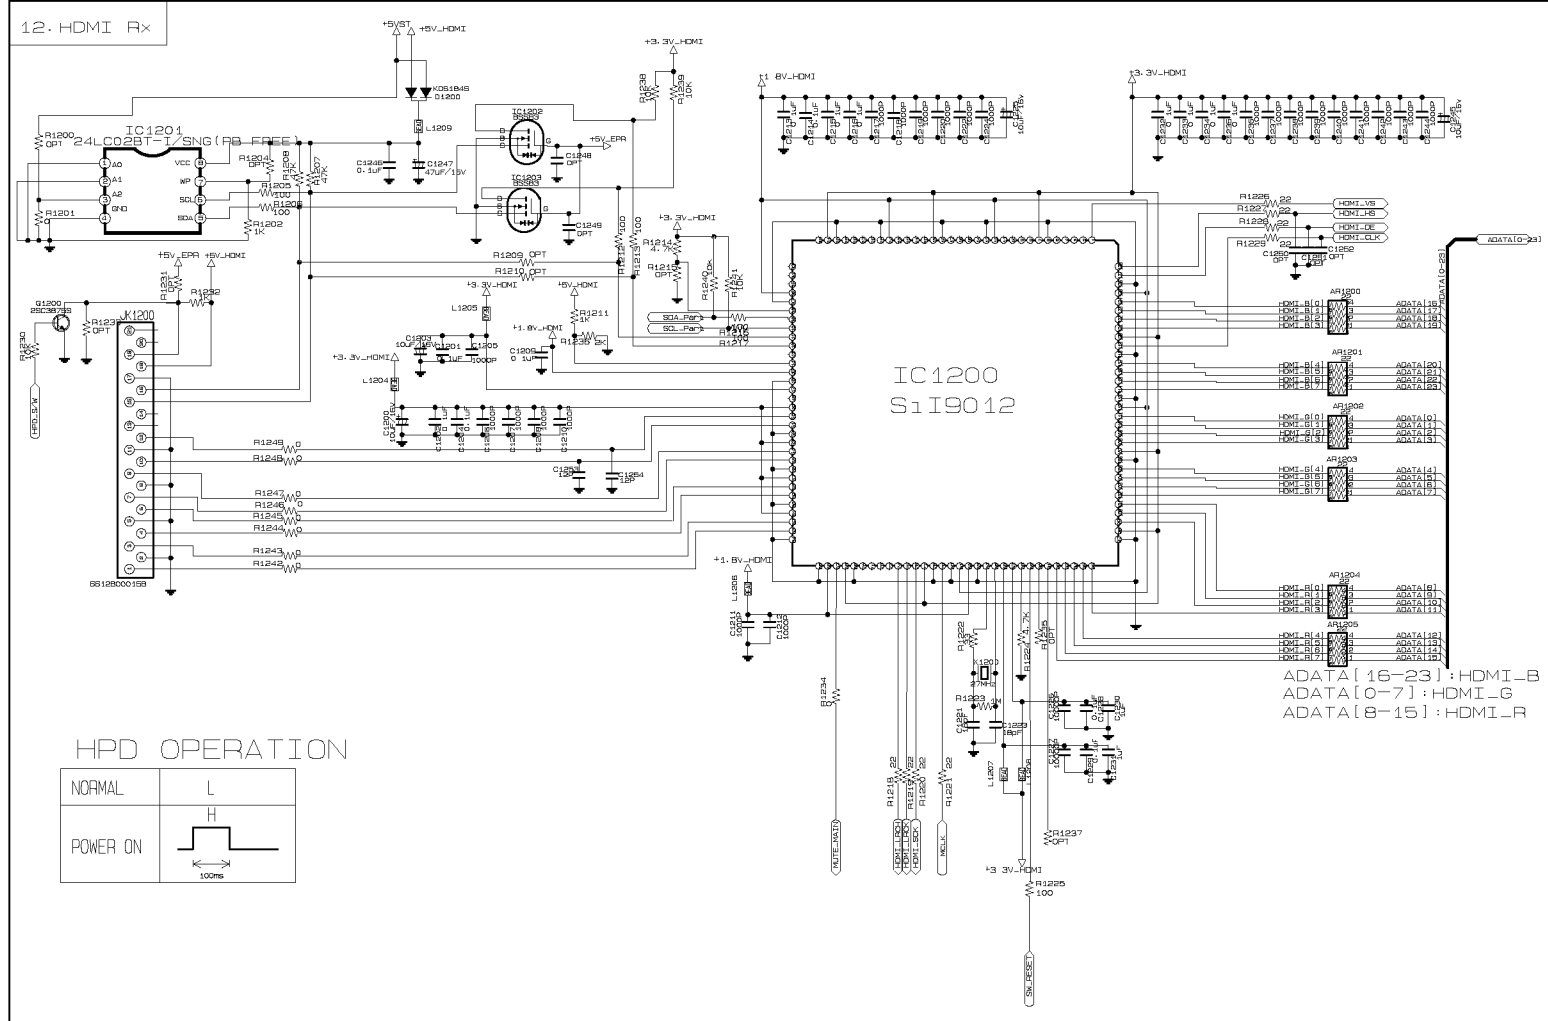



P/NO : 3828VD0209N

Mar., 2005
Printed in Korea

