

RC4191/RC4192/RC4193

Micropower Switching Regulator

Features

- High efficiency – 85% typical
- Low quiescent current – 215 μ A
- Adjustable output – 1.3V to 30V
- High switch current – 200 mA
- Bandgap reference – 1.31V
- Accurate oscillator frequency – $\pm 10\%$
- Remote shutdown capability
- Low battery detection circuitry
- Low component count
- 8-lead packages

Description


The RC4191/4192/4193 series of monolithic ICs are low power switch mode regulators intended for miniature power supply applications. These DC-to-DC converter ICs provide all of the active components needed to create supplies for micropower circuits. Contained internally are an oscillator, switch, reference, comparator, and logic, plus a discharged battery detection circuit.

These regulators can achieve up to 85% efficiency in most applications while operating over a wide supply voltage range, 2.2V to 30V, at a very low quiescent current drain of 215 μ A.

The standard application circuit requires just seven external components for step-up operation: an inductor, a steering diode, three resistors, a low value timing capacitor, and an electrolytic filter capacitor. The combination of simple application circuit, low supply current, and small package make the RC4193 adaptable to a wide range of miniature power supply applications.


The RC4193 is most suited for single ended step-up ($V_{OUT} > V_{IN}$) circuits because the NPN internal switch transistor is referenced to ground. It is complemented by Raytheon's micropower switching regulator, the RC4391, which is dedicated to step-down ($V_{OUT} < V_{IN}$) and inverting $V_{OUT} = -V_{IN}$ applications. Between the two devices the ability to create all three basic switching regulator configurations is assured. Refer to the RC4391 data sheet for step-down and inverting applications.

Block Diagram

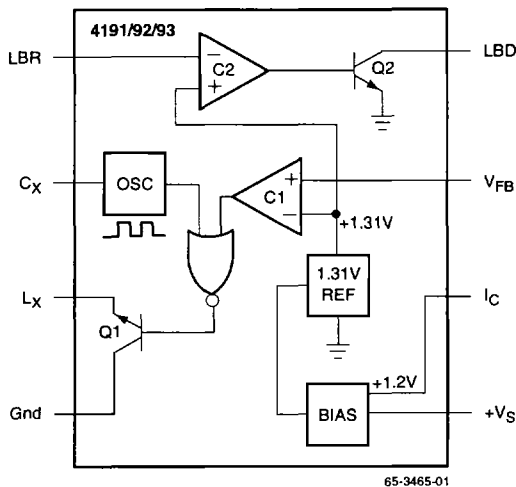

The RC4191/92/93 series of micropower switching regulators consists of three devices, each with slightly different specifications. The RC4191 has a 1.5% maximum output voltage tolerance, 0.2% maximum line regulation, and operation to 30V. The RC4192 has a 3.0% maximum output voltage tolerance, 0.5% maximum line regulation, and operation to 30V. The RC4193 has a 5.0% maximum output voltage tolerance, 0.5% maximum line regulation, and operation to 24V. Other specifications are identical for the RC4191, RC4192 and RC4193. Each type is available in commercial, industrial, and military temperature ranges, and in plastic and ceramic DIPs and S0-8 packages.

Pin Assignments



Pin Definitions

Pin Name	Pin Number	Pin Function Description
LBR	1	Low Battery (Set) Resistor
Cx	2	Timing Capacitor
Lx	3	External Inductor
Gnd	4	Ground
+Vs	5	Positive Supply Voltage
Ic	6	Reference Set Current
VFB	7	Feedback Voltage
LBD	8	Low Battery Detector Output

Absolute Maximum Ratings

(beyond which the device may be damaged)¹

Parameter		Min	Typ	Max	Units
Supply Voltage (Without External Transistor)	4191, 4192			30	V
	4193			24	V
P _{DTA} < 50°C	SOIC			300	mW
	PDIP			468	mW
	CerDIP			833	mW
Operating Temperature	RM4191/2/3	-55		125	°C
	RV4191/2/3	-25		85	°C
	RC4191/2/3	0		70	°C
Storage Temperature		-65		150	°C
Junction Temperature	SOIC, PDIP		125		°C
	CerDIP		175		°C
Switch Current	Peak			375	mA
For T _A > 50°C Derate at	SOIC		4.17		mW/°C
	PDIP		6.25		mW/°C
	CerDIP		8.33		mW/°C

Note:

- Functional operation under any of these conditions is NOT implied. Performance and reliability are guaranteed only if Operating Conditions are not exceeded.

Operating Conditions

Parameter		Min	Typ	Max	Units
θ _{JC}	Thermal resistance		45		°C/W
θ _{JA}	Thermal resistance		240		°C/W
			160		°C/W
			150		°C/W

Electrical Characteristics

(+V_S = +6.0V, I_C = 5.0 μA over the full operating temperature range unless otherwise noted.)

Parameters		Conditions	4191			4192			4193			Units
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
+V _S	Supply Voltage		2.6		30	2.6		30	2.6		24	V
V _{REF}	Reference Voltage (Internal)		1.25	1.31	1.37	1.23	1.31	1.39	1.20	1.31	1.42	V
I _{SY}	Supply Current	Measure at Pin 5 I ₃ = 0		225	350		235	350		225	350	μA
	Line Regulation	0.5 V _O < V _S < V _O		0.2	0.5		0.5	1.0		0.5	1.0	% V _O
I _L	Load Regulation	V _S = 0.5 V _O P _L = 150 mW		0.5	1.0		0.5	1.0		0.5	1.0	% V _O
I _C	Reference Set Current		1.0	5.0	50	1.0	5.0	50	1.0	5.0	50	μA
I _{CO}	Switch Leakage Current	V ₃ = 24V (4193) 30V (4191, 4192)			30			30			30	μA
I _{SO}	Supply Current (Disabled)	V _C ≤ 200 mV			30			30			30	μA
I _{LBD}	Low Battery Output Current	V ₈ = 0.4V, V ₁ = 1.1V	400	1200		400	1200		400	1200		μA
	Oscillator Frequency Temperature Drift			±200			±200			±200		ppm/ °C

Electrical Characteristics

(+V_S = +6.0V, I_C = 5.0 μA, and T_A = +25°C unless otherwise noted.)

Parameters		Conditions	4191			4192			4193			Units
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
+V _S	Supply Voltage		2.2		30	2.2		30	2.2		24	V
V _{REF}	Reference Voltage (Internal)		1.29	1.31	1.33	1.27	1.31	1.35	1.24	1.31	1.38	V
I _{SW}	Switch Current	V ₃ = 400 mV	100	200		100	200		100	200		mA
I _{SY}	Supply Current	Measure at Pin 5 I ₃ = 0		215	300		215	300		215	300	μA
ef	Efficiency			85			85			85		%
	Line Regulation	0.5 V _O < V _S < V _O		0.04	0.2		0.04	0.5		0.04	0.5	% V _O
L _I	Load Regulation	V _S = +0.5 V _{OUT} P _L = 150 mW		0.2	0.5		0.2	0.5		0.2	0.5	% V _O
F _O	Operating Frequency Range		0.1	25	75	0.1	25	75	0.1	25	75	kHz
I _C	Reference Set Current		1.0	5.0	50	1.0	5.0	50	1.0	5.0	50	μA
I _{CO}	Switch Leakage Current	V ₃ = 24V (4193), 30V (4191/2)		0.01	5.0		0.01	5.0		0.01	5.0	μA
I _{SO}	Supply Current (Disabled)	V _C ≤ 200 mV		0.1	5.0		0.1	5.0		0.1	5.0	μA
I _I	Low Battery Bias Current	V ₁ = 1.2V		0.7			0.7			0.7		μA
I _{CX}	Capacitor Charging Current			8.6			8.6			8.6		μA
	Oscillator Frequency Tolerance			±10			±10			±10		%
+V _{THX}	Capacitor Threshold Voltage +			1.4			1.4			1.4		V
-V _{THX}	Capacitor Threshold Voltage -			0.5			0.5			0.5		V
I _{FB}	Feedback Input Current	V ₇ = 1.3V		0.1			0.1			0.1		μA
I _{LBD}	Low Battery Output Current	V ₈ = 0.4V, V ₁ = 1.1V	500	1500		500	1500		500	1500		μA

ANALOG

Typical Performance Characteristics

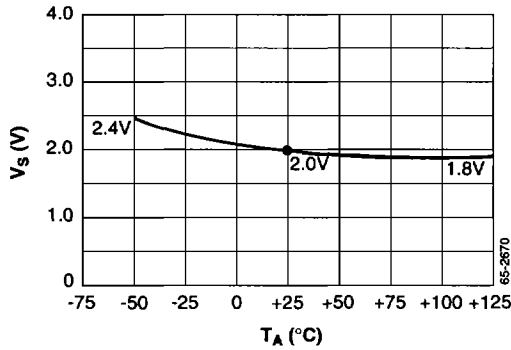


Figure 1. Minimum Supply Voltage vs. Temperature

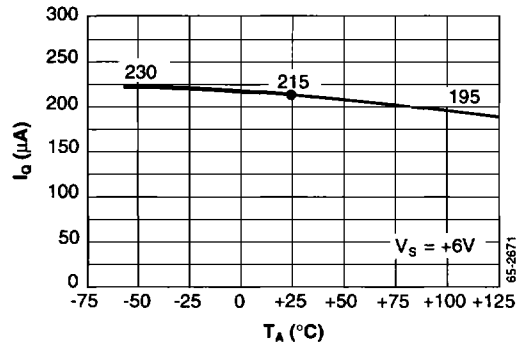


Figure 2. Quiescent Current vs. Temperature

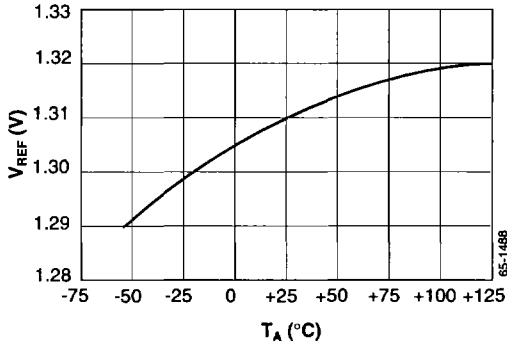


Figure 3. Reference Voltage vs. Temperature

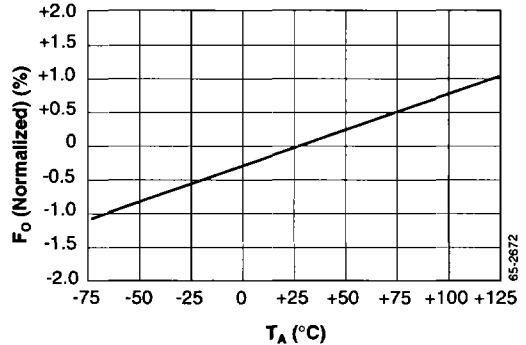


Figure 4. Oscillator Frequency vs. Temperature

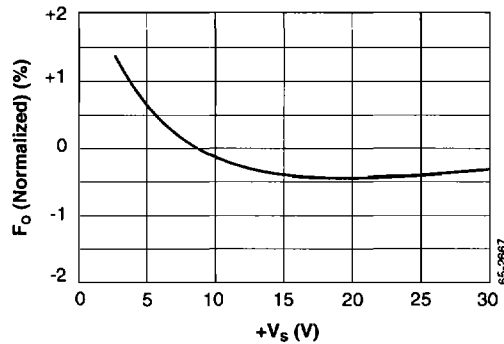


Figure 5. Minimum Supply Voltage vs. Temperature

Applications Discussion

Simple Step-Up Converter

The most common application, the step-up regulator, is derived from a simple step-up ($V_{OUT} > V_{BAT}$) DC-to-EC Converter (Figure 6).

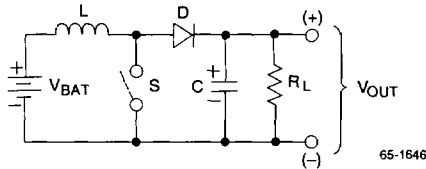


Figure 6. Simple Set-Up Converter

When switch S is closed, the battery voltage is applied across the inductor L . Charging current flows through the inductor, building up a magnetic field, increasing as the switch is held closed. While the switch is closed, the diode D is reverse biased (open circuit) and current is supplied to the load by the capacitor C . Until the switch is opened, the inductor current will increase linearly to a maximum value determined by the battery voltage, inductor value, and the amount of time the switch is held closed ($I_{MAX} = V_{BAT}/L \times T_{ON}$). When the switch is opened, the magnetic field collapses, and the energy stored in the magnetic field is converted into a discharge current which flows through the inductor in the same direction as the charging current. Because there is no path for current to flow through the switch, the current must flow through the diode to supply the load and charge the output capacitor.

If the switch is opened and closed repeatedly, at a rate much greater than the time constant of the output RC , then a constant DC voltage will be produced at the output.

An output voltage higher than the input voltage is possible because of the high voltage produced by a rapid change of current in the inductor. When the switch is opened, the inductor voltage will instantly rise high enough to forward bias the diode, to $V_{OUT} + V_D$.

In the complete RC4193 regulator, a feedback control system adjusts the on time of the switch, controlling the level of inductor current, so that the average inductor discharge current equals the load current, thus regulating the output voltage.

Complete Step-Up Regulator

A complete schematic of the minimum step-up application is shown in Figure 7. The ideal switch in the DC-to-DC Converter diagram is replaced by an open collector NPN transistor $Q1$. C_F functions as the output filter capacitor, and $D1$ and L_X replace D and L .

When power is first applied, the current in $R1$ supplies bias current to pin 6 (I_C). This current is stabilized by a unity gain current source amplifier and then used as bias current for the 1.31V bandgap reference. A very stable bias current generated by the bandgap is mirrored and used to bias the remainder of the chip. At the same time the RC4193 is starting up, current will flow through the inductor and the diode to charge the output capacitor to $V_{BAT} - V_D$.

At this point, the feedback (pin 7) senses that the output voltage is too low, by comparing a division of the output voltage (set by the ratio of $R2$ to $R3$) to the +1.31V reference. If the output voltage is too low then the comparator output changes to a logical zero. The NOR gate then effectively ANDs the oscillator square wave with the comparator signal; if the comparator output is zero AND the oscillator output is low, then the NOR gate output is high and the switch transistor will be forced on. When the oscillator goes high again, the NOR gate output goes low and the switch transistor will turn off. This turning on and off of the switch transistor performs the same function that opening and closing the switch in the simple DC-to-DC Converter does; i.e., it stores energy in the inductor during the on time and releases it into the capacitor during the off time.

The comparator will continue to allow the oscillator to turn the switch on and off until enough charge has been delivered to the capacitor to raise the feedback voltage above 1.31V.

Thereafter, this feedback system will vary the duration of the on time in response to changes in load current or battery voltage (see Figure 8). If the load current increases (waveform C), then the transistor will remain on (waveform D) for a longer portion of the oscillator cycle (waveform B), thus allowing the inductor current (waveform E) to build up to a higher peak value. The duty cycle of the switch transistor varies in response to changes in load and time.

ANALOG

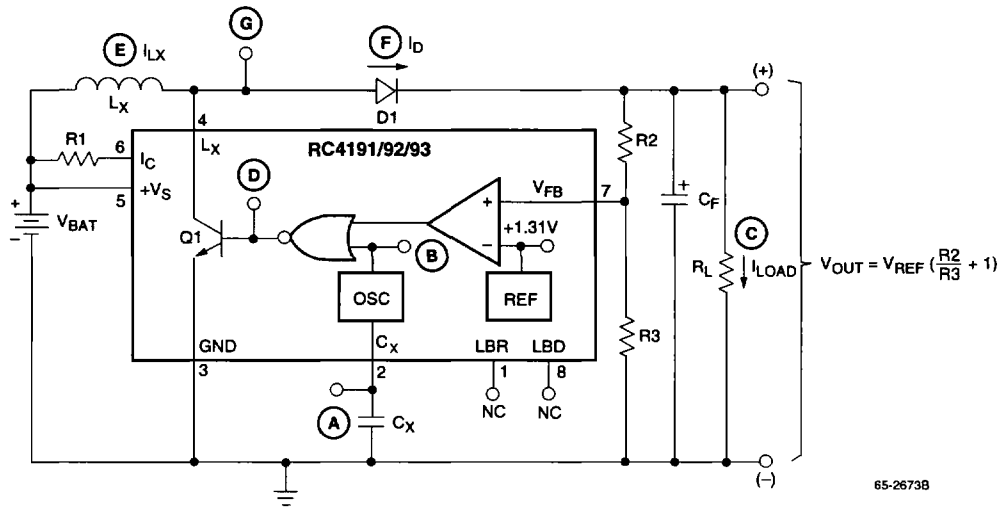


Figure 7. Complete Step-Up Regulator


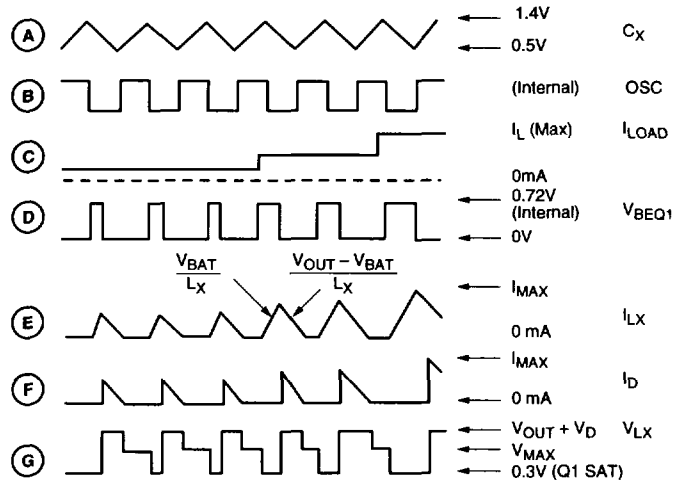


Figure 8. Step-Up Regulator Waveforms

Simplified Schematic Diagram

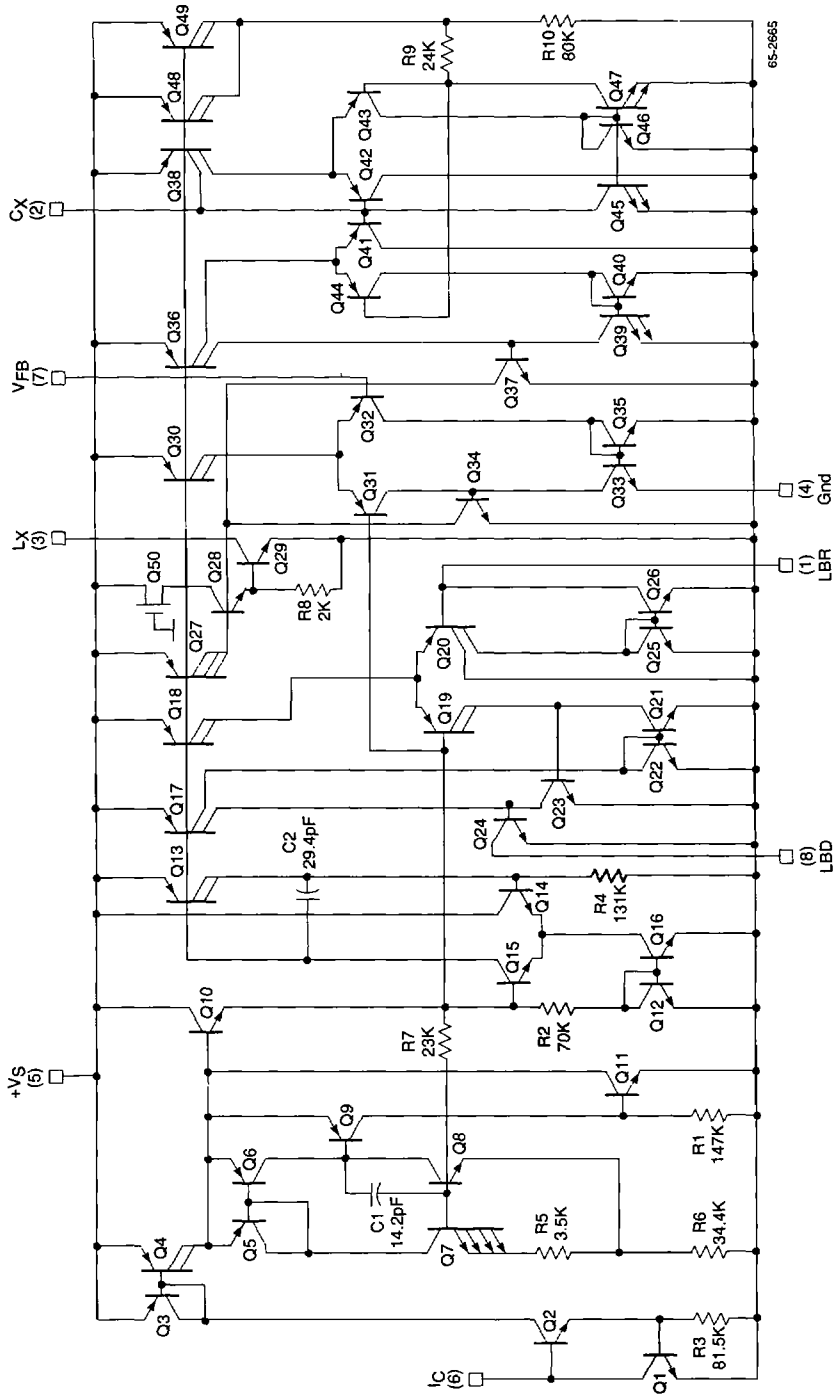

65-2685

Ordering Information

Product Number	Temperature Range	Screening	Package
RC4191M/2M/3M	0° to +70°C	Commercial	8 Pin Wide SOIC
RC4191N/2N/3N	0° to +70°C	Commercial	8 Pin Plastic DIP
RV4191N/92N/93N	-25° to +85°C		8 Pin Plastic DIP
RM4191D/92D/93D	-55°C to +125°C		8 Pin Ceramic DIP
RM4191D/883	-55°C to +125°C	Military	8 Pin Ceramic DIP

Note:

1. /883 suffix denotes MIL-STD-883, Par. 1.2.1 compliant device.