



TrueTriangle™

Product Specifications (1 of 4)
July 2002

Features

- ❑ InGaP HBT Technology
- ❑ 6mm Square, 50 Ohm Power Module
- ❑ Single Positive Supply
- ❑ 35% Linear Power Added Efficiency
- ❑ +28.5 dBm Output Power (CDMA Mode)
- ❑ 30 dB Gain at Operating Output Power
- ❑ On-Board Power Down Mode

Applications

- ❑ PCS Handsets
- ❑ PCS Infrastructure
- ❑ Wireless Local Loop Subscriber Units
- ❑ CDMA Handsets
- ❑ CDMA2K 1X Handsets


Description

The CHP1232-PM is a 50 ohm matched, single supply, linear power amplifier module intended for use in PCS handsets and wireless local loop subscriber units. The highly integrated amplifier meets the requirements of PCS-1900 or CDMA systems. It is a member of Celeritek's new **TrueTriangle™** family of 3V power amplifier modules.

The CHP1232-PM is packaged in a low-cost, space efficient, 6mm square, matched module that provides excellent

1.85 to 1.91 GHz 28.5 dBm, PCS InGaP HBT Amplifier Module

Functional Block Diagram

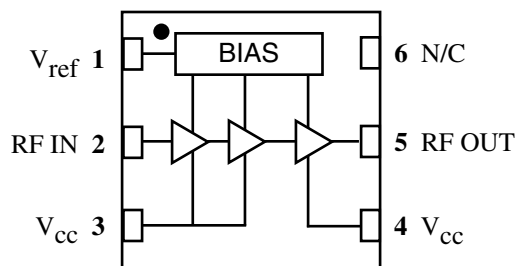

Ground connection is on backside

electrical stability and low thermal resistance. The module operates from a fixed positive voltage and requires no external matching which significantly reduces space, cost and enhances ease of use.

The 6x6 mm package is self contained, incorporating 50 ohm input and output matching networks optimized for output power, linearity and efficiency.

Celeritek's InGaP HBT technology offers a thermally robust and reliable PAM (power amplifier module) solution.

Absolute Maximum Ratings

Parameter	Rating	Parameter	Rating	Parameter	Rating
Collector Voltage (+V _{cc})	+6.0 V*	Reference Voltage (V _{ref})	+3.1 V	Operating Temperature	-40°C to +100°C
Collector Current (I _{cc})	1.2 A	Power Dissipation	5 W	Storage Temperature	-65°C to +150°C
RF Input Power	7 dBm			Soldering Temperature	260°C for 5 Sec.

* RF Off.

Recommended Operating Conditions

Parameter	Typ	Units	Parameter	Typ	Units
Collector Voltage (+V _{cc})	3.2 to 4.1	Volts	Operating Temperature (PC Board)	-20 to +70	°C
Reference Voltage (V _{ref}) (Fixed and regulated)	+2.95 (±1.2%)	Volts			

Application Information

The CHP1232-PM is a three-stage amplifier that requires a single regulated positive supply along with the unregulated battery voltage for proper operation. Vref is a regulated 2.95 reference voltage for the bias control circuitry. It can also be used as a power down mode select. Vcc is an unregulated supply voltage directly from the battery. Vcc should be applied prior to Vref and before RF input power. The CHP1232-PM can be operated over a range of supply voltages and bias points by adjustment of Vref. It is important that the maximum power dissipation of the package be observed at all times and that the maximum voltage across the device is not exceeded.

Circuit Design Considerations

Biasing The positive Vcc supply voltages are applied to pins 3 and 4. Most bypass decoupling is provided on-board. Vref is applied to pin 1.

The recommended DC bypass capacitance is shown in the schematic diagram on Page 3.

Inadequate bypass capacitance and inductance around the DC supply lines can compromise the adjacent channel power ratio (ACPR), reduce power gain and/or create oscillations.

— Continued on Page 2 —

Electrical Characteristics

Unless otherwise specified, the following specifications are guaranteed at room temperature with collector voltage (V_{CC}) = 3.6 V.

Parameter	Condition	Min	Typ	Max	Units
Frequency Range		1.85		1.91	GHz
Gain	Pout = 28.5 dBm	28	30	33	dB
Gain Ripple*	1850-1910 MHz			1.5	dB
Gain Variation	Over supply voltage		2		dB/V
	Over temperature		0.03		dB/°C
Power Output	CDMA mode		+28.5		dBm
Harmonics	2nd @ Digital power output, no output trapping, Po = +28.5 dBm		-30		dBc
	3rd @ Digital power output, no output trapping, Po = +28.5 dBm		-30		dBc
Noise Power in Receive Band	30 kHz Bandwidth			-90	dBm
Linearity (ACPR)	CDMA mode @ +28.5 dBm Pout, 1.25 MHz offset		-53	-48	dBc/30KHz
	CDMA2K 1X mode** @ +28.0 dBm Pout, 1.25 MHz offset		-51	-48	dBc/30KHz
Noise Figure				5.0	dB
Input Return Loss			-10		dB
Efficiency (V_{CC} = 3.6 V)	Pout = +28.5 dBm - CDMA mode	32	35		%
Positive Supply Current (I_{CC})	Pout = +28.5 dBm - CDMA mode		545	590	mA
Quiescent Current (I_Q)	No RF		60		mA
V_{ref} Supply Current (I_{ref})			2.5	5.0	mA
V_{ref} Supply Voltage (V_{ref})	Fixed and regulated (1.2% tolerance)		2.95		V
Leakage Current	V_{ref} = 0 V, V_{CC} = 3.6 V		<30		μA

* Specifications guaranteed over the temperature range of -20°C to +70°C. ** Modulation HPSK in 1.2288 MHz, RC3 PAR = 4.7 @ 1% CCDF.

– Continued from Page 1 –





Modulation When biased as specified, the CHP1232-PM will achieve the required adjacent channel response for the digital system specified. Celeritek tests 100% of each product under digital modulation to ensure correlation to customer applications.

Thermal

1. The ground pad on the backside of the CHP1232-PM must be soldered to the ground plane.
2. All leads of the package must be soldered to the appropriate electrical connection.


Product Consistency Distribution

Note: Unless otherwise specified, the following data was taken at 1880 MHz.

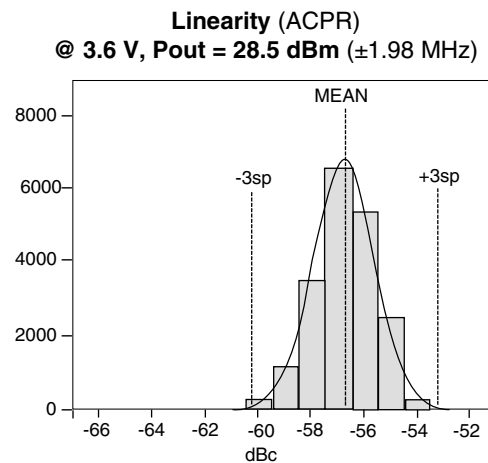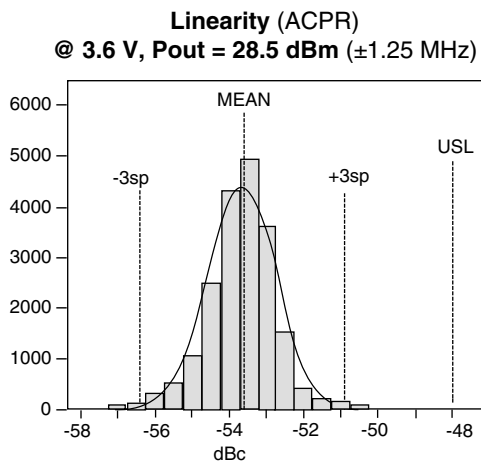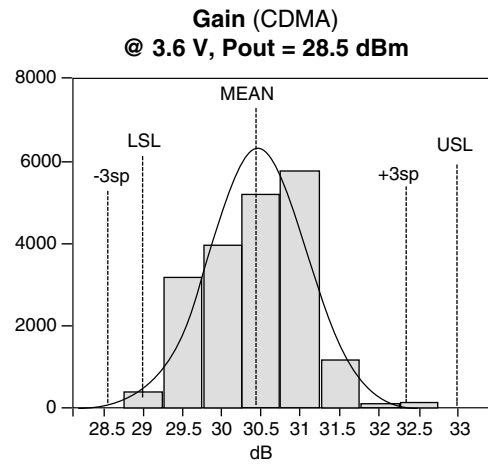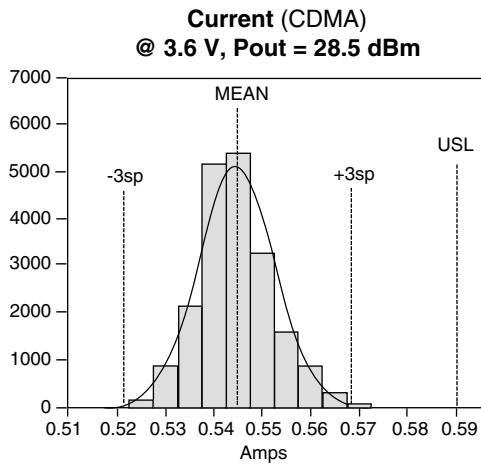

Recommended Application Circuit


Note: This schematic represents the topology of the application circuit recommended by Celeritek.

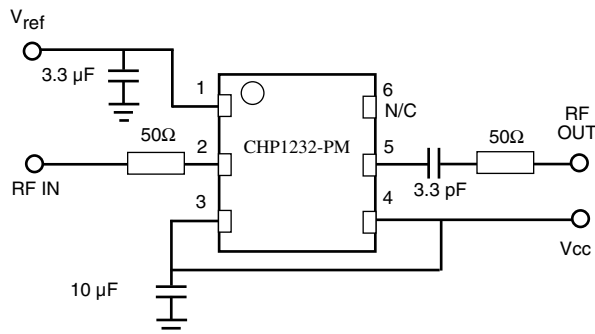

Evaluation Board Schematic


Board substrate:
ER = 4.60
Thickness = 0.031 in.

PCB Footprint (Minimum Pad Dimensions)

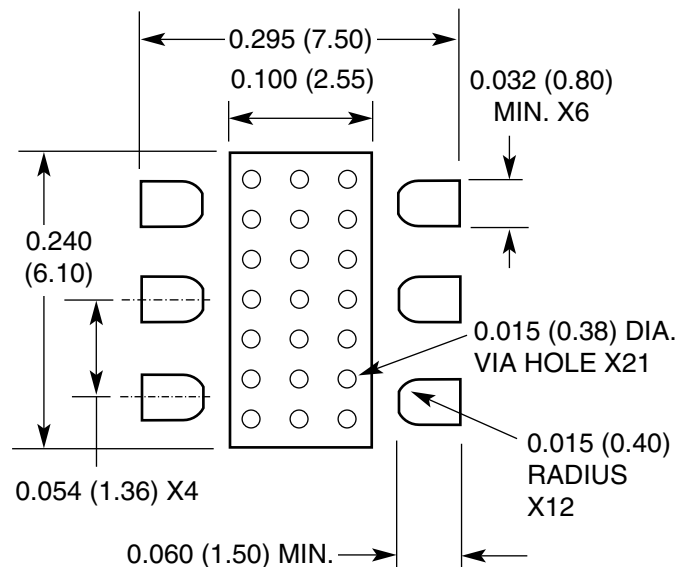

DIMENSIONS IN INCHES (mm)
DRAWING NOT TO SCALE

Physical Dimensions

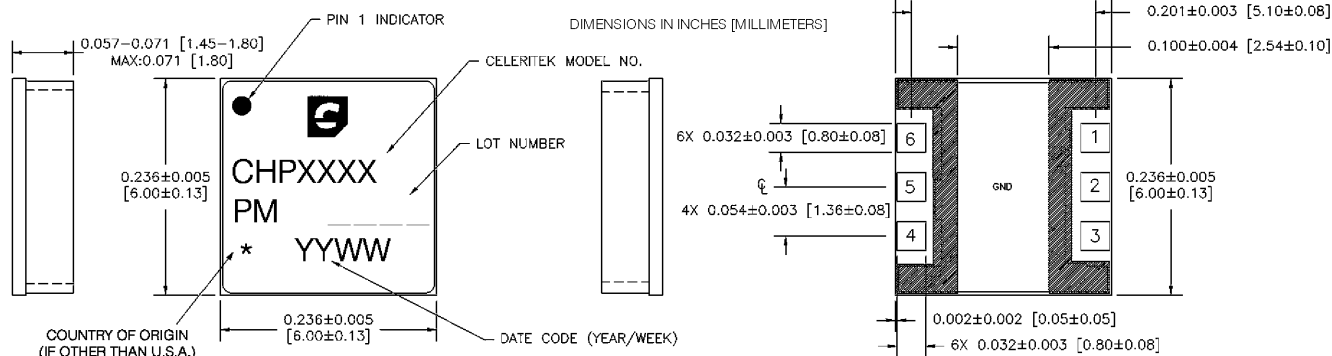

Ordering Information

The CHP1232-PM is available in a surface mount 50 ohm matched module and devices are available in tube or tape and reel.

Part Number for Ordering

CHP1232-PM-0000

CHP1232-PM-000T

PB-CHP1232-PM

Package

PM6 surface mount power package in tube

PM6 surface mount power package in tape and reel

Evaluation Board with SMA connectors for CHP1232-PM

Celeritek reserves the right to make changes without further notice to any products herein. Celeritek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Celeritek assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Celeritek does not convey any license under its patent rights nor the rights of others. Celeritek products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Celeritek product could create a situation where personal injury or death may occur. Should Buyer purchase or use Celeritek products for any such unintended or unauthorized application, Buyer shall indemnify and hold Celeritek and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Celeritek was negligent regarding the design or manufacture of the part. Celeritek is a registered trademark of Celeritek, Inc. Celeritek, Inc. is an Equal Opportunity/Affirmative Action Employer.