



HIGH VOLTAGE RECTIFIER

R1200F THRU R5000F

VOLTAGE RANGE
CURRENT


1200 to 5000 Volts
0.2 to 0.5 Ampere

FEATURES

- Low Leakage
- High Surge Capacity
- High current capability
- High Temperature soldering guaranteed:
260°C / 10 second, 0.375" (9.5mm) lead length

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V – 0 rate flame retardant
- Polarity: Color Band denotes cathode end
- Lead: Plated axial lead, solderable per
MIL – STD-202E Method 208C
- Mounting Position: Any
- Weight: 0.012 ounce, 0.33 gram (DO-41)
0.014 ounce, 0.39 gram (DO-15)

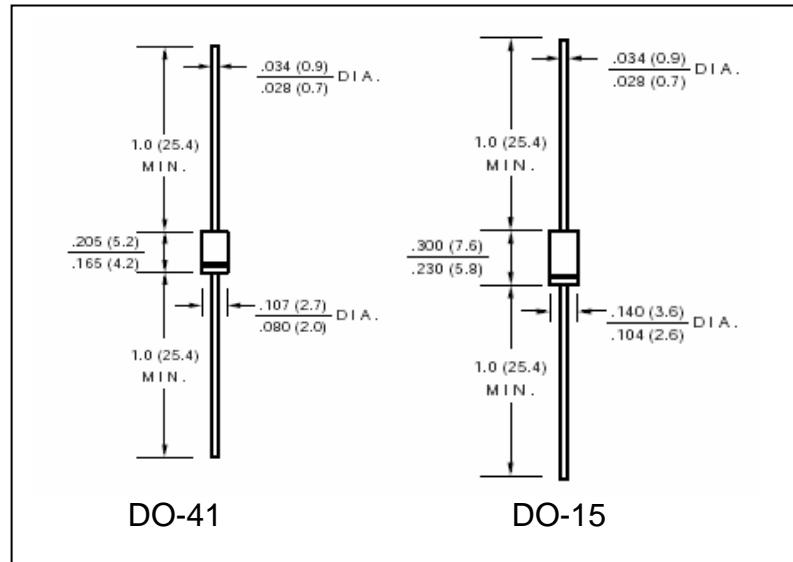

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

| | SYMBOLS | R 1200F | R 1500F | R 1800F | R 2000F | R 2500F | R 3000F | R 4000F | R 5000F | UNIT | | | | |
|--|--------------------|---------------|------------|------------|------------|------------|------------|------------|------------|-------|--|--|--|--|
| Package | | DO-41 | DO-41 | DO41 | DO-41 | DO-15 | DO-15 | DO-15 | DO-15 | | | | | |
| Maximum Repetitive Peak Reverse Voltage | V _{RRM} | 1200 | 1500 | 1800 | 2000 | 2500 | 3000 | 4000 | 5000 | Volts | | | | |
| Maximum RMS Voltage | V _{RMS} | 840 | 1050 | 1260 | 1400 | 1750 | 2100 | 2800 | 3500 | Volts | | | | |
| Maximum DC Blocking Voltage | V _{DC} | 1200 | 1500 | 1800 | 2000 | 2500 | 3000 | 4000 | 5000 | Volts | | | | |
| Maximum Average Forward Rectified Current, 0.375" (9.5mm) lead length at T _A = 50°C | I _(AV) | 500 | | | | 200 | | | | mA | | | | |
| Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method) | I _{FSM} | 30 | | | | | | | Amps | | | | | |
| Maximum Instantaneous Forward Voltage @ 0.5/0.2A | V _F | 2.5 | | 6.0 | | 5.0 | 6.5 | | Volts | | | | | |
| Maximum DC Reverse Current at Rated T _A = 25 °C | I _R | 5.0 | | | | | | | μA | | | | | |
| Maximum Full Load Reverse Current, Full Cycle average 0.375" (9.5mm) lead length at T _A = 55°C | I _{R(AV)} | 100 | | | | | | | μA | | | | | |
| Maximum Reverse Recovery Time Test conditions I _F = 0.5A, I _R = 1.0A, I _{RR} = 0.25A | t _{rr} | 500 | | | | | | | nS | | | | | |
| Operating Junction Temperature Range | T _J | (-65 to +150) | | | | | | | °C | | | | | |
| Storage Temperature Range | T _{STG} | (-65 to +150) | | | | | | | °C | | | | | |



RATINGS AND CHARACTERISTIC CURVES R1200F THRU R5000F

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

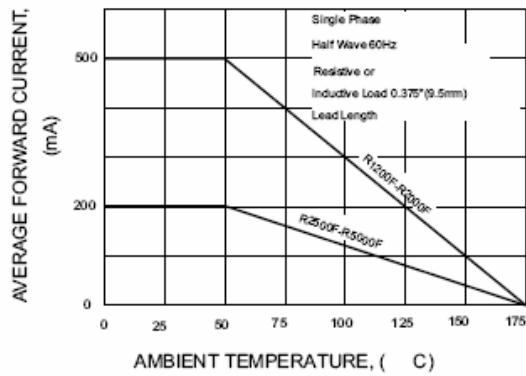


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

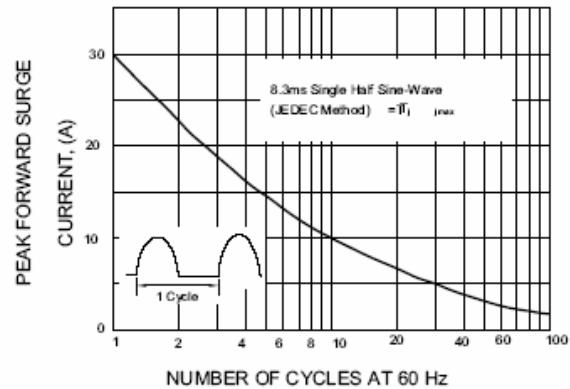


FIG.3-TYPICAL REVERSE
CHARACTERISTICS


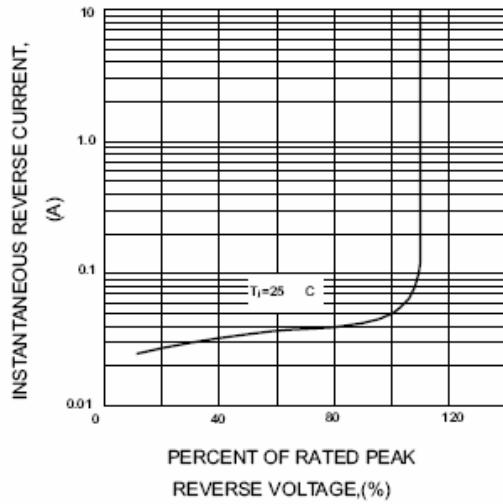


FIG.4-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC

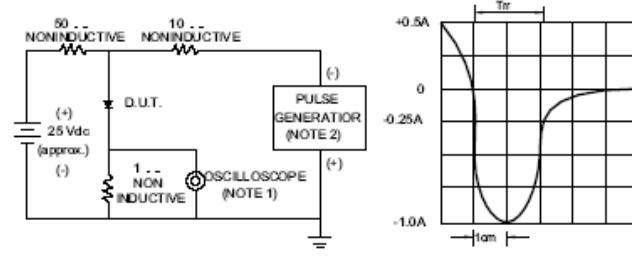

NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 megohm, 22pF

2. Rise Time = 10ns max. Source Impedance = 50 ohms

SET TIME BASE FOR

50/100ns/cm