

- ◆ N-Channel Power MOS FET
- ◆ DMOS Structure
- ◆ Low On-State Resistance: **0.17Ω MAX**
- ◆ Ultra High-Speed Switching
- ◆ SOT-23 Package

Applications

- Notebook PCs
- Cellular and portable phones
- On-board power supplies
- Li-ion battery systems

General Description

The XP151A03A7MR is a N-Channel Power MOS FET with low on-state resistance and ultra high-speed switching characteristics. Because high-speed switching is possible, the IC can be efficiently set thereby saving energy. The small SOT-23 package makes high density mounting possible.

Features

Low on-state resistance: $R_{ds(on)}=0.17\Omega(V_{gs}=4.5V)$
 $R_{ds(on)}=0.24\Omega(V_{gs}=2.5V)$
 $R_{ds(on)}=0.5\Omega(V_{gs}=1.5V)$


Ultra high-speed switching

Operational Voltage: 1.5V

High density mounting: SOT-23

7

Pin Configuration




SOT-23
(TOP VIEW)

Pin Assignment

PIN NUMBER	PIN NAME	FUNCTION
1	G	Gate
2	S	Source
3	D	Drain

Equivalent Circuit



N-Channel MOS FET
(1 device built-in)

Absolute Maximum Ratings

$T_a=25^\circ\text{C}$

PARAMETER	SYMBOL	RATINGS	UNITS
Drain-Source Voltage	V_{dss}	20	V
Gate-Source Voltage	V_{gss}	± 8	V
Drain Current (DC)	I_d	0.8	A
Drain Current (Pulse)	I_{dp}	2.5	A
Reverse Drain Current	I_{dr}	0.8	A
Continuous Channel Power Dissipation (note)	P_d	0.5	W
Channel Temperature	T_{ch}	150	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55~150	$^\circ\text{C}$

Note: When implemented on a glass epoxy PCB

Electrical Characteristics

DC characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Drain Cut-off Current	Idss	Vds=20V, Vgs=0V			10	μA
Gate-Source Leakage Current	Igss	Vgs=±8V, Vds=0V			±10	μA
Gate-Source Cut-off Voltage	Vgs(off)	Id=1mA, Vds=10V	0.5			V
Drain-Source On-state Resistance (note)	Rds(on)	Id=0.4A, Vgs=4.5V		0.13	0.17	Ω
		Id=0.4A, Vgs=2.5V		0.18	0.24	Ω
		Id=0.4A, Vgs=1.5V		0.3	0.5	Ω
Forward Transfer Admittance (note)	Yfs	Id=0.4A, Vds=10V		3.5		S
Body Drain Diode Forward Voltage	Vf	If=0.8A, Vgs=0V		0.8	1.1	V

Note: Effective during pulse test.

Dynamic characteristics

Ta=25°C

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Capacitance	Ciss	Vds=10V, Vgs=0V f=1MHz		220		pF
Output Capacitance	Coss			100		pF
Feedback Capacitance	Crss			30		pF

Switching characteristics

Ta=25°C


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Turn-on Delay Time	td (on)	Vgs=5V, Id=0.4A Vdd=10V		10		ns
Rise Time	tr			15		ns
Turn-off Delay Time	td (off)			45		ns
Fall Time	tf			60		ns

Thermal characteristics


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Thermal Resistance (channel-surroundings)	Rth (ch-a)	Implement on a glass epoxy resin PCB		250		°C/W

XP151A03A7MR Characteristics


Drain Current vs. Drain /Source Voltage

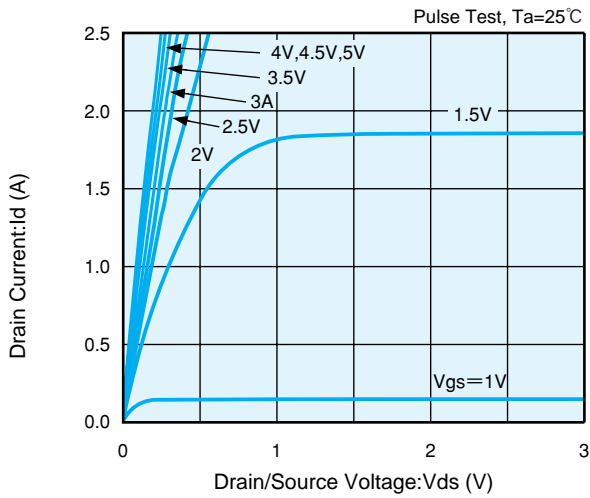


Drain Current vs. Gate/Source Voltage

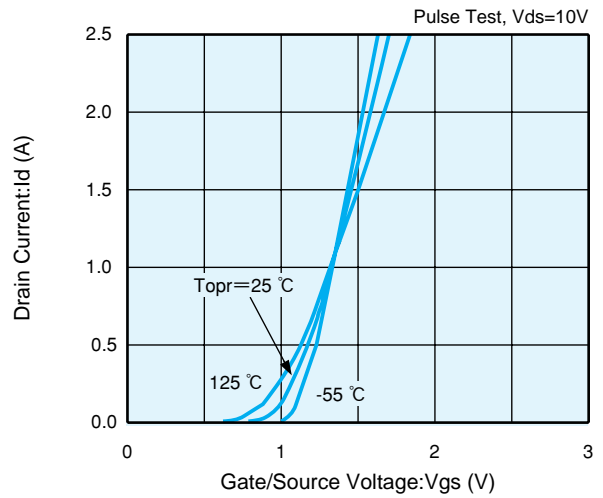


Drain/Source On-State Resistance vs. Gate/Source Voltage

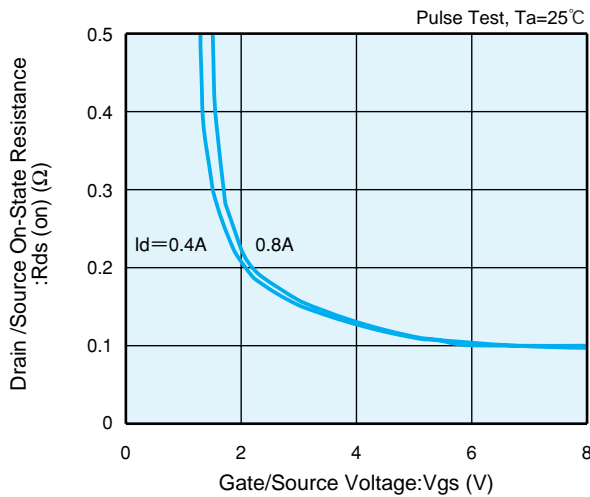


Drain/Source On-State Resistance vs. Drain Current

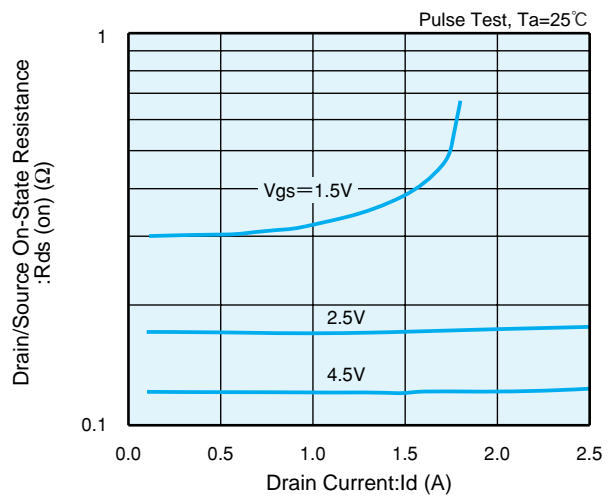

Drain/Source On-State Resistance vs. Ambient Temp.

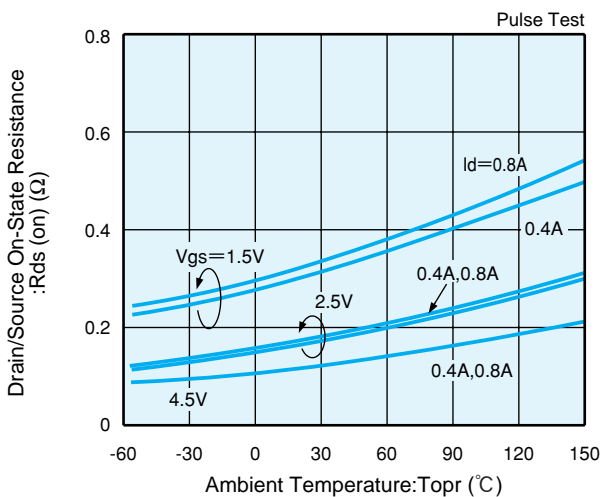


Gate/Source Cut Off Voltage Variance vs. Ambient Temp.

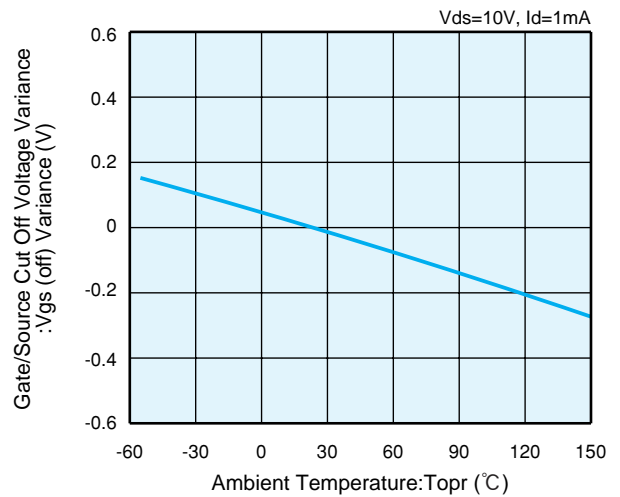


7

XP151A03A7MR Characteristics


Drain/Source Voltage vs. Capacitance

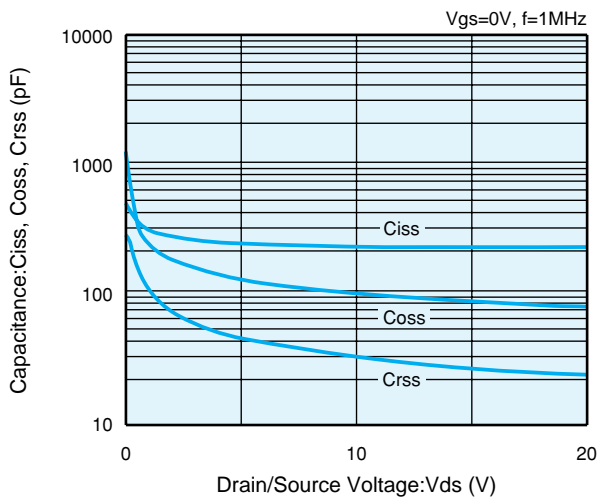


Switching Time vs. Drain Current

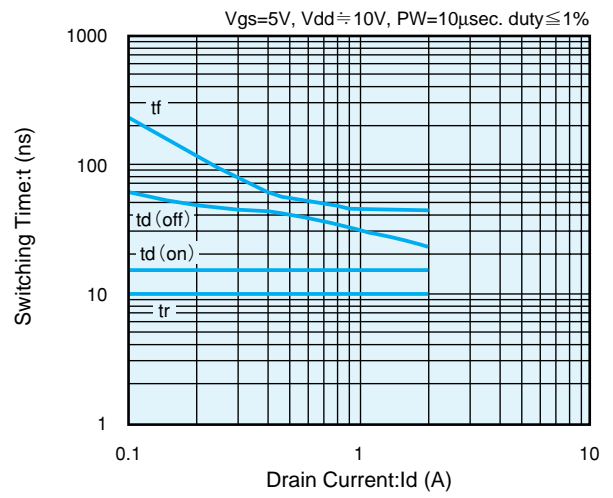

Gate/Source Voltage vs. Gate Charge

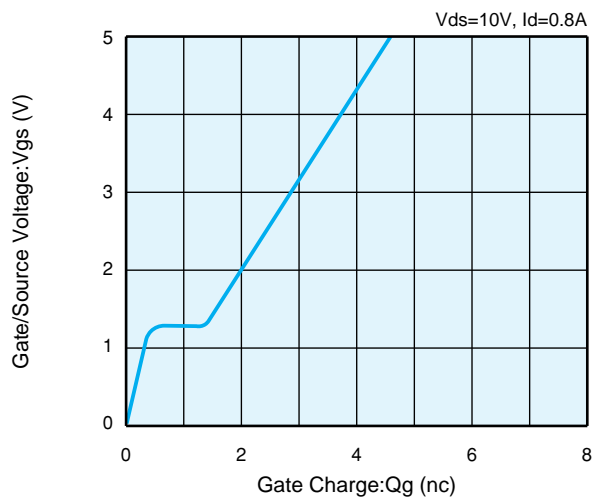

Reverse Drain Current vs. Source/Drain Voltage

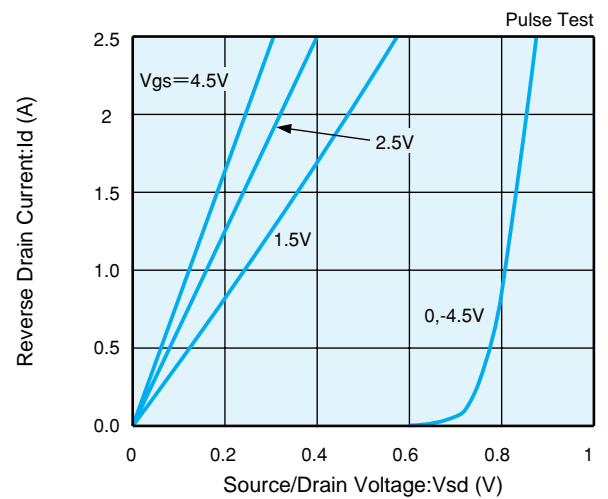

Standardized Transition Thermal Resistance vs. Pulse Width

