


NPN Silicon AF Transistors

- For AF input stages and driver applications
- High current gain
- Low collector-emitter saturation voltage
- Low noise between 30 Hz and 15 kHz
- Complementary types: BCW61, BCX71 (PNP)

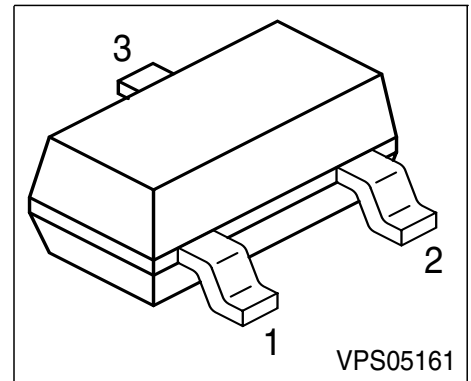

Type	Marking	Pin Configuration			Package
BCW60A	AAs	1 = B	2 = E	3 = C	SOT23
BCW60B	ABs	1 = B	2 = E	3 = C	SOT23
BCW60C	ACs	1 = B	2 = E	3 = C	SOT23
BCW60D	ADs	1 = B	2 = E	3 = C	SOT23
BCW60FF	AFs	1 = B	2 = E	3 = C	SOT23
BCW60FN	ANs	1 = B	2 = E	3 = C	SOT23
BCX70G	AGs	1 = B	2 = E	3 = C	SOT23
BCX70H	AHs	1 = B	2 = E	3 = C	SOT23
BCX70J	AJs	1 = B	2 = E	3 = C	SOT23
BCX70K	AKs	1 = B	2 = E	3 = C	SOT23

Maximum Ratings

Parameter	Symbol	BCW60	BCW60FF	BCX70	Unit
Collector-emitter voltage	V_{CEO}	32	32	45	V
Collector-base voltage	V_{CBO}	32	32	45	
Emitter-base voltage	V_{EBO}	5	5	5	
DC collector current	I_{C}	100			mA
Peak collector current	I_{CM}	200			
Peak base current	I_{BM}	200			
Total power dissipation, $T_{\text{S}} = 71\text{ °C}$	P_{tot}	330			mW
Junction temperature	T_{j}	150			°C
Storage temperature	T_{sta}	-65 ... 150			

Thermal Resistance

Junction - soldering point ¹⁾	R_{thJS}	≤240	K/W
--	------------	------	-----

Electrical Characteristics at $T_A = 25\text{ °C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

DC Characteristics

Collector-emitter breakdown voltage $I_C = 10\text{ mA}$, $I_B = 0$	$V_{(BR)CEO}$				V
		BCW60/60FF	32	-	
		BCX70	45	-	
Collector-base breakdown voltage $I_C = 10\text{ }\mu\text{A}$, $I_B = 0$	$V_{(BR)CBO}$				
		BCW60/60FF	32	-	
		BCX70	45	-	
Emitter-base breakdown voltage $I_E = 1\text{ }\mu\text{A}$, $I_C = 0$	$V_{(BR)EBO}$	5	-	-	

¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Collector cutoff current $V_{CB} = 32\text{ V}$, $I_E = 0$ BCW60 /60FF $V_{CB} = 45\text{ V}$, $I_E = 0$ BCX70	I_{CBO}	-	-	20	nA
Collector cutoff current $V_{CB} = 32\text{ V}$, $I_E = 0$, $T_A = 150\text{ }^{\circ}\text{C}$ BCW60 / 60FF $V_{CB} = 45\text{ V}$, $I_E = 0$, $T_A = 150\text{ }^{\circ}\text{C}$ BCX70	I_{CBO}	-	-	20	μA
Emitter cutoff current $V_{EB} = 4\text{ V}$, $I_C = 0$	I_{EBO}	-	-	20	nA
DC current gain 1) $I_C = 10\text{ }\mu\text{A}$, $V_{CE} = 5\text{ V}$ $h_{FE}\text{-grp. A/ G}$ $h_{FE}\text{-grp. B/ H}$ $h_{FE}\text{-grp. C/ J/ FF}$ $h_{FE}\text{-grp. D/ K/ FN}$	h_{FE}	20 20 40 100	140 200 300 460	- - - -	-
DC current gain 1) $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$ $h_{FE}\text{-grp. A/ G}$ $h_{FE}\text{-grp. B/ H}$ $h_{FE}\text{-grp. C/ J/ FF}$ $h_{FE}\text{-grp. D/ K/ FN}$	h_{FE}	120 180 250 380	170 250 350 500	220 310 460 630	
DC current gain 1) $I_C = 50\text{ mA}$, $V_{CE} = 1\text{ V}$ $h_{FE}\text{-grp. A/ G}$ $h_{FE}\text{-grp. B/ H}$ $h_{FE}\text{-grp. C/ J/ FF}$ $h_{FE}\text{-grp. D/ K/ FN}$	h_{FE}	50 70 90 100	- - - -	- - - -	

1) Pulse test: $t \leq 300\mu\text{s}$, $D = 2\%$

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
DC Characteristics						
Collector-emitter saturation voltage1) $I_C = 10\text{ mA}$, $I_B = 0.25\text{ mA}$ $I_C = 50\text{ mA}$, $I_B = 1.25\text{ mA}$	V_{CEsat}	- -	0.12 0.2	0.25 0.55	V	
Base-emitter saturation voltage 1) $I_C = 10\text{ mA}$, $I_B = 0.25\text{ mA}$ $I_C = 50\text{ mA}$, $I_B = 1.25\text{ mA}$	V_{BEsat}	- -	0.7 0.83	0.85 1.05		
Base-emitter voltage 1) $I_C = 10\text{ }\mu\text{A}$, $V_{CE} = 5\text{ V}$ $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$ $I_C = 50\text{ mA}$, $V_{CE} = 1\text{ V}$	$V_{BE(ON)}$	- 0.55 -	0.52 0.65 0.78	- 0.75 -		
AC Characteristics						
Transition frequency $I_C = 20\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 100\text{ MHz}$	f_T	-	250	-	MHz	
Collector-base capacitance $V_{CB} = 10\text{ V}$, $f = 1\text{ MHz}$	C_{cb}	-	3	-	pF	
Emitter-base capacitance $V_{EB} = 0.5\text{ V}$, $f = 1\text{ MHz}$	C_{eb}	-	8	-		
Short-circuit input impedance $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	$h_{FE}\text{-grp.}$ A / G B / H C / J / FF D / K / FN	h_{11e}	- - - -	2.7 3.6 4.5 7.5	- - - -	kΩ
Open-circuit reverse voltage transf.ratio $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	$h_{FE}\text{-grp.}$ A / G B / H C / J/FF D / K / FN	h_{12e}	- - - -	1.5 2 2 3	- - - -	

1) Pulse test: $t \leq 300\mu\text{s}$, $D = 2\%$

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified.


Parameter	Symbol	Values			Unit	
		min.	typ.	max.		
AC Characteristics						
Short-circuit forward current transf.ratio $h_{FE-grp.}$ $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	h_{21e}					-
A / G		-	200	-		
B / H		-	260	-		
C / J / FF		-	330	-		
D / K / FN		-	520	-		
Open-circuit output admittance $I_C = 2\text{ mA}$, $V_{CE} = 5\text{ V}$, $f = 1\text{ kHz}$	$h_{FE-grp.}$ h_{22e}					μS
A / G		-	18	-		
B / H		-	24	-		
C / J / FF		-	30	-		
D / K / FN		-	50	-		
Noise figure $I_C = 200\text{ }\mu\text{A}$, $V_{CE} = 5\text{ V}$, $R_S = 2\text{ k}\Omega$, $f = 1\text{ kHz}$, $\Delta f = 200\text{ Hz}$	$h_{FE-grp.}$ F					dB
A - K		-	2	-		
FF - FN		-	1	2		
Equivalent noise voltage $I_C = 200\text{ }\mu\text{A}$, $V_{CE} = 5\text{ V}$, $R_S = 2\text{ k}\Omega$, $f = 10 \dots 50\text{ Hz}$	$h_{FE-grp.}$ V_n	-	-	0.135		μV
FF / FN						

Total power dissipation $P_{\text{tot}} = f(T_S)$

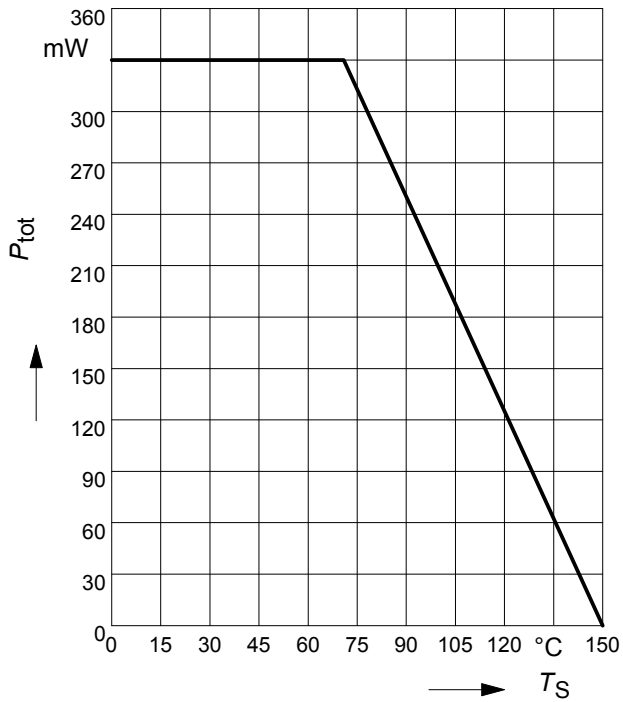


Collector-base capacitance $C_{CB} = f(V_{CBO})$

Emitter-base capacitance $C_{EB} = f(V_{EBO})$

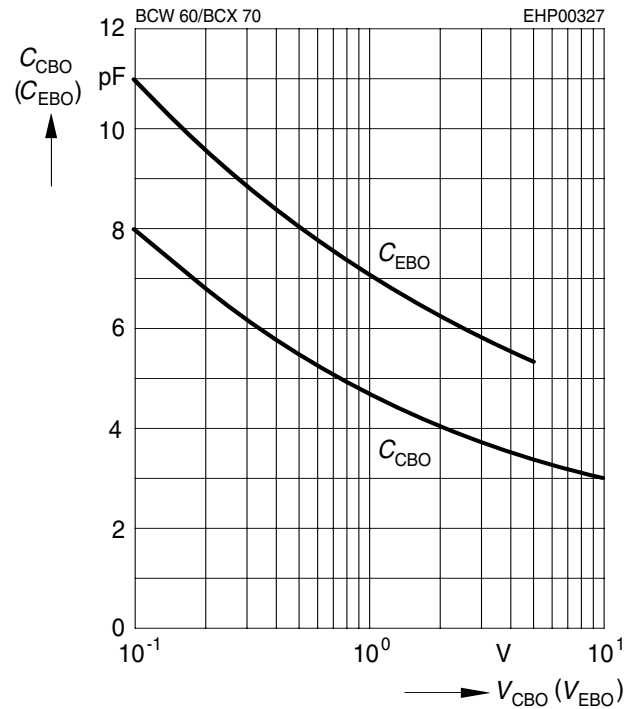


Permissible pulse load

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

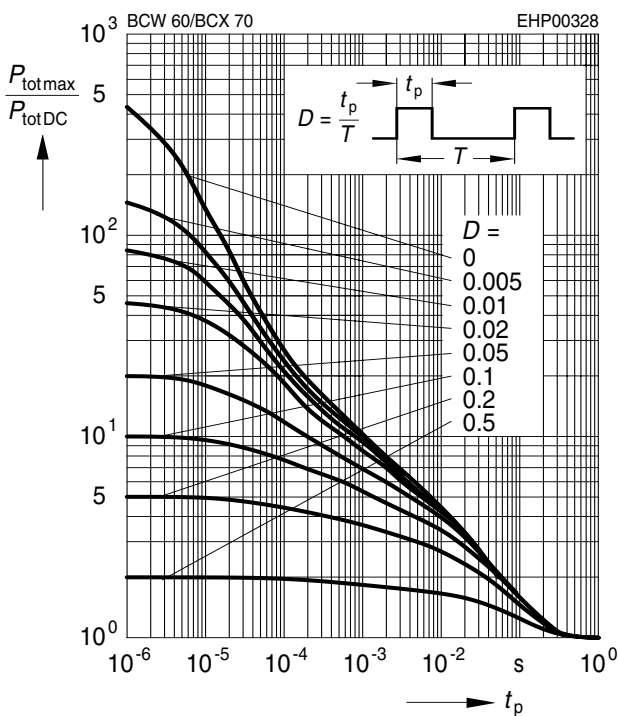


Transition frequency $f_T = f(I_C)$

$V_{CE} = 5V$

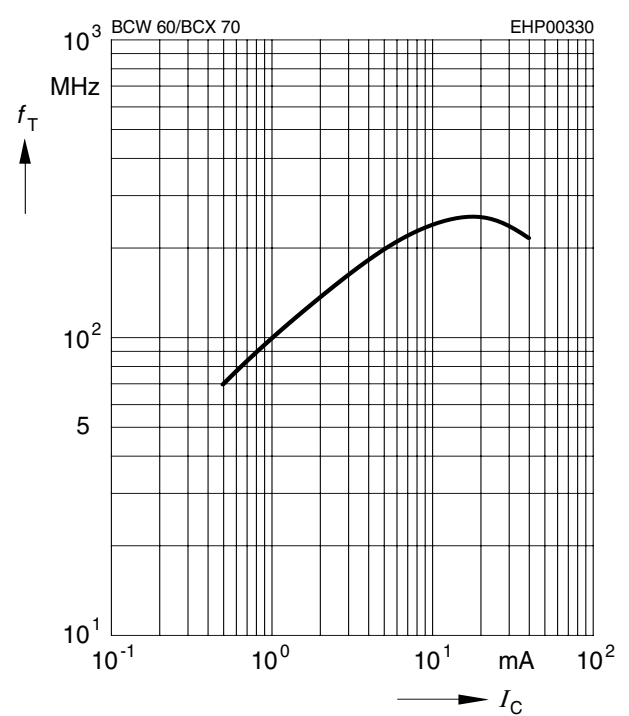


Base-emitter saturation voltage

$$I_C = f(V_{BEsat}), h_{FE} = 40$$

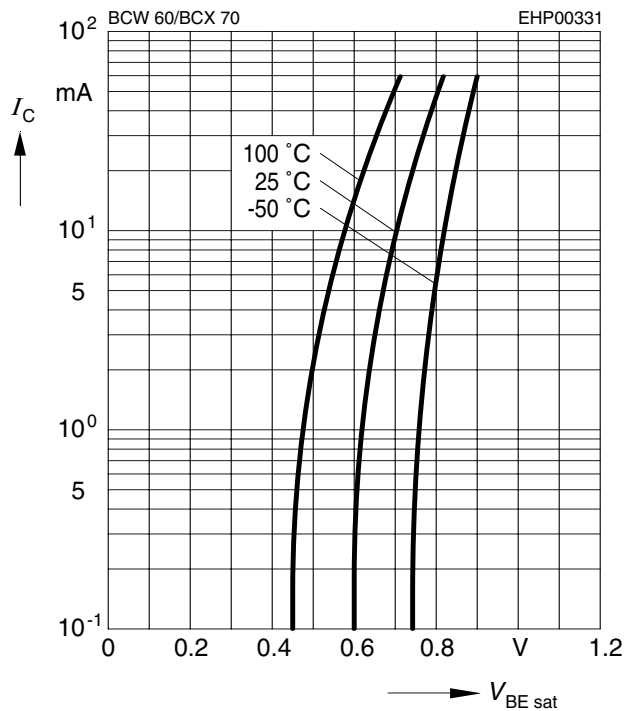


Collector-emitter saturation voltage

$$I_C = f(V_{CEsat}), h_{FE} = 40$$

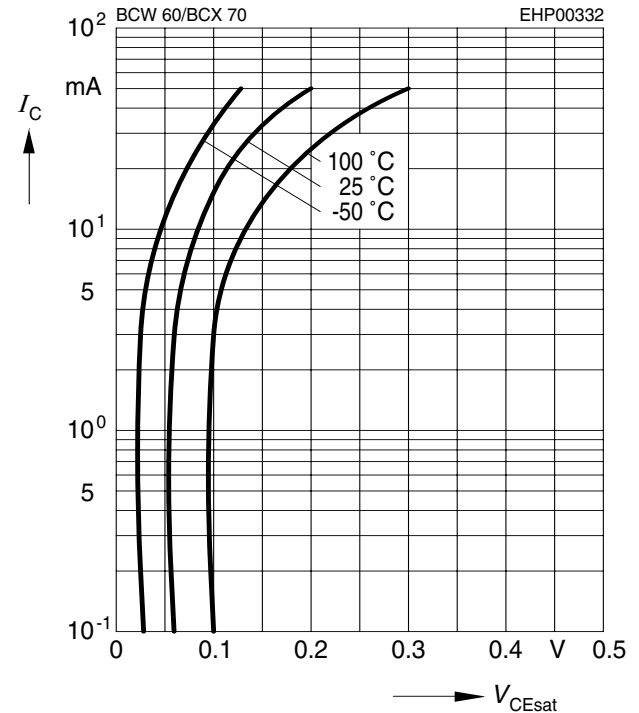


Collector current $I_C = f(V_{BE})$

$$V_{CE} = 5V$$

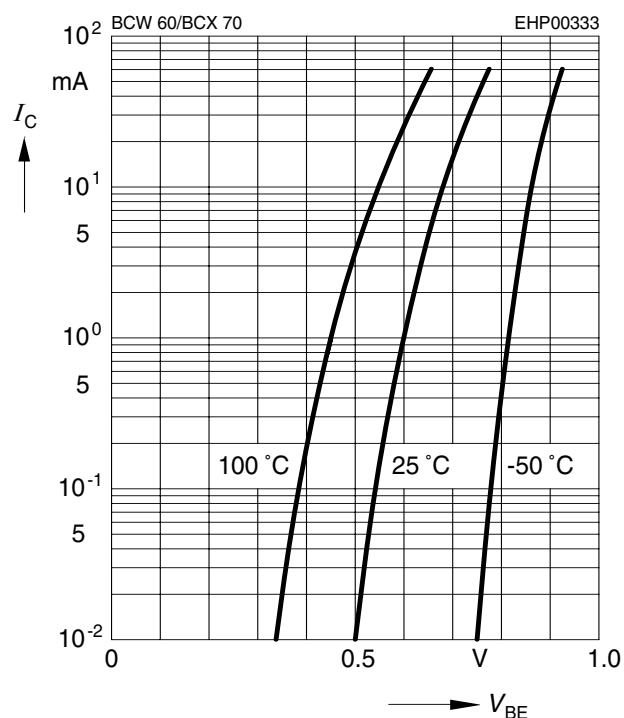


DC current gain $h_{FE} = f(I_C)$

$$V_{CE} = 5V$$

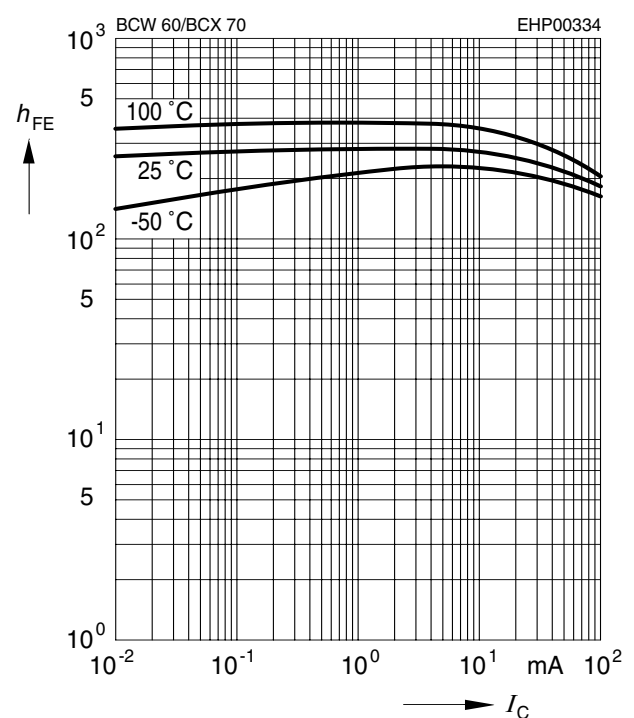


Collector cutoff current $I_{CBO} = f(T_A)$

$$V_{CB} = V_{CEmax}$$

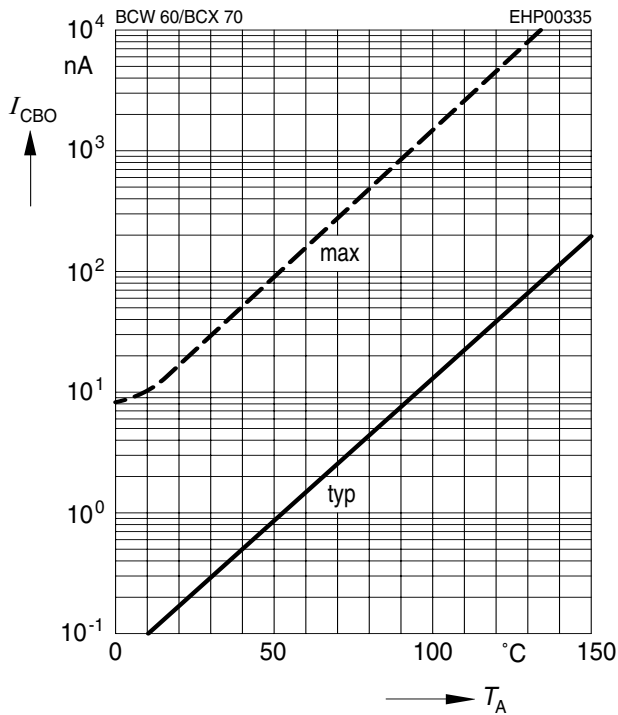


h parameter $h_e = f(I_C)$ normalized

$$V_{CE} = 5V$$

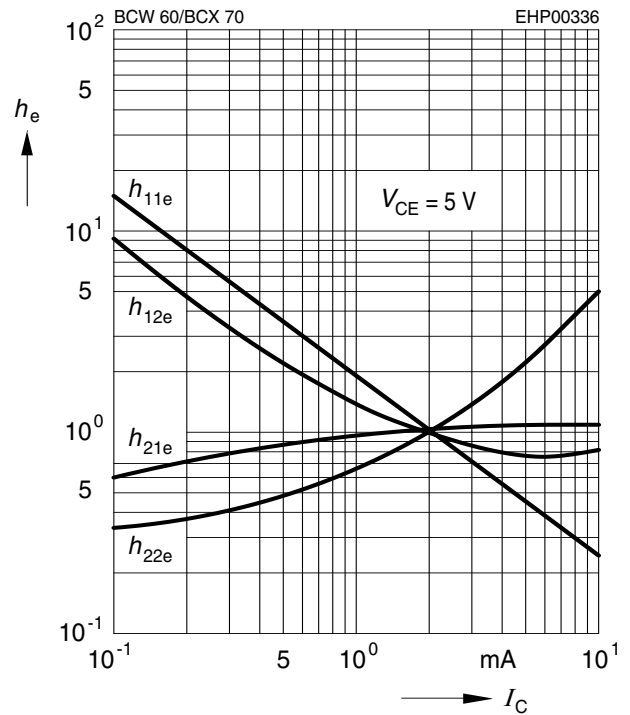


h parameter $h_e = f(V_{CE})$ normalized

$$I_C = 2mA$$

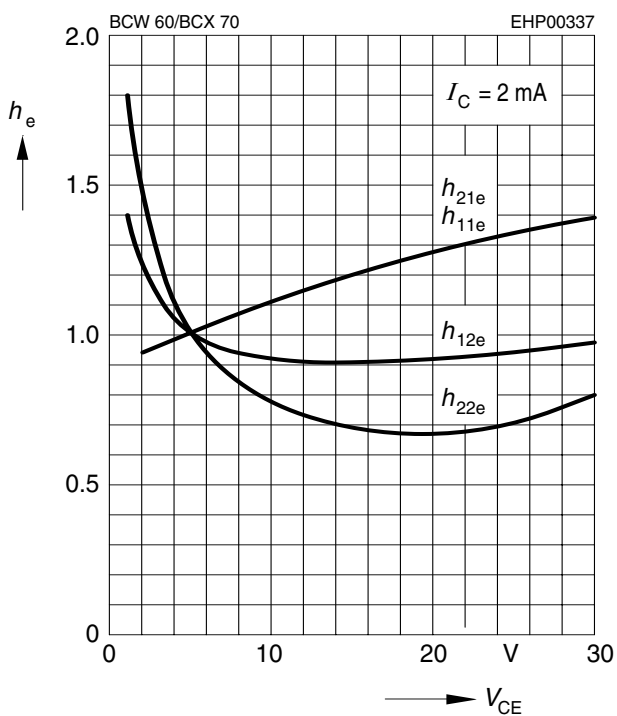


Noise figure $F = f(V_{CE})$

$$I_C = 0.2mA, R_S = 2k\Omega, f = 1kHz$$

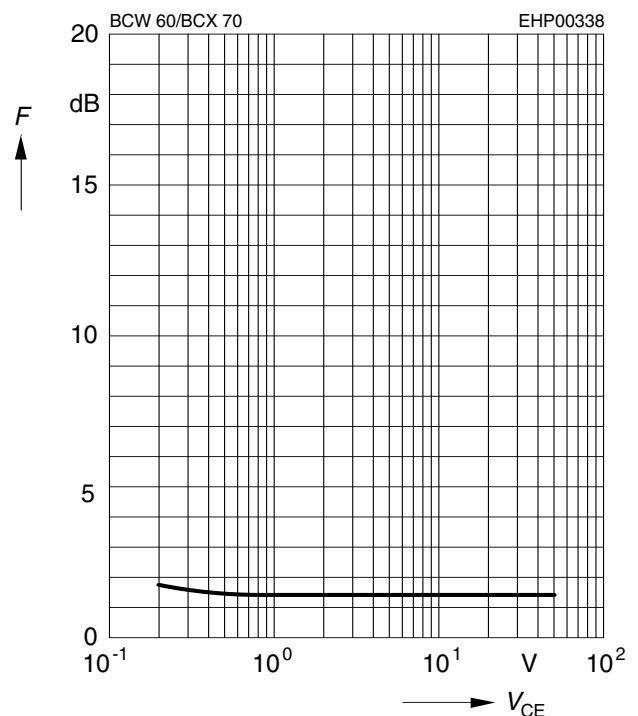


Noise figure $F = f(f)$

$I_C = 0.2\text{mA}$, $V_{CE} = 5\text{V}$, $R_S = 2\text{k}\Omega$

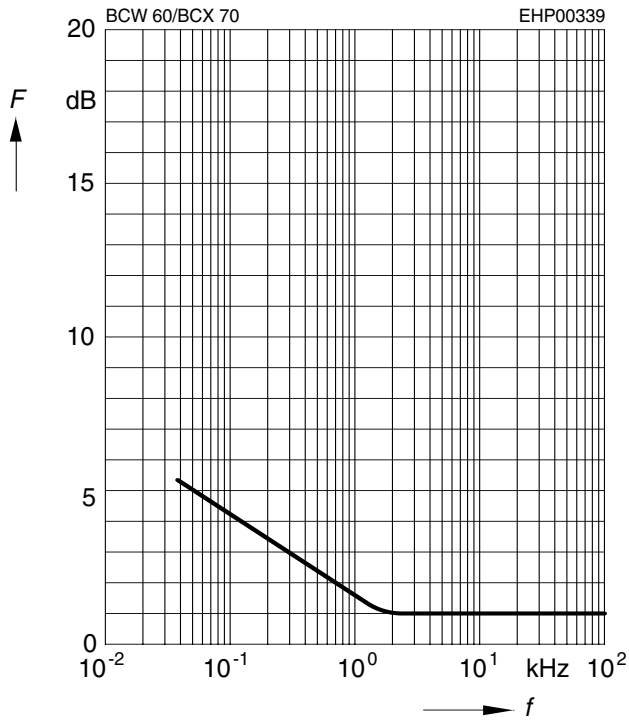


Noise figure $F = f(I_C)$

$V_{CE} = 5\text{V}$, $f = 120\text{Hz}$

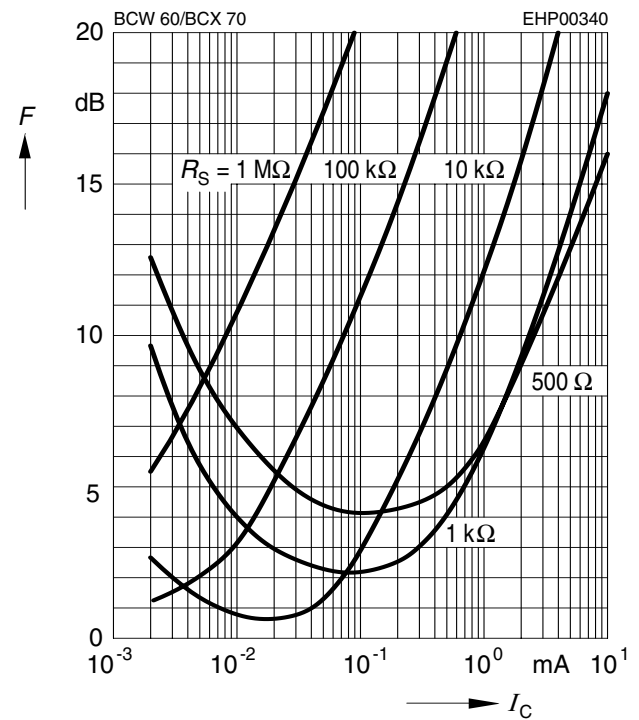

Noise figure $F = f(I_C)$

$V_{CE} = 5\text{V}$, $f = 1\text{kHz}$

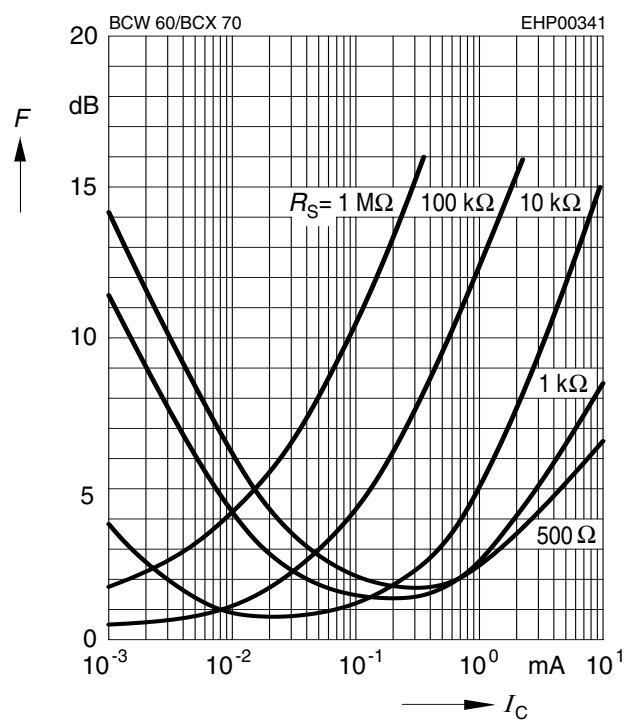

Noise figure $F = f(I_C)$

$V_{CE} = 5\text{V}$, $f = 10\text{kHz}$

