

32-bit Microcontroller

CMOS

FR60Lite MB91230 Series

MB91233L/MB91F233/MB91F233L/MB91V230

■ DESCRIPTION

The MB91230 series is a line of standard microcontrollers, based on a 32-bit high-performance RISC CPU and containing variety of I/O resources, for embedded control applications which require high CPU performance at high speed processing.

Audio motor control storage: Designed to specifications for embedded control applications which high CPU performance power processing.

The MB91230 series belongs to the FR60Lite family.

■ FEATURES


● FR60Lite CPU

- 32-bit RISC, load/store architecture with a five-stage pipeline
- Maximum operating frequency: 33.6 MHz (oscillation frequency = 4.2 MHz, oscillation frequency 8-multiplier (PLL clock multiplication method))
- 16-bit fixed length instructions (basic instructions)
- Execution speed of instructions : 1 instruction per cycle

(Continued)


■ PACKAGES

401-pin Ceramic PGA



(PGA-401C-A02)

120-pin Plastic LQFP



(FTP-120P-M05)

128-pin plastic FLGA


(LGA-128P-M01)

(Continued)

- Memory-to-memory transfer, bit handling, and barrel shift instructions, etc : Instructions suitable for embedded applications
- Function entry/exit instructions, multiple-register load/store instructions : Instructions adapted for C-language
- Register interlock function : Facilitates coding in assembler
- Built-in multiplier with instruction-level support
 - 32-bit multiplication with sign : 5 cycles
 - 16-bit multiplication with sign : 3 cycles
- Interrupt (PC and PS save) : 6 cycles (16 priority levels)
- Harvard architecture allowing program access and data access to be executed simultaneously
- Instruction compatible with FR family
- Capacity of built-in ROM and ROM type
 - MASK ROM : 256 KB
 - FLASH ROM : 256 KB
- Capacity of built-in RAM : 16 KB
- General-purpose ports : Maximum 98 ports(Nch of these channels is open-drain port : 4 ports)
- A/D converter (series-parallel type)
 - Resolution : 10-bit : 8 ch (4 ch \times 2 unit)
 - Conversion time : 1.69 μ s (Minimum conversion time)
- D/A converter (R-2R type)
 - Resolution : 8-bit : 2 ch (independence)
 - Conversion speed : 0.6 μ s (when load capacitance 20 pF)
- External interrupt input : 16 ch
- Bit search module (for REALOS)
 - Function for searching the MSB (Upper bit) in each word for the first "0" or "1" inverted point
- UART (full-duplex double buffer) : 4 ch
 - Selectable parity On/Off
 - Asynchronous (start-stop synchronized) or clock-synchronous communications selectable
 - Internal timer for dedicated baud rate (U-timer) on each channel
 - External clock can be used as transfer clock
 - Error detection function for parity, frame and overrun
- PPG : 16-bit \times 6 ch
- Up/down counter : 2 ch (8-bit \times 2 ch or 16-bit \times 1 ch)
- Reload timer : 16-bit \times 4 ch
- Free-run timer : 16-bit \times 2 ch
- Watch timer : 15-bit \times 1 ch
- PWC : 8-bit \times 2 ch
- Input capture : 2 ch (interface with free-run timer 0)
- Output compare : 4 ch (free-run timer 0 and output compare unit 0/1 interlock each other, free-run timer 1 and output compare units 2/3 interlock with one another)
- LCD controller : SEG00 to SEG31/COM0 to COM3 (also serving as a port)
- Clock monitor (peripheral clock output function) : 1 ch
- Timebase/watchdog timer (26-bit)
- Real-time clock (counting even with the real-time clock stopped)
- Low Power Consumption Mode
- Sleep/stop function
- Package : LQFP-120
- Technology : CMOS 0.35 μ m
- Power supply
- Dual power supply configuration [internal logic 3.3 V, I/O 5.5 V(3.3 V for ADC and DAC input/output)]

Note : Do not set the external bus mode in which the MB91230 series cannot operate.

(Continued)
• MB91F233L

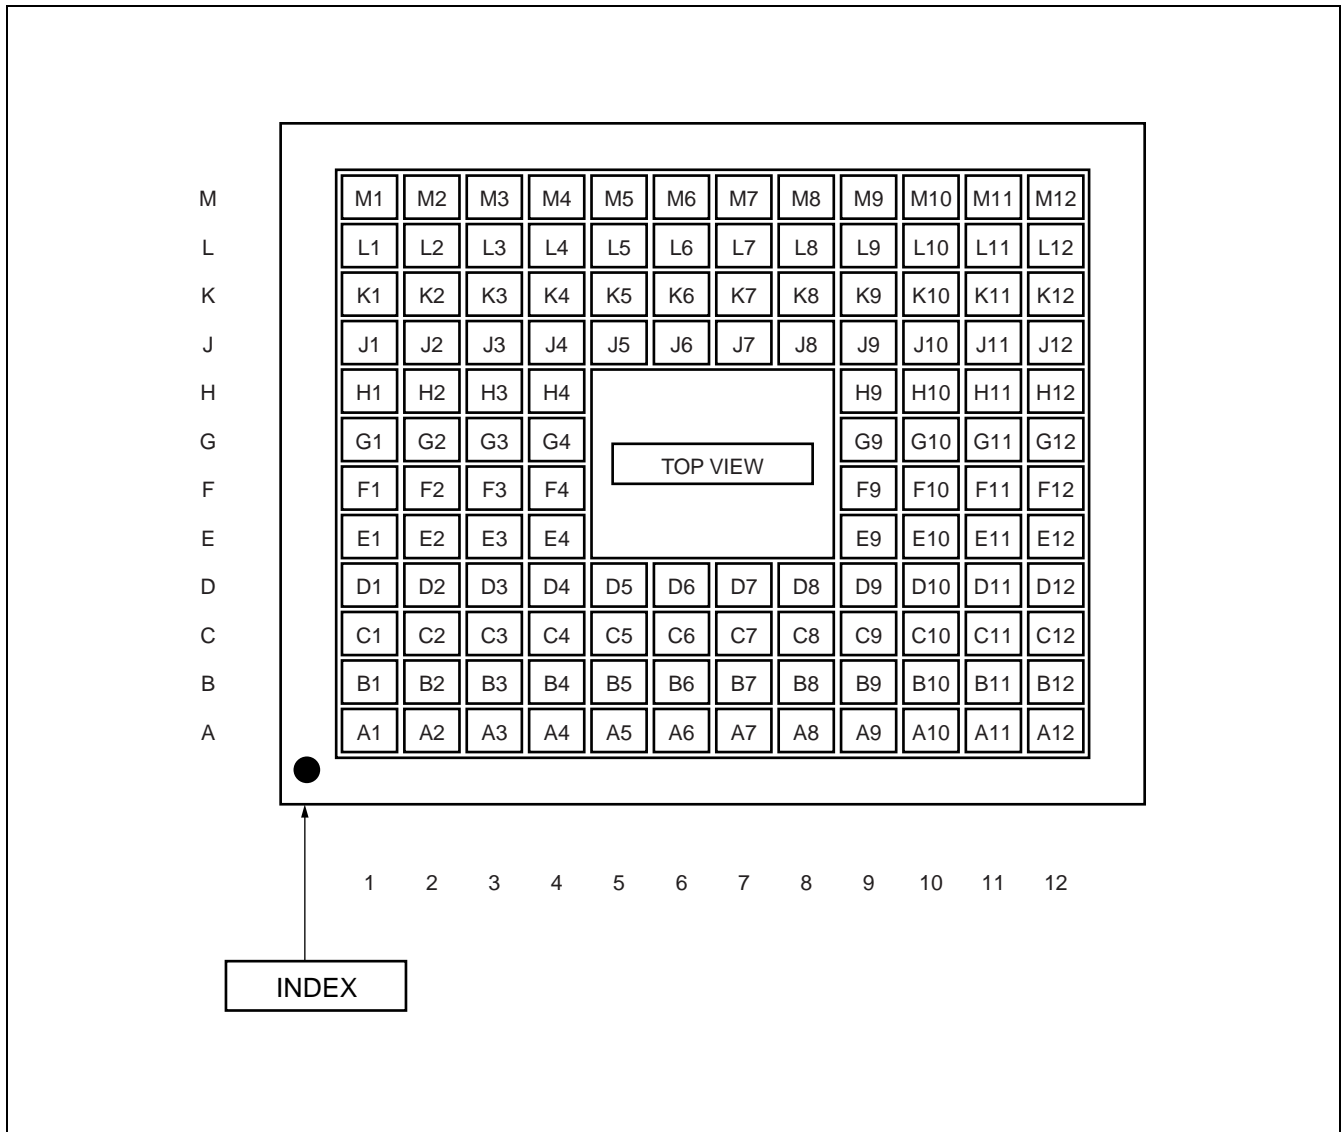

MB91[F]233LLGA-GE1 pin -PAD correspondence table (LGA-128P-M01)

LQFP120 No.	FLGA No. (JEDEC No.)	Signal name	LQFP120 No.	FLGA No. (JEDEC No.)	Signal name	LQFP120 No.	FLGA No. (JEDEC No.)	Signal name
1	A1	P26/SCK2	98	C9	P03/SIN1	18	G1	P42/PPG2
120	A2	P25/SOT2	93	C10	V2	15	G2	V _{cc3B}
117	A3	P22/PWIO/ OP2	85	C11	P72/COM2	(*1)	G3	V _{cc3}
114	A4	P17/INT7	87	C12	MD2	17	G4	V _{cc3}
—	A5	NC	10	D1	P37/ZIN1	71	G9	PA6/ SEG22
109	A6	P12/INT2	6	D2	P33/BIN0	75	G10	V _{cc}
107	A7	X1	8	D3	P35/AIN1	74	G11	PB1/ SEG25
103	A8	P10/INT0	119	D4	P24/SIN2	77	G12	PB2/ SEG26
100	A9	P05/SCK1	111	D5	P14/INT4	21	H1	P45/TOT1
97	A10	P02/SCK0	—	D6	NC	19	H2	P43/PPG3
94	A11	V3	101	D7	P06/IC0	23	H3	P47/CKOT
91	A12	V0	95	D8	P00/SIN0	20	H4	P44/TOT0
4	B1	P31/SCK3	89	D9	MD0	65	H9	PA0/ SEG16
118	B2	P23/PW11/ OP3	86	D10	P73/COM3	72	H10	PA7/ SEG23
115	B3	P20/CKI0/ OP0	82	D11	P67/ SEG31*	69	H11	PA4/ SEG20
112	B4	P15/INT5	84	D12	P71/COM1	73	H12	PB0/ SEG24
110	B5	P13/INT3	13	E1	X0A	24	J1	P50/INT8
106	B6	V _{ss}	9	E2	P36/BIN1	22	J2	P46/TOT2
104	B7	P11/INT1	12	E3	P41/PPG1	26	J3	P52/INT10
99	B8	P04/SOT1	5	E4	P32/AIN0	29	J4	P55/INT13/ TIN2
96	B9	P01/SOT0	81	E9	P66/ SEG30*	35	J5	PD1/DA1
92	B10	V1	83	E10	P70/COM0	40	J6	PC1/AN1
88	B11	MD1	80	E11	P65/ SEG29*	47	J7	V _{ss}
90	B12	$\overline{\text{INIT}}$	—	E12	NC	50	J8	P81/SEG1

(Continued)

(Continued)

LQFP120 No.	FLGA No. (JEDEC No.)	Signal name	LQFP120 No.	FLGA No. (JEDEC No.)	Signal name	LQFP120 No.	FLGA No. (JEDEC No.)	Signal name
7	C1	P34/ZIN0	16	F1	V _{ss}	59	J9	P92/SEG10
2	C2	P27/SIN3	—	F2	NC	68	J10	PA3/SEG19
3	C3	P30/SOT3	14	F3	X1A	66	J11	PA1/SEG17
116	C4	P21/CKI1/OP1	11	F4	P40/PPG0	70	J12	PA5/SEG21
113	C5	P16/INT6	78	F9	PB3/SEG27	27	K1	P53/INT11/PPG4
108	C6	X0	79	F10	P64/SEG28*	25	K2	P51/INT9
105	C7	V _{cc}	76	F11	V _{ss}	33	K3	PF4/TIN3/ADTG1
102	C8	P07/IC1	—	F12	NC	38	K4	AV _{ss}
41	K5	PC2/AN2	36	L4	AV _{cc}	37	M3	AVRH
44	K6	PC5/AN5	(*2)	L5	AVRL	39	M4	PC0/AN0
48	K7	V _{cc} 3IO	43	L6	PC4/AN4	42	M5	PC3/AN3
53	K8	P84/SEG4	45	L7	PC6/AN6	46	M6	PC7/AN7
56	K9	P87/SEG7	49	L8	P80/SEG0	—	M7	NC
63	K10	P96/SEG14	52	L9	P83/SEG3	51	M8	P82/SEG2
62	K11	P95/SEG13	55	L10	P86/SEG6	54	M9	P85/SEG5
67	K12	PA2/SEG18	58	L11	P91/SEG9	57	M10	P90/SEG8
30	L1	P56/INT14/TIN1	64	L12	P97/SEG15	60	M11	P93/SEG11
28	L2	P54/INT12/PPG5	31	M1	P57/INT15/TIN0/ADTG0	61	M12	P94/SEG12
32	L3	PF3/TOT3	34	M2	PD0/DA0			

NC NC pin on the FLGA version

Signals added to the FLGA version

(*1) Connected to pin 17(V_{cc}3) on the LQFP120 version

(*2) Connected to pin 38(AV_{ss}) on the LQFP120 version

* : Open-drain

■ PIN DESCRIPTION

Pin no.		Pin name	Circuit type	Description
LQFP	FLGA			
1	A1	SCK2	D	UART2 clock input/output.
		P26		General purpose input/output port.
2	C2	SIN3	D	UART3 data input.
		P27		General purpose input/output port.
3	C3	SOT3	B	UART3 data output.
		P30		General purpose input/output port.
4	B1	SCK3	B	UART3 clock input/output.
		P31		General purpose input/output port.
5	E4	AIN0	B	Up/down counter 0 input
		P32		General purpose input/output port.
6	D2	BIN0	B	Up/down counter 0 input
		P33		General purpose input/output port.
7	C1	ZIN0	B	Up/down counter 0 input
		P34		General purpose input/output port.
8	D3	AIN1	B	Up/down counter 1 input
		P35		General purpose input/output port.
9	E2	BIN1	B	Up/down counter 1 input
		P36		General purpose input/output port.
10	D1	ZIN1	B	Up/down counter 1 input
		P37		General purpose input/output port.
11	F4	PPG0	D	PPG0 output.
		P40		General purpose input/output port.
12	E3	PPG1	D	PPG1 output
		P41		General purpose input/output port.
13	E1	X0A	—	Sub-clock oscillation pin (32 kHz)
14	F3	X1A		
15	G2	V _{cc3B}	—	Power supply pin for backup (internal logic)
16	F1	V _{ss}	—	Power supply pin (GND)
17	G4	V _{cc3}	—	Power supply pin (internal logic)
18	G1	PPG2	D	PPG2 output.
		P42		General purpose input/output port.
19	H2	PPG3	D	PPG3 output.
		P43		General purpose input/output port.

(Continued)

Pin no.		Pin name	Circuit type	Description
LQFP	FLGA			
20	H4	TOT0	D	Reload timer 0 output port.
		P44		General purpose input/output port.
21	H1	TOT1	D	Reload timer 1 output port.
		P45		General purpose input/output port.
22	J2	TOT2	D	Reload timer 2 output port.
		P46		General purpose input/output port.
23	H3	CKOT	D	Clock monitor function output pin.
		P47		General purpose input/output port.
24	J1	INT8	C	External interrupt input.
		P50		General purpose input/output port.
25	K2	INT9	C	External interrupt input.
		P51		General purpose input/output port.
26	J3	INT10	C	External interrupt input.
		P52		General purpose input/output port.
27	K1	PPG4	C	PPG4 output.
		INT11		External interrupt input.
		P53		General purpose input/output port.
28	L2	PPG5	C	PPG5 output.
		INT12		External interrupt input.
		P54		General purpose input/output port.
29	J4	TIN2	C	Reload timer 2 event input pin
		INT13		External interrupt input.
		P55		General purpose input/output port.
30	L1	TIN1	C	Reload timer 1 event input pin
		INT14		External interrupt input.
		P56		General purpose input/output port.
31	M1	ADTG0	C	External trigger input pin of A/D converter 0.
		TIN0		Reload timer 0 event input pin
		INT15		External interrupt input.
		P57		General purpose input/output port.
32	L3	TOT3	D	Reload timer 3 output port.
		PF3		General purpose input/output port.

(Continued)

Pin no.		Pin name	Circuit type	Description
LQFP	FLGA			
33	K3	ADTG1	D	External trigger input pin of A/D converter 1.
		TIN3		Reload timer 3 event input pin
		PF4		General purpose input/output port.
34	M2	DA0	F	D/A converter 0 output pin.
		PD0		General purpose input/output port.
35	J5	DA1	F	D/A converter 1 output pin.
		PD1		General purpose input/output port.
36	L4	AV _{cc}	—	Analog power supply (for A/D, D/A converter) .
37	M3	AVRH	—	Analog reference power supply (for A/D, D/A converter) .
38	K4	AV _{ss}	—	GND level input for analog circuit (for A/D, D/A converter) .
39 to 46	M4, J6, K5, M5, L6, K6, L7, M6	AN0 to AN7	E	Analog input pin for A/D converter.
		PC0 to PC7		General purpose input/output port.
47	J7	V _{ss}	—	Power supply pin (GND)
48	K7	V _{cc3IO}	—	Power supply pin (analog-shared pin I/O)
49 to 56	L8, J8, M8, L9, K8, M9, L10, K9	SEG0 to 7	I	LCDC controller/driver LCD segment output pin.
		P80 to P87		General purpose input/output port.
57 to 64	M10, L11, J9, M11, M12, K11, K10, L12	SEG8 to 15	I	LCDC controller/driver LCD segment output pin.
		P90 to P97		General purpose input/output port.
65 to 72	H9, J11, K12, J10, H11, J12, G9, H10	SEG16 to 23	I	LCDC controller/driver LCD segment output pin.
		PA0 to PA7		General purpose input/output port.
73, 74	H12, G11	SEG24, 25	I	LCDC controller/driver LCD segment output pin.
		PB0, PB1		General purpose input/output port.
75	G10	V _{cc}	—	Power supply pin (I/O)
76	F11	V _{ss}	—	Power supply pin (GND)
77, 78	G12, F9	SEG26, 27	I	LCDC controller/driver LCD segment output pin.
		PB2, PB3		General purpose input/output port.
79 to 82	F10, E11, E9, D11	SEG28 to 31	J	LCDC controller/driver LCD segment output pin.
		P64 to P67		General purpose input/output port. (Nch-OD)

(Continued)

Pin no.		Pin name	Circuit type	Description
LQFP	FLGA			
83 to 86	E10, D12, C11, D10	COM0 to 3	I	LCDC controller/driver common pins.
		P70 to P73		General purpose input/output port.
87 to 89	C12, B11, D9	MOD2, 1, 0	H	Mode input pin.
90	B12	$\overline{\text{INIT}}$	G	External reset input.
91 to 94	A12, B10, C10, A11	V0 to V3	—	LCD controller/driver reference power supply input pins.
95	D8	SIN0	D	UART0 data input.
		P00		General purpose input/output port.
96	B9	SOT0	D	UART0 data output.
		P01		General purpose input/output port.
97	A10	SCK0	D	UART0 clock input/output.
		P02		General purpose input/output port.
98	C9	SIN1	D	UART1 data input.
		P03		General purpose input/output port.
99	B8	SOT1	D	UART1 data output.
		P04		General purpose input/output port.
100	A9	SCK1	D	UART1 clock input/output.
		P05		General purpose input/output port.
101	D7	IC0	D	Input capture input 0.
		P06		General purpose input/output port.
102	C8	IC1	D	Input capture input 1.
		P07		General purpose input/output port.
103	A8	INT0	A	External interrupt input.
		P10		General purpose input/output port.
104	B7	INT1	A	External interrupt input.
		P11		General purpose input/output port.
105	C7	V _{cc}	—	Power supply pin (I/O)
106	B6	V _{ss}	—	Power supply pin (GND)
107	A7	X1	—	Main-clock oscillation pin
108	C6	X0	—	
109	A6	INT2	A	External interrupt input.
		P12		General purpose input/output port.
110	B5	INT3	A	External interrupt input.
		P13		General purpose input/output port.

(Continued)





(Continued)

Pin no.		Pin name	Circuit type	Description
LQFP	FLGA			
111	D5	INT4	A	External interrupt input.
		P14		General purpose input/output port.
112	B4	INT5	A	External interrupt input.
		P15		General purpose input/output port.
113	C5	INT6	A	External interrupt input.
		P16		General purpose input/output port.
114	A4	INT7	A	External interrupt input.
		P17		General purpose input/output port.
115	B3	CKI0	D	External clock input pin for free-run timer 0.
		OP0		Output compare0 output pin.
		P20		General purpose input/output port.
116	C4	CKI1	D	External clock input pin for free-run timer 1.
		OP1		Output compare1 output pin.
		P21		General purpose input/output port.
117	A3	PWI0	D	Pulse width counter 0 input
		OP2		Output compare2 output pin.
		P22		General purpose input/output port.
118	B2	PWI1	D	Pulse width counter 0 input
		OP3		Output compare3 output pin.
		P23		General purpose input/output port.
119	D4	SIN2	D	UART2 data input.
		P24		General purpose input/output port.
120	A2	SOT2	D	UART2 data output.
		P25		General purpose input/output port.

I/O CIRCUIT TYPE

Type	Circuit type	Remarks
A		<p>With Pull-up control (50 kΩ)</p> <p>CMOS level output $I_{OH} = 4 \text{ mA}/I_{OL} = 4 \text{ mA}$ CMOS hysteresis input (with standby control)</p>
B		<p>With Pull-up control (50 kΩ)</p> <p>CMOS level output $I_{OH} = 4 \text{ mA}/I_{OL} = 4 \text{ mA}$ CMOS hysteresis input (with standby control) Test pin for FLASH</p>
C		<p>CMOS level output CMOS hysteresis input (with standby control)</p>
D		<p>CMOS level output $I_{OH} = 4 \text{ mA}/I_{OL} = 4 \text{ mA}$ CMOS hysteresis input (with standby control) Test pin for FLASH</p>

(Continued)

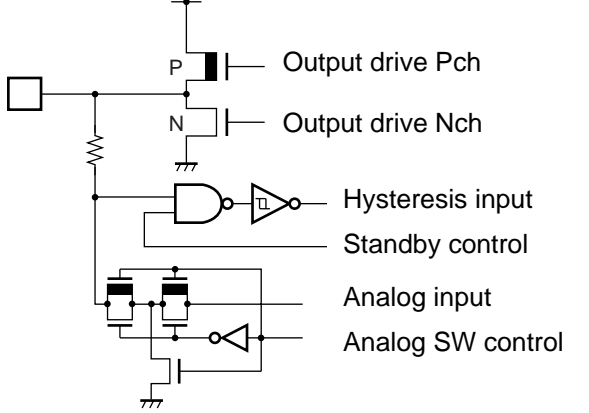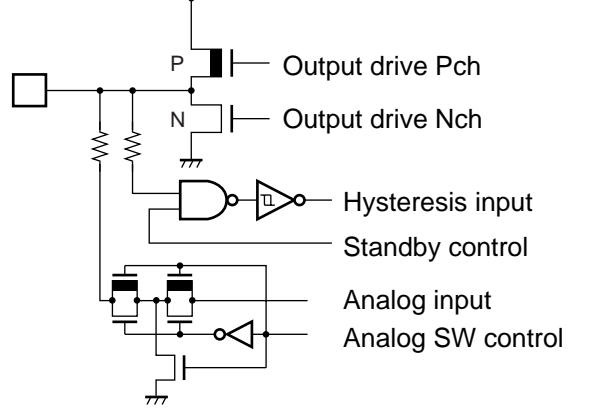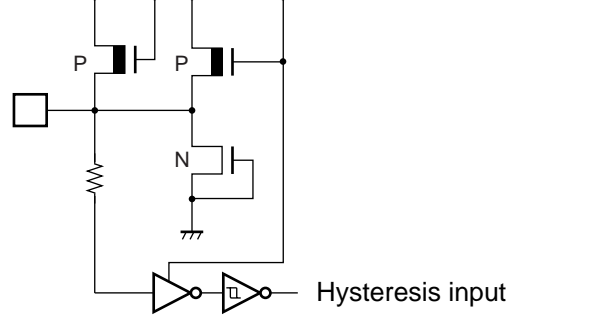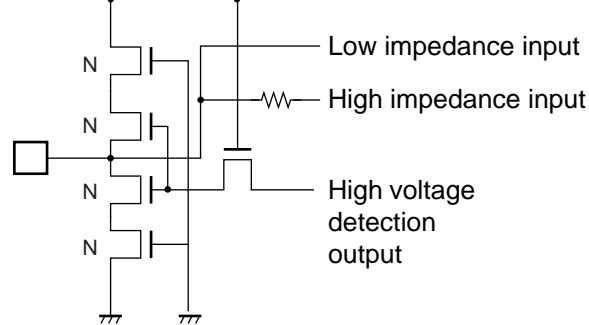Type	Circuit type	Remarks
E	 <p>Output drive Pch Output drive Nch Hysteresis input Standby control Analog input Analog SW control</p>	<p>CMOS level output $I_{OH} = 4 \text{ mA}/I_{OL} = 4 \text{ mA}$ CMOS hysteresis input (with standby control) Also serving as an analog input</p>
F	 <p>Output drive Pch Output drive Nch Hysteresis input Standby control Analog input Analog SW control</p>	<p>CMOS level output $I_{OH} = 4 \text{ mA}/I_{OL} = 4 \text{ mA}$ CMOS hysteresis input (with standby control) Also serving as an analog input</p>
G	 <p>Hysteresis input</p>	<p>With Pull-up control (50 kΩ) CMOS hysteresis input</p>
H	 <p>Low impedance input High impedance input High voltage detection output</p>	<p>high withstand-voltage input CMOS input (hysteresis level)</p>

(Continued)

(Continued)

Type	Circuit type	Remarks
I		<p>CMOS level output $I_{OH} = 4 \text{ mA}/I_{OL} = 4 \text{ mA}$ CMOS hysteresis input (with standby control) LCDC output</p>
J		<p>CMOS level output (open-drain) $I_{OL} = 20 \text{ mA}$ CMOS hysteresis input (with standby control) LCDC output</p>
K		<p>Oscillation circuit</p>

■ HANDLING DEVICES

Preventing Latchup

Latch-up may occur in a CMOS IC if a voltage greater than V_{CC} or less than V_{SS} is applied to an input or output pin or if an above-rating voltage is applied between V_{CC} and V_{SS} .

A latchup, if it occurs, significantly increases the power supply current and may cause thermal destruction of an element. When you use a CMOS IC, be very careful not to exceed the maximum rating.

Treatment of Unused Pins

Do not leave an unused input pin open, since it may cause a malfunction. Handle by, for example, using a pull-up or pull-down resistor.

About Power Supply Pins

In products with multiple V_{CC} or V_{SS} pins, the pins of the same potential are internally connected in the device to avoid abnormal operations including latch-up. However you must connect the pins to external power supply and a ground line to lower the electro-magnetic emission level to prevent abnormal operation of strobe signals caused by the rise in the ground level, and to conform to the total output current rating.

The power pins should be connected to V_{CC} and V_{SS} of this device at the lowest possible impedance from the current supply source.

It is also advisable to connect a ceramic bypass capacitor of approximately 0.1 μF between V_{CC} and V_{SS} near this device.

About Crystal Oscillator Circuit

Noise near the X0 and X1 pin may cause the device to malfunction.

Design the circuit board so that X0 and X1, the crystal oscillator (or ceramic oscillator), and the bypass capacitor to ground are located as close to the device as possible.

It is strongly recommended to design the PC board artwork with the X0 and X1 pins surrounded by ground plane because stable operation can be expected with such a layout.

Treatment of NC and OPEN pins

Pins marked as NC or OPEN must be left open-circuit.

About Mode Pins (MD0 to MD2)

These pins should be connected directly to V_{CC} or V_{SS} .

To prevent the device erroneously switching to test mode due to noise, design the printed circuit board such that the distance between the mode pins and V_{CC} or V_{SS} is as short as possible and the connection impedance is low.

Operation at Start-up

Be sure to execute setting initialized reset (INIT) with $\overline{\text{INIT}}$ pin immediately after start-up.

Also, in order to provide a delay while the oscillator circuit stabilize immediately after start-up, maintain the "L" level input to the $\overline{\text{INIT}}$ pin for the required stabilization wait time. (For INIT via the $\overline{\text{INIT}}$ pin, the oscillation stabilization wait time setting is initialized to the minimum value).

About Oscillation Input at Power On

When turning the power on, maintain clock input until the device is released from the oscillation stabilization wait state.

Clock Control Block

Input the “L” signal to the $\overline{\text{INIT}}$ pin to assure the clock oscillation stabilization wait time.

Switch Shared Port Function

To switch between the use as a port and the use as a dedicated pin, use the port function register (PFR) .

Low Power Consumption Mode

To enter the standby mode, use the synchronous standby mode (set with the SYNCS bit as bit 8 in the TBCR : timebase counter control register) and be sure to use the following sequence

```
(LDI    #value_of_standby, R0) : value_of_standby is write data to STCR.
(LDI    #_STCR, R12)          : _STCR is address (481H) of STCR.
STB     R0, @R12              : Writing to standby control register (STCR)
LDUB    @R12, R0              : STCR read for synchronous standby
LDUB    @R12, R0              : Dummy re-read of STCR
NOP                                           : NOP × 5 for arrangement of timing
NOP
NOP
NOP
NOP
```

In addition, please set I flag, ILM, and ICR to diverge to the interruption handler that is the return factor after the standby returns.

- Please do not do the following when the monitor debugger is used.
- Break point setting for above instruction lines
- Step execution for above instruction lines

Power-on sequence for dual-power-supply model

- Notes on the power-on and power-off sequences
 - Power-on sequence : Vcc3B, Vcc3→Vcc→Vcc3IO, AVRH, V0-V3
 - Power-off sequence : Vcc3IO, AVRH, V0-V3 Vcc3→Vcc→Vcc3B, Vcc3
- When Vcc is turned on earlier, a potential difference between Vcc and Vcc3 must fall within 3.6 V.
- The LCD power supply V3 must not exceed Vcc in voltage. Apply V3 after turning on Vcc3.
- Turn on Vcc3 before applying the analog power supply AVcc or an analog signal.

Notes on the PS register

As the PS register is processed by some instructions in advance, exception handling below may cause the interrupt handling routine to break when the debugger is used or the display contents of flags in the PS register to be updated.

As the microcontroller is designed to carry out reprocessing correctly upon returning from such an EIT event, it performs operations before and after the EIT as specified in either case.

- The following operations may be performed when the instruction immediately followed by a DIVOU/DIVOS instruction is (a) acceptance of a user interrupt, (b) single-stepped, or (c) breaks in response to a data event or emulator menu :
 - 1) The D0 and D1 flags are updated in advance.
 - 2) An EIT handling routine (user interrupt or emulator) is executed.
 - 3) Upon returning from the EIT, the DIVOU/DIVOS instruction is executed, and the D0 and D1 flags are updated to the same values as in 1).
- The following operations are performed when the ORCCR/STILM/MOVRi and PS instructions are executed.
 - 1) The PS register is updated in advance.
 - 2) An EIT handling routine (user interrupt) is executed.
 - 3) Upon returning from the EIT, the above instructions are executed, and the PS register is updated to the same value as in 1).

Watchdog Timer

The watchdog timer built in this model monitors a program that it defers a reset within a certain period of time. The watchdog timer resets the CPU if the program runs out of controls, preventing the reset defer function from being executed. Once the function of the watchdog timer is enabled, therefore, the watchdog timer keeps on operating programs until it resets the CPU.

As an exception, the watchdog timer defers a reset automatically under the condition in which the CPU stops program execution.

For those conditions to which this exception applies, see the function description of watchdog timer.

Step execution of RETI instruction

If an interrupt occurs frequently during step execution, the corresponding interrupt handling routine is executed repeatedly after step execution. This will prevent the main routine and low-interrupt-level programs from being executed.


Do not execute step of RETI instruction for escape.

Disable the corresponding interrupt and execute debugger when the corresponding interrupt routine no longer needs debugging.

Operand Break

Do not apply a data event break to access to the area containing the address of a system stack pointer.

■ BLOCK DIAGRAM

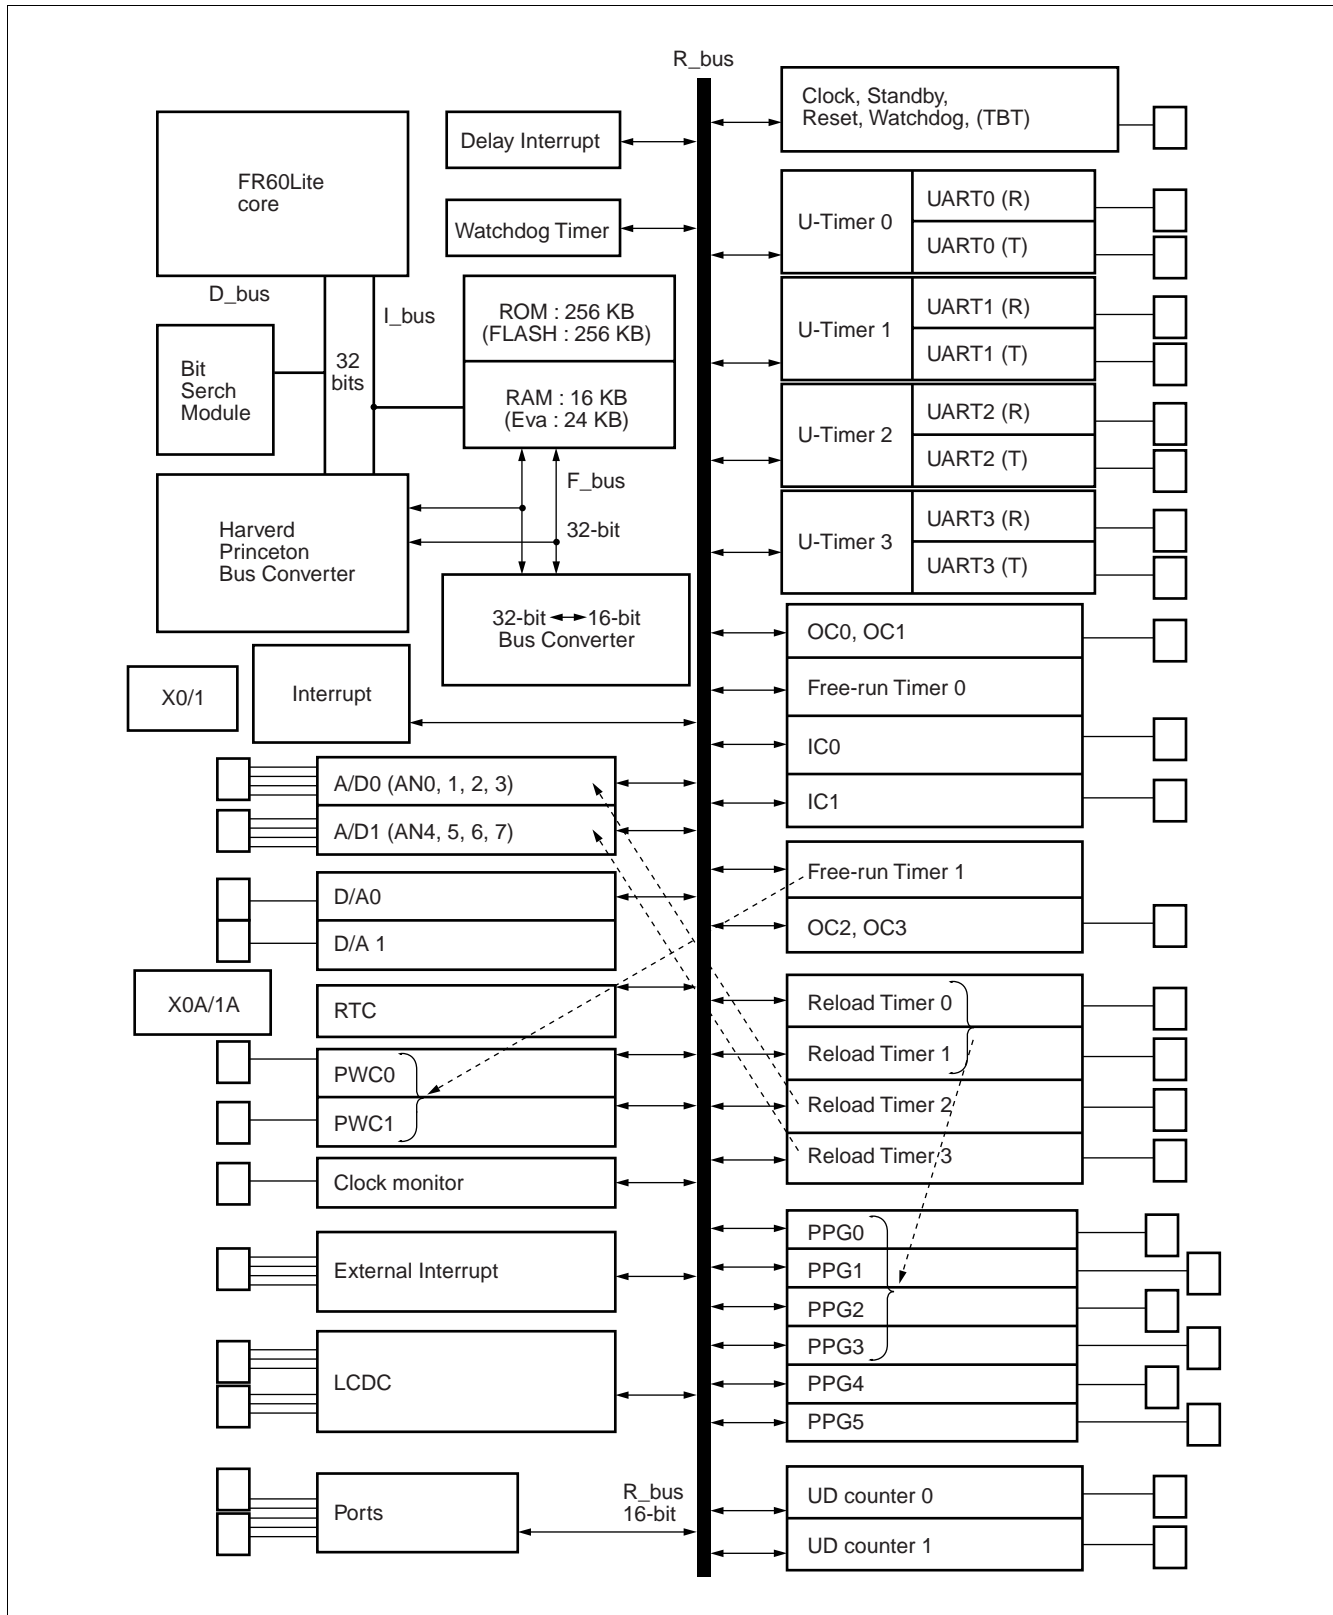

* : For shared ports, see "PIN DESCRIPTION".

MEMORY SPACE

1. Memory space

The FR60 Lite family has 4 gigabytes of logical address space (2^{32} addresses) available to the CPU by linear access.

- Direct Addressing Areas


The following address space areas are used as I/O areas.

These areas are called direct addressing areas, in which the address of an operand can be specified directly during an instruction.

The size of directly addressable areas depends on the length of the data being accessed as shown below.

- byte data access : 0 to 0FF_H
- half word data access : 0 to 1FF_H
- word data access : 0 to 3FF_H

2. Memory Map

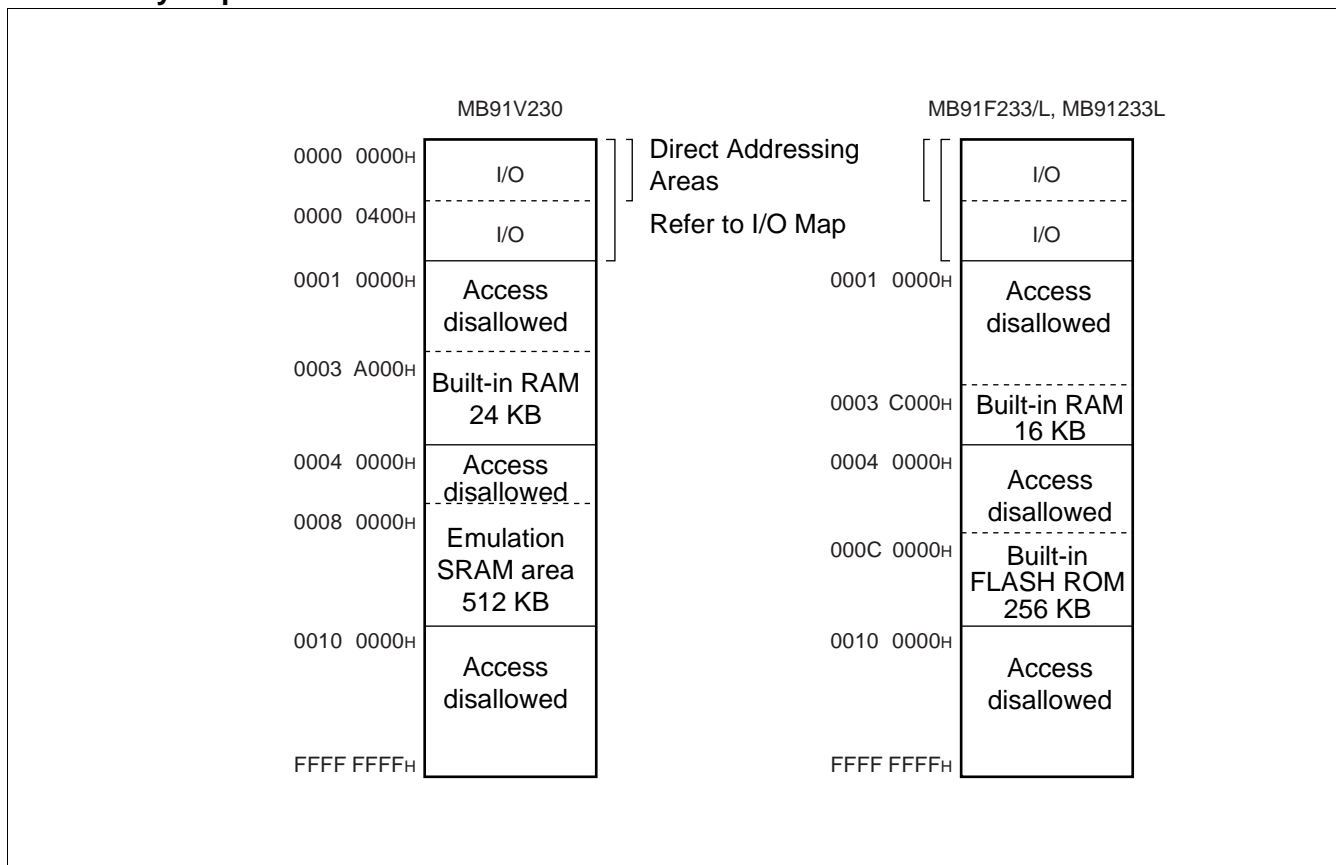

Note : Do not set the external bus mode in which the MB91230 series cannot operate.

MODE SETTINGS

The FR family uses mode pins (MD2 to MD0) and a mode data to set the operation mode.

- Mode Pins

The MD2, MD1, and MD0 pins specify how the mode vector fetch and reset vector fetch is performed.

Setting is prohibited other than that shown in the following table.

Mode Pins			Mode name	Reset vector access area	Remarks
MD2	MD1	MD0			
0	0	0	Internal ROM mode vector	Internal	
0	0	1	External ROM mode vector	External	Not supported by this model.


- Mode data

Data written to the internal mode register (MODR) by a mode vector fetch (see "Reset Sequence") is called mode data.

After an operation mode has been set in the mode register, the device operates in the operation mode.

The mode data is set by all reset source. User programs cannot set data to the mode register.

Details of mode data description

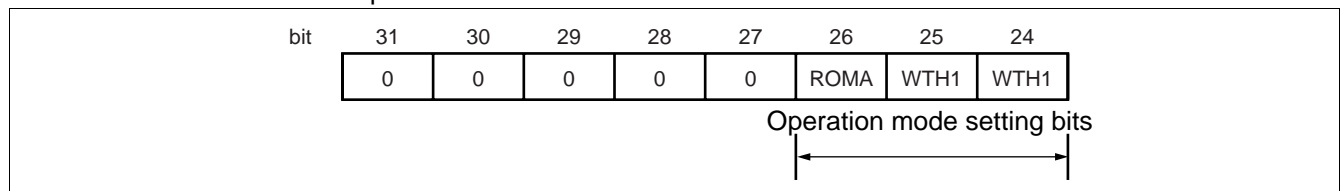

[bit31 to bit27] Reserved bit

Be sure to set this bit to "00000".

Operation is not guaranteed when any value other than "00000" is set.

[bit26] ROMA : Internal ROM enable bit

Specifies whether the internal ROM area is enabled.

For this model, be sure to set "1".

ROMA	Function	Remarks
0	External ROM mode	Not supported by this model.
1	Internal ROM mode	The internal ROM area is enabled.


[bit25, bit24] WTH1, WTH0 (Bus width setting bits)

This sets the bus width in external bus mode. In external bus mode, the values of bits DBW1 and DBW0 in ACRO (CS0 area) are set in these bits.

For this model, be sure to set "11"

WTH1	WTH0	Function	Remarks
0	0	8-bit bus width	Not supported by this model.
0	1	16-bit bus width	Not supported by this model.
1	0	—	
1	1	Single chip mode	

Note : Mode data set in the mode vector must be placed as byte data at 0x000FFF8H.
Use the highest byte from bit31 to bit24 for placement as the FR family uses the big endian for byte endian.

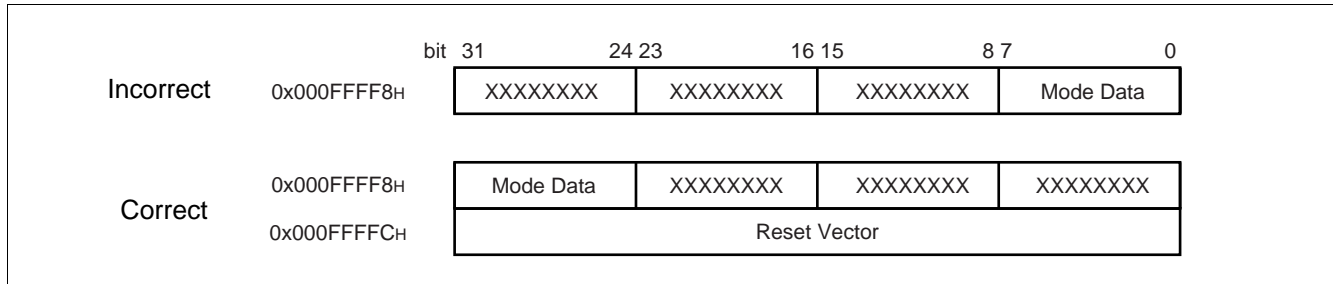

- Operation mode



- Bus mode

Bus mode indicates the mode that controls the internal ROM operations and external access function operations, and specifies using the mode set up terminals (MD2, MD1 and MD0) and ROMA bit contents within the mode data.

- Access mode

Access mode indicates the mode that controls the external data bus width, and specifies by the WTH1/WTH0 bits within the mode data, and the DBW1/DBW0 bits within ACR0 to ACR3 (Area Configuration Registers) .

- Bus mode

In the FR60 Lite, there are 3 bus modes shown next.

Refer to “■ MEMORY SPACE” for details.

- Bus mode 0 (single chip mode)

This mode enables access to internal I/O, external RAM, and to internal ROM while disabling access to any other area.

The external pin functions as a peripheral function or a general purpose port.

The pin does not work as a bus pin.

- Bus mode 1 (Internal ROM external bus mode)

Not supported by this model.

This mode enables access to internal I/O, internal RAM, and to internal ROM, in which access to externally accessible areas are handled as access to external space.

A part of an external pin functions as a bus pin.

- Bus mode 2 (external ROM external bus mode)

Not supported by this model.

This mode enables access to internal I/O and internal RAM while disabling access to internal ROM, in which access to externally accessible areas or internal ROM space are handled as access to external space.

A part of an external functions as a bus pin.

■ I/O Map

[How to read the table]

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
000000H	PDR0 [R/W] XXXXXXXXX	PDR1 [R/W] XXXXXXXXX	PDR2 [R/W] XXXXXXXXX	PDR3 [R/W] XXXXXXXXX	T-unit Port data register

Data access attribute
(B : byte, H : half word, W : word)

Read/write attribute (R : Read, W : Write)

Register name (First-column register at address 4n; second-column register at address 4n+2)

Location of left-most register (When using word access, the register in column 1 is in the MSB side of the data.)

Note : Initial values of register bits are represented as follows :

“ 1 ” : Initial Value “ 1 ”

“ 0 ” : Initial Value “ 0 ”

“ X ” : Initial Value “ undefined ”

“ - ” : No physical register at this location

Access is barred with an undefined data access attribute.

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
000000 _H	PDR0 [R/W] B XXXXXXXX	PDR1 [R/W] B XXXXXXXX	PDR2 [R/W] B XXXXXXXX	PDR3 [R/W] B XXXXXXXX	Port data register
000004 _H	PDR4 [R/W] B XXXXXXXX	PDR5 [R/W] B XXXXXXXX	PDR6 [R/W] B XXXX----	PDR7 [R/W] B ----XXXX	
000008 _H	PDR8 [R/W] B XXXXXXXX	PDR9 [R/W] B XXXXXXXX	PDRA [R/W] B XXXXXXXX	PDRB [R/W] B ----XXXX	
00000C _H	PDRC [R/W] B XXXXXXXX	PDRD [R/W] B -----XX	—	PDRF [R/W] ---XX---	
000010 _H to 00003C _H	—	—	—	—	Unused
000040 _H	EIRR0 [R/W] B, H, W 00000000	ENIR0 [R/W] B, H, W 00000000	ELVR0 [R/W] B, H, W 00000000 00000000		External interrupt (INT0 to 7)
000044 _H	DICR [R/W] B, H, W -----0	—	—		Delay interrupt
000048 _H	TMRLR0 [W] H, W XXXXXXXX XXXXXXXX		TMR0 [R] H, W XXXXXXXX XXXXXXXX		Reload timer 0
00004C _H	—		TMCSR0 [R/W] B, H, W ----0000 00000000		
000050 _H	TMRLR1 [W] H, W XXXXXXXX XXXXXXXX		TMR1 [R] H, W XXXXXXXX XXXXXXXX		Reload timer 1
000054 _H	—		TMCSR1 [R/W] B, H, W ----0000 00000000		
000058 _H	TMRLR2 [W] H, W XXXXXXXX XXXXXXXX		TMR2 [R] H, W XXXXXXXX XXXXXXXX		Reload timer 2
00005C _H	—		TMCSR2 [R/W] B, H, W ----0000 00000000		
000060 _H	SSR0 [R/W] B, H, W 00001000	SIDR0 [R] B, H, W SODR0 [W] B, H, W XXXXXXXX	SCR0 [R/W] B, H, W 00000100	SMR0 [R/W] B, H, W 00--0-0-	UART0
000064 _H	UTIM0 [R] H (UTIMR0 [W] H) 00000000 00000000		—	UTIMC0 [R/W] B 0--00001	U-TIMER0
000068 _H	SSR1 [R/W] B, H, W 00001000	SIDR1 [R] B, H, W SODR1 [W] B, H, W XXXXXXXX	SCR1 [R/W] B, H, W 00000100	SMR1 [R/W] B, H, W 00--0-0-	UART1
00006C _H	UTIM1 [R] H (UTIMR1 [W] H) 00000000 00000000		—	UTIMC1 [R/W] B 0--00001	U-TIMER1

(Continued)

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
000070 _H	SSR2 [R/W] B, H, W 00001000	SIDR2 [R] B, H, W SODR2 [W] B, H, W XXXXXXXX	SCR2 [R/W] B, H, W 00000100	SMR2 [R/W] B, H, W 00--0-0-	UART2
000074 _H	UTIM2 [R] H (UTIMR1 [W] H) 00000000 00000000		—	UTIMC2 [R/W] B 0--00001	U-TIMER2
000078 _H	ADCS0 [R/W] H, W XXXXXXXX XXXXXXXX		ADCT0 [R/W] H, W 000-0000 -000--00		A/D converter 0 (series-parallel type)
00007C _H	ADT00 (ADTH0/ADTL0) [R] H, W 000000XX XXXXXXXX	ADT01 (ADTH1/ADTL1) [R] H, W 000000XX XXXXXXXX			
000080 _H	ADT02 (ADTH2/ADTL2) [R] H, W 000000XX XXXXXXXX	ADT03 (ADTH3/ADTL3) [R] H, W 000000XX XXXXXXXX			
000084 _H	ADCS1 [R/W] H, W XXXXXXXX XXXXXXXX		ADCT1 [R/W] H, W 000-0000 --000--00		A/D converter 1 (series-parallel type)
000088 _H	ADT10 (ADTH0/ADTL0) [R] H, W 000000XX XXXXXXXX	ADT11 (ADTH1/ADTL1) [R] H, W 000000XX XXXXXXXX			
00008C _H	ADT12 (ADTH2/ADTL2) [R] H, W 000000XX XXXXXXXX	ADT13 (ADTH3/ADTL3) [R] H, W 000000XX XXXXXXXX			
000090 _H	—	—	DACR1 [R/W] B, H, W -----0	DACR0 [R/W] B, H, W -----0	D/A converter
000094 _H	—	—	DADR1 [R/W] B, H, W XXXXXXXX	DADR0 [R/W] B, H, W XXXXXXXX	
000098 _H	LCDCMR [R/W] B, H, W ----0000	—	LCR0 [R/W] B, H, W 00010000	LCR1 [R/W] B, H, W 00000000	LCD controller/driver
00009C _H	VRAM0 [R/W] B, H, W XXXXXXXX	VRAM1 [R/W] B, H, W XXXXXXXX	VRAM2 [R/W] B, H, W XXXXXXXX	VRAM3 [R/W] B, H, W XXXXXXXX	
0000A0 _H	VRAM4 [R/W] B, H, W XXXXXXXX	VRAM5 [R/W] B, H, W XXXXXXXX	VRAM6 [R/W] B, H, W XXXXXXXX	VRAM7 [R/W] B, H, W XXXXXXXX	
0000A4 _H	VRAM8 [R/W] B, H, W XXXXXXXX	VRAM9 [R/W] B, H, W XXXXXXXX	VRAM10 [R/W] B, H, W XXXXXXXX	VRAM11 [R/W] B, H, W XXXXXXXX	
0000A8 _H	VRAM12 [R/W] B, H, W XXXXXXXX	VRAM13 [R/W] B, H, W XXXXXXXX	VRAM14 [R/W] B, H, W XXXXXXXX	VRAM15 [R/W] B, H, W XXXXXXXX	
0000AC _H	CKR [R/W] B, H, W ----0000	—	—	—	Clock monitor

(Continued)

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
0000B0 _H	RCR1 [W] B, H, W 00000000	RCR0 [W] B, H, W 00000000	UDCR1 [R] B, H, W 00000000	UDCR0 [R] B, H, W 00000000	Up/down counter0, 1
0000B4 _H	CCRH0 [R/W] B, H, W 00000000	CCRL0 [R/W] B, H, W 00001000	—	CSR0 [R/W] B, H, W 00000000	
0000B8 _H	CCRH1 [R/W] B, H, W 00000000	CCRL1 [R/W] B, H, W 00001000	—	CSR1 [R/W] B, H, W 00000000	
0000BC _H	—	—	—	—	unused
0000C0 _H	SSR [R/W] B, H, W 00001000	SIDR 3 [R] B, H, W SODR 3 [W] B, H, W XXXXXXXXXX	SCR [R/W] B, H, W 00000100	SMR [R/W] B, H, W 00--0-0-	UART3
0000C4 _H	UTIM [R] H (UTIMR [W] H) 00000000 00000000		—	UTIMC [R/W] B 0--00001	U-TIMER3
0000C8 _H	TMRLR3 [W] H, W XXXXXXXXXX XXXXXXXXXX		TMR3 [R] H, W XXXXXXXXXX XXXXXXXXXX		Reload timer 3
0000CC _H	—		TMCSR3 [R/W] B, H, W ---00000 00000000		
0000D0 _H	EIRR1 [R/W] B, H, W 00000000	ENIR1 [R/W] B, H, W 00000000	ELVR1 [R/W] B, H, W 00000000 00000000		External interrupt (INT8 to 16)
0000D4 _H	TCDT0 [R/W] H, W 00000000 00000000		—	TCCS0 [R/W] B, H, W 00000000	Free-run timer 0
0000D8 _H	TCDT1 [R/W] H, W 00000000 00000000		—	TCCS1 [R/W] B, H, W 00000000	Free-run timer 1
0000DC _H	IPCP1 [R] H, W XXXXXXXXXX XXXXXXXXXX		IPCP0 [R] H, W XXXXXXXXXX XXXXXXXXXX		Input capture
0000E0 _H	—	—	—	ICS01 [R/W] B, H, W 00000000	
0000E4 _H	OCCP1 [R/W] H, W XXXXXXXXXX XXXXXXXXXX		OCCP0 [R/W] H, W XXXXXXXXXX XXXXXXXXXX		
0000E8 _H	OCCP3 [R/W] H, W XXXXXXXXXX XXXXXXXXXX		OCCP2 [R/W] H, W XXXXXXXXXX XXXXXXXXXX		Output compare
0000EC _H	OCS23 [R/W] B, H, W ---0--00 0000--00		OCS01 [R/W] B, H, W ---0-00 0000--00		

(Continued)

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
0000F0 _H	PWCC0 [R/W] B, H, W 0---00-0	PWCD0 [R] B, H, W XXXXXXXX	PWCC1 [R/W] B, H, W 0---00-0	PWCD1 [R] B, H, W XXXXXXXX	PWC0, 1
0000F4 _H	—	WTDBL [R/W] B -----0	WTCR [R/W] B, H 00000000 000-00-X		Real-time clock
0000F8 _H	—	WTBR0 [R/W] B ---XXXXX	WTBR1 [R/W] B XXXXXXXX	WTBR2 [R/W] B XXXXXXXX	
0000FC _H	WTHR [R/W] B, H ---XXXXX	WTMR [R/W] B, H --XXXXXX	WTSR [R/W] B --XXXXXX	—	
000100 _H to 000114 _H	—	—	—	—	Unused
000118 _H	GCN10 [R/W] H 00110010 00010000		—	GCN20 [R/W] B 00000000	PPG
00011C _H	—	—	—	—	Unused
000120 _H	PTMR0 [R] H, W 11111111 11111111		PCSR0 [W] H, W XXXXXXXX XXXXXXXX		PPG0
000124 _H	PDUT0 [W] H, W XXXXXXXX XXXXXXXX		PCNH0 [R/W] B, H, W 00000000	PCNL0 [R/W] B, H, W 00000000	
000128 _H	PTMR1 [R] H, W 11111111 11111111		PCSR1 [W] H, W XXXXXXXX XXXXXXXX		PPG1
00012C _H	PDUT1 [W] H, W XXXXXXXX XXXXXXXX		PCNH1 [R/W] B, H, W 00000000	PCNL1 [R/W] B, H, W 00000000	
000130 _H	PTMR2 [R] H, W 11111111 11111111		PCSR2 [W] H, W XXXXXXXX XXXXXXXX		PPG2
000134 _H	PDUT2 [W] H, W XXXXXXXX XXXXXXXX		PCNH2 [R/W] B, H, W 00000000	PCNL2 [R/W] B, H, W 00000000	
000138 _H	PTMR3 [R] H, W 11111111 11111111		PCSR3 [W] H, W XXXXXXXX XXXXXXXX		PPG3
00013C _H	PDUT3 [W] H, W XXXXXXXX XXXXXXXX		PCNH3 [R/W] B, H, W 00000000	PCNL3 [R/W] B, H, W 00000000	
000140 _H	PTMR4 [R] H, W 11111111 11111111		PCSR4 [W] H, W XXXXXXXX XXXXXXXX		PPG4
000144 _H	PDUT4 [W] H, W XXXXXXXX XXXXXXXX		PCNH4 [R/W] B, H, W 00000000	PCNL4 [R/W] B, H, W 00000000	

(Continued)

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
000148H	PTMR5 [R] H, W 11111111 11111111		PCSR5 [W] H, W XXXXXXXX XXXXXXXX		PPG5
00014CH	PDUT5 [W] H, W XXXXXXXX XXXXXXXX		PCNH5 [R/W] B, H, W 00000000	PCNL5 [R/W] B, H, W 00000000	
000150H to 0001FCH	—	—	—	—	Unused
000200H to 0003ECH	—	—	—	—	Unused
0003F0H	BSD0 [W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				Bit search
0003F4H	BSD1 [R/W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
0003F8H	BSDC [W] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
0003FCH	BSRR [R] W XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
000400H	DDR0 [R/W] B 00000000	DDR1 [R/W] B 00000000	DDR2 [R/W] B 00000000	DDR3 [R/W] B00000000	Data direction register
000404H	DDR4 [R/W] B 00000000	DDR5 [R/W] B 00000000	DDR6 [R/W] B 0000----	DDR7 [R/W] B ----0000	
000408H	DDR8 [R/W] B 00000000	DDR9 [R/W] B 00000000	DDRA [R/W] B 00000000	DDRB [R/W] B ----0000	
00040CH	DDRC [R/W] B 00000000	DDRD [R/W] B -----00	—	DDRF [R/W] B ---00---	
000410H to 00041CH	—	—	—	—	Unused
000420H	PFR0 [R/W] B --00-00-	PFR1 [R/W] B -----	PFR2 [R/W] B -00-0000	PFR3 [R/W] B -----00	Port function register
000424H	PFR4 [R/W] B 00000000	PFR5 [R/W] B ---00---	PFR6 [R/W] B 0000----	PFR7 [R/W] B ----0000	
000428H	PFR8 [R/W] B 00000000	PFR9 [R/W] B 00000000	PFRA [R/W] B 00000000	PFRB [R/W] B ----0000	
00042CH	PFRC [R/W] B -----	PFRD [R/W] B -----00	—	PFRF [R/W] B ----0---	
000430H to 00043CH	—	—	—	—	Unused

(Continued)

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
000440 _H	ICR00 [R/W] B, H, W ---11111	ICR01 [R/W] B, H, W ---11111	ICR02 [R/W] B, H, W ---11111	ICR03 [R/W] B, H, W ---11111	Interrupt control unit
000444 _H	ICR04 [R/W] B, H, W ---11111	ICR05 [R/W] B, H, W ---11111	ICR06 [R/W] B, H, W ---11111	ICR07 [R/W] B, H, W ---11111	
000448 _H	ICR08 [R/W] B, H, W ---11111	ICR09 [R/W] B, H, W ---11111	ICR10 [R/W] B, H, W ---11111	ICR11 [R/W] B, H, W ---11111	
00044C _H	ICR12 [R/W] B, H, W ---11111	ICR13 [R/W] B, H, W ---11111	ICR14 [R/W] B, H, W ---11111	ICR15 [R/W] B, H, W ---11111	
000450 _H	ICR16 [R/W] B, H, W ---11111	ICR17 [R/W] B, H, W ---11111	ICR18 [R/W] B, H, W ---11111	ICR19 [R/W] B, H, W ---11111	
000454 _H	ICR20 [R/W] B, H, W ---11111	ICR21 [R/W] B, H, W ---11111	ICR22 [R/W] B, H, W ---11111	ICR23 [R/W] B, H, W ---11111	
000458 _H	ICR24 [R/W] B, H, W ---11111	ICR25 [R/W] B, H, W ---11111	ICR26 [R/W] B, H, W ---11111	ICR27 [R/W] B, H, W ---11111	
00045C _H	ICR28 [R/W] B, H, W ---11111	ICR29 [R/W] B, H, W ---11111	ICR30 [R/W] B, H, W ---11111	ICR31 [R/W] B, H, W ---11111	
000460 _H	ICR32 [R/W] B, H, W ---11111	ICR33 [R/W] B, H, W ---11111	ICR34 [R/W] B, H, W ---11111	ICR35 [R/W] B, H, W ---11111	
000464 _H	ICR36 [R/W] B, H, W ---11111	ICR37 [R/W] B, H, W ---11111	ICR38 [R/W] B, H, W ---11111	ICR39 [R/W] B, H, W ---11111	
000468 _H	ICR40 [R/W] B, H, W ---11111	ICR41 [R/W] B, H, W ---11111	ICR42 [R/W] B, H, W ---11111	ICR43 [R/W] B, H, W ---11111	
00046C _H	ICR44 [R/W] B, H, W ---11111	ICR45 [R/W] B, H, W ---11111	ICR46 [R/W] B, H, W ---11111	ICR47 [R/W] B, H, W ---11111	
000470 _H to 00047C _H	—	—	—	—	

(Continued)

(Continued)

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
000480 _H	RSRR [R/W] B, H, W 10000000	STCR [R/W] B, H, W 00110011	TBCR [R/W] B, H, W 00XXXX00	CTBR [W] B, H, W XXXXXXXX	Clock control
000484 _H	CLKR [R/W] B, H, W 00000000	WPR [R/W] B, H, W XXXXXXXX	DIVR0 [R/W] B, H, W 00000011	DIVR1 [R/W] B, H, W 00000000	
000488 _H	—	—	OSCCR [R/W] B XXXXXXXX0	—	
00048C _H	WPCR [R/W] B 00---000	—	—	—	Watch timer
000490 _H	OSCR [R/W] B 00---000	—	—	—	Main clock oscillation stabilization wait timer
000494 _H to 0004FC _H	—	—	—	—	Unused
000500 _H	—	PCR1 [R/W] B 00000000	—	PCR3 [R/W] B 00000000	Pull-up control register
000504 _H to 00051C _H	—	—	—	—	Unused
000520 _H to 0007F8 _H	—	—	—	—	Unused
0007FC _H	—	MODR* XXXXXXXX	—	—	Operation mode
000800 _H to 000AFC _H	—	—	—	—	Unused
000B00 _H to 000FFC _H	—	—	—	—	Unused
001000 _H to 001FFC _H	—	—	—	—	Unused

* : This register is set when the mode vector is fetched. Not user-accessible.

■ INTERRUPT VECTOR

Interrupt source	Interrupt number		Interrupt level	Offset	TBR default address
	10	16			
Reset	0	00	—	3FC _H	000FFFFC _H
Mode vector	1	01	—	3F8 _H	000FFFF8 _H
System reserved	2	02	—	3F4 _H	000FFFF4 _H
System reserved	3	03	—	3F0 _H	000FFFF0 _H
System reserved	4	04	—	3EC _H	000FFFE _C
System reserved	5	05	—	3E8 _H	000FFFE8 _H
System reserved	6	06	—	3E4 _H	000FFFE4 _H
Coprocessor absent trap	7	07	—	3E0 _H	000FFFE0 _H
Coprocessor error trap	8	08	—	3DC _H	000FFFD _C
INTE instruction	9	09	—	3D8 _H	000FFFD8 _H
Instruction break exception	10	0A	—	3D4 _H	000FFFD4 _H
Operand break trap	11	0B	—	3C0 _H	000FFFD0 _H
Step trace trap	12	0C	—	3CC _H	000FFFC _C
NMI request (tool)	13	0D	—	3C8 _H	000FFFC8 _H
Undefined instruction exception	14	0E	—	3C4 _H	000FFFC4 _H
NMI request (This model has no NMI request)	15	0F	15 (F _H) fixed	3C0 _H	000FFFC0 _H
External interrupt 0	16	10	ICR00	3BC _H	000FFFB _C
External interrupt 1	17	11	ICR01	3B8 _H	000FFFB8 _H
External interrupt 2	18	12	ICR02	3B4 _H	000FFFB4 _H
External interrupt 3	19	13	ICR03	3B0 _H	000FFFB0 _H
External interrupt 4	20	14	ICR04	3AC _H	000FFFA _C
External interrupt 5	21	15	ICR05	3A8 _H	000FFFA8 _H
External interrupt 6	22	16	ICR06	3A4 _H	000FFFA4 _H
External interrupt 7	23	17	ICR07	3A0 _H	000FFFA0 _H
Reload timer 0	24	18	ICR08	39C _H	000FFF9 _C
Reload timer 1	25	19	ICR09	398 _H	000FFF98 _H
Reload timer 2	26	1A	ICR10	394 _H	000FFF94 _H
UART0(Reception completed)	27	1B	ICR11	390 _H	000FFF90 _H
UART0 (Transmission completed)	28	1C	ICR12	38C _H	000FFF8 _C
UART1 (Reception completed)	29	1D	ICR13	388 _H	000FFF88 _H
UART1 (Transmission completed)	30	1E	ICR14	384 _H	000FFF84 _H
UART2 (Reception completed)	31	1F	ICR15	380 _H	000FFF80 _H
UART2 (Transmission completed)	32	20	ICR16	37C _H	000FFF7 _C

(Continued)

Interrupt source	Interrupt number		Interrupt level	Offset	TBR default address
	10	16			
UART3 (Reception completed)	33	21	ICR17	378 _H	000FFF78 _H
UART3 (Transmission completed)	34	22	ICR18	374 _H	000FFF74 _H
A/D ch0	35	23	ICR19	370 _H	000FFF70 _H
A/D ch1	36	24	ICR20	36C _H	000FFF6C _H
External interrupt8	37	25	ICR21	368 _H	000FFF68 _H
External interrupt9	38	26	ICR22	364 _H	000FFF64 _H
External interrupt 10	39	27	ICR23	360 _H	000FFF60 _H
External interrupt 11	40	28	ICR24	35C _H	000FFF5C _H
External interrupt 12	41	29	ICR25	358 _H	000FFF58 _H
External interrupt 13	42	2A	ICR26	354 _H	000FFF54 _H
External interrupt 14	43	2B	ICR27	350 _H	000FFF50 _H
External interrupt 15	44	2C	ICR28	34C _H	000FFF4C _H
Real-time clock	45	2D	ICR29	348 _H	000FFF48 _H
Main clock oscillation stabilization wait timer	46	2E	ICR30	344 _H	000FFF44 _H
Timebase timer 0 overflow	47	2F	ICR31	340 _H	000FFF40 _H
Reload timer 3	48	30	ICR32	33C _H	000FFF3C _H
Watch timer	49	31	ICR33	338 _H	000FFF38 _H
UD Counter 0	50	32	ICR34	334 _H	000FFF34 _H
UD Counter 1	51	33	ICR35	330 _H	000FFF30 _H
PPG 0/1	52	34	ICR36	32C _H	000FFF2C _H
PPG 2/3	53	35	ICR37	328 _H	000FFF28 _H
PPG 4/5	54	36	ICR38	324 _H	000FFF24 _H
Free-run timer 0	55	37	ICR39	320 _H	000FFF20 _H
Free-run timer 1	56	38	ICR40	31C _H	000FFF1C _H
ICU 0 (capture)	57	39	ICR41	318 _H	000FFF18 _H
ICU 1 (capture)	58	3A	ICR42	314 _H	000FFF14 _H
OCU 0 (match)	59	3B	ICR43	310 _H	000FFF10 _H
OCU 1 (match)	60	3C	ICR44	30C _H	000FFF0C _H
OCU 2 (match)	61	3D	ICR45	308 _H	000FFF08 _H
OCU 3 (match)	62	3E	ICR46	304 _H	000FFF04 _H
Delay interrupt source bit	63	3F	ICR47	300 _H	000FFF00 _H
System reserved (Used by REALOS)	64	40	—	2FC _H	000FFEFC _H
System reserved (Used by REALOS)	65	41	—	2F8 _H	000FFE8 _H
System reserved	66	42	—	2F4 _H	000FFE4 _H

(Continued)

(Continued)

Interrupt source	Interrupt number		Interrupt level	Offset	TBR default address
	10	16			
System reserved	67	43	—	2F0 _H	000FFE0 _H
System reserved	68	44	—	2EC _H	000FEEC _H
System reserved	69	45	—	2E8 _H	000FEE8 _H
System reserved	70	46	—	2E4 _H	000FEE4 _H
System reserved	71	47	—	2E0 _H	000FEE0 _H
System reserved	72	48	—	2DC _H	000FEDC _H
System reserved	73	49	—	2D8 _H	000FED8 _H
System reserved	74	4A	—	2D4 _H	000FED4 _H
System reserved	75	4B	—	2D0 _H	000FED0 _H
System reserved	76	4C	—	2CC _H	000FECC _H
System reserved	77	4D	—	2C8 _H	000FEC8 _H
System reserved	78	4E	—	2C4 _H	000FEC4 _H
System reserved	79	4F	—	2C0 _H	000FEC0 _H
Used by INT instruction	80 to 255	50 to FF	—	2BC _H to 000 _H	000FEBC _H to 000FC00 _H

■ PIN STATUS IN EACH CPU STATE

Terms used as the status of pins mean as follows.

- Input enabled
Indicates that the input function can be used.
- Input 0 fixed
Indicates that the input level has been internally fixed to be “0” to prevent leakage when the input is released.
- Output Hi-Z
Means the placing of a pin in a high impedance state by preventing the transistor for driving the pin from driving.
- Output is maintained
Indicates the output in the output state existing immediately before this mode is established. If the device enters this mode with an internal output peripheral operating or while serving as an output port, the output is performed by the internal peripheral or the port output is maintained, respectively.
- State existing immediately before is maintained
When the device serves for output or input immediately before entering this mode, the device maintains the output or is ready for the input, respectively.

• Pin Status List

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1	
1	P26/ SCK2	P26	—	—	SCK2	P26	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	Output Hi-Z/ Input 0 fixed	
2	P27/ SIN3	P27	SIN3	—	—	P27					
3	P30/ SOT3	P30	—	SOT3	—	P30					Pull-up options can be selected
4	P31/ SCK3	P31	—	—	SCK3	P31					Pull-up options can be selected
5	P32/ AIN0	P32	AIN0	—	—	P32					Pull-up options can be selected
6	P33/ BIN0	P33	BIN0	—	—	P33					Pull-up options can be selected
7	P34/ ZIN0	P34	ZIN0	—	—	P34					Pull-up options can be selected
8	P35/ AIN1	P35	AIN1	—	—	P35					Pull-up options can be selected
9	P36/ BIN1	P36	BIN1	—	—	P36					Pull-up options can be selected
10	P37/ ZIN1	P37	ZIN1	—	—	P37					Pull-up options can be selected
11	P40/ PPG0	P40	—	PPG 0	—	P40					
12	P41/ PPG1	P41	—	PPG 1	—	P41					

(Continued)

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks	
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1		
13	X0A											
14	X1A											
15	V _{cc3B} / V _{cc}											
16	V _{ss}											
17	V _{cc3} /C											
18	P42/ PPG2	P42	—	PPG2	—	P42	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	Output Hi-Z/ Input 0 fixed		
19	P43/ PPG3	P43	—	PPG3	—	P43						
20	P44/ TOT0	P44	—	TOT0	—	P44						
21	P45/ TOT1	P45	—	TOT1	—	P45						
22	P46/ TOT2	P46	—	TOT2	—	P46						
23	P47/ CKOT	P47	—	CKOT	—	P47						
24	P50/ INT8	P50	INT8	—	—	P50					Retention of the immediately prior state	P : Retention of the immediately prior state F : Input enabled
25	P51/ INT9	P51	INT9	—	—	P51						
26	P52/ INT10	P52	INT10	—	—	P52						
27	P53/ INT11/ PPG4	P53	INT11	PPG4	—	P53						
28	P54/ INT12/ PPG5	P54	INT12	PPG5	—	P54						
29	P55/ INT13/ TIN2	P55	INT13 TIN2	—	—	P55						
30	P56/ INT14/ TIN1	P56	INT14 TIN1	—	—	P56						

P : Port selected, F : Specified function selected

(Continued)

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks			
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1				
31	P57/ INT15/ TIN0/ ADTG0	P57	INT15 TIN0 ADTG0	—	—	P57	Output Hi-Z/ Input enabled	Retention of the immediately prior state	P : Retention of the immediately prior state F : Input enabled	P : Output Hi-Z/ F : Input 0 enabled				
32	PF3/ TOT3	PF3	—	TOT3	—	PF3								
33	PF4/ TIN3/ ADTG1	PF4	TIN3 ADTG1	—	—	PF4					Retention of the immediately prior state	Output Hi-Z/ Input 0 fixed		
34	PD0/ DA0	PD0	—	DA0	—	PD0								
35	PD1/ DA1	PD1	—	DA1	—	PD1								
36	AV _{CC}													
37	AVRH													
38	AV _{SS}													
39	PC0/ AN0	PC0	AN0	—	—	PC0	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	Output Hi-Z/ Input 0 fixed				
40	PC1/ AN1	PC1	AN1	—	—	PC1								
41	PC2/ AN2	PC2	AN2	—	—	PC2	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	Output Hi-Z/ Input 0 fixed				
42	PC3/ AN3	PC3	AN3	—	—	PC3								
43	PC4/ AN4	PC4	AN4	—	—	PC4								
44	PC5/ AN5	PC5	AN5	—	—	PC5								
45	PC6/ AN6	PC6	AN6	—	—	PC6								
46	PC7/ AN7	PC7	AN7	—	—	PC7								

P : Port selected, F : Specified function selected

(Continued)

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1	
47	V _{SS}										
48	V _{CC3IO}										
49	P80/ SEG0	P80	—	SEG0	—	P80	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	P(port) : Output Hi-Z/ Input 0 fixed F (peripheral) : Retention of the immediately prior state	
50	P81/ SEG1	P81	—	SEG1	—	P81					
51	P82/ SEG2	P82	—	SEG2	—	P82					
52	P83/ SEG3	P83	—	SEG3	—	P83					
53	P84/ SEG4	P84	—	SEG4	—	P84					
54	P85/ SEG5	P85	—	SEG5	—	P85					
55	P86/ SEG6	P86	—	SEG6	—	P86					
56	P87/ SEG7	P87	—	SEG7	—	P87					
57	P90/ SEG8	P90	—	SEG8	—	P90					
58	P91/ SEG9	P91	—	SEG9	—	P91					
59	P92/ SEG10	P92	—	SEG10	—	P92					
60	P93/ SEG11	P93	—	SEG11	—	P93					
61	P94/ SEG12	P94	—	SEG12	—	P94					
62	P95/ SEG13	P95	—	SEG13	—	P95					
63	P96/ SEG14	P96	—	SEG14	—	P96					

P : Port selected, F : Specified function selected

(Continued)

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1	
64	P97/ SEG15	P97	—	SEG15	—	P97	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	P(port) : Output Hi-Z/ Input 0 fixed F (peripheral) : Retention of the immediately prior state	
65	PA0/ SEG16	PA0	—	SEG16	—	PA0					
66	PA1/ SEG17	PA1	—	SEG17	—	PA1					
67	PA2/ SEG18	PA2	—	SEG18	—	PA2					
68	PA3/ SEG19	PA3	—	SEG19	—	PA3					
69	PA4/ SEG20	PA4	—	SEG20	—	PA4					
70	PA5/ SEG21	PA5	—	SEG21	—	PA5					
71	PA6/ SEG22	PA6	—	SEG22	—	PA6					
72	PA7/ SEG23	PA7	—	SEG23	—	PA7					
73	PB0/ SEG24	PB0	—	SEG24	—	PB0					
74	PB1/ SEG25	PB1	—	SEG25	—	PB1	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	P(port) : Output Hi-Z/ Input 0 fixed F (peripheral) : Retention of the immediately prior state	
75	V _{cc}										
76	V _{ss}										
77	PB2/ SEG26	PB2	—	SEG26	—	PB2	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	P(port) : Output Hi-Z/ Input 0 fixed F (peripheral) : Retention of the immediately prior state	
78	PB3/ SEG27	PB3	—	SEG27	—	PB3					
79	P64/ SEG28 *	P64	—	SEG28	—	P64					Pseudo Nch-OD pin, IOL = 20mA

P : Port selected, F : Specified function selected

(Continued)

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1	
80	P65/ SEG29 *	P65	—	SEG29	—	P65	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	P(port) : Output Hi-Z/ Input 0 fixed F (peripheral) : Retention of the immediately prior state	Pseudo Nch-OD pin, IOL = 20mA
81	P66/ SEG30 *	P66	—	SEG30	—	P66					Pseudo Nch-OD pin, IOL = 20mA
82	P67/ SEG31 *	P67	—	SEG31	—	P67					Pseudo Nch-OD pin, IOL = 20mA
83	P70/ COM0	P70	—	COM0	—	P70					
84	P71/ COM1	P71	—	COM1	—	P71					
85	P72/ COM2	P72	—	COM2	—	P72					
86	P73/ COM3	P73	—	COM3	—	P73					
87	MOD2										
88	MOD1										
89	MOD0										
90	INIT										
91	V0										
92	V1										
93	V2										
94	V3										

P : Port selected, F : Specified function selected

(Continued)

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1	
95	P00/ SIN0	P00	SIN0	—	—	P00	Output Hi-Z/ Input enabled	Retention of the immediately prior state	Retention of the immediately prior state	Output Hi-Z/ Input 0 fixed	
96	P01/ SOT0	P01	—	SOT0	—	P01					
97	P02/ SCK0	P02	—	—	SCK0	P02					
98	P03/ SIN1	P03	SIN1	—	—	P03					
99	P04/ SOT1	P04	—	SOT1	—	P04					
100	P05/ SCK1	P05	—	—	SCK1	P05					
101	P06/ IC0	P06	IC0	—	—	P06					
102	P07/ IC1	P07	IC1	—	—	P07					
103	P10/ INT0	P10	INT0	—	—	P10		P : Retention of the immediately prior state	P : Output Hi-Z F : Input enabled	Pull-up options can be selected	
104	P11/ INT1	P11	INT1	—	—	P11		F : Input enabled		Pull-up options can be selected	
105	V _{CC}										
106	V _{SS}										
107	X1										
108	X0										

P : Port selected, F : Specified function selected

(Continued)

(Continued)

Pin no.	Pin name	Port name	Specified function name			At initializing		At sleep mode	At Stop mode		Remarks
			Input	Output	Input/Output	Function name	Reset initialization		HIZ = 0	HIZ = 1	
109	P12/ INT2	P12	INT2	—	—	P12	Output Hi-Z/ Input enabled	Retention of the immediately prior state	P : Retention of the immediately prior state F : Input enabled	P : Output Hi-Z F : Input enabled	Pull-up options can be selected
110	P13/ INT3	P13	INT3	—	—	P13					Pull-up options can be selected
111	P14/ INT4	P14	INT4	—	—	P14					Pull-up options can be selected
112	P15/ INT5	P15	INT5	—	—	P15					Pull-up options can be selected
113	P16/ INT6	P16	INT6	—	—	P16					Pull-up options can be selected
114	P17/ INT7	P17	INT7	—	—	P17					Pull-up options can be selected
115	P20/ CKI0/ OP0	P20	CKI0	OP0	—	P20			Retention of the immediately prior state	Output Hi-Z/ Input 0 fixed	
116	P21/ CKI1/ OP1	P21	CKI1	OP1	—	P21					
117	P22/ PWI0/ OP2	P22	PWI0	OP2	—	P22					
118	P23/ PWI1/ OP3	P23	PWI1	OP3	—	P23					
119	P24/ SIN2	P24	SIN2	—	—	P24					
120	P25/ SOT2	P25	—	SOT2	—	P25					

P : Port selected, F : Specified function selected

■ ELECTRICAL CHARACTERISTICS

1. Absolute Maximum Ratings

MB91F233, MB91V230

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage	VCC	$V_{SS}-0.5$	$V_{SS} + 6.0$	V	
	VCC3	$V_{SS}-0.5$	$V_{SS} + 4.0$	V	
	VCC3IO	$V_{SS}-0.5$	$V_{SS} + 4.0$	V	
Analog power supply voltage	AVCC	$V_{SS}-0.5$	$V_{SS} + 4.0$	V	
Input voltage	VI	$V_{SS}-0.5$	$V_{CC} + 0.5$	V	
Input voltage (Nch-OD)	VIND	$V_{SS}-0.5$	$V_{CC} + 0.5$	V	
Analog pin input voltage	VIA	$V_{SS}-0.5$	$AV_{CC} + 0.5$	V	
Output voltage	VO	$V_{SS}-0.5$	$V_{CC} + 0.5$	V	
Storage temperature	Tstg	-55	+ 125	°C	

MB91F233L, MB91233L

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply voltage	VCC	$V_{SS}-0.5$	$V_{SS} + 4.0$	V	
	VCC3	$V_{SS}-0.5$	$V_{SS} + 4.0$	V	
	VCC3IO	$V_{SS}-0.5$	$V_{SS} + 4.0$	V	
Analog power supply voltage	AVCC	$V_{SS}-0.5$	$V_{SS} + 4.0$	V	
Input voltage	VI	$V_{SS}-0.5$	$V_{CC} + 0.5$	V	
Input voltage (Nch-OD)	VIND	$V_{SS}-0.5$	$V_{CC} + 0.5$	V	
Analog pin input voltage	VIA	$V_{SS}-0.5$	$AV_{CC} + 0.5$	V	
Output voltage	VO	$V_{SS}-0.5$	$V_{CC} + 0.5$	V	
Storage temperature	Tstg	-55	+ 125	°C	

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

2. Recommended Operating Conditions

MB91F233

Parameter	Symbol	Value		Unit	Remarks
		Min	Max		
Operating temperature	Ta	-40	+ 85	°C	
Power supply voltage	VCC	4.00	5.25	V	*1
	VCC3	3.00	3.60	V	*4
	VCC3B	2.20	3.60	V	*2
	VCC3IO	3.00	3.60	V	
Analog power supply voltage	AVCC	3.00	3.60	V	
LCD reference voltage	V3	—	5.25	V	*3

MB91V230

Parameter	Symbol	Value		Unit	Remarks
		Min	Max		
Operating temperature	Ta	-40	+ 85	°C	
Power supply voltage	VCC	4.00	5.25	V	*1
	VCC3	3.00	3.60	V	
	VCC3B	3.00	3.60	V	*2
	VCC3IO	3.00	3.60	V	
Analog power supply voltage	AVCC	3.00	3.60	V	
LCD reference voltage	V3	—	5.25	V	*3

MB91F233L, MB91F233M

Parameter	Symbol	Value		Unit	Remarks
		Min	Max		
Operating temperature	Ta	-40	+ 85	°C	
Power supply voltage	VCC	3.00	3.60	V	*1
	VCC3	3.00	3.60	V	*4
	VCC3B	2.20	3.60	V	*2
	VCC3IO	3.00	3.60	V	
Analog power supply voltage	AVCC	3.00	3.60	V	
LCD reference voltage	V3	—	3.60	V	*3

MB91233L

Parameter	Symbol	Value		Unit	Remarks
		Min	Max		
Operating temperature	Ta	-40	+ 85	°C	
Power supply voltage	VCC	3.00	3.60	V	*1
	VCC3	3.00	3.60	V	*4
	VCC3B	2.20	3.60	V	*2
	VCC3IO	3.00	3.60	V	
Analog power supply voltage	AVCC	3.00	3.60	V	
LCD reference voltage	V3	—	3.60	V	*3

For normal use, set $V_{cc3} = V_{cc3B} = AV_{cc} = V_{cc3IO}$.

*1 : The standard power-supply voltage varies with the model of product.

*2 : Only for backup. For normal use, set $V_{cc3} = V_{cc3B} = AV_{cc} = V_{cc3IO}$.

*3 : V3 must not exceed VCC.

*4 : For the relationships between V_{cc3} and operating frequencies, see section "4.3 Operation Assurance Range".

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their FUJITSU representatives beforehand.

3. DC Characteristics

MB91V230, MB91F233

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current	ICC	V _{CC3}	FLASH model normal operation, Ta = +25 °C, f _{cp} = 33 MHz, f _{cpp} = 16.5 MHz	—	84	95	mA	
	ICCT		RTC mode, @Ta = +25 °C, f _{clk} = 32 KHz	—	20	50	μA	Watch timer, RTC, LCDC VCC3 = VCC3B = 2.4 V
	ICCH		STOP mode, @Ta = +25 °C, f _{clk} = 0	—	5	50	μA	
	ICCS		SLEEP mode	—	30	45	mA	
"H" level input voltage	VIH	—	—	V _{CC} × 0.8	—	V _{CC}	V	
		X0A	VCC3B = 2.2 V to 3.6 V	V _{CC3B} × 0.8	—	V _{CC3B}	V	When external clock is used
"L" level input voltage	VIL	—	—	V _{SS}	—	V _{CC} × 0.2	V	
		X0A	VCC3B = 2.2 V to 3.6 V	V _{SS}	—	V _{SS} + 0.4	V	When external clock is used
"H" level output voltage	VOH	—	IOH = -4 mA	V _{CC} - 0.5	—	V _{CC}	V	
"L" level output voltage	VOL	—	IOL = 4 mA	V _{SS}	—	0.4	V	
		P64-67	IOL = 20 mA					
Input leakage current	IIL	—	—	-5	—	5	μA	
Open-drain output leakage current	Ileak	—	—	-10	—	10	μA	
LCD division resistance	RLCD	V0-V1 V1-V2 V2-V3	—	50	100	200	kΩ	
COM0 to COM3 output impedance	RVCOM	COM0 to COM3	V1 to V3 = 5.0 V	—	—	2.5	kΩ	
SEG00 to SEG31 output impedance	RVSEG	SEG00 to SEG31		—	—	15	kΩ	
LCDC leakage current	ILCDC	V0 to V3, COM0 to COM3, SEG00 to SEG31	—	-5	—	5	μA	


MB91F233L, MB91233L

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current	ICC	Vcc3	FLASH model normal operation, Ta = +25 °C, fcp = 33 MHz, fcpp = 16.5 MHz	—	84	95	mA	
	ICC		ROM model normal operation, Ta = +25 °C, fcp = 33 MHz, fcpp = 16.5 MHz	—	56	75	mA	
	ICCT		RTC mode, @Ta = +25 °C, fclk = 32 KHz	—	20	50	μA	Watch timer, RTC, LCDC VCC3 = VCC3B = 2.4 V
	ICCH		STOP mode, @Ta = +25 °C, fclk = 0	—	5	50	μA	
	ICCS		SLEEP mode	—	30	45	mA	
"H" level input voltage	VIH	—	—	Vcc × 0.8	—	Vcc	V	
		X0A	VCC3B = 2.2 V to 3.6 V	Vcc3B × 0.8	—	Vcc3B	V	When external clock is used
"L" level input voltage	VIL	—	—	Vss	—	Vcc × 0.15	V	
		X0A	VCC3B = 2.2 V to 3.6 V	Vss	—	Vss + 0.4	—	When external clock is used
"H" level output voltage	VOH	—	VCC = 3.3 V, IOH = -2 mA	Vcc - 0.5	—	Vcc	V	
"L" level output voltage	VOL	—	IOL = 2 mA	Vss	—	0.4	V	
		P64-67	IOL = 10 mA					
Input leakage current	IIL	—	—	-5	—	5	μA	
Open-drain output leakage current	Ileak	—	—	-10	—	10	μA	
LCD division resistance	RLCD	V0-V1 V1-V2 V2-V3	—	50	100	200	kΩ	
COM0 to COM3 output impedance	RVCOM	COM0 to COM3	V1 to V3 = 5.0 V	—	—	2.5	kΩ	
SEG00 to SEG31 output impedance	RVSEG	SEG00 to SEG31		—	—	15	kΩ	
LCDC leakage current	ILCDC	V0 to V3, COM0 to COM3, SEG00 to SEG31	—	-5	—	-5	μA	

4. AC Characteristics


(1) Main clock input standard

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Input frequency	F_C	X0	—	3.6	4	4.2	MHz	
Input clock cycle	t_{CYL}		—	—	250	—	ns	
Input clock pulse width	—		P_{WH}/t_{CYL} P_{WL}/t_{CYL}	40	—	60	%	
Input clock rise time and fall time	t_{CF} t_{CR}		—	—	—	5	ns	At external clock
Internal operating clock frequency	F_{CP}	—	—	—	—	33.6	MHz	

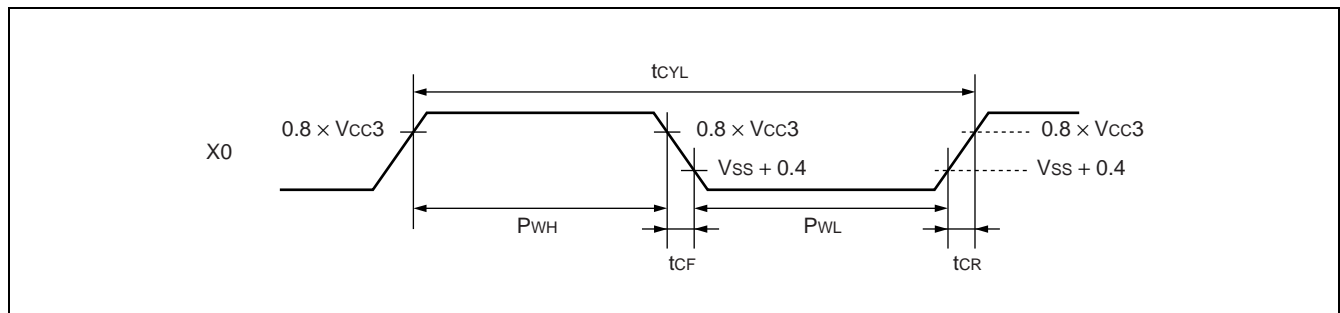


(2) Subclock input standard

Parameter	Symbol	Pin name	Conditions	Value			Unit	Remarks
				Min	Typ	Max		
Input frequency	F_{CL}	X0A	—	—	32.768	—	kHz	At external clock
Input clock cycle	t_{LCYL}		—	28.571	32.768	35.714		
Input clock pulse width	—		P_{WLH}/t_{LCYL} P_{WLL}/t_{LCYL}	45	—	55	%	
Input clock rise time and fall time	—		t_{CF}/t_{LCYL} t_{CR}/t_{LCYL}	—	—	5	%	At external clock

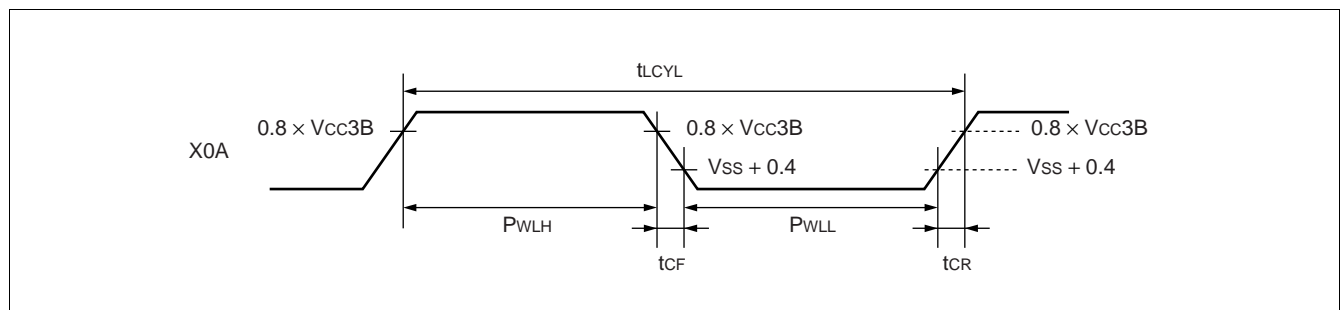

(3) Operation Assurance Range

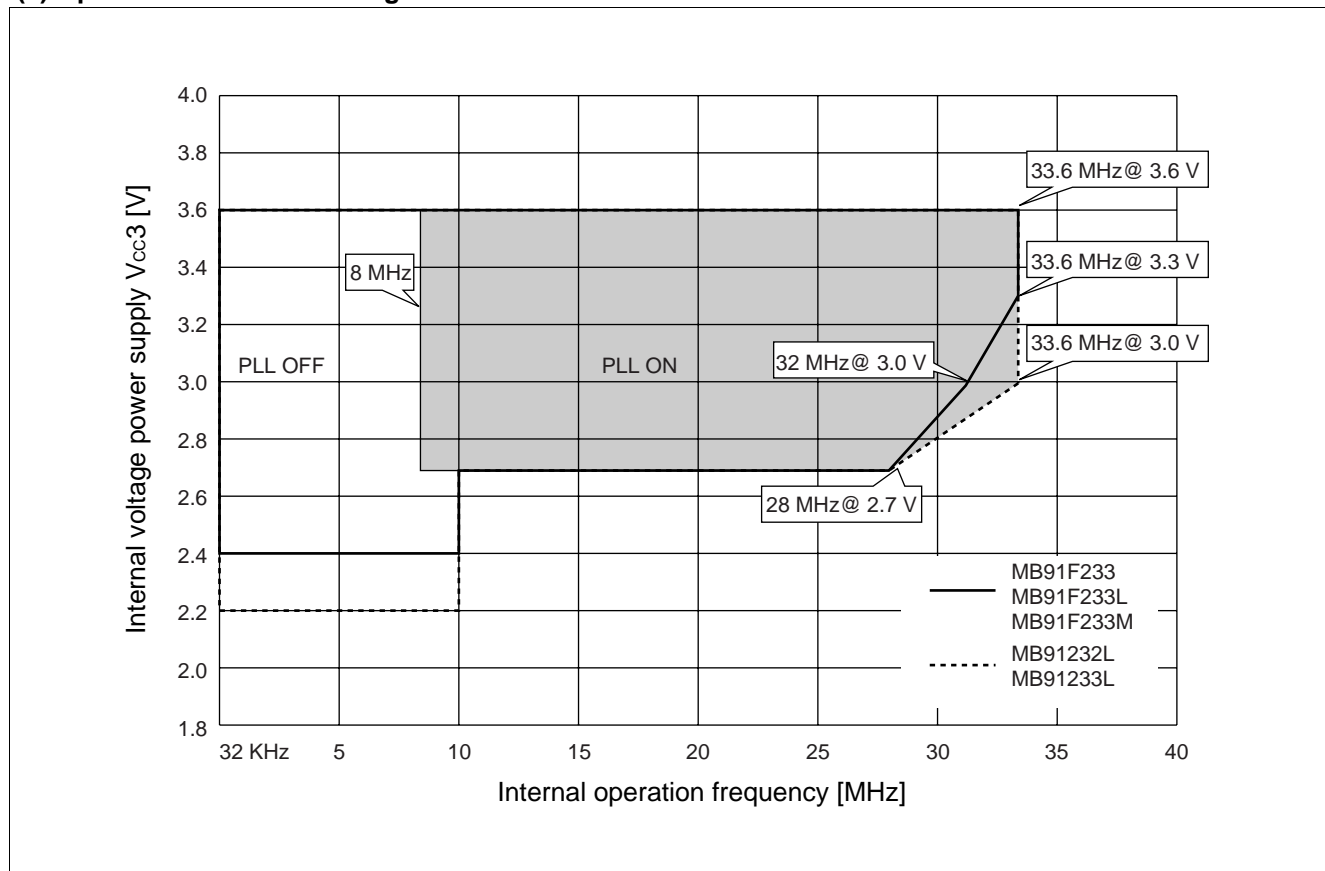

5. Notes on the power-on sequence for dual-powered model based on 0.35 μ s technology

- Power-on/off sequences

Power-on : $V_{cc3B}, V_{cc3} \rightarrow V_{cc} \rightarrow V_{cc3IO}, AV_{cc}, AVRH, V0-V3$

Power-off : $V_{cc3IO}, AV_{cc}, AVRH, V0-V3 \rightarrow V_{cc} \rightarrow V_{cc3}, V_{cc3B}$

When V_{cc} is turned on earlier, a potential difference between V_{cc} and V_{cc3} must fall within 3.6 V.

The LCDC power supply $V3$ must not exceed V_{cc} in voltage. Apply $V3$ after turning on V_{cc3} .

Turn on V_{cc3} before applying the analog power supply AV_{cc} or an analog signal.

6. Electrical Characteristics for the A/D Converter


($V_{CC} = AV_{CC} = 3.0$ to 3.6 V, $V_{SS} = DAVS = AV_{SS} = 0$ V, $AVRH = 3.0$ V to 3.6 V, $T_a = 0$ °C to $+70$ °C)

Parameter	Value			Unit	Remarks
	Min	Typ	Max		
Resolution	—	—	10	bit	AV _{CC} = 3.3 V, At AVRH = 3.3 V At CPU sleep mode
Total error* ¹	-5.0	—	+5.0	LSB	
Nonlinear error* ¹	-3.5	—	+3.5	LSB	
Differential linear error* ¹	-2.5	—	+2.5	LSB	
Zero transition voltage* ¹	-2.0	+1.0	+6.0	LSB	
Full transition voltage* ¹	AVRH-5.5	AVRH-1.0	AVRH+3.0	LSB	
Conversion time	1.69* ²	—	—	μs	
Power supply voltage (analog+digital)	—	3.6	—	mA	
	—	—	5	μA	
Reference power supply current (between AVRH and AVRL)	—	470	—	μA	AVRH = 3.0 V, At AVRL = 0.0 V
	—	—	10	μA	At power-down* ³
Analog input capacitance	—	40	—	pF	
Inter-channel disparity	—	—	4	LSB	

*1 : Measured in the CPU sleep state

*2 : It depends on the clock cycle supplied to peripheral resources.

*3 : The current when the CPU is in stop mode and the A/D converter is not operating.

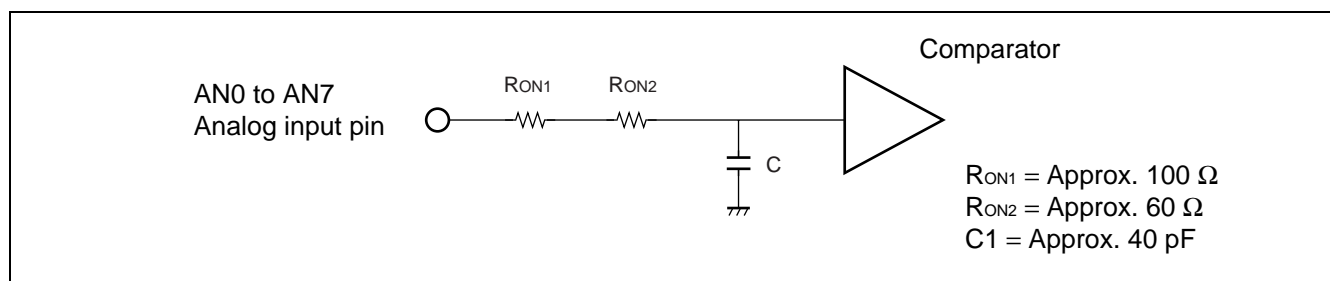

7. Electrical Characteristics for the D/A Converter

($V_{CC} = DAV_C = 3.0\text{ V to }3.6\text{ V}$, $V_{SS} = DAV_S = 0\text{ V}$, $T_a = 0\text{ }^{\circ}\text{C to }70\text{ }^{\circ}\text{C}$)

Parameter	Value			Unit	Remarks
	Min	Typ	Max		
Resolution	—	—	8	bit	
Nonlinear error	-2.0	—	+2.0	LSB	When the output is unloaded
Differential linear error	-1.0	—	+1.0	LSB	When the output is unloaded
Conversion speed	—	0.6	—	μs	When load capacitance (CL) = 20 pF
	—	3.0	—	μs	When load capacitance (CL) = 100 pF
Output impedance	2.0	2.9	3.8	k Ω	
Analog current	—	40	—	μA	10 μs conversion, when the output is unloaded
	—	—	460	μA	When the input digital code is fixed at 7Ah or 85h
	—	0.1	—	μA	At power-down

The current consumption by this D/A converter varies with input digital code.


This standard value indicates the current consumed when the digital code that maximizes the current consumption is input.

■ ORDERING INFORMATION

Part number	Package	Remarks
MB91V230CR-ES	401-pin ceramic PGA (PGA-401C-A02)	
MB91F233PFF-GE1	120-pin plastic LQFP (FPT-120P-M05)	
MB91F233LPFF-GE1	120-pin plastic LQFP (FPT-120P-M05)	
MB91F233LLGA-GE1	128-pin plastic FLGA (LGA-128P-M01)	
MB91233LPFF-G-xxx	120-pin plastic LQFP (FPT-120P-M05)	
MB91233LLGA-Gxxx	128-pin plastic FLGA (LGA-128P-M01)	

■ PACKAGE DIMENSIONS

401-pin Ceramic PGA
(PGA-401C-A02)

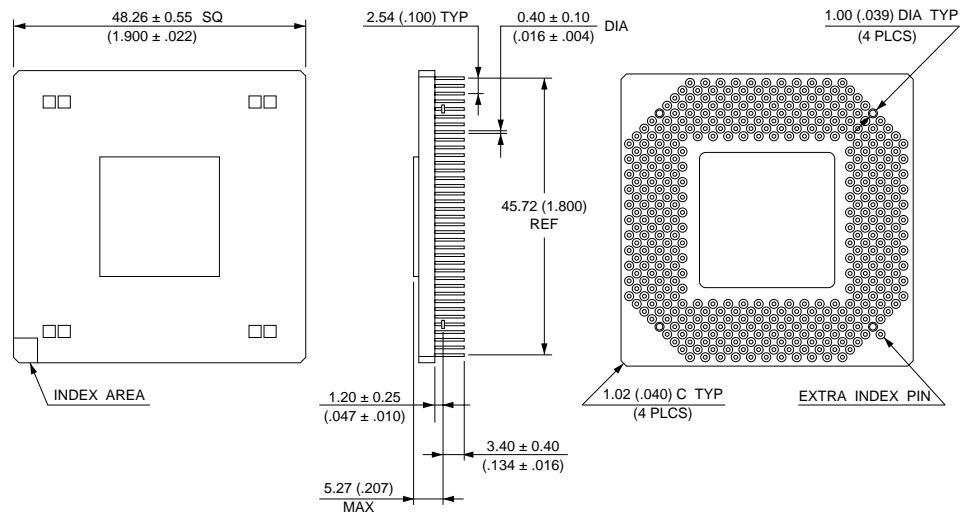

© 1994 FUJITSU LIMITED R401002SC-2-2


Dimensions in mm (inches) .

Note : The values in parentheses are reference values.

(Continued)

120-pin Plastic LQFP
(FPT-120P-M05)

Note 1) * : These dimensions do not include resin protrusion.
 Note 2) Pins width and pins thickness include plating thickness.
 Note 3) Pins width do not include tie bar cutting remainder.

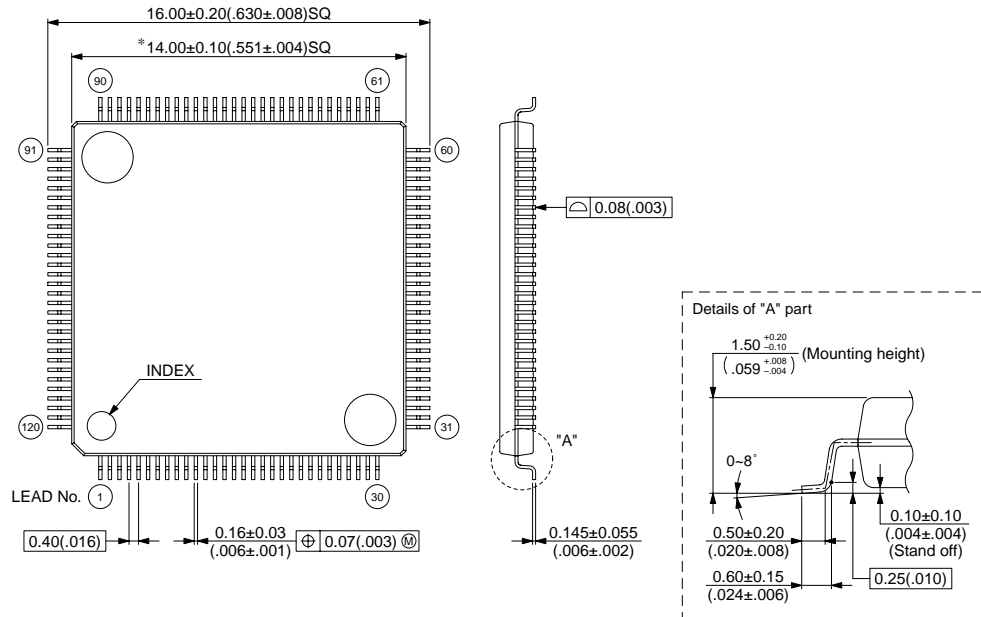

© 2003 FUJITSU LIMITED F120006S-c-4-5

Dimensions in mm (inches) .

Note : The values in parentheses are reference values.

(Continued)

(Continued)

128-pin plastic FLGA
(LGA-128P-M01)

Dimensions in mm (inches) .

Note : The values in parentheses are reference values.

FUJITSU LIMITED

For further information please contact:

Japan

FUJITSU LIMITED
Marketing Division
Electronic Devices
Shinjuku Dai-Ichi Seimei Bldg. 7-1,
Nishishinjuku 2-chome, Shinjuku-ku,
Tokyo 163-0721, Japan
Tel: +81-3-5322-3353
Fax: +81-3-5322-3386
<http://edevice.fujitsu.com/>

North and South America

FUJITSU MICROELECTRONICS AMERICA, INC.
1250 E. Arques Avenue, M/S 333
Sunnyvale, CA 94088-3470, U.S.A.
Tel: +1-408-737-5600
Fax: +1-408-737-5999
<http://www.fma.fujitsu.com/>

Europe

FUJITSU MICROELECTRONICS EUROPE GmbH
Am Siebenstein 6-10,
D-63303 Dreieich-Buchschlag,
Germany
Tel: +49-6103-690-0
Fax: +49-6103-690-122
<http://www.fme.fujitsu.com/>

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE LTD.
#05-08, 151 Lorong Chuan,
New Tech Park,
Singapore 556741
Tel: +65-6281-0770
Fax: +65-6281-0220
<http://www.fmal.fujitsu.com/>

Korea

FUJITSU MICROELECTRONICS KOREA LTD.
1702 KOSMO TOWER, 1002 Daechi-Dong,
Kangnam-Gu, Seoul 135-280
Korea
Tel: +82-2-3484-7100
Fax: +82-2-3484-7111
<http://www.fmk.fujitsu.com/>

F0401

© FUJITSU LIMITED Printed in Japan

All Rights Reserved.

The contents of this document are subject to change without notice. Customers are advised to consult with FUJITSU sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of Fujitsu semiconductor device; Fujitsu does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information. Fujitsu assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of Fujitsu or any third party or does Fujitsu warrant non-infringement of any third-party's intellectual property right or other right by using such information. Fujitsu assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that Fujitsu will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

If any products described in this document represent goods or technologies subject to certain restrictions on export under the Foreign Exchange and Foreign Trade Law of Japan, the prior authorization by Japanese government will be required for export of those products from Japan.