


- ZENER DIODE CHIPS
- ALL JUNCTIONS COMPLETELY PROTECTED WITH SILICON DIOXIDE
- ELECTRICALLY EQUIVALENT TO 1N5333B THRU 1N5379B
- 5 WATT CAPABILITY WITH PROPER HEAT SINKING
- COMPATIBLE WITH ALL WIRE BONDING AND DIE ATTACH TECHNIQUES, WITH THE EXCEPTION OF SOLDER REFLOW

CD5333B
thru
CD5379B

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified

| TYPE NUMBER | NOMINAL ZENER VOLTAGE V_Z (Note 1) | TEST CURRENT I_{ZT} | MAXIMUM ZENER IMPEDANCE Z_{ZT} (Note 2) | MAXIMUM REVERSE CURRENT I_R @ V_R | | MAXIMUM ZENER KNEE IMPEDANCE Z_{ZK} @ 1.0 mA (Note 2) |
|-------------|--------------------------------------|-----------------------|---|---------------------------------------|---------|---|
| | V | | | mA | μA | |
| CD5333B | 3.3 | 380 | 3.0 | 300 | 1.0 | 400 |
| CD5334B | 3.6 | 350 | 2.5 | 150 | 1.0 | 500 |
| CD5335B | 3.9 | 320 | 2.0 | 50 | 1.0 | 500 |
| CD5336B | 4.3 | 290 | 2.0 | 10 | 1.0 | 500 |
| CD5337B | 4.7 | 260 | 2.0 | 5.0 | 1.0 | 450 |
| CD5338B | 5.1 | 240 | 1.5 | 1.0 | 1.0 | 400 |
| CD5339B | 5.6 | 220 | 1.0 | 1.0 | 2.0 | 400 |
| CD5340B | 6.0 | 200 | 1.0 | 1.0 | 3.0 | 300 |
| CD5341B | 6.2 | 200 | 1.0 | 1.0 | 3.0 | 200 |
| CD5342B | 6.8 | 175 | 1.0 | 10 | 5.2 | 200 |
| CD5343B | 7.5 | 175 | 1.5 | 10 | 5.7 | 200 |
| CD5344B | 8.2 | 150 | 1.5 | 10 | 6.2 | 200 |
| CD5345B | 8.7 | 150 | 2.0 | 10 | 6.6 | 200 |
| CD5346B | 9.1 | 150 | 2.0 | 7.5 | 6.9 | 150 |
| CD5347B | 10 | 125 | 2.0 | 5.0 | 7.6 | 125 |
| CD5348B | 11 | 125 | 2.5 | 5.0 | 8.4 | 125 |
| CD5349B | 12 | 100 | 2.5 | 2.0 | 9.1 | 125 |
| CD5350B | 13 | 100 | 2.5 | 1.0 | 9.9 | 100 |
| CD5351B | 14 | 100 | 2.5 | 1.0 | 10.6 | 75 |
| CD5352B | 15 | 75 | 2.5 | 1.0 | 11.5 | 75 |
| CD5353B | 16 | 75 | 2.5 | 1.0 | 12.2 | 75 |
| CD5354B | 17 | 70 | 2.5 | 0.5 | 12.9 | 75 |
| CD5355B | 18 | 65 | 2.5 | 0.5 | 13.7 | 75 |
| CD5356B | 19 | 65 | 3.0 | 0.5 | 14.4 | 75 |
| CD5357B | 20 | 65 | 3.0 | 0.5 | 15.2 | 75 |
| CD5358B | 22 | 50 | 3.5 | 0.5 | 16.7 | 75 |
| CD5359B | 24 | 50 | 3.5 | 0.5 | 18.2 | 100 |
| CD5360B | 25 | 50 | 4.0 | 0.5 | 19 | 110 |
| CD5361B | 27 | 50 | 5.0 | 0.5 | 20.6 | 120 |
| CD5362B | 28 | 50 | 6.0 | 0.5 | 21.2 | 130 |
| CD5363B | 30 | 40 | 8.0 | 0.5 | 22.8 | 140 |
| CD5364B | 33 | 40 | 10 | 0.5 | 25.1 | 150 |
| CD5365B | 36 | 30 | 11 | 0.5 | 27.4 | 160 |
| CD5366B | 39 | 30 | 14 | 0.5 | 29.7 | 170 |
| CD5367B | 43 | 30 | 20 | 0.5 | 32.7 | 190 |
| CD5368B | 47 | 25 | 25 | 0.5 | 35.8 | 210 |
| CD5369B | 51 | 25 | 27 | 0.5 | 38.8 | 230 |
| CD5370B | 56 | 20 | 35 | 0.5 | 42.6 | 280 |
| CD5371B | 60 | 20 | 40 | 0.5 | 45.5 | 350 |
| CD5372B | 62 | 20 | 42 | 0.5 | 47.1 | 400 |
| CD5373B | 68 | 20 | 44 | 0.5 | 51.7 | 500 |
| CD5374B | 75 | 20 | 45 | 0.5 | 56 | 620 |
| CD5375B | 82 | 15 | 65 | 0.5 | 62.2 | 720 |
| CD5376B | 87 | 15 | 75 | 0.5 | 66 | 760 |
| CD5377B | 91 | 15 | 75 | 0.5 | 69.2 | 760 |
| CD5378B | 100 | 12 | 90 | 0.5 | 76 | 800 |
| CD5379B | 110 | 12 | 125 | 0.5 | 83.6 | 1000 |

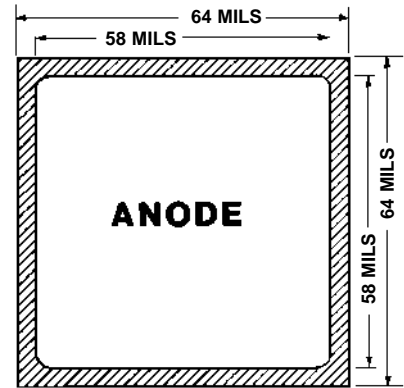

BACKSIDE IS CATHODE

FIGURE 1

DESIGN DATA

METALLIZATION:
Top: (Anode).....Al
Back: (Cathode).....Au

AL THICKNESS.....25,000 Å Min

GOLD THICKNESS.....4,000 Å Min

CHIP THICKNESS.....10 Mils

CIRCUIT LAYOUT DATA:
For Zener operation, cathode must be operated positive with respect to anode.

TOLERANCES: ALL
Dimensions \pm 2 mils



COMPENSATED DEVICES INCORPORATED

22 COREY STREET, MELROSE, MASSACHUSETTS 02176
PHONE (781) 665-1071 FAX (781) 665-7379
WEBSITE: <http://www.cdi-diodes.com> E-mail: mail@cdi-diodes.com

CD5333B thru CD5379B

MAXIMUM RATINGS

Operating Temperature: -65°C to +200°C
 Storage Temperature: -65°C to +200°C
 Forward Voltage @ 1.0Amp = 1.5 Volts maximum

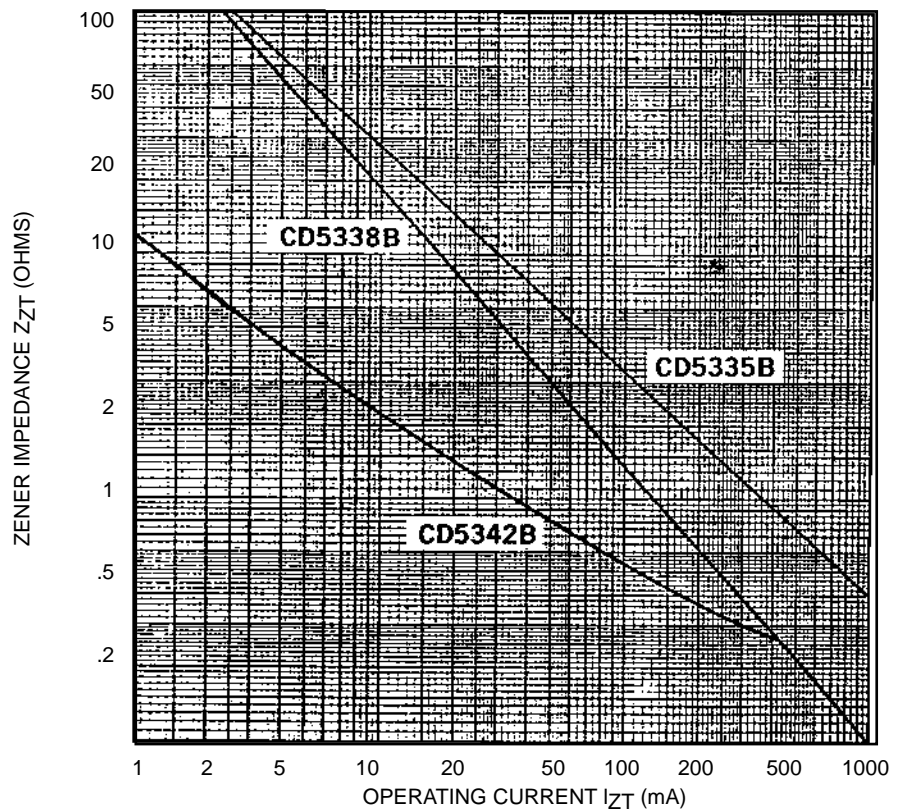


FIGURE 2

ZENER IMPEDANCE VS. OPERATING CURRENT

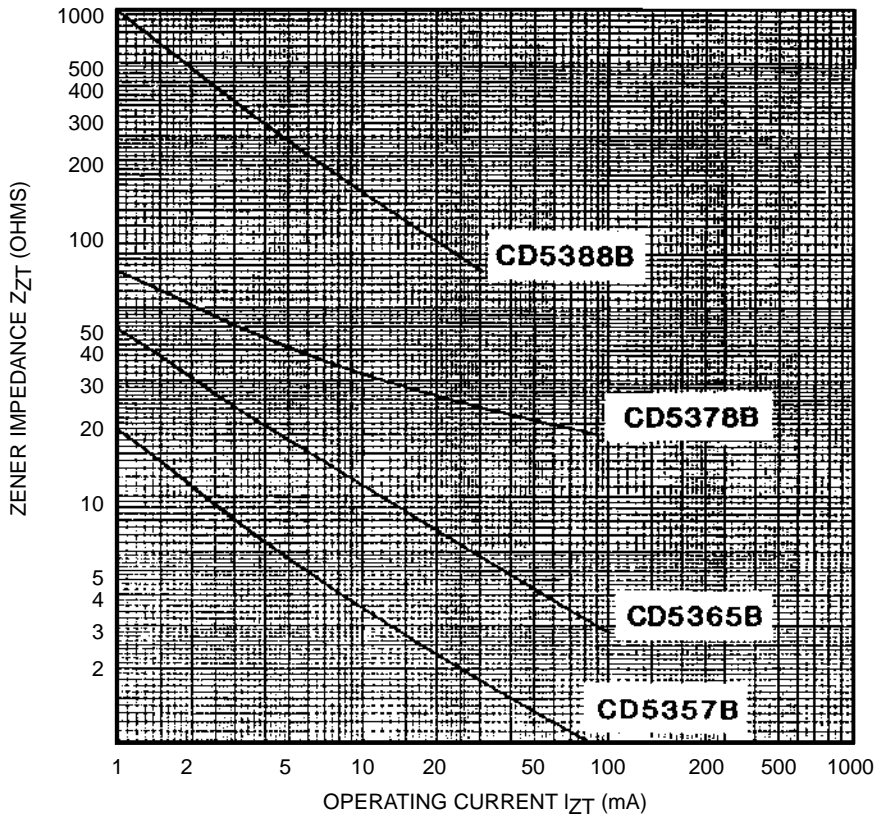


FIGURE 3

ZENER IMPEDANCE VS. OPERATING CURRENT

NOTE 1 Zener voltage range equals nominal voltage $\pm 5\%$ for "B" Suffix. "A" Suffix denotes $\pm 10\%$. No Suffix denotes $\pm 20\%$. "C" suffix = $\pm 2\%$ and "D" suffix = $\pm 1\%$.

NOTE 2 Zener impedance is derived by superimposing on I_{ZT} and I_{ZK} , A 60 Hz rms a.c. current equal to 10% of I_{ZT} and I_{ZK} .

NOTE 3 Zener voltage is read using a pulse measurement, 10 milliseconds maximum.