

## Photocoupler

KODENSHI

# KPC814A • KPC824A • KPC844A

These Photocouplers consist of two Gallium Arsenide Infrared Emitting Diodes connected in a reverse-paralleled configuration for AC-input and a Silicon NPN Phototransistor per a channel.

The KPC814A has one channel in a 4-pin DIP package.

The KPC824A has two channels in a 8-pin DIP package.

The KPC844A has four channels in a 16-pin DIP package.

## FEATURES


- Small Package Size
- Collector-Emitter Voltage : Min.35V
- Current Transfer Ratio : 50% Min.(at  $I_F = \pm 1\text{mA}$ )
- Electrical Isolation Voltage : AC5000V<sub>rms</sub>
- UL Recognized File No. E107486
- VDE Approval No. 0884

## APPLICATIONS

- AC Signal Input
- Interface between two circuits of difference
- Vending Machine
- Cordless Phone, Key Phone
- Programmable Logic Control

## DIMENSION

(Unit : mm)

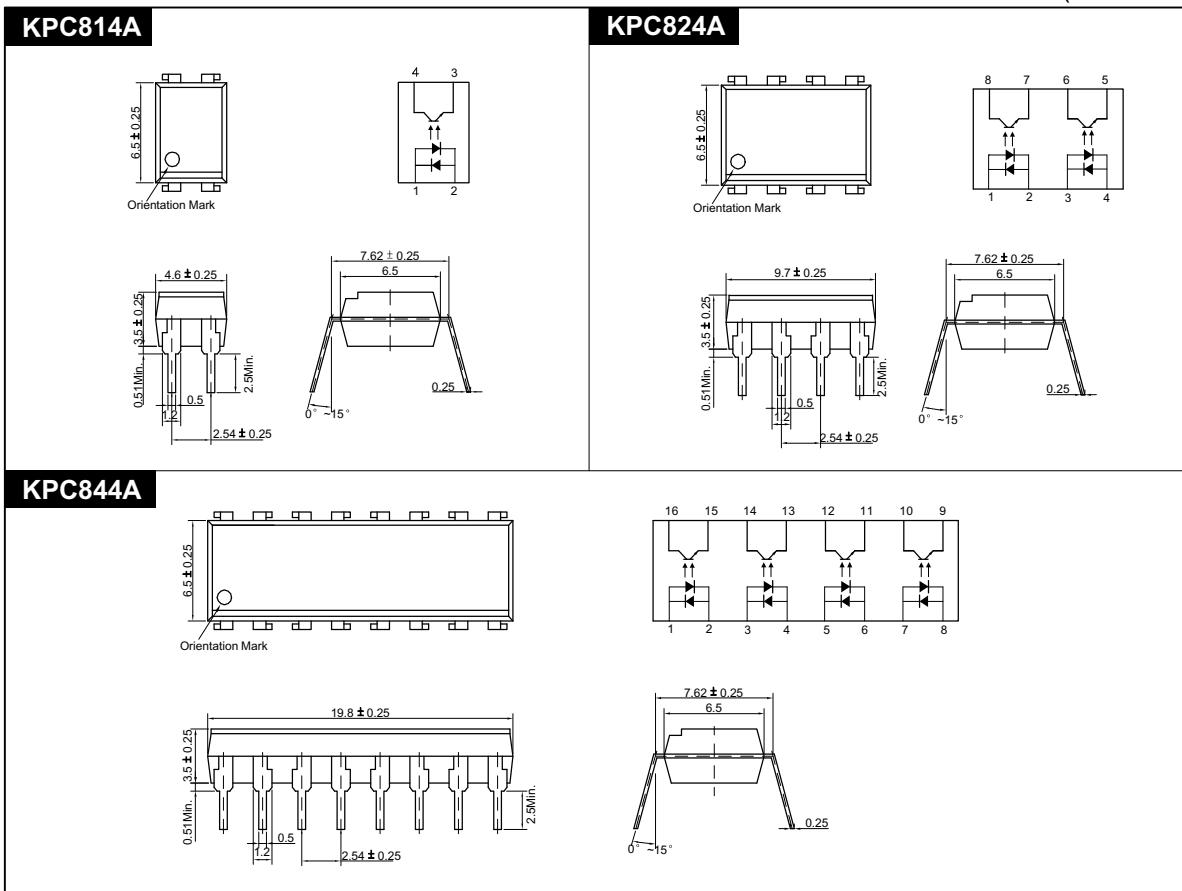

# Photocoupler



## KPC814A • KPC824A • KPC844A

### MAXIMUM RATINGS

(Ta=25 °C)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I <sub>F</sub>	± 50	mA
	Peak Forward Current <sup>*1</sup>	I <sub>FP</sub>	± 1	A
	Power Dissipation	P <sub>D</sub>	70	mW
Output	Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	35	V
	Emitter-Collector Breakdown Voltage	BV <sub>ECO</sub>	6	V
	Collector Current	I <sub>C</sub>	50	mA
	Collector Power Dissipation	P <sub>C</sub>	150	mW
Input to Output Isolation Voltage <sup>*2</sup>		V <sub>iso</sub>	AC5000	V <sub>rms</sub>
Storage Temperature		T <sub>stg</sub>	-55~+125	
Operating Temperature		T <sub>opr</sub>	-30~+100	
Lead Soldering Temperature <sup>*3</sup>		T <sub>sol</sub>	260	
Total Power Dissipation		P <sub>tot</sub>	200	mW

\*1. Input current with 100μs pulse width, 1% duty cycle

\*2. Measured at RH=40~60% for 1min

\*3. 1/16 inch form case for 10sec

### ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25 °C, unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = ± 10mA	-	1.15	1.30	V
	Capacitance	C <sub>T</sub>	V=0, f=1kHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	I <sub>C</sub> =0.5mA	35	-	-	V
	Emitter-Collector Breakdown Voltage	BV <sub>ECO</sub>	I <sub>E</sub> =0.1mA	6	-	-	V
	Collector Dark Current	I <sub>CEO</sub>	I <sub>F</sub> =0, V <sub>CE</sub> =24V	-	-	100	nA
	Capacitance	C <sub>CE</sub>	V <sub>CE</sub> =0, f=1kHz	-	10	-	pF
Coupled	Current Transfer Ratio <sup>*4</sup>	CTR	I <sub>F</sub> = ± 1mA, V <sub>CE</sub> =5V	50	-	600	%
	Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>F</sub> = ± 5mA, I <sub>C</sub> =1mA	-	0.15	0.4	V
	Input-Output Capacitance	C <sub>IO</sub>	V=0, f=1kHz	-	1	-	pF
	Input-Output Isolation Resistance	R <sub>IO</sub>	RH=40~60%, V=500V	-	10 <sup>11</sup>	-	
	Rise Time	tr	V <sub>CE</sub> =5V, R <sub>L</sub> =100 I <sub>C</sub> =2mA	-	4	-	μs
	Fall Time	tf		-	4	-	μs
Symmetry Ratio		CTR1/CTR2		1	-	3	

\*4. CTR=(I<sub>C</sub>/I<sub>F</sub>) X 100 (%)

## Photocoupler

**KODENSHI**

### KPC814A • KPC824A • KPC844A

