



FEATURES

- Automatically restarts microprocessor after power failure
- Maintains reset for 350 ms after V_{CC} returns to an in-tolerance condition
- Accurate 5%, 10% or 15% microprocessor 5V power supply monitoring
- Reduces need for discrete components
- Precision temperature-compensated voltage reference and voltage sensor
- Low-cost TO-92 package or surface mount SOT-223 package
- Internal 5 k Ω pull-up resistor
- Compatible with Motorola 68XXX series and HC16 Microprocessors
- Operating temperature of -40°C to +85°C

PIN ASSIGNMENT



BOTTOM VIEW
 TO-92 PACKAGE
 See Mech.
 Drawings Section
 On Website



TOP VIEW
 SOT-23 PACKAGE
 See Mech.
 Drawings Section
 On Website

PIN DESCRIPTION

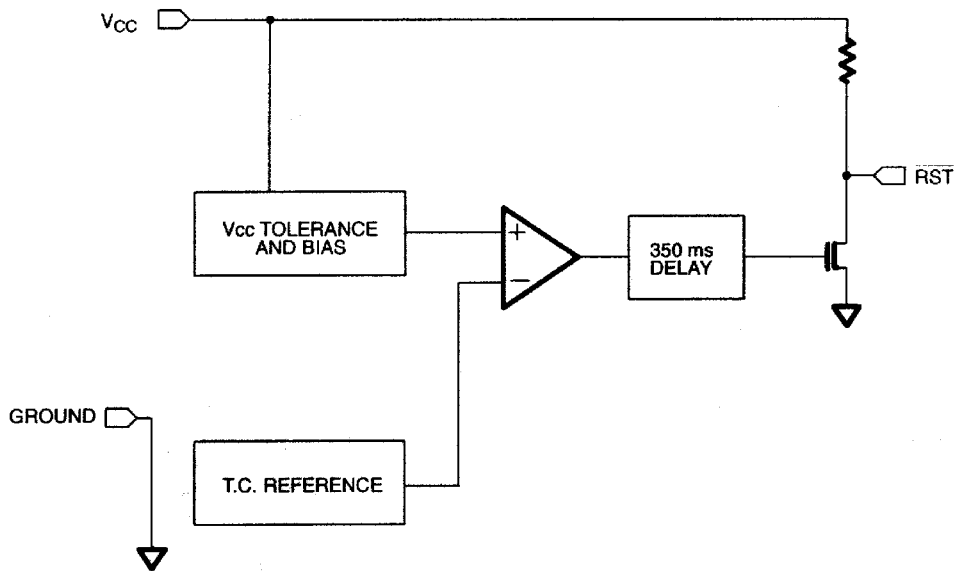
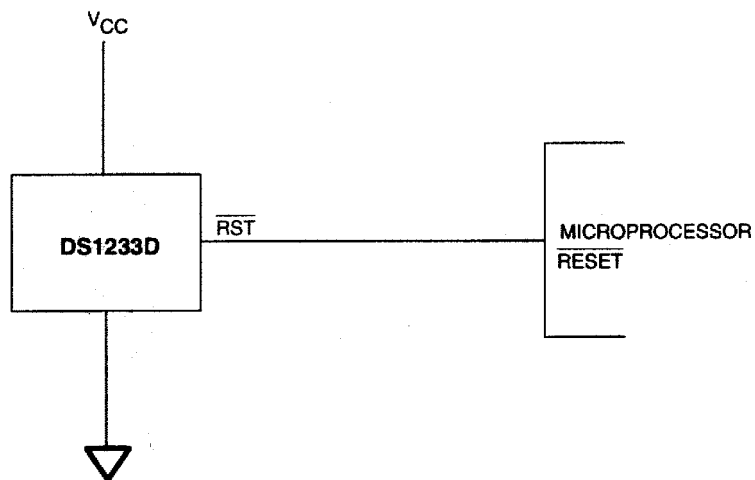
| | |
|-------|-----------------------|
| PIN 1 | <u>GROUND</u> |
| PIN 2 | <u>RESET</u> |
| PIN 3 | V_{CC} |
| PIN 4 | GROUND (SOT-223 ONLY) |

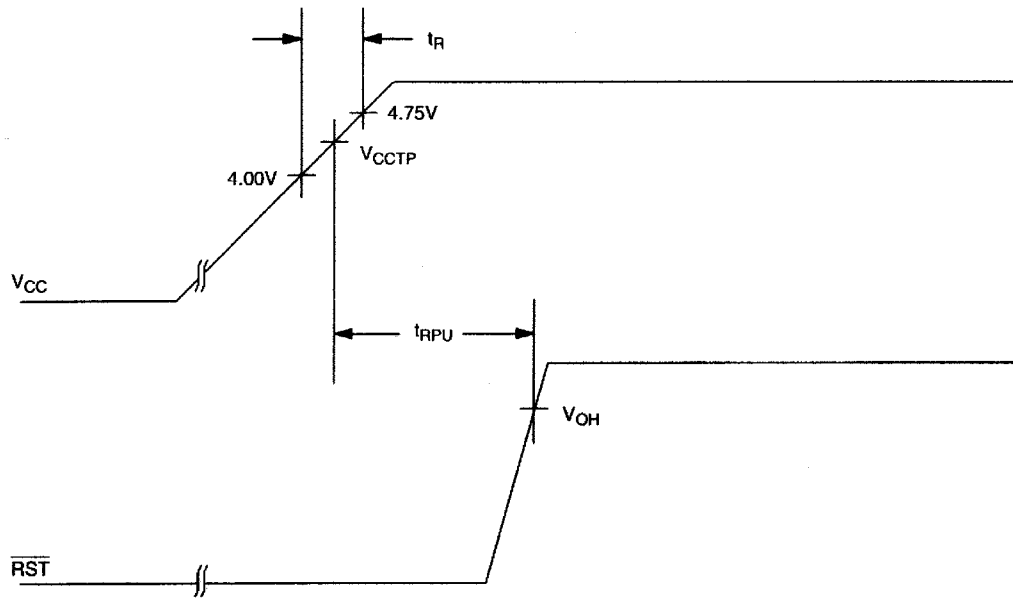
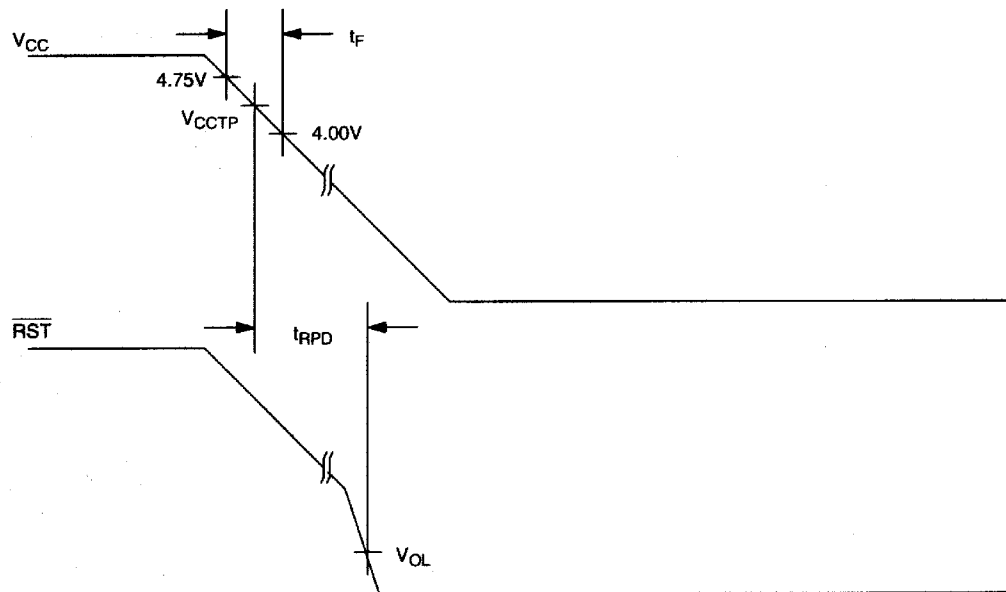
DESCRIPTION

The DS1233D EconoReset uses a precision temperature-compensated reference and comparator circuit to monitor the status of the power supply (V_{CC}). When an out-of-tolerance condition is detected, an internal power-fail signal is generated which forces reset to the active state. When V_{CC} returns to an in-tolerance condition, the reset signal is kept in the active state for approximately 350 ms to allow the power supply and processor to stabilize.

OPERATION - POWER MONITOR

The DS1233D provides the functions of detecting out-of-tolerance power supply conditions and warning a processor-based system of impending power failure. When V_{CC} is detected as out of tolerance as defined by the tolerance of the part selected, the RST signal is asserted. On power-up, RST is kept active for approximately 350 ms after the power supply has reached the selected tolerance. This allows the power supply and microprocessor to stabilize before RST is released.

BLOCK DIAGRAM Figure 1**APPLICATION EXAMPLE Figure 2**

POWER UP Figure 3**POWER DOWN Figure 4**

ABSOLUTE MAXIMUM RATINGS*

| | |
|--|--------------------------|
| Voltage on V_{CC} Pin Relative to Ground | -0.5V to +7.0V |
| Voltage on I/O Relative to Ground | -0.5V to $V_{CC} + 0.5V$ |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +125°C |
| Soldering Temperature | 260°C for 10 seconds |

* This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operation sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS (-40°C to +85°C)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | NOTES |
|----------------|----------|-----|-----|-----|-------|-------|
| Supply Voltage | V_{CC} | 1.2 | 5.0 | 5.5 | V | 1 |

DC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; $V_{DD} = 5V \pm 10\%$)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | NOTES |
|------------------------------|-------------|------|-------|------|------------|-------|
| Low Level @ \overline{RST} | V_{OL} | | | 0.4 | V | 1 |
| Output Current @ 0.4V | I_{OL} | +8 | | | mA | 2 |
| Operating Current | I_{CC} | | | 50 | μA | |
| V_{CC} Trip Point 5% | V_{CCTP1} | 4.5 | 4.625 | 4.74 | V | 1 |
| V_{CC} Trip Point 10% | V_{CCTP2} | 4.25 | 4.375 | 4.49 | V | 1 |
| V_{CC} Trip Point 15% | V_{CCTP3} | 4.0 | 4.125 | 4.24 | V | 1 |
| Output Capacitance | C_{OUT} | | | 10 | pF | |
| Internal Pull-Up Resistor | R_P | 3.75 | 5 | 6.25 | k Ω | |

AC ELECTRICAL CHARACTERISTICS (-40°C to +85°C; $V_{CC} = 5V \pm 10\%$)

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS | NOTES |
|-------------------------------------|-----------|-----|-----|-----|---------|-------|
| Reset Active Time | t_{RST} | 250 | 350 | 450 | ms | |
| V_{CC} Detect to \overline{RST} | t_{RPD} | | | 100 | ns | |
| V_{CC} Slew Rate (4.75V - 4.00V) | t_F | 300 | | | μs | |
| V_{CC} Slew Rate (4.00V - 4.75V) | t_R | 0 | | | ns | |
| V_{CC} Detect to RST | t_{RPU} | 250 | 350 | 450 | ms | |

NOTES:

- All voltages are referenced to ground.
- A 1 k Ω external resistor may be required for proper operation of the microprocessor reset control circuit.

ECONORESET SELECTION GUIDE

| | | VCC TRIP POINT | | | PUSHBUTTON DETECT | | |
|-------------|------------|----------------|-------|------|-------------------|-----|-----|
| | | MIN | TYP | MAX | MIN | TYP | MAX |
| 5V | DS1233-15 | 4.0 | 4.125 | 4.24 | 2.4 | - | 3.3 |
| | DS1233-10 | 4.25 | 4.375 | 4.49 | 2.4 | - | 3.3 |
| | DS1233-5 | 4.5 | 4.625 | 4.75 | 2.4 | - | 3.3 |
| | DS1233D-15 | 4.0 | 4.125 | 4.24 | N/A | | N/A |
| | DS1233D-10 | 4.25 | 4.375 | 4.49 | N/A | | N/A |
| | DS1233D-5 | 4.5 | 4.625 | 4.75 | N/A | | N/A |
| | DS1833-15 | 4.0 | 4.125 | 4.24 | N/A | | N/A |
| | DS1833-10 | 4.25 | 4.375 | 4.49 | N/A | | N/A |
| | DS1833-5 | 4.5 | 4.625 | 4.75 | N/A | | N/A |
| 3.3V | DS1233A-15 | 2.64 | 2.72 | 2.80 | 1.8 | - | 3.0 |
| | DS1233A-10 | 2.8 | 2.88 | 2.97 | 1.8 | - | 3.0 |