


# Current Transducer LA 55-TP

$$I_{PN} = 50 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



## Electrical data

$I_{PN}$	Primary nominal r.m.s. current	50	A					
$I_P$	Primary current, measuring range	0 .. $\pm 70$	A					
$R_M$	Measuring resistance @	$T_A = 70^\circ\text{C}$		$T_A = 85^\circ\text{C}$				
		$R_{Mmin}$	$R_{Mmax}$	$R_{Mmin}$	$R_{Mmax}$			
		with $\pm 12 \text{ V}$	@ $\pm 50 \text{ A}_{max}$	10	100	60	95	$\Omega$
			@ $\pm 70 \text{ A}_{max}$	10	50	60 <sup>1)</sup>	60 <sup>1)</sup>	$\Omega$
		with $\pm 15 \text{ V}$	@ $\pm 50 \text{ A}_{max}$	50	160	135	155	$\Omega$
	@ $\pm 70 \text{ A}_{max}$	50	90	135 <sup>2)</sup>	135 <sup>2)</sup>	$\Omega$		
$I_{SN}$	Secondary nominal r.m.s. current	50	mA					
$K_N$	Conversion ratio	1 : 1000						
$V_C$	Supply voltage ( $\pm 5 \%$ )	$\pm 12 \dots 15$	V					
$I_C$	Current consumption	10 (@ $\pm 15 \text{ V}$ ) + $I_S$	mA					

## Accuracy - Dynamic performance data

$X$	Accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$	@ $\pm 15 \text{ V} (\pm 5 \%)$	$\pm 0.65$	%
		@ $\pm 12 \dots 15 \text{ V} (\pm 5 \%)$	$\pm 0.90$	%
$e_L$	Linearity error		< 0.15	%
$I_O$	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$		Typ	Max
$I_{OM}$	Residual current <sup>3)</sup> @ $I_P = 0$ , after an overload of $3 \times I_{PN}$			$\pm 0.2$ mA
$I_{OT}$	Thermal drift of $I_O$	$0^\circ\text{C} \dots 70^\circ\text{C}$	$\pm 0.1$	$\pm 0.5$ mA
		$-25^\circ\text{C} \dots 85^\circ\text{C}$	$\pm 0.1$	$\pm 0.6$ mA
$t_{ra}$	Reaction time @ 10 % of $I_{Pmax}$		< 500	ns
$t_r$	Response time <sup>4)</sup> @ 90 % of $I_{Pmax}$		< 2.5	$\mu\text{s}$
$di/dt$	$di/dt$ accurately followed		> 200	A/ $\mu\text{s}$
$f$	Frequency bandwidth @ 30A (-3 dB)		DC .. 100	kHz

## General data

$T_A$	Ambient operating temperature	-25 .. +85	$^\circ\text{C}$
$T_S$	Ambient storage temperature	-40 .. +90	$^\circ\text{C}$
$R_S$	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	80 $\Omega$
		$T_A = 85^\circ\text{C}$	85 $\Omega$
$m$	Mass	24	g
	Standards	EN 50178 : 1997	

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Printed circuit board mounting
- Insulated plastic case recognized according to UL 94-V0.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

## Application Domain

- Industrial

Notes :  
<sup>1)</sup> Measuring range limited to  $\pm 60 \text{ A}_{max}$   
<sup>2)</sup> Measuring range limited to  $\pm 55 \text{ A}_{max}$   
<sup>3)</sup> Result of the coercive field of the magnetic circuit  
<sup>4)</sup> With a  $di/dt$  of  $100 \text{ A}/\mu\text{s}$ .

## Current Transducer LA 55-TP

### Isolation characteristics

$V_d$	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	2.5	kV
$V_b$	R.m.s. rated voltage	600	V
		Min	
dCp	Creepage distance	6.9	mm
dCl	Clearance distance	6.1	mm
CTI	Comparative Tracking Index (Group IIIa)	175	

### Application examples

According to EN 50178 and IEC 61010-1 standards and following conditions :

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
dCp, dCl	Rated isolation voltage	Nominal voltage
Single isolation	600 V	600 V
Reinforced isolation	300 V	300 V

### Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the following manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a built-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Dimensions LA 55-TP (in mm. 1 mm = 0.0394 inch)

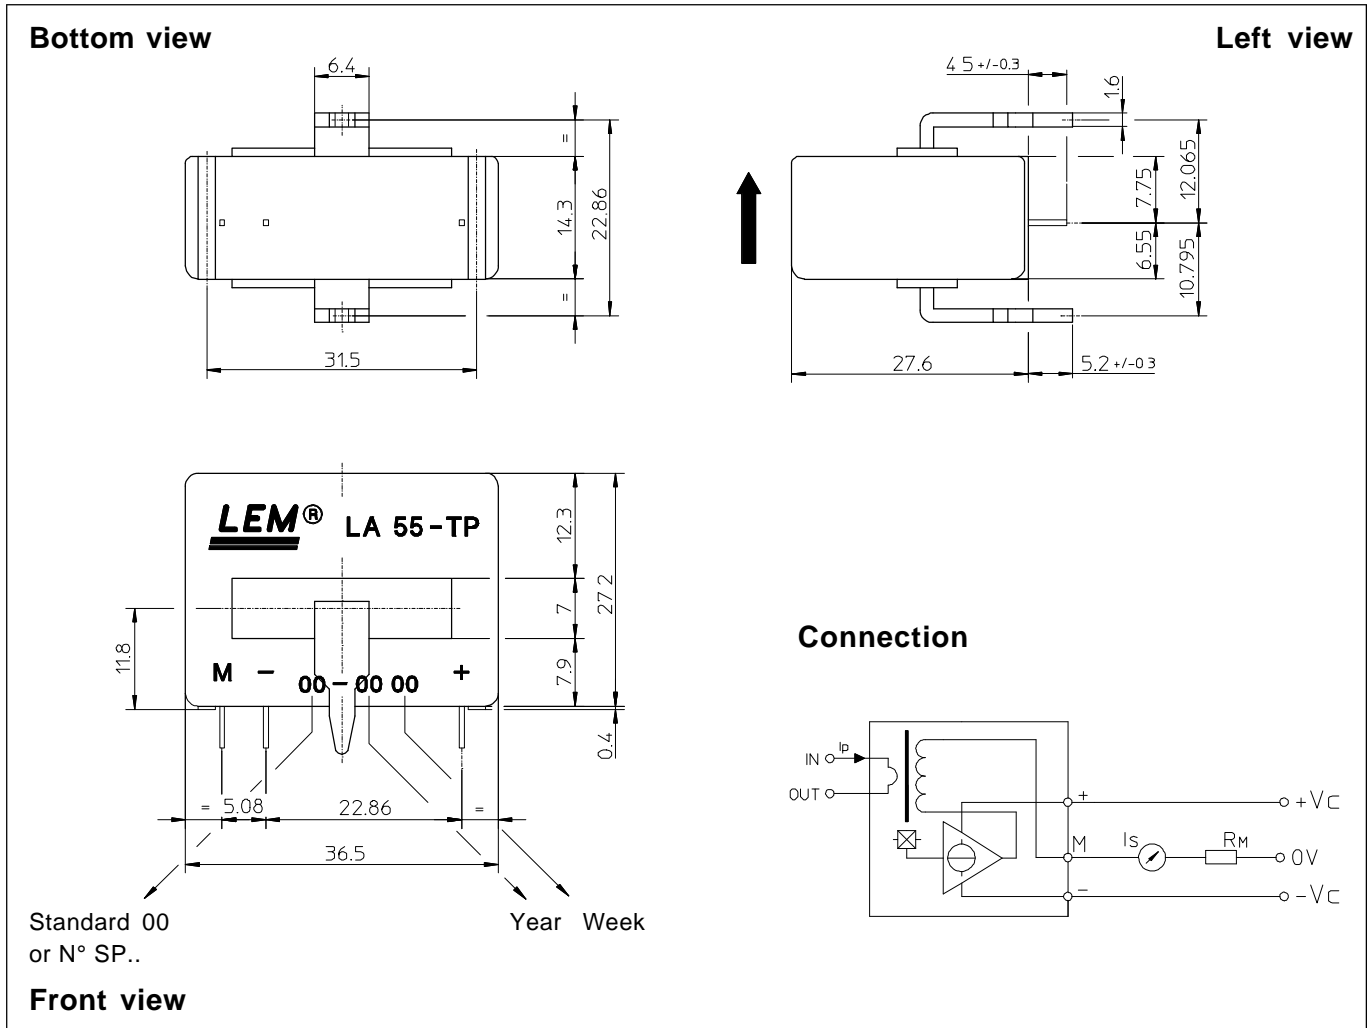

### Mechanical characteristics

- General tolerance ± 0.2 mm
- Fastening & connection of primary bus bar 6.4 x 1.6 mm
- Recommended PCB hole 3.8 mm
- Fastening & connection of secondary 3 pins 0.63 x 0.56 mm
- Recommended PCB hole 0.9 mm

### Remarks

- I<sub>S</sub> is positive when I<sub>p</sub> flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 90°C.
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.