

## COLOUR DEMODULATOR COMBINATION

The TDA2520 is an integrated synchronous demodulator combination for colour television receivers incorporating the following functions :

- 8, 8 MHz oscillator followed by a divider giving two 4, 4 MHz signals used as reference signals
- keyed burst phase detector for optimum noise behaviour
- a stage to obtain chrominance signal control (a. c. c.) and an a. c. c. reference level
- a colour killer and identification signal detector
- two synchronous demodulators for the (B-Y) and (R-Y) signals
- temperature compensated emitter follower outputs
- PAL switch
- PAL flip-flop
- integrated capacitors in the symmetrical demodulators reduce unwanted carrier-signals at the outputs.


QUICK REFERENCE DATA				
Supply voltage	$V_{12-16}$	typ.	12	V
Supply current	$I_{12}$	typ.	40	mA
Colour difference output signals peak-to-peak values				
	-(R-Y)	$V_{3-16(p-p)}$	>	2, 4 V
	-(G-Y)	$V_{2-16(p-p)}$	>	1, 35 V
	-(B-Y)	$V_{1-16(p-p)}$	>	3 V
Impedance of colour difference signal outputs		typ.	250	$\Omega$

### PACKAGE OUTLINES

TDA2520 : 16-lead DIL ; plastic (SOT-38).  
TDA2520Q : 16-lead QIL ; plastic (SOT-58).

**TDA2520  
TDA2520Q**

**BLOCK DIAGRAM**

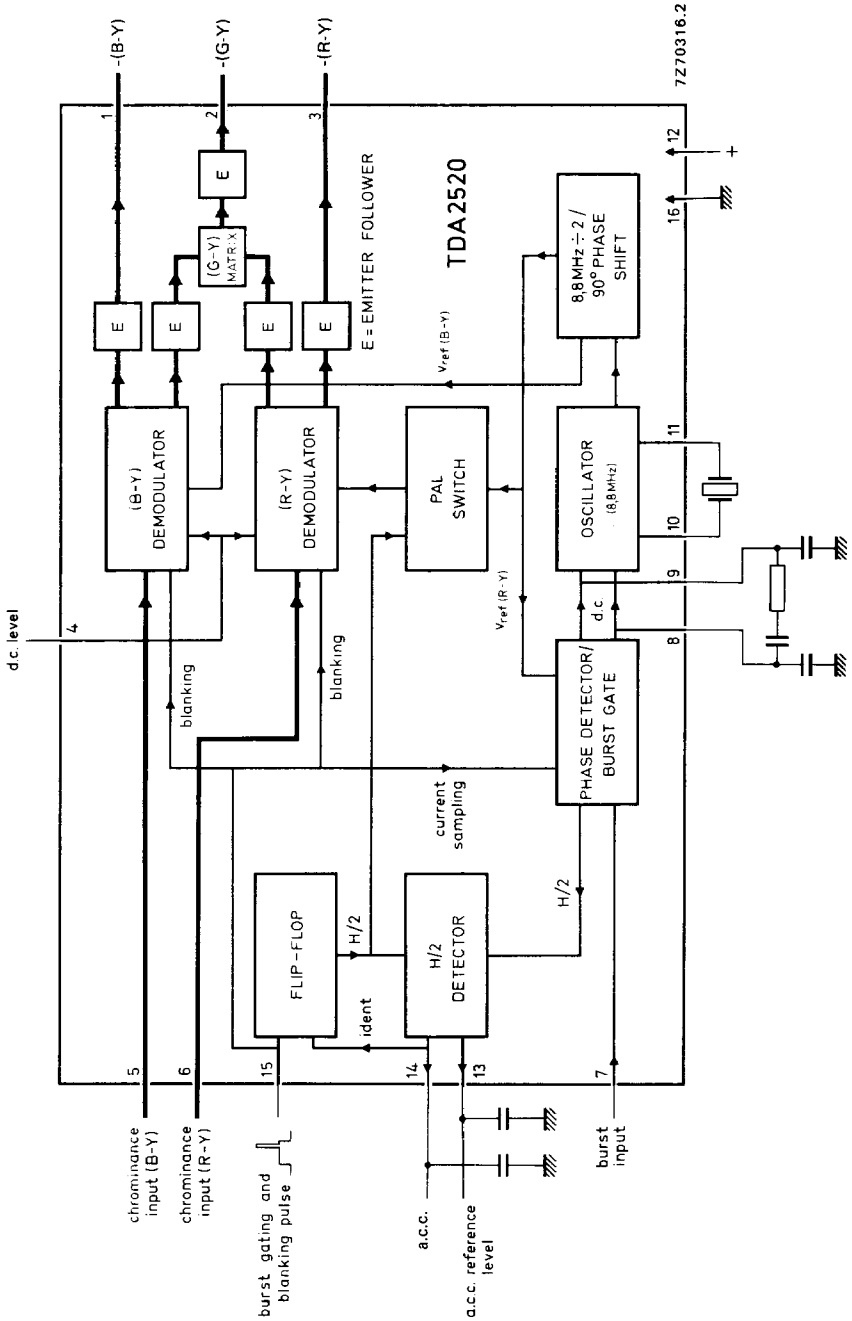

7Z70316.2

184

**RATINGS** Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltage

Supply voltage  $V_{12-16}$  max. 14 V

Power dissipation

Total power dissipation  $P_{tot}$  max. 600 mW

Temperatures

Storage temperature  $T_{stg}$  -20 to +125 °C

Operating ambient temperature  $T_{amb}$  -20 to +60 °C

**CHARACTERISTICS** at  $V_{12-16} = 12$  V;  $T_{amb} = 25$  °C

**Demodulator part**

Ratio of demodulated signals

B-Y/R-Y:  $\frac{V_{1-16}}{V_{3-16}}$  typ. 1,78

G-Y/R-Y:  $\frac{V_{2-16}}{V_{3-16}}$  typ. 0,85 1)

G-Y/R-Y:  $\frac{V_{2-16}}{V_{3-16}}$  typ. 0,17 2)

Colour difference output signals <sup>3)</sup>  
peak-to-peak values

-(R-Y)  $V_{3-16(p-p)}$  > 2,4 V  
-(G-Y)  $V_{2-16(p-p)}$  > 1,35 V  
-(B-Y)  $V_{1-16(p-p)}$  > 3 V

Impedance of colour difference  
signal outputs

$|Z_{3-16}|$  typ. 250 Ω  
 $|Z_{2-16}|$  typ. 250 Ω  
 $|Z_{1-16}|$  typ. 250 Ω

H/2 ripple at R-Y output (peak-to-peak value)

< 10 mV

Blanking and keying pulse

burst keying: active for  $V_{15-16}$  > 7,5 V  
inactive for  $V_{15-16}$  < 6,5 V

blanking: active for  $V_{15-16}$  > 2 V  
inactive for  $V_{15-16}$  < 1 V

1) The demodulators are driven by a chrominance signal of equal amplitude for the (R-Y) and the (B-Y) components. The phase of the (R-Y) chrominance signal equals the phase of the (R-Y) reference signal.

The same holds for the (B-Y) signals.

2) As under note 1, but the phase of the (R-Y) reference signal reversed.

3) The d. c. level of the colour difference outputs can be adjusted from 6 to 10 V at pin 4.

**CHARACTERISTICS** (continued)

Reference part

Colour burst (peak-to-peak value)	$V_{7-16(p-p)}$	typ.	0,5 V
Phase difference between reference and burst signals for $\pm 400$ Hz deviation of crystal frequency		<	$\pm 5^\circ$
Overall holding range with typical crystal	$\Delta f$	typ.	$\pm 500$ Hz
A.C.C. reference output voltage	$V_{13-16}$	typ.	7 V
A.C.C. voltage at 0,5 V peak-to-peak burst at correct phase with zero burst	$V_{14-16}$ $V_{14-16}$	typ. typ.	5,5 V 7,0 V
Oscillator input resistance	$R_{11-16}$	typ.	270 $\Omega$
Oscillator input capacitance	$C_{11-16}$	see note	
Oscillator output resistance	$R_{10-16}$	typ.	200 $\Omega$

Note : to be established.