

Ultra 1.24V Precision Adjustable Shunt Regulator

FEATURES

- Low Voltage Operation 1.24V
- Trimmed Bandgap to 0.5% / 1%
- Wide Operating Current 1mA to 100mA
- Extended Temperature Range 0°C to 105°C
- Adjustable Output Voltage V_{REF} to 18V
- Low Temperature Coefficient 50 ppm/°C
- Offered in TO-92, SOIC, SOT-23-3, SOT-23-5
- Improved Replacement in Performance for TLV431

APPLICATIONS

- 3.0V to 3.3V Switching Power Supplies
- Adjustable Supplies
- Error Amplifiers
- Single Supply Amplifier
- Monitors / VCR / TV
- Personal Computers


PRODUCT DESCRIPTION

The SPX432 is a 3-terminal Adjustable Shunt Voltage Regulator providing a highly accurate 1.24V bandgap reference with 0.5% tolerance. The SPX432 thermal stability, wide operating current (80mA) and temperature range (0°C to 105°C) makes it suitable for broad range of applications. **SPX432 tolerance of 0.5% is proven to be sufficient to overcome other errors in the system to virtually eliminate the need for trimming in the power supply manufactures assembly line and contribute a significant cost savings.**

The SPX432 is an ideal voltage reference in an isolated feedback circuit for 3.0V to 3.3V switching mode power supplies. SPX432 offers many advantages over TLV431, such as, wider output voltage up to 18V vs. 6V, output current of 80mA vs. 15mA, and a wider temperature range with tighter tolerance down to 0.5%.


PIN CONNECTIONS

8-Pin Surface Mount (S)




Top View

TO-92 (N)




Bottom View

SOT-23-3 (M)




Top View

SOT-23-5 (M5)



Top View

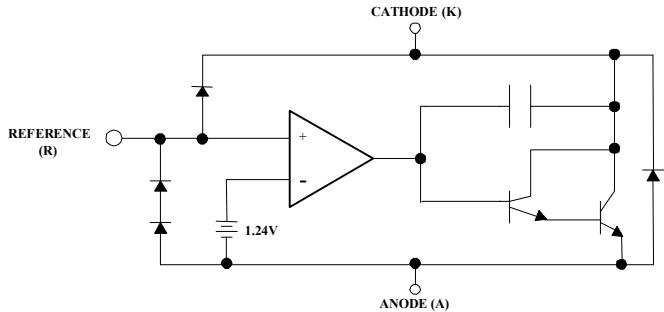

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Rating	Units
Cathode-Anode Reverse Breakdown	V _{DA}	18	V
Anode-Cathode Forward Current	I _{AK}	1	A
Operating Cathode Current	I _{KA}	80	mA
Reference Input Current	I _{REF}	1	mA
Continuous Power at 25°C	P _D		
TO-92		775	mW
8L SOIC		750	mW
SOT-23		200	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	- 65 to +150	°C
Lead Temperature (Soldering 10 sec.)	TL	300	°C

Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED CONDITIONS

Parameter	Symbol	Rating	Unit
Cathode Voltage	V _{KA}	V _{REF} to 18	V
Cathode Current	I _K	10	mA


TYPICAL THERMAL RESISTANCES

Package	θ _{JA}	θ _{JC}	Typical Derating
TO-92	160 °C/W	80 °C/W	6.3 mW/°C
SOIC	175 °C/W	45 °C/W	5.7 mW/°C
SOT-23	575°C/W	150°C/W	1.7mW/°C

ELECTRICAL CHARACTERISTICS are guaranteed over the full junction temperature range (0°C to 105°C). Ambient temperature must be derated based upon power dissipation and package thermal characteristics. Unless otherwise specified, test conditions are: $V_{KA} = V_{REF}$ and $I_K = 10\text{mA}$.

Parameter	Symbol	Test Circuit	Test Condition	SPX432A			SPX432			Unit
				Min	Typ	Max	Min	Typ	Max	
Output Voltage	V_{REF}	1 1	$I_K = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_K = V_{REF}$	1.2338	1.240	1.2462	1.2276	1.240	1.2524	V
Line Regulation	V_{REF}	1	$V_{KA} = 1.25\text{V}$ to 15V		19	37		19	37	mV
Load Regulation	V_{REF}	1	$I_K = 1$ to 80mA		3	6		3	6	mV
Temperature Deviation	V_{REF}	1	$0 < T_J < 105^\circ\text{C}$		2	6		2	6	mV
Reference Input Current	I_{REF}	2			3	6		3	6	μA
Reference Input Current Temperature Coefficient	I_{REF}	2	$0 < T_J < 105^\circ\text{C}$		0.3	0.6		0.3	0.6	μA
Minimum Cathode Current for Regulation	$I_K(\text{MIN})$	1			0.6	1		0.6	1	mA
Off State Leakage	$I_K(\text{MIN})$	3	$V_{REF} = 0\text{V}$, $V_{KA} = 18\text{V}$		0.04	500		0.04	500	nA

Calculating Average Temperature Coefficient (TC)

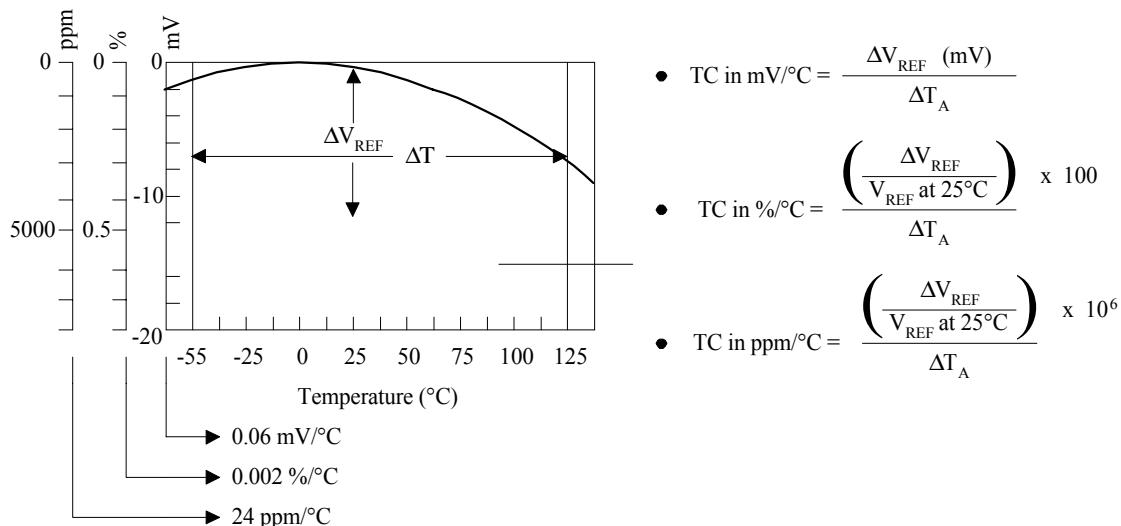

TEST CIRCUITS

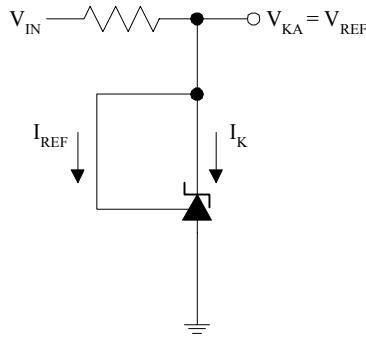


Figure 1a. Test Circuit 1




Figure 1b. Test Circuit 2


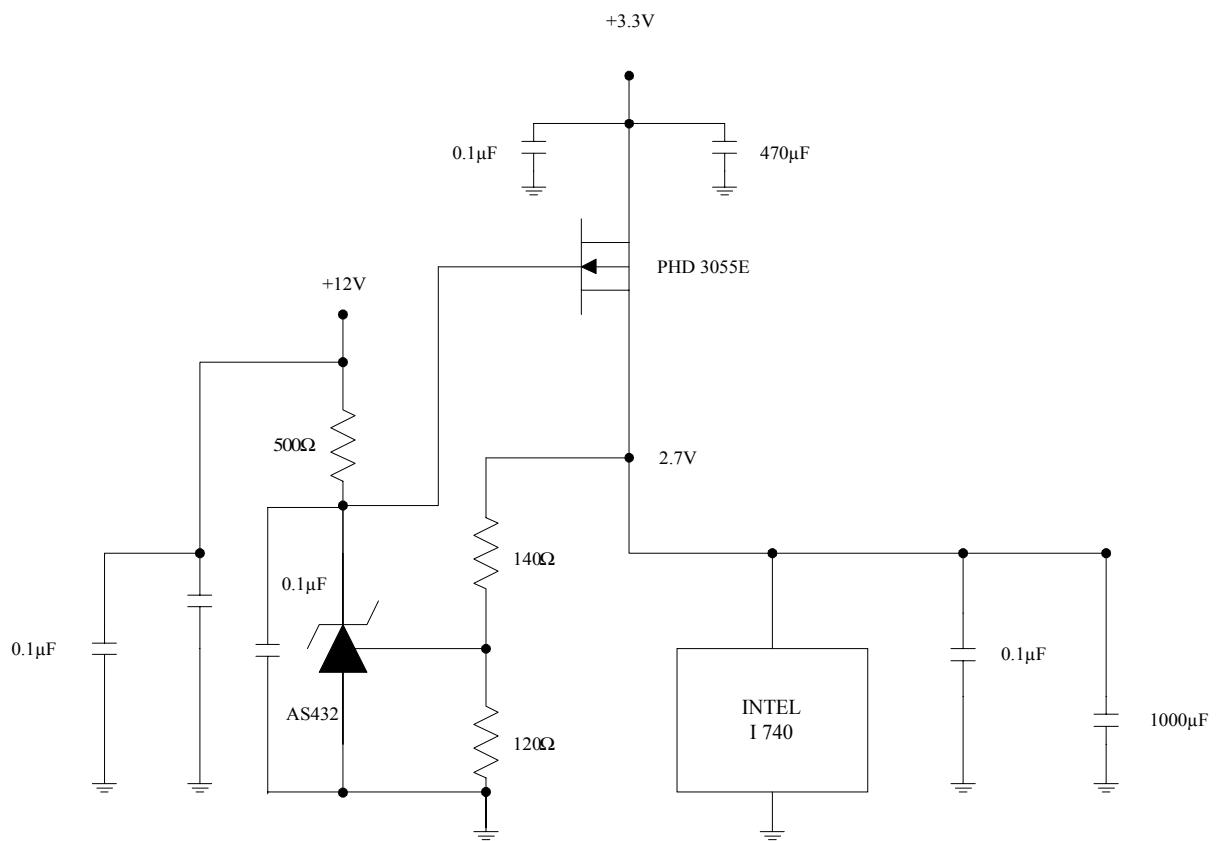
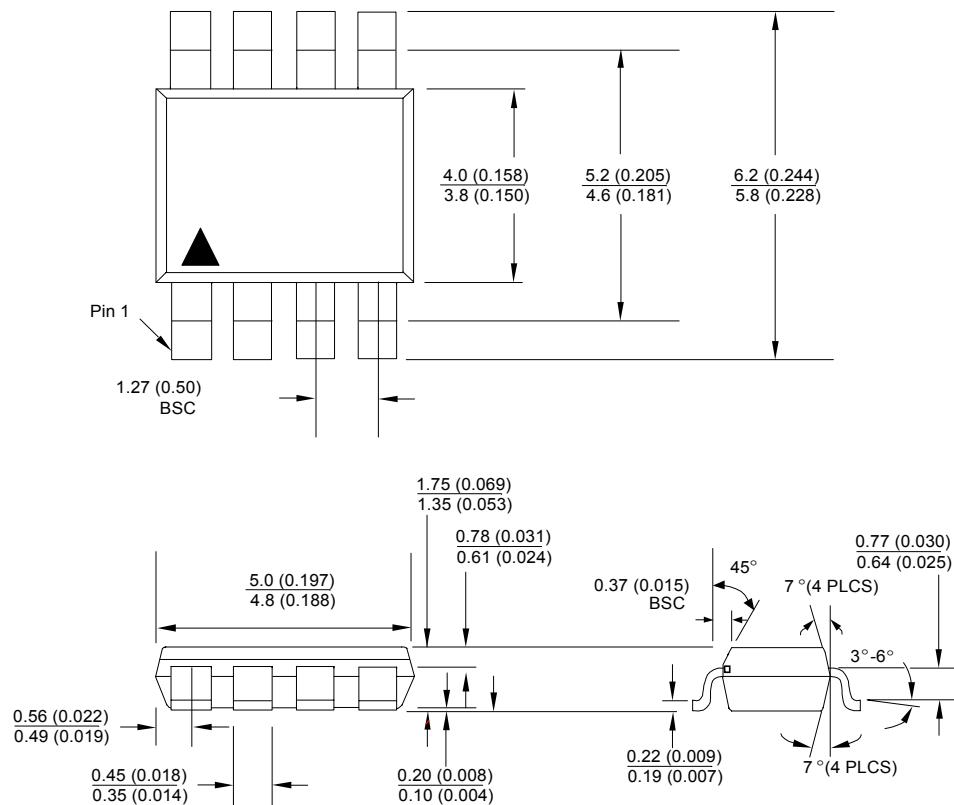
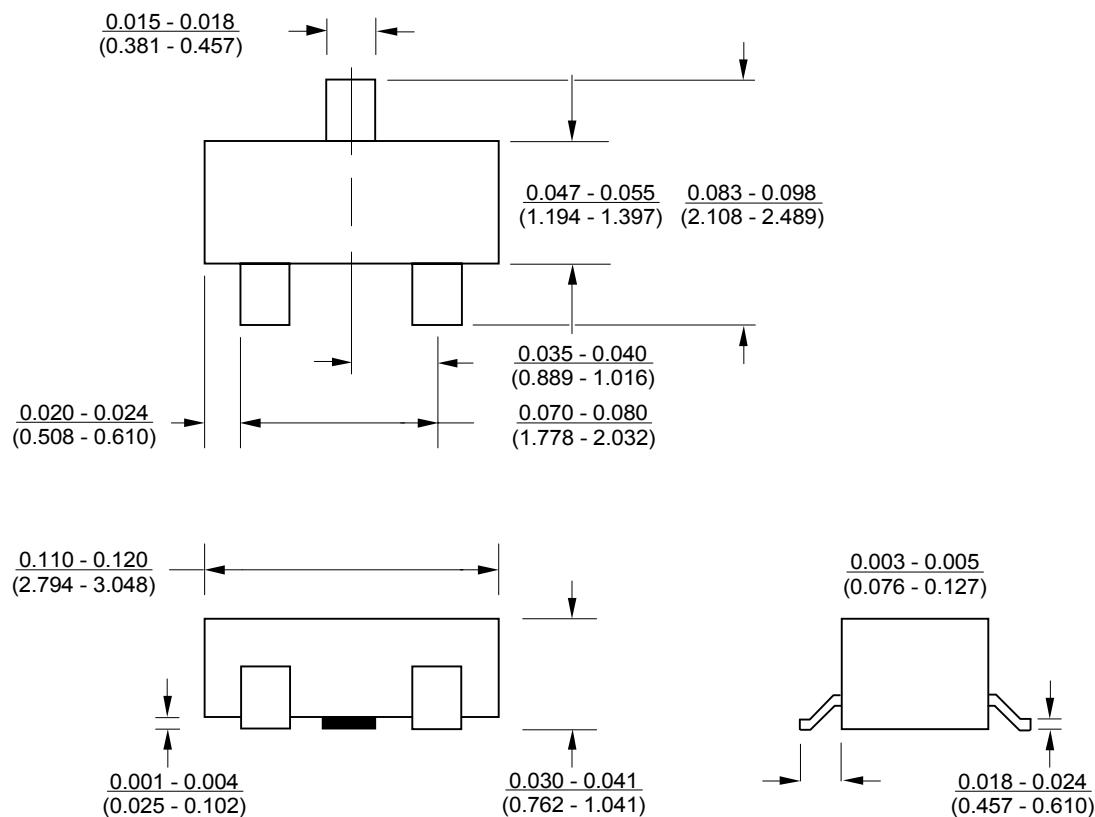


Figure 1c. Test Circuit 3


TYPICAL APPLICATIONS

*If the output voltage has noise, then please add a $0.1\mu F$ in between drain and gate of power MOSFET to reduce the noise.




**PACKAGE DRAWING
SOIC-8 (S)**

**PACKAGE DRAWING
SOT-23-3L (M)**

PACKAGE DRAWING
TO-92 (N)

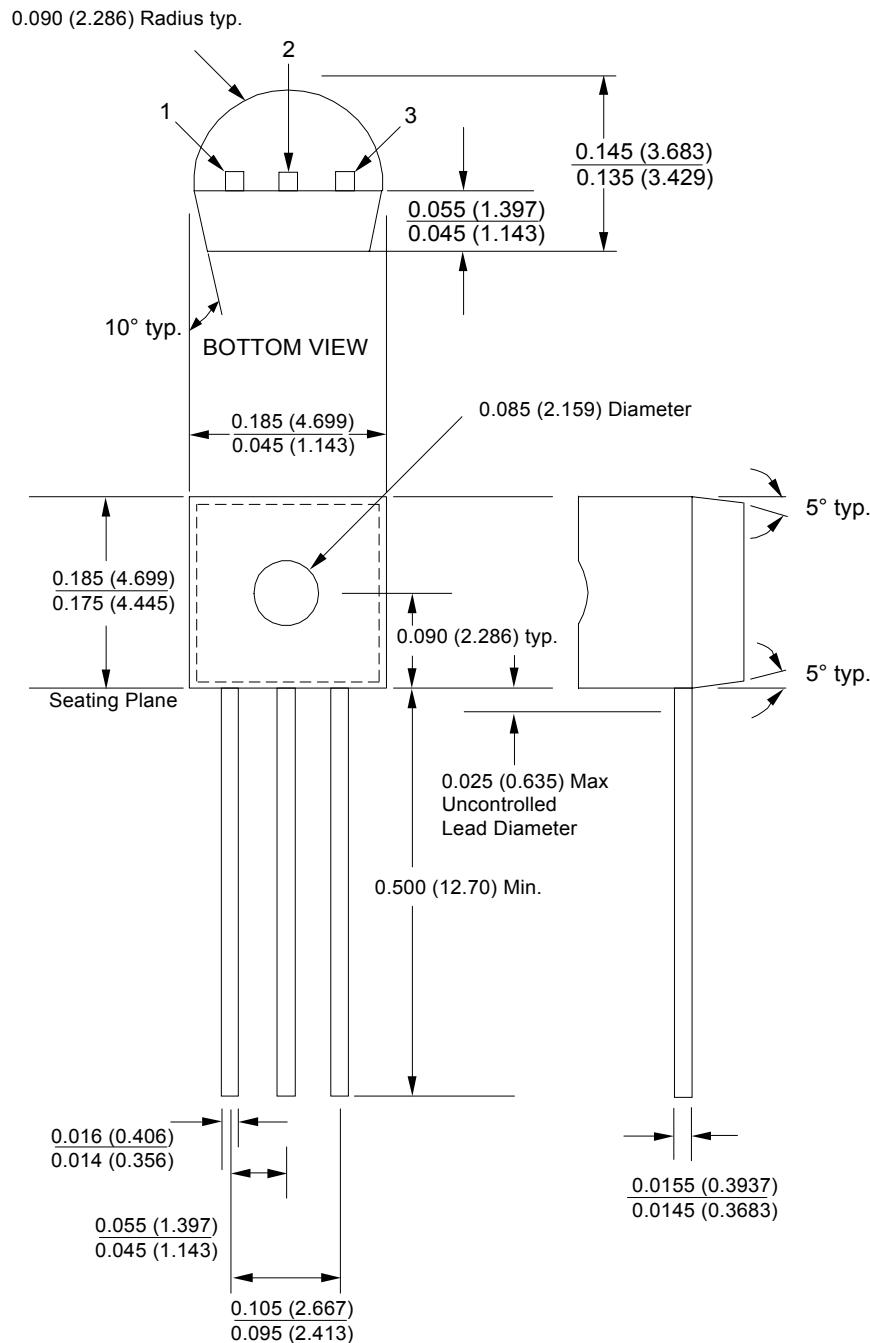

**PACKAGE DRAWING
SOT-23-5L (M5)**

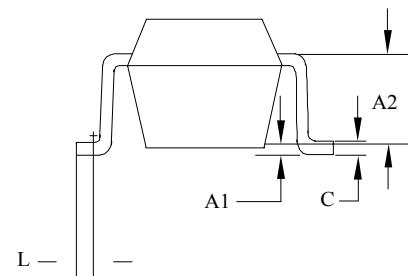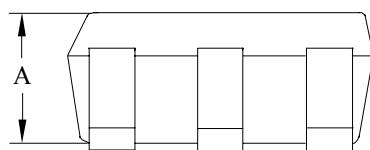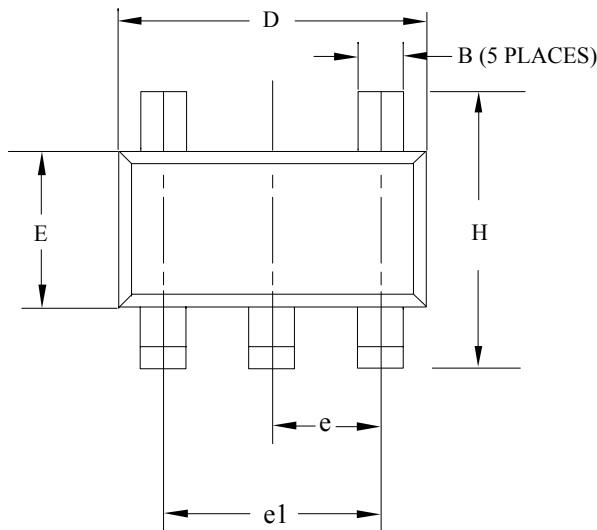

SYMBOL	MILLIMETERS		INCHES	
	MIN.	MAX	MIN.	MAX.
A	0.90	1.30	.035	.051
A1	0	0.10	0	.004
A2	0.80 REF		.0315 REF	
B	0.30	0.50	.012	.019
C	0.10	0.35	.004	.0137
D	2.70	3.10	.106	.122
E	1.40	1.80	.055	.071
e	0.95 BSC.		.037 BSC.	
e1	1.70	2.10	.066	.082
H	2.50	3.00	.098	.118
L	MIN 0.2		MIN .0078	

NOTE:

1. REFER TO APPLICABLE
2. CONTROLLING DIMENTION : MILLIMETER
3. PACKAGE SURFACE FINISHING TO BE SMOOTH FINISH.

ORDERING INFORMATION

Ordering No.	Precision	Output Accuracy	Packages
SPX432M	1%	1.24V	3 Lead SOT-22-3
SPX432AM	0.5%	1.24V	3 Lead SOT-23-3
SPX432M5	1%	1.24V	5 Lead SOT-22-5
SPX432AM5	0.5%	1.24V	5 Lead SOT-23-5
SPX432S	1%	1.24V	8 Lead SOIC
SPX432AS	0.5%	1.24V	8 Lead SOIC
SPX432N	1%	1.24V	3 Lead TO-92
SPX432AN	0.5%	1.24V	3 Lead TO-92

MARKING INFORMATION

[For SOT-23 (3 and 5 Pin) and SOT-89 only]

Device	Marking
SPX432A	4321
SPX432	4322



SIGNAL PROCESSING EXCELLENCE

Sipex Corporation

Headquarters and Main Offices:

22 Linnell Circle
Billerica, MA 01821
TEL: (978) 667-8700
FAX: (978) 670-9001
e-mail: sales@sipex.com

233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 935-7600
FAX: (408) 934-7500

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.