


**LA7016****VCR Electronic Switch****Features**

- Wide input dynamic range.
- Low distortion.
- Good frequency characteristic.

Package Dimensions

unit:mm

3016B-SIP8

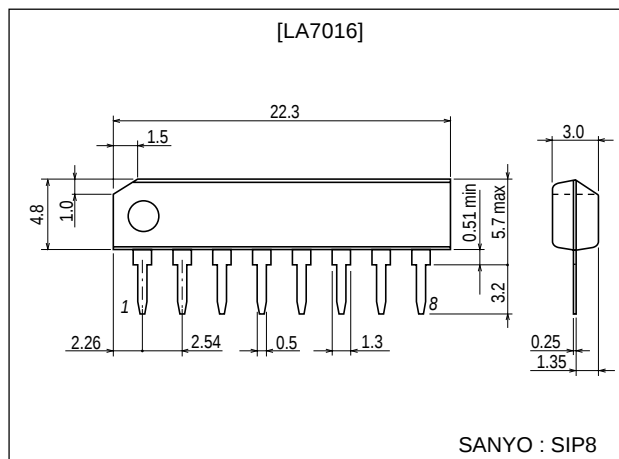**Specifications****Maximum Ratings** at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V_{CC} max		15	V
Allowable power dissipation	P_d max	$T_a \leq 65^\circ\text{C}$	300	mW
Operating temperature	T_{opr}		-20 to +65	$^\circ\text{C}$
Storage temperature	T_{stg}		-40 to +125	$^\circ\text{C}$

Operating Characteristics at $T_a = 25^\circ\text{C}$, $V_{CC}=12\text{V}$

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Circuit current	I_D			9.3	12.5	mA
Total harmonic distortion	THD	* $R_g=600\Omega$, 4.5Vp-p, $f=1\text{kHz}$, $R_L=\infty$		0.007	0.1	%
Noise	en	* $R_g=600\Omega$, $f=20\text{Hz}$ to 20kHz , $R_L=\infty$		-93	-80	dBs
Crosstalk	I_{S1}	*input A : $R_g=50\Omega$, $f=3.58\text{MHz}$ 2Vp-p, Input B : $R_g=1\text{k}\Omega$	50	68		dB
Pedestal	ΔV_{ped}	$V_3=2.2\text{V}$ to 3.0V	-100	0	+100	mV
Second harmonic		$R_g=50\Omega$, $f=1\text{MHz}$, 4.0Vp-p, $R_L=\infty$	46	55		dB
Third harmonic		$R_g=50\Omega$, $f=1\text{MHz}$, 4.0Vp-p, $R_L=\infty$	46	52		dB
Control, threshold voltage	V_{3s}		2.2	2.6	3.0	V

Note) * : Test for input 1 and input2.

For input 1 test, V_{cont} (pin 3 voltage) is 2.0V.For input 2 test, V_{cont} is 3.0V.

Continued on next page.

■ Any and all SANYO products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your SANYO representative nearest you before using any SANYO products described or contained herein in such applications.

■ SANYO assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO products described or contained herein.

SANYO Electric Co.,Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN


42000TN (KT)/N308TA/8182KI No.1052-1/4

LA7016


Continued from preceding page.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Pin voltage (pin 4)	V_4			6.9	6.9	V
Pin voltage (pin 7)	V_7	$V_3=2.2V$		7.6		V
Pin voltage (pin 7)	V_7	$V_3=3.0V$		7.6		V
Pin voltage (pin 2)	V_2	$V_3=3.0V$		7.6		V
Pin voltage (pin 2)	V_2	$V_3=2.2V$		7.6		V

Equivalent Circuit Block Diagram

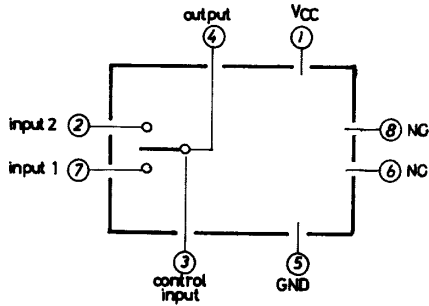

Test Circuit








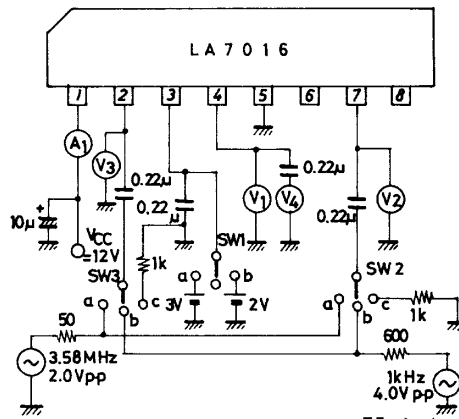


Unit (resistance:Ω, capacitance:F)

Test Conditions

Item	Symbol	SW mode			Test point
		SW1	SW2	SW3	
Circuit current	I_D	c	c	c	A_1
Distortion (1)	THD	b	b	c	V_4
Distortion (2)	THD	a	c	b	V_4
Noise (1)	e_n	b	c	c	V_4
Noise (2)	e_n	a	c	c	V_4
Crosstalk (1)	I_{S1}	b	c	a	V_4
Crosstalk (2)	I_{S2}	a	a	c	V_4
Pedestal	ΔV_{PED}	a-b	c	c	V_1
Pin voltage (pin 4)		b	c	c	V_1
Pin voltage (pin 7)		b	c	c	V_2
Pin voltage (pin 7)		a	c	c	V_2
Pin voltage (pin 2)		a	c	c	V_3
Pin voltage (pin 2)		b	c	c	V_3

Main Characteristics

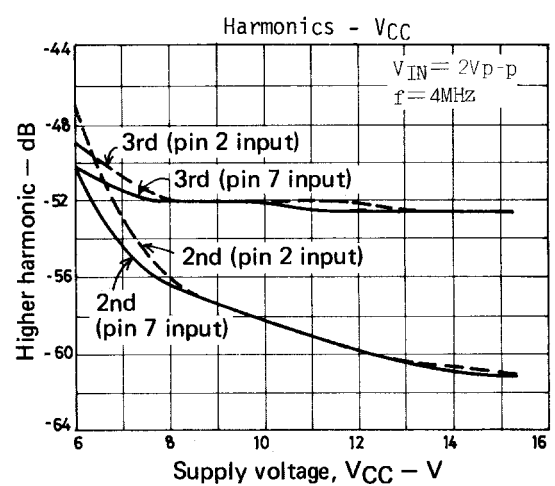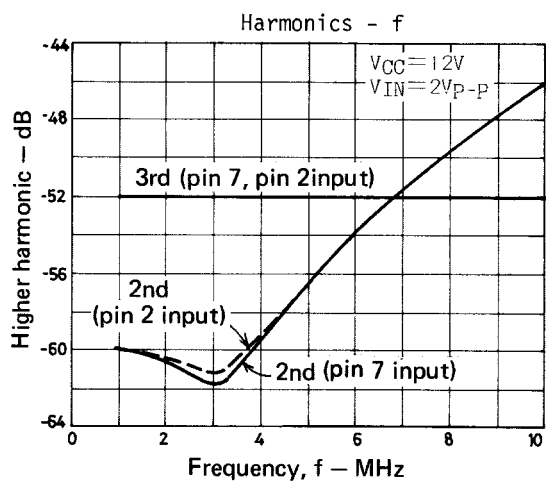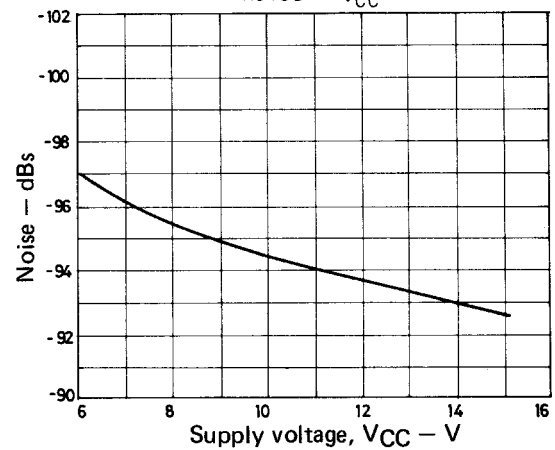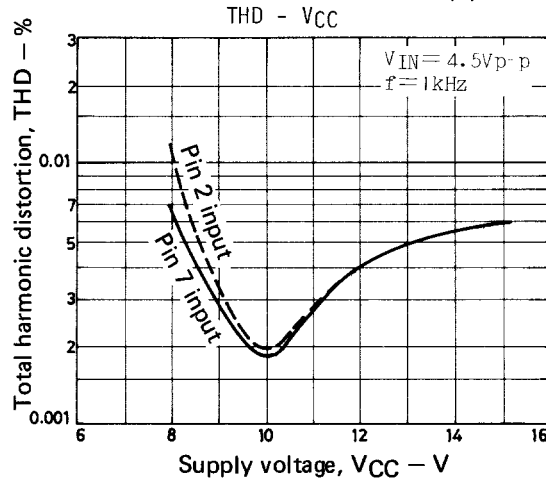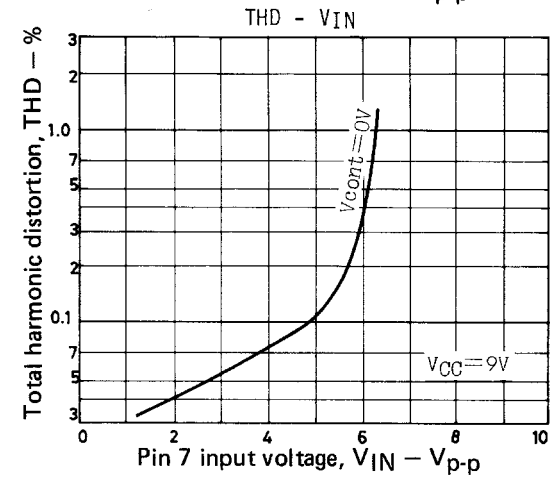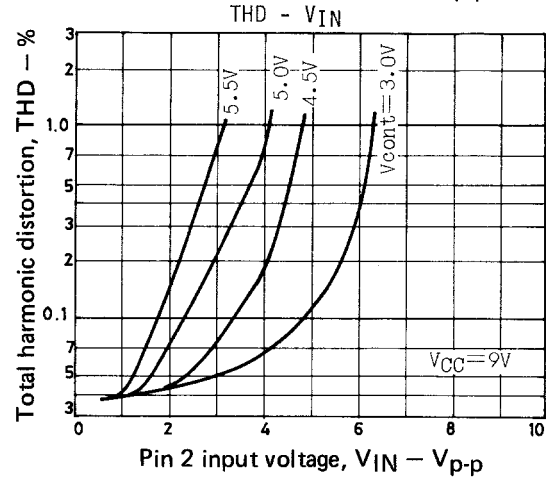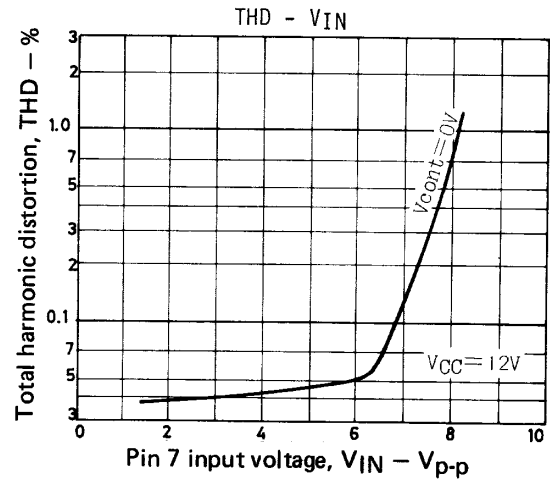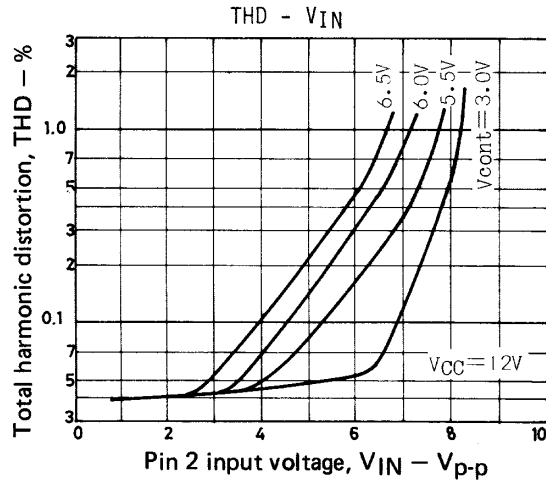

- Specifications of any and all SANYO products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- SANYO Electric Co., Ltd. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO products(including technical data,services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of SANYO Electric Co., Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This catalog provides information as of April, 2000. Specifications and information herein are subject to change without notice.