

POWER SCHOTTKY RECTIFIER

MAIN PRODUCT CHARACTERISTICS

$I_{F(AV)}$	2 A
V_{RRM}	150 V
T_j (max)	175°C
V_F (max)	0.67 V

FEATURES AND BENEFITS

- NEGLIGIBLE SWITCHING LOSSES
- LOW FORWARD VOLTAGE DROP FOR HIGHER EFFICIENCY AND EXTENDED BATTERY LIFE
- LOW THERMAL RESISTANCE
- AVALANCHE CAPABILITY SPECIFIED

DESCRIPTION


150V Power Schottky rectifier are suited for switch Mode Power Supplies on up to 24V rails and high frequency converters.

Packaged in SMA or Axial, this device is intended for use in consumer & computer applications like TV, STB, PC and DVD where low drop forward voltage is required to reduce power dissipation.

ABSOLUTE RATINGS (limiting values)

Symbol	Parameter			Value	Unit
V_{RRM}	Repetitive peak reverse voltage			150	V
$I_{F(RMS)}$	RMS forward current			15	A
$I_{F(AV)}$	Average forward current	$T_L = 145^\circ\text{C}$	$\delta = 0.5$	SMA	A
		$T_L = 130^\circ\text{C}$	$\delta = 0.5$	DO-15	
I_{FSM}	Surge non repetitive forward current	Half wave, single phase, 50Hz	SMA	75	A
			DO-15	150	
P_{ARM}	Repetitive peak avalanche power	$t_p = 1\mu\text{s}$ $T_j = 25^\circ\text{C}$		2400	W
T_{stg}	Storage temperature range			- 65 to + 150	°C
T_j	Maximum junction temperature *			175	°C
dV/dt	Critical rate of rise of reverse voltage (rated V_R , $T_j = 25^\circ\text{C}$)			10000	V/ μs

* : $\frac{dP_{tot}}{dT_j} < \frac{1}{R_{th}(j - a)}$ thermal runaway condition for a diode on its own heatsink

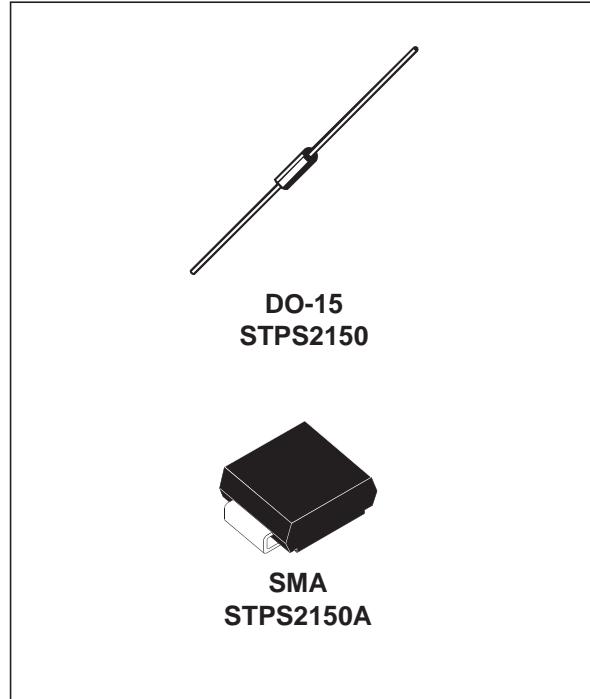

STPS2150/A

THERMAL RESISTANCES

Symbol	Parameter			Value	Unit
$R_{th(j-l)}$	Junction to leads	Lead length = 10 mm	DO-15	30	$^{\circ}\text{C/W}$
		SMA		20	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Tests conditions	Min.	Typ.	Max.	Unit
I_R *	Reverse leakage current	$T_j = 25^{\circ}\text{C}$	$V_R = 150\text{V}$	0.5	1.5	μA
		$T_j = 125^{\circ}\text{C}$		0.5	1.5	mA
V_F *	Forward voltage drop	$T_j = 25^{\circ}\text{C}$	$I_F = 2\text{ A}$	0.78	0.82	V
		$T_j = 125^{\circ}\text{C}$		0.62	0.67	
		$T_j = 25^{\circ}\text{C}$	$I_F = 4\text{ A}$	0.86	0.89	
		$T_j = 125^{\circ}\text{C}$		0.70	0.75	

Pulse test : * $t_p = 380 \mu\text{s}$, $\delta < 2\%$

To evaluate the maximum conduction losses use the following equation:

$$P = 0.59 \times I_{F(\text{AV})} + 0.04 \times I_{F(\text{RMS})}^2$$

Fig. 1: Average forward power dissipation versus average forward current.

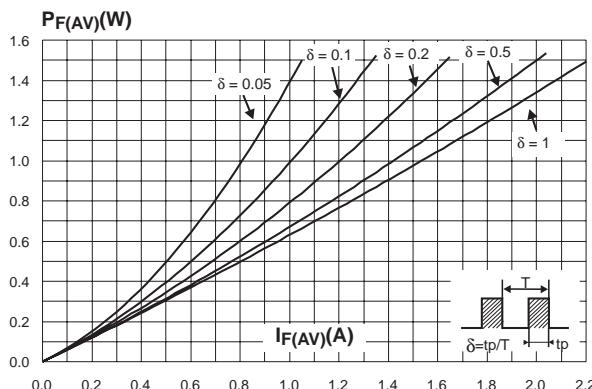


Fig. 3: Normalized avalanche power derating versus pulse duration.

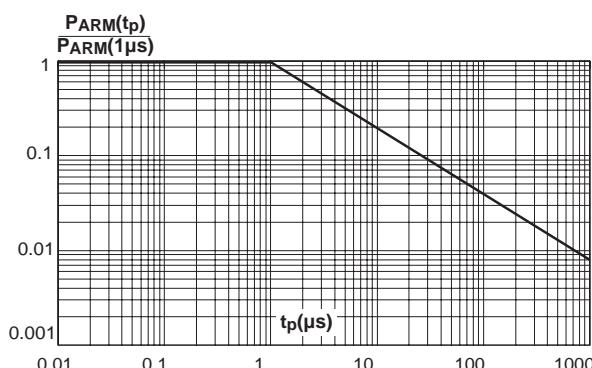


Fig. 2: Average forward current versus ambient temperature ($\delta = 0.5$).

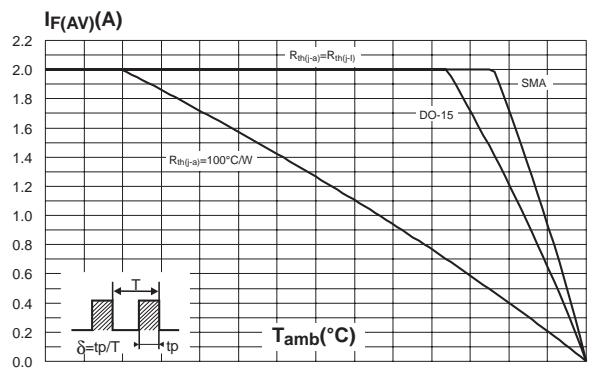


Fig. 4: Normalized avalanche power derating versus junction temperature.

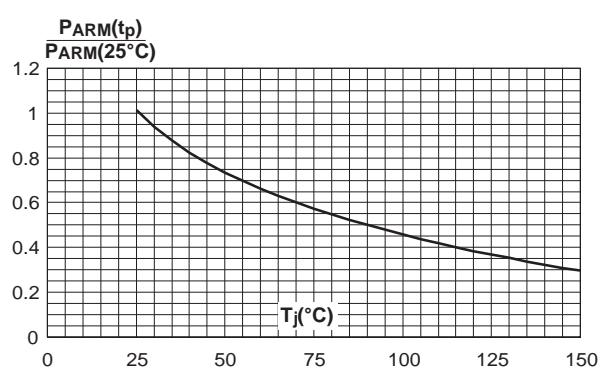


Fig. 5-1: Non repetitive surge peak forward current versus overload duration (maximum values) (DO-15).

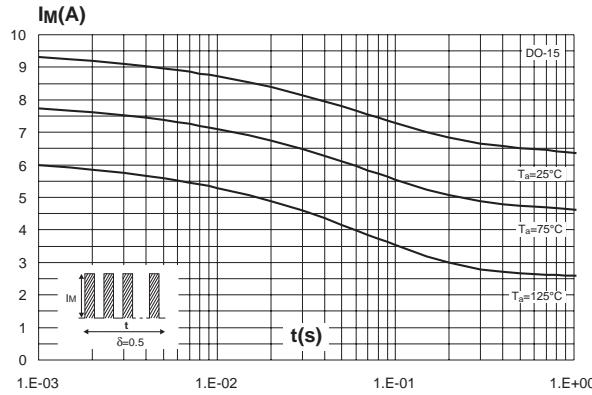


Fig. 6-1: Relative variation of thermal impedance junction to ambient versus pulse duration (DO-15).

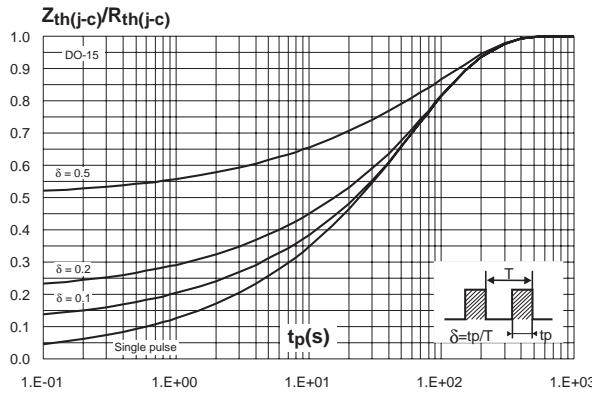


Fig. 7: Reverse leakage current versus reverse voltage applied (typical values).

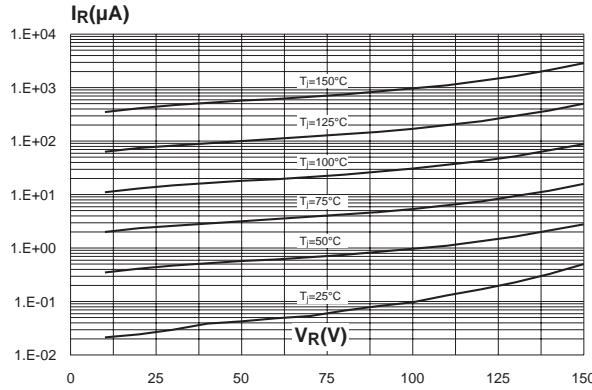


Fig. 5-2: Non repetitive surge peak forward current versus overload duration (maximum values) (SMA).

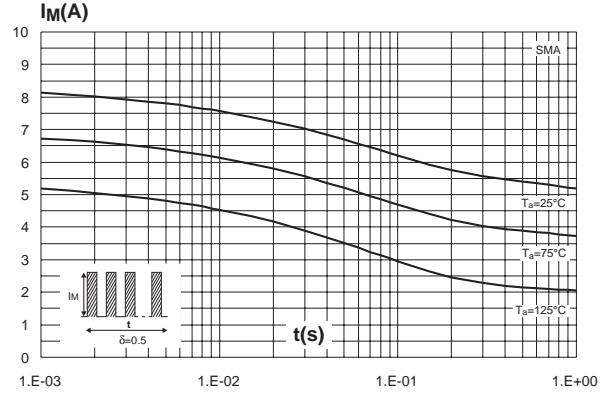


Fig. 6-2: Relative variation of thermal impedance junction to ambient versus pulse duration (SMA).


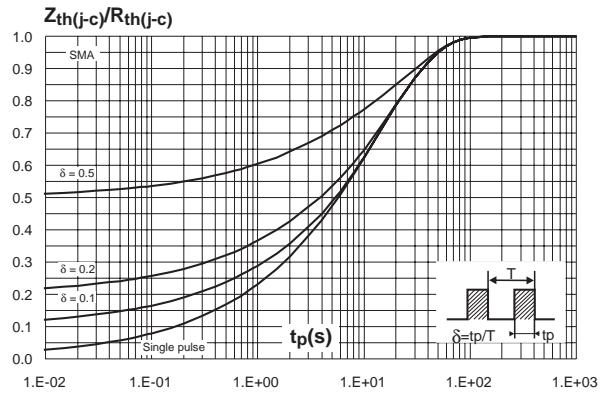


Fig. 8: Junction capacitance versus reverse voltage applied (typical values).

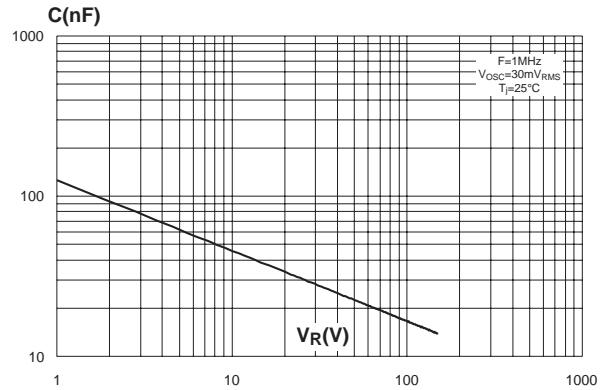

STPS2150/A

Fig. 9-1: Forward voltage drop versus forward current (low level).

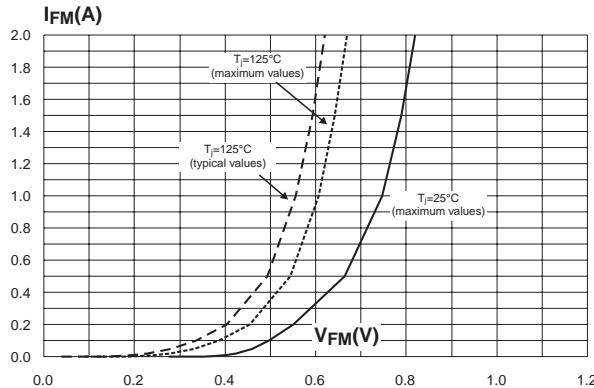


Fig. 9-2: Forward voltage drop versus forward current (high level).

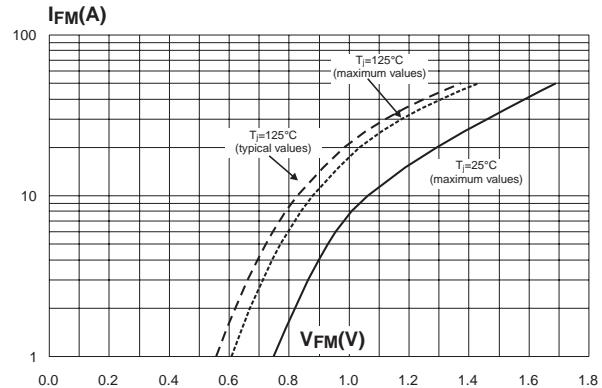


Fig. 10: Thermal resistance junction to ambient versus copper surface under each lead (Epoxy printed circuit board FR4, Cu: 35 μ m) (SMA).



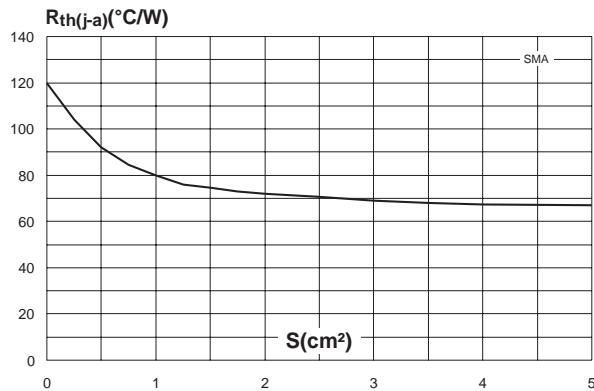


Fig. 11: Thermal resistance versus lead length (DO-15).

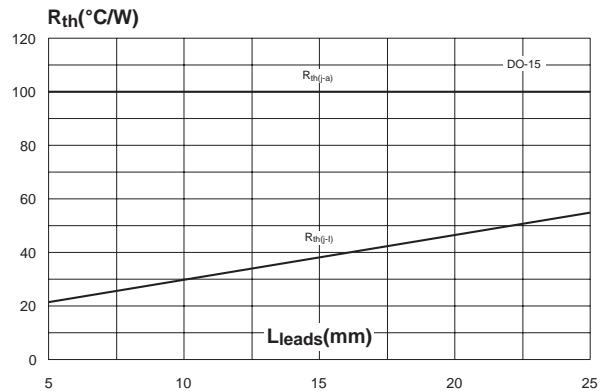


PACKAGE MECHANICAL DATA DO-15 plastic

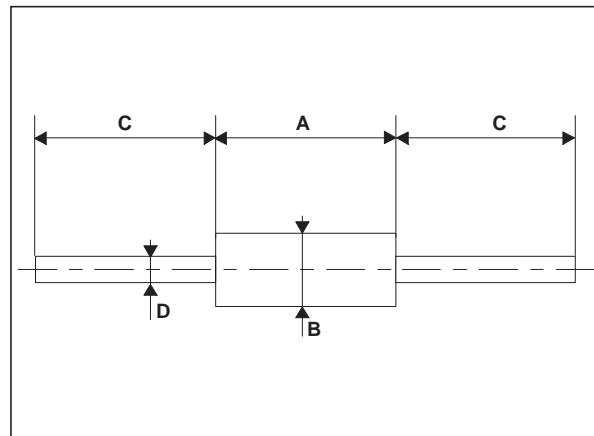


REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	6.05	6.75	0.238	0.266
B	2.95	3.53	0.116	0.139
C	26	31	1.024	1.220
D	0.71	0.88	0.028	0.035

PACKAGE MECHANICAL DATA
SMA (JEDEC DO-214AC)

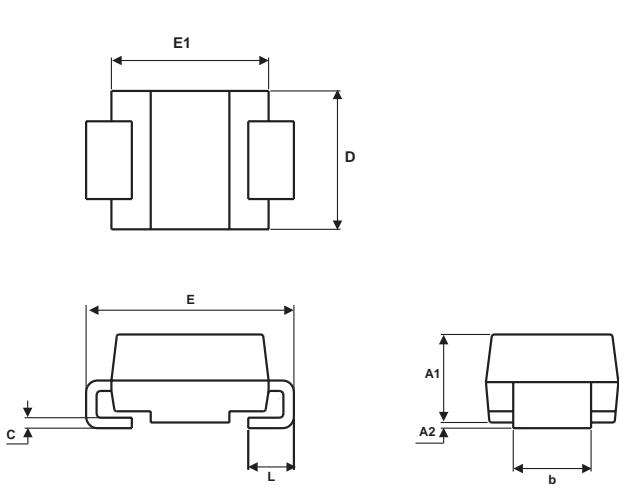

REF.	DIMENSIONS			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A1	1.90	2.70	0.075	0.106
A2	0.05	0.20	0.002	0.008
b	1.25	1.65	0.049	0.065
c	0.15	0.41	0.006	0.016
E	4.80	5.60	0.189	0.220
E1	3.95	4.60	0.156	0.181
D	2.25	2.95	0.089	0.116
L	0.75	1.60	0.030	0.063

FOOT PRINT DIMENSIONS (in millimeters)

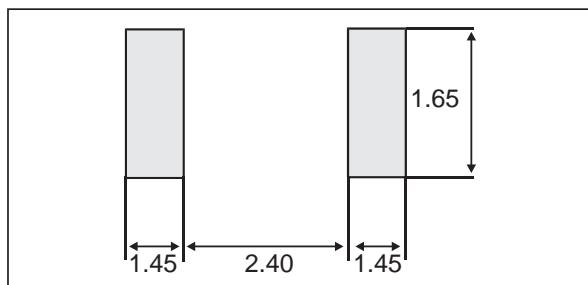

Ordering type	Marking	Package	Weight	Base qty	Delivery mode
STPS2150	STPS2150	DO-15	0.4 g	2000	Ammopack
STPS2150RL	STPS2150	DO-15	0.4 g	5000	Tape & Reel
STPS2150A	2150	SMA	0.068 g	5000	Tape & Reel

- Epoxy meets UL94,V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2003 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore
Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>