

4035B

4-BIT UNIVERSAL SHIFT REGISTER

DESCRIPTION — The 4035B is a fully synchronous edge-triggered 4-Bit Shift Register with a Clock Input (CP), four synchronous Parallel Data Inputs (P_0 – P_3), two synchronous Serial Data Inputs (J, \bar{K}), a synchronous Parallel Enable Input (PE), Buffered Parallel Outputs from all 4-bit positions (Q_0 – Q_3), a True/Complement Input (T/\bar{C}) and an overriding asynchronous Master Reset Input (MR).

Operation is synchronous (except for Master Reset) and is edge-triggered on the LOW-to-HIGH transition of the Clock Input (CP). When the Parallel Enable Input (PE) is HIGH, data is loaded into the register from Parallel Inputs (P_0 – P_3) on the LOW-to-HIGH transition of the Clock Input (CP). When the Parallel Enable Input (PE) is LOW, data is shifted into the first register position from the Serial Data Inputs (J, \bar{K}) and all the data in the register is shifted one position to the right on the LOW-to-HIGH transition of the Clock Input (CP). D-type entry is obtained by tying the two Serial Data Inputs (J, \bar{K}) together.

The Outputs (Q_0 – Q_3) are either inverting or non-inverting, depending on the True/Complement Input (T/\bar{C}). With the T/\bar{C} Input HIGH, the Outputs (Q_0 – Q_3) are non-inverting (Active HIGH). With the T/\bar{C} Input LOW, the Outputs (Q_0 – Q_3) are inverting (Active LOW).


A HIGH on the Master Reset Input (MR) resets all four bit positions (Q_0 – Q_3 = LOW if T/\bar{C} = HIGH, Q_0 – Q_3 = HIGH if T/\bar{C} = LOW) independent of all other input conditions.

- TYPICAL SHIFT FREQUENCY OF 17 MHz AT V_{DD} = 10 V
- J, \bar{K} INPUTS TO THE FIRST STAGE
- T/\bar{C} INPUT FOR TRUE OR COMPLEMENTARY OUTPUTS
- SYNCHRONOUS PARALLEL ENABLE
- CLOCK EDGE-TRIGGERED ON LOW-TO-HIGH TRANSITION
- ASYNCHRONOUS MASTER RESET

PIN NAMES


PE	Parallel Enable Input
P_0 – P_3	Parallel Data Inputs
J	First Stage J Input (Active HIGH)
\bar{K}	First Stage K Input (Active LOW)
CP	Clock Input (L→H Edge-Triggered)
T/\bar{C}	True/Complement Input
MR	Master Reset Input
Q_0 – Q_3	Buffered Parallel Outputs

LOGIC SYMBOL




V_{DD} = Pin 16
 V_{SS} = Pin 8

CONNECTION DIAGRAM DIP (TOP VIEW)



NOTE:
 The Flatpak version has the same pinouts (Connection Diagram) as the Dual In-line Package.

LOGIC DIAGRAM

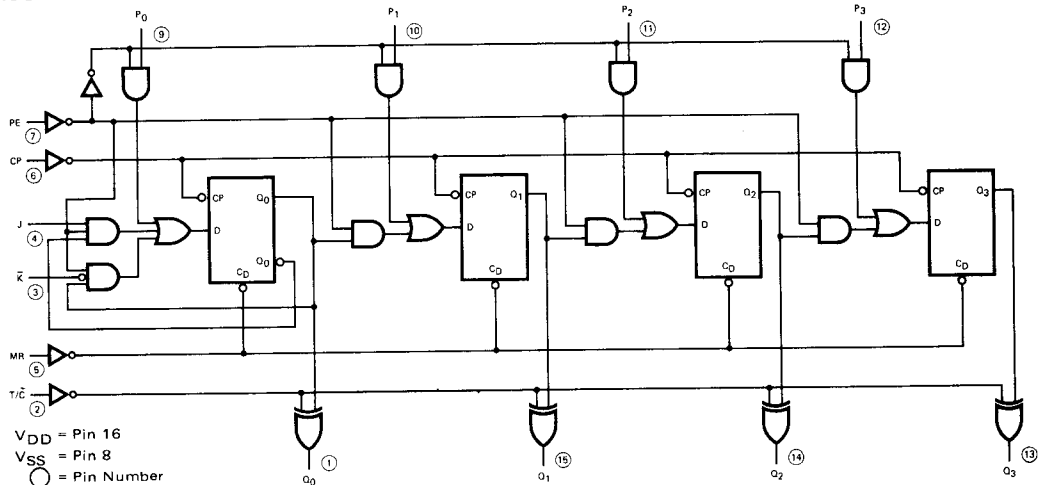

V_{DD} = Pin 16
 V_{SS} = Pin 8
 ○ = Pin Number

FAIRCHILD CMOS • 4035B

DC CHARACTERISTICS: V_{DD} as shown, $V_{SS} = 0$ V (See Note 1)

SYMBOL	PARAMETER	LIMITS									UNITS	TEMP	TEST CONDITIONS	
		$V_{DD} = 5$ V			$V_{DD} = 10$ V			$V_{DD} = 15$ V						
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX				
I_{DD}	Quiescent Power	XC			20			40			80	μ A	MIN, 25°C	All inputs at 0 V or V_{DD}
					150			300			600		MAX	
	Supply Current	XM			5			10			20	μ A	MIN, 25°C	
					150			300			600		MAX	


AC CHARACTERISTICS AND SET-UP REQUIREMENTS: V_{DD} as shown, $V_{SS} = 0$ V, $T_A = 25^\circ$ C (See Note 2)

SYMBOL	PARAMETER	LIMITS									UNITS	TEST CONDITIONS
		$V_{DD} = 5$ V			$V_{DD} = 10$ V			$V_{DD} = 15$ V				
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX		
t_{PLH}	Propagation Delay, CP to Q_n		200	400		90	180		60	140	ns	$C_L = 50$ pF, $R_L = 200$ k Ω Input Transition Times ≤ 20 ns
t_{PHL}			200	400		90	180		60	140		
t_{PLH}	Propagation Delay, MR to Q_n		250	500		120	230		75	180	ns	
t_{PHL}			250	500		120	230		75	180		
t_{PLH}	Propagation Delay, T/\bar{C} to Q_n		125	250		55	120		40	95	ns	
t_{PHL}			125	250		55	120		40	95		
t_{TLH}	Output Transition Time		85	135		45	75		30	45	ns	
t_{THL}			85	135		45	75		30	45		
t_{wCP}	CP Minimum Pulse Width	125	50		55	20		44	14		ns	
t_{wMR}	MR Minimum Pulse Width	150	60		70	25		56	20		ns	
t_{rec}	MR Recovery Time	120	60		54	30		43	22		ns	
t_s	Set-Up Time, P_n to CP	250	100		110	46		88	32		ns	
t_h	Hold Time, P_n to CP	10	-90		5	-32		0	-22			
t_s	Set-Up Time, PE to CP	250	100		110	46		88	32		ns	
t_h	Hold Time, PE to CP	10	-90		5	-32		0	-22			
t_s	Set-Up Time, J, \bar{K} to CP	275	130		125	48		100	30		ns	
t_h	Hold Time, J, \bar{K} to CP	25	-100		10	-37		5	-23			
f_{MAX}	Maximum Input Clock Frequency (Note 3)	4	8		8	17		10	20		MHz	


NOTES:

1. Additional DC Characteristics are listed in this section under 4000B Series CMOS Family Characteristics.
2. Propagation Delays and Output Transition Times are graphically described in this section under 4000B Series CMOS Family Characteristics.
3. For t_{MAX} , input rise and fall times are greater than or equal to 5 ns and less than or equal to 20 ns.
4. It is recommended that input rise and fall times to the Clock Input be less than 15 μ s at $V_{DD} = 5$ V, 4 μ s at $V_{DD} = 10$ V, and 3 μ s at $V_{DD} = 15$ V.

SWITCHING WAVEFORMS

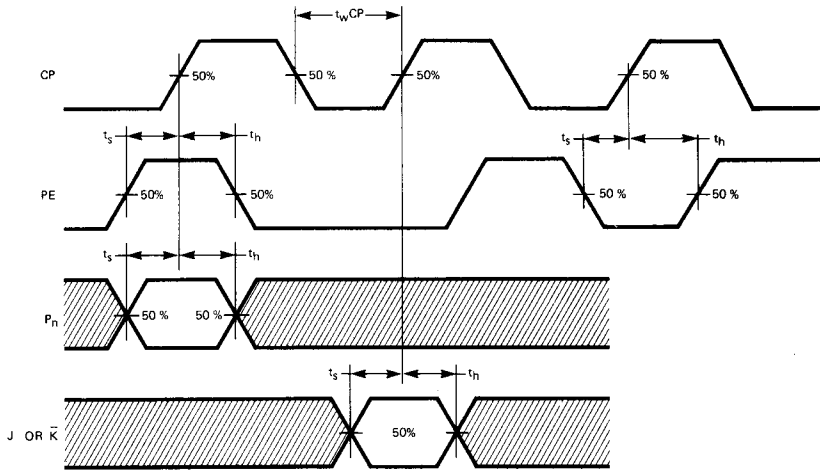

MINIMUM CP PULSE WIDTH AND SET-UP AND HOLD TIMES, PE TO CP, P_n TO CP, AND J OR \bar{K} TO CP

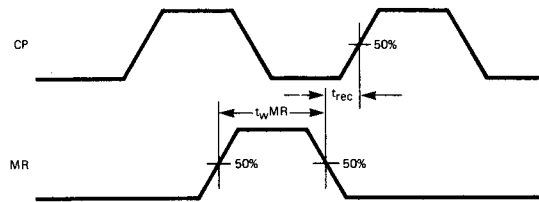

MR RECOVERY TIME AND MINIMUM MR PULSE WIDTH

NOTE: Set-up and Hold Times are shown as positive values but may be specified as negative values.