



SAW Components

Data Sheet B9022

Data Sheet

A large, stylized, 3D-rendered graphic of the EPCOS logo. The letters "EPCOS" are in a bold, sans-serif font, appearing to be part of a larger, curved structure that resembles a stylized globe or a series of overlapping planes. The graphic is rendered in a light gray color against a dark, textured background.



SAW Components

B9022

Low-Loss Filter for Mobile Communication

881,5 MHz


Data Sheet



Features

- Low-loss RF filter for mobile telephone Cellular systems, receive path
- Usable passband 25 MHz
- Unbalanced operation
- Impedance 50 Ω input and output
- Suitable for GPRS Class 1 to 12
- Ceramic Package for **Surface Mounted Technology (SMT)**

Chip sized SAW package DCS4F

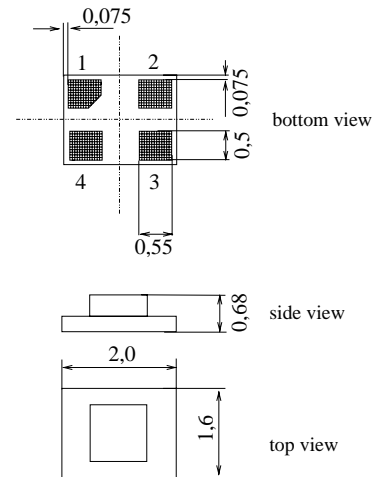


Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,007 g

Pin configuration

- 1 Input, unbalanced
- 3 Output, unbalanced
- 2,4 Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B9022	B39881-B9022-E610	C61157-A7-A113	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	$^{\circ}\text{C}$	machine model, 10 pulses peak power of GSM signal, duty cycle 4:8
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}^*	100*	V	
Input power at	P_{IN}	15	dBm	
GSM850, GSM900 GSM1800 and GSM1900 Tx bands				

* acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



SAW Components

B9022

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet



Characteristics

Operating temperature: $T = +25\text{ °C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}					
	869,0 ... 894,0 MHz		—	1,9	2,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	869,0 ... 894,0 MHz		—	0,6	0,7	dB
Input VSWR						
	869,0 ... 894,0 MHz		—	1,7	2,0	
Output VSWR						
	869,0 ... 894,0 MHz		—	1,7	2,0	
Attenuation	α					
	0,0 ... 780,0 MHz		50	54	—	dB
	780,0 ... 840,0 MHz		42	50	—	dB
	840,0 ... 849,0 MHz		39	39	—	dB
	914,0 ... 950,0 MHz		28	30	—	dB
	950,0 ... 1500,0 MHz		45	52	—	dB
	1500,0 ... 2200,0 MHz		40	45	—	dB
	2200,0 ... 3000,0 MHz		33	38	—	dB
	3000,0 ... 4000,0 MHz		28	32	—	dB
	4000,0 ... 6000,0 MHz		15	21	—	dB



SAW Components

B9022

Low-Loss Filter for Mobile Communication

881,5 MHz

Data Sheet



Characteristics

Operating temperature: $T = -30 \dots +85 \text{ }^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50 \text{ } \Omega$

Terminating load impedance: $Z_L = 50 \text{ } \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	881,5	—	MHz
Maximum insertion attenuation	α_{\max}					
	869,0 ... 894,0 MHz		—	2,0	2,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	869,0 ... 894,0 MHz		—	0,7	1,0	dB
Input VSWR						
	869,0 ... 894,0 MHz		—	1,7	2,0	
Output VSWR						
	869,0 ... 894,0 MHz		—	1,7	2,0	
Attenuation	α					
	0,0 ... 780,0 MHz		50	54	—	dB
	780,0 ... 840,0 MHz		42	50	—	dB
	840,0 ... 849,0 MHz		35	39	—	dB
	914,0 ... 950,0 MHz		25	28	—	dB
	950,0 ... 1500,0 MHz		45	52	—	dB
	1500,0 ... 2200,0 MHz		40	45	—	dB
	2200,0 ... 3000,0 MHz		33	38	—	dB
	3000,0 ... 4000,0 MHz		28	32	—	dB
	4000,0 ... 6000,0 MHz		15	21	—	dB



SAW Components

B9022


Low-Loss Filter for Mobile Communication

881,5 MHz


Data Sheet



Transfer function (narrow band)

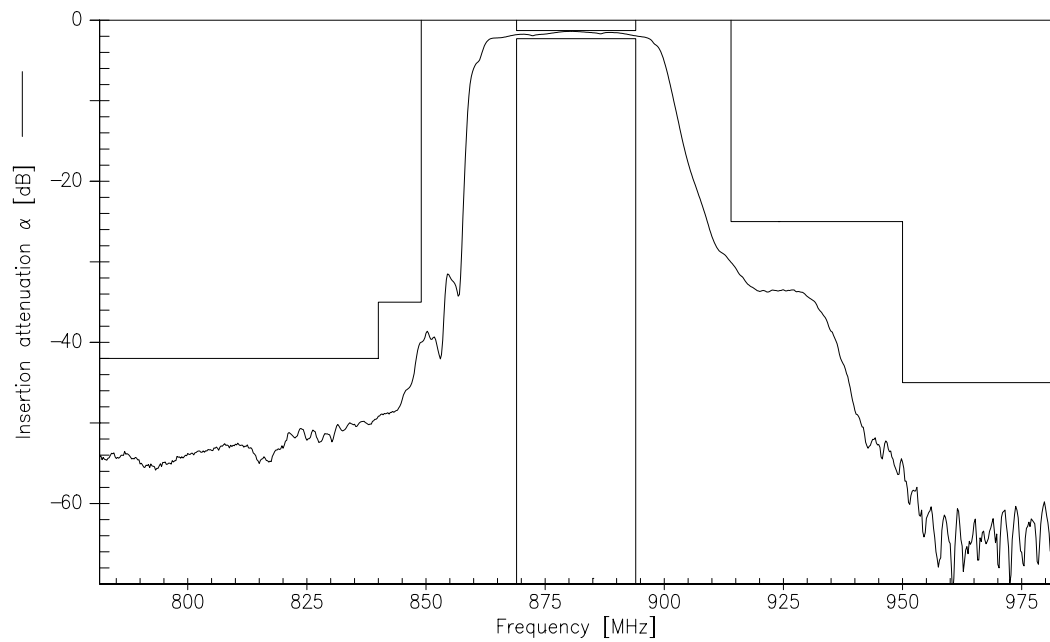

Transfer function (wideband)

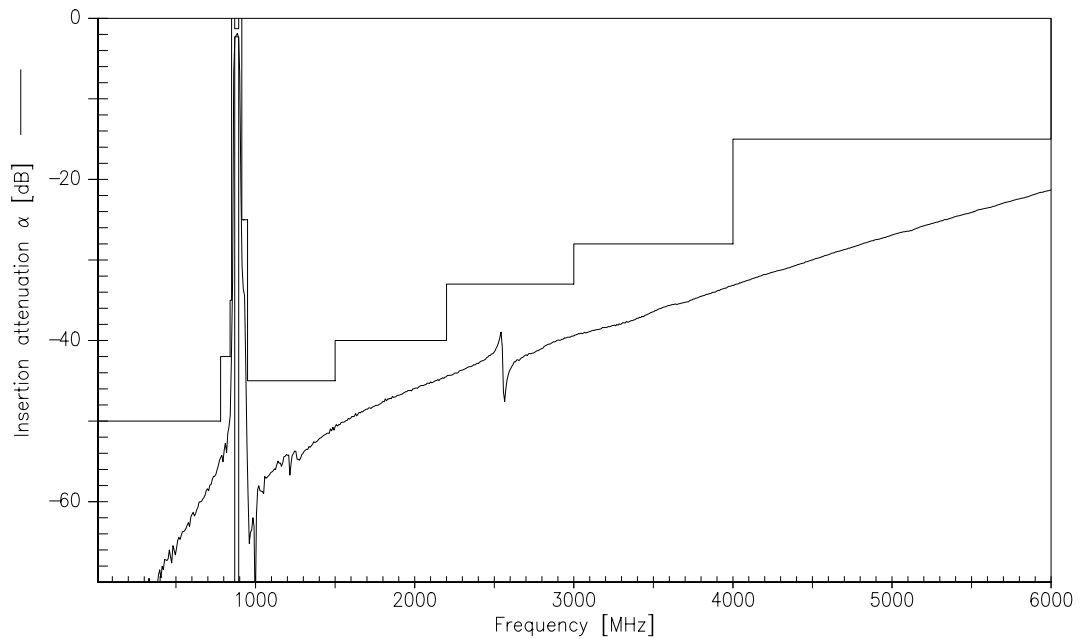



SAW Components	B9022
Low-Loss Filter for Mobile Communication	881,5 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.