

# 2012 Size

## 1850/1910 MHz Chip Multilayer Coupler


# FSLC-S190E

All the technical data and information contained herein are subject to change without notice.




**LC-FSLC-S190E-0406A**

## Equivalent Circuits

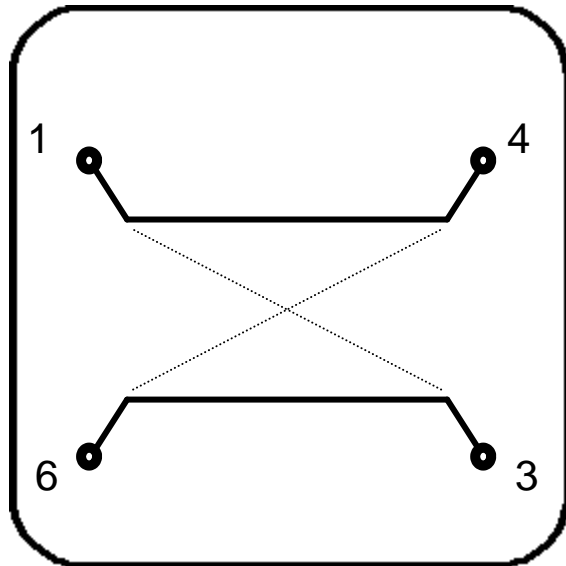

## Shape & Size

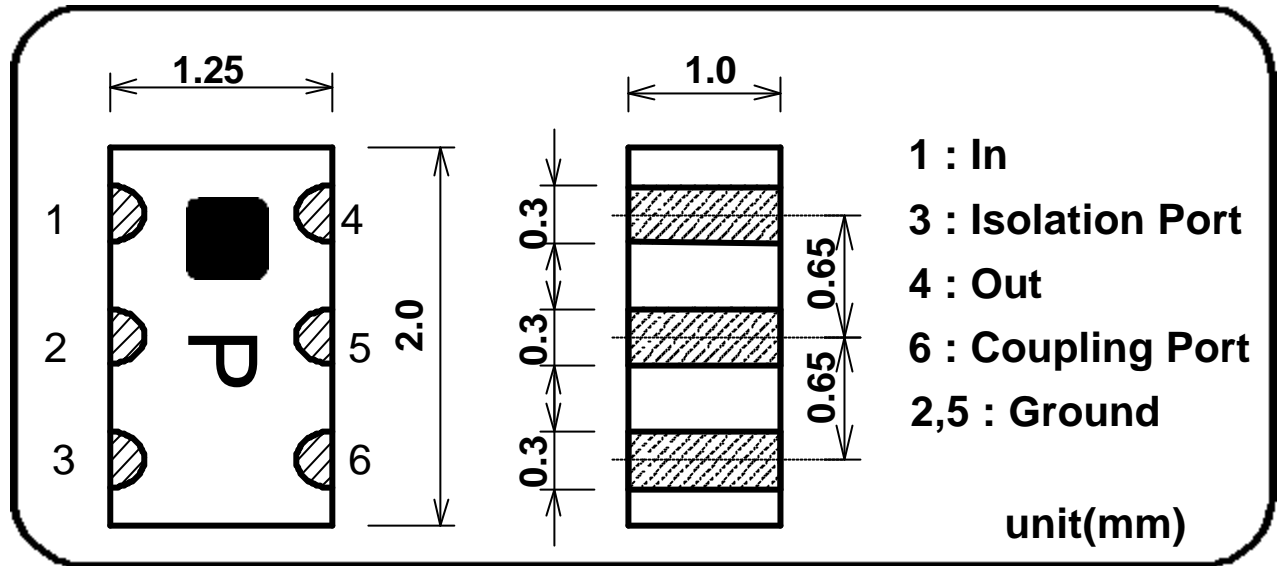

## Specifications


Part Name: FSLC-S190E

Frequency Range	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
1850-1910MHz	21.0 +/- 1dB	0.5dB Max. (0.25dB Typ.)	30dB Typ.	17dB Min. (30dB Typ.)	1W Max. (CW)	-35 to +85 deg.C

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S190E-0406A





# FOOT PATTERN

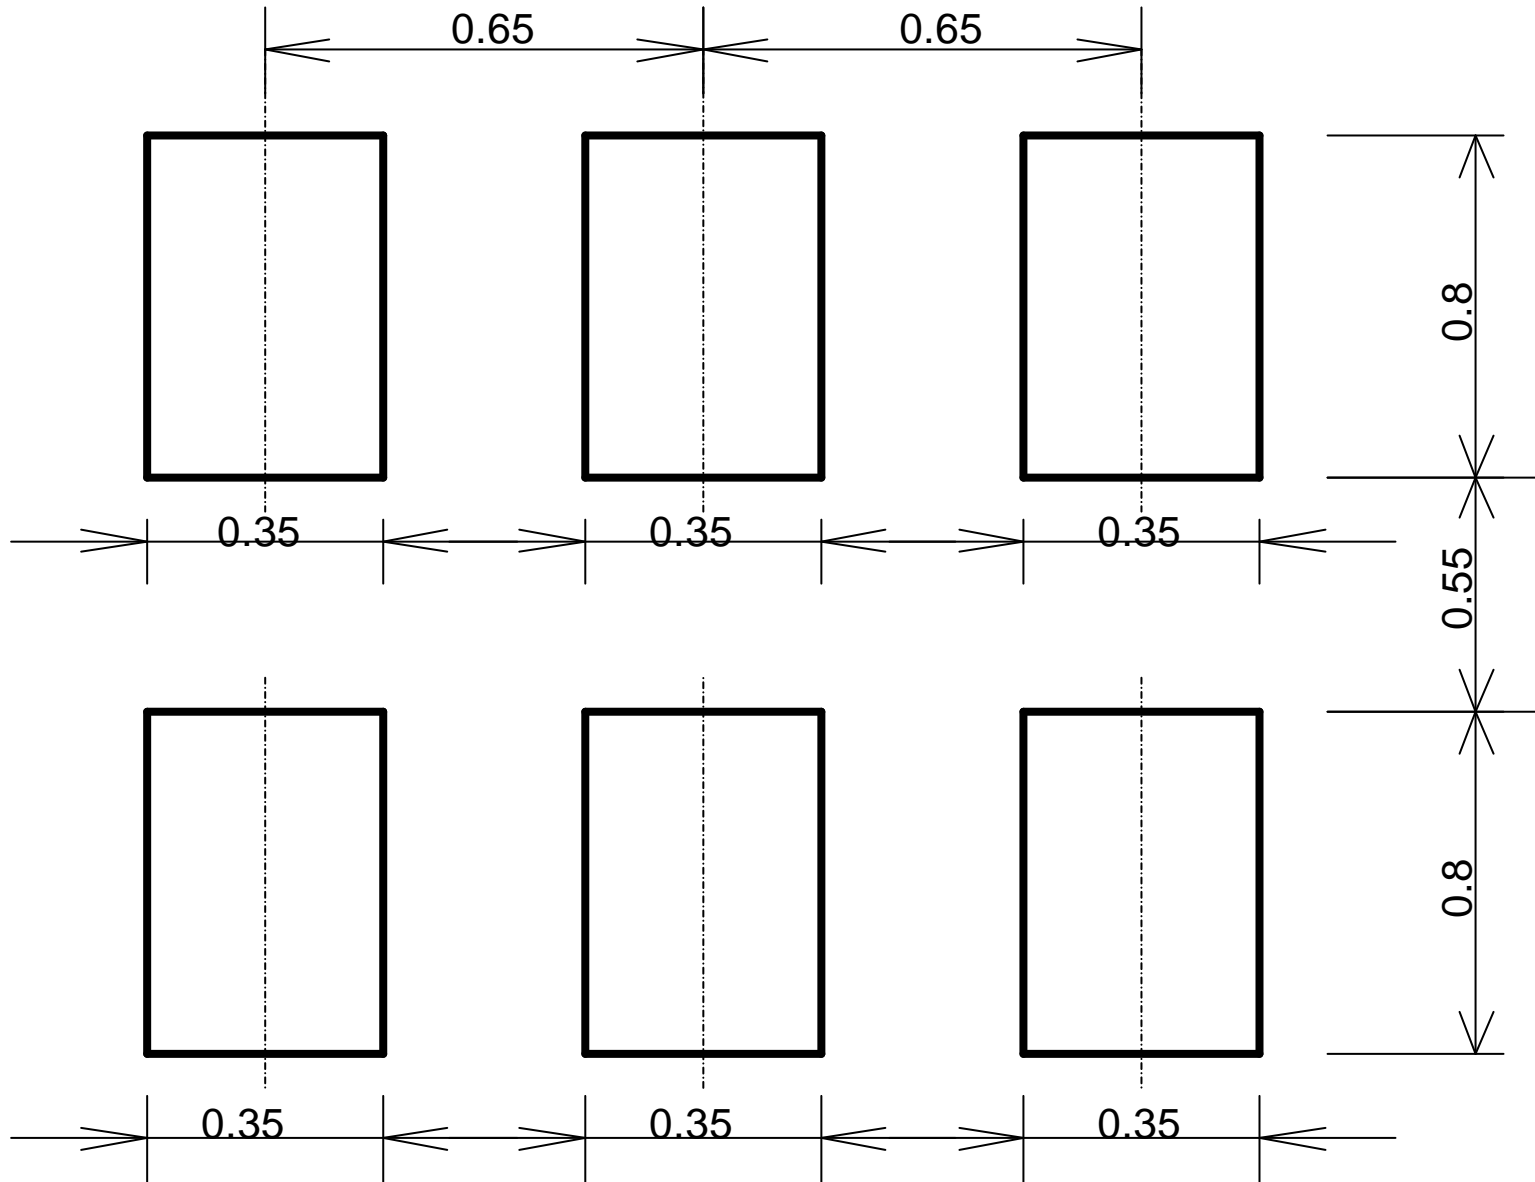


All the technical data and information contained herein are subject to change without notice.

**LC-FSLC-S190E-0406A**

# FSLC-S190E Sample Data

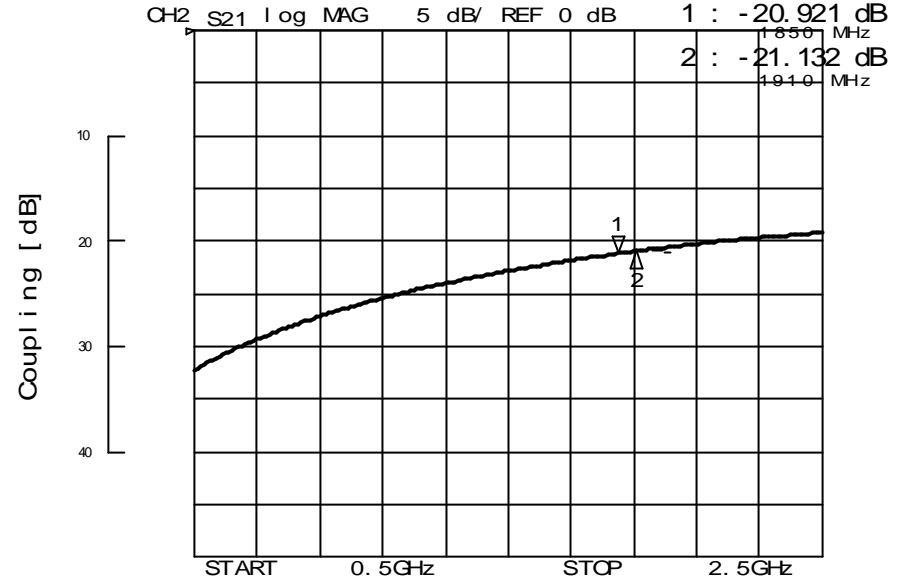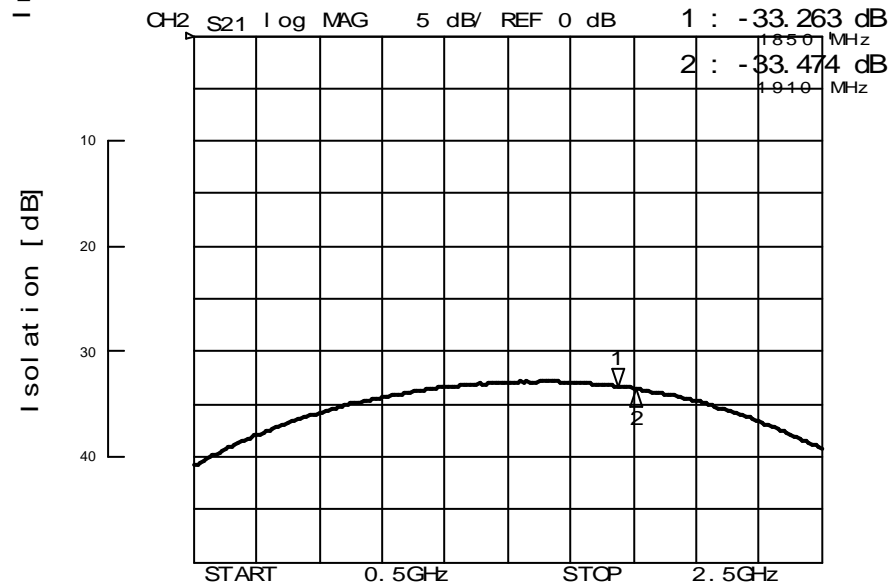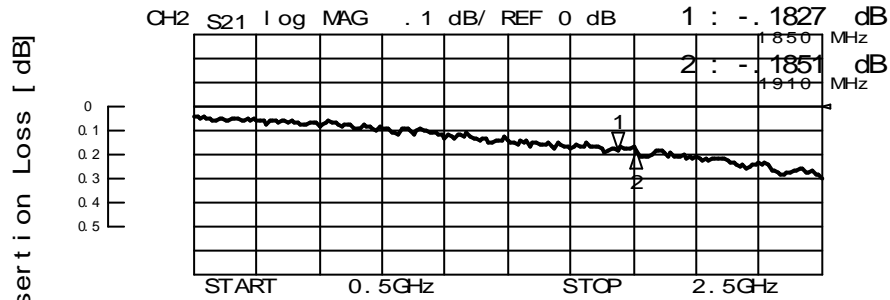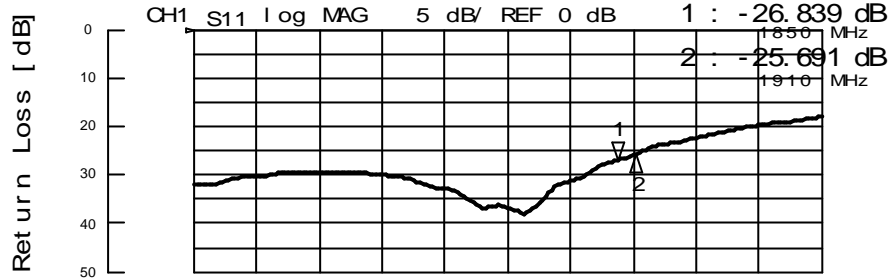

1850/1910 MHz  
Chip Multilayer Coupler "FSLC-S190E"

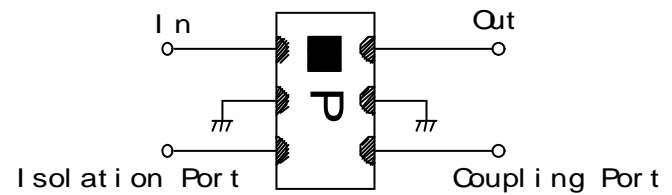

LC-FSLC-S190E-0406A