


# SKiiP 12NAB066V1(old)

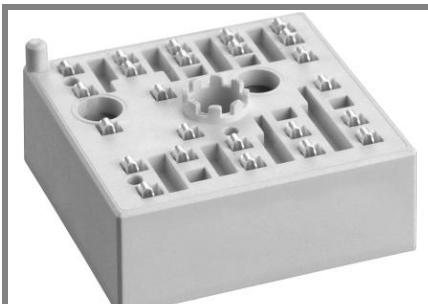

**MiniSKiiP® 1**

3-phase bridge rectifier +  
brake chopper + 3-phase  
bridge inverter  
**SKiiP 12NAB066V1**

Target Data

## Features


- Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections
- UL recognised file no. E63532

## Typical Applications

- Inverter up to 4,8 kVA
- Typical motor power 2,2 kW

| Absolute Maximum Ratings         |  | $T_s = 25^\circ\text{C}$ , unless otherwise specified |  |                  |
|----------------------------------|--|---|--|------------------|
| Symbol                           | Conditions   | Values  |  | Units            |
| <b>IGBT - Inverter, Chopper</b>  |  |   |  |                  |
| $V_{CES}$                        |  | 600   |  | V                |
| $I_C$                            | $T_s = 25 (70)^\circ\text{C}$                                | 15 (12)   |  | A                |
| $I_{CRM}$                        | $T_s = 25 (70)^\circ\text{C}, t_p \leq 1\text{ ms}$          | 30 (24)   |  | A                |
| $V_{GES}$                        |  | $\pm 20$  |  | V                |
| $T_j$                            |  | - 40 ... + 150  |  | °C               |
| <b>Diode - Inverter, Chopper</b> |  |   |  |                  |
| $I_F$                            | $T_s = 25 (70)^\circ\text{C}$                                | 21 (16)   |  | A                |
| $I_{FRM}$                        | $T_s = 25 (70)^\circ\text{C}, t_p \leq 1\text{ ms}$          | 42 (32)   |  | A                |
| $T_j$                            |  | - 40 ... + 150  |  | °C               |
| <b>Diode - Rectifier</b>         |  |   |  |                  |
| $V_{RRM}$                        |  | 800   |  | V                |
| $I_F$                            | $T_s = 70^\circ\text{C}$                                     | 20  |  | A                |
| $I_{FSM}$                        | $t_p = 10\text{ ms}, \sin 180^\circ, T_j = 25^\circ\text{C}$ | 220   |  | A                |
| $i_{\bar{t}}$                    | $t_p = 10\text{ ms}, \sin 180^\circ, T_j = 25^\circ\text{C}$ | 240   |  | A <sup>2</sup> s |
| $T_j$                            |  | - 40 ... + 150  |  | °C               |
| $I_{tRMS}$                       | per power terminal (20 A / spring)                           | 20  |  | A                |
| $T_{stg}$                        | $T_{op} \leq T_{stg}$  | - 40 ... + 125  |  | °C               |
| $V_{isol}$                       | AC, 1 min.   | 2500  |  | V                |

| Characteristics                  |   | $T_s = 25^\circ\text{C}$ , unless otherwise specified |            |      |
|----------------------------------|---|---|------------|------|
| Symbol                           | Conditions  | min.  | typ.       | max. |
| <b>IGBT - Inverter, Chopper</b>  |   |   |            |      |
| $V_{CEsat}$                      | $I_C = 10\text{ A}, T_j = 25 (125)^\circ\text{C}$             | 1,75 (2)  | 2,25 (2,5) | V    |
| $V_{GE(th)}$                     | $V_{GE} = V_{CE}, I_C = \text{mA}$                            |   |            | V    |
| $V_{CE(TO)}$                     | $T_j = 25 (125)^\circ\text{C}$                                | 0,9 (0,8)   | 1 (0,9)    | V    |
| $r_T$                            | $T_j = 25 (125)^\circ\text{C}$                                | 85 (120)  | 125 (160)  | mΩ   |
| $C_{ies}$                        | $V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$ | 0,61  |            | nF   |
| $C_{oes}$                        | $V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$ | 0,19  |            | nF   |
| $C_{res}$                        | $V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$ | 0,05  |            | nF   |
| $R_{th(j-s)}$                    | per IGBT  | 2,4   |            | K/W  |
| $t_{d(on)}$                      | under following conditions                                    | 13  |            | ns   |
| $t_r$                            | $V_{CC} = 300\text{ V}, V_{GE} = \pm 15\text{ V}$             | 17  |            | ns   |
| $t_{d(off)}$                     | $I_C = 10\text{ A}, T_j = 125^\circ\text{C}$                  | 150   |            | ns   |
| $t_f$                            | $R_{Gon} = R_{Goff} = 23\Omega$                               | 45  |            | ns   |
| $E_{on}$                         | inductive load  | 0,32  |            | mJ   |
| $E_{off}$                        |   | 0,33  |            | mJ   |
| <b>Diode - Inverter, Chopper</b> |   |   |            |      |
| $V_F = V_{EC}$                   | $I_F = 10\text{ A}, T_j = 25 (125)^\circ\text{C}$             | 1,4 (1,4)   | 1,7 (1,7)  | V    |
| $V_{(TO)}$                       | $T_j = 25 (125)^\circ\text{C}$                                | 1 (0,9)   | 1,1 (1)    | V    |
| $r_T$                            | $T_j = 25 (125)^\circ\text{C}$                                | 45 (50)   | 60 (70)    | mΩ   |
| $R_{th(j-s)}$                    | per diode   | 2,4   |            | K/W  |
| $I_{RRM}$                        | under following conditions                                    | 11  |            | A    |
| $Q_{rr}$                         | $I_F = 10\text{ A}, V_R = 300\text{ V}$                       | 1,1   |            | μC   |
| $E_{rr}$                         | $V_{GE} = 0\text{ V}, T_j = 125^\circ\text{C}$                | 0,18  |            | mJ   |
| $di_F/dt$                        | $= 1050\text{ A}/\mu\text{s}$                                 |   |            |      |
| <b>Diode Rectifier</b>           |   |   |            |      |
| $V_F$                            | $I_F = 15\text{ A}, T_j = 25^\circ\text{C}$                   | 1,15  |            | V    |
| $V_{(TO)}$                       | $T_j = 150^\circ\text{C}$                                     | 0,8   |            | V    |
| $r_T$                            | $T_j = 150^\circ\text{C}$                                     | 20  |            | mΩ   |
| $R_{th(j-s)}$                    | per diode   | 1,8   |            | K/W  |
| <b>Temperature Sensor</b>        |   |   |            |      |
| $R_{ts}$                         | $3\%, T_r = 25 (100)^\circ\text{C}$                           | 1000(1670)  |            | Ω    |
| <b>Mechanical Data</b>           |   |   |            |      |
| $w$                              |   | 35  |            | g    |
| $M_s$                            | Mounting torque   | 2   | 2,5        | Nm   |

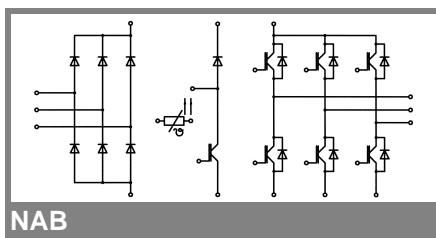

# SKiiP 12NAB066V1(old)

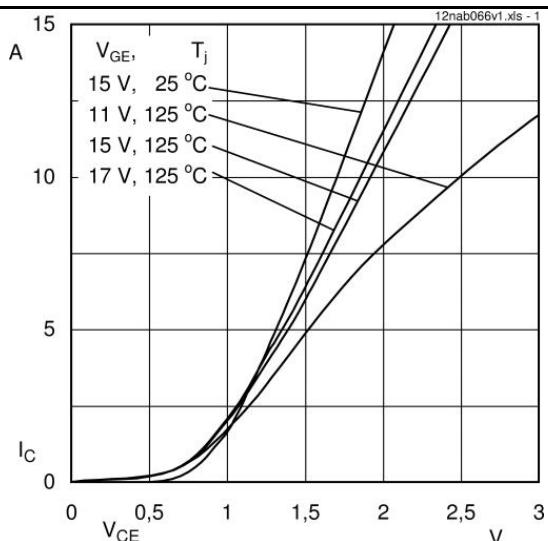


Fig. 1 Typ. output characteristic

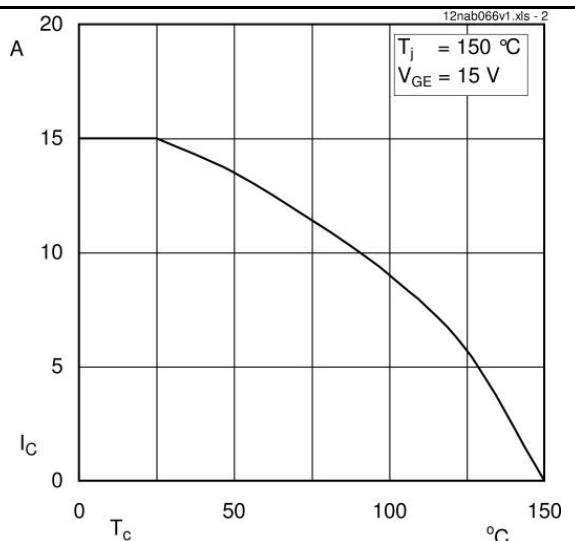


Fig. 2 Typ. rated current vs. temperature

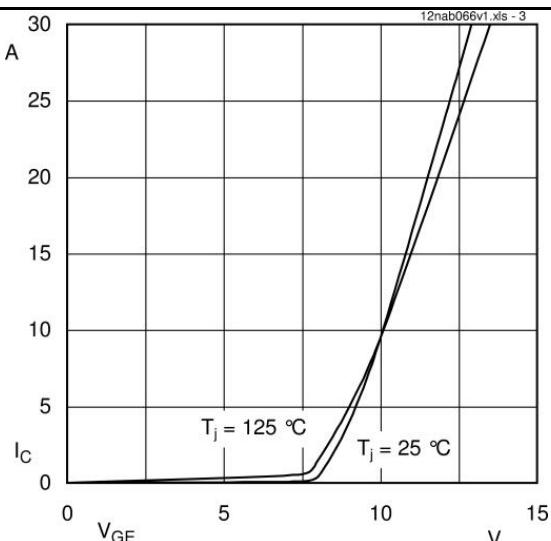


Fig. 3 Typ. transfer characteristic

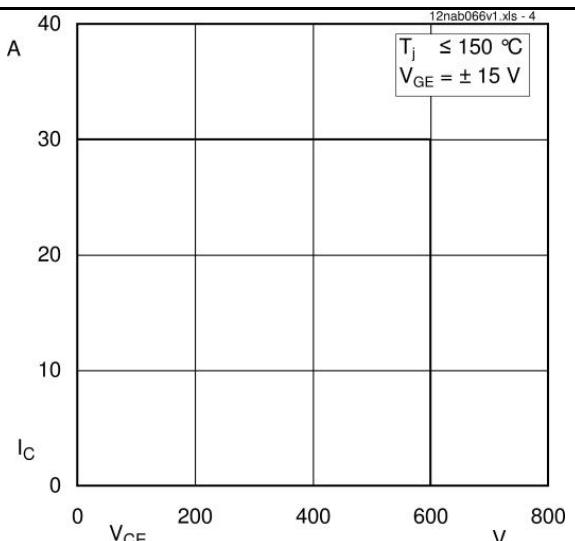


Fig. 4 Reverse bias safe operating area

# SKiiP 12NAB066V1(old)

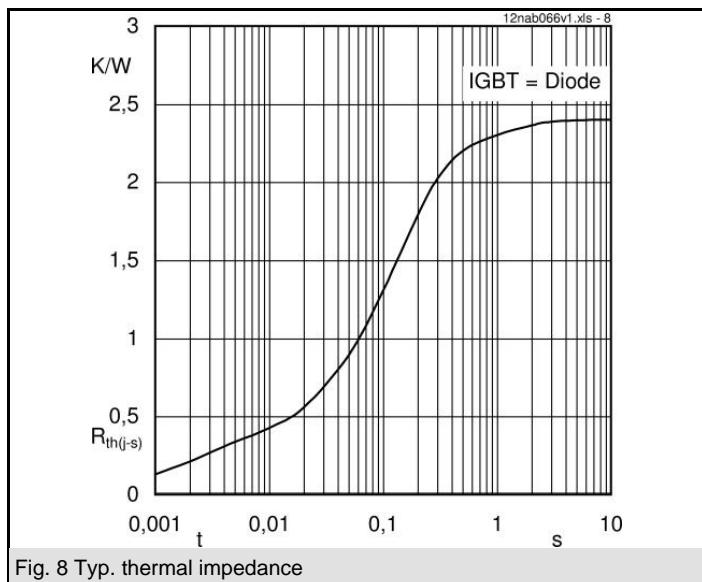


Fig. 8 Typ. thermal impedance

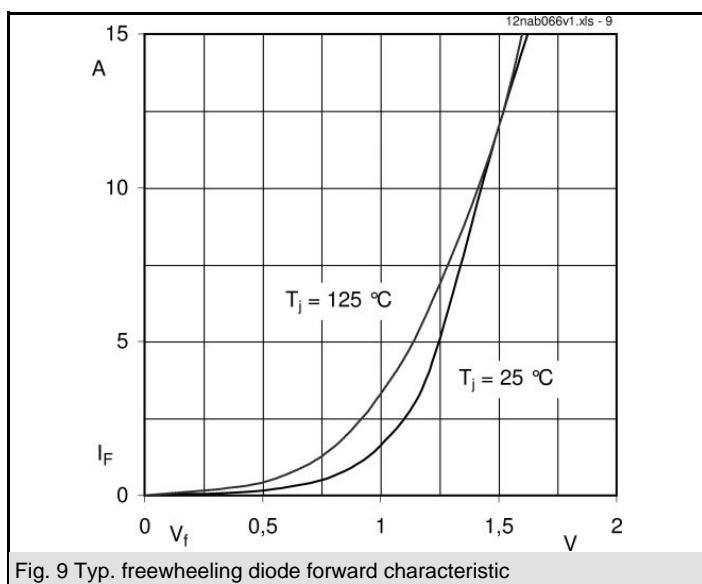


Fig. 9 Typ. freewheeling diode forward characteristic



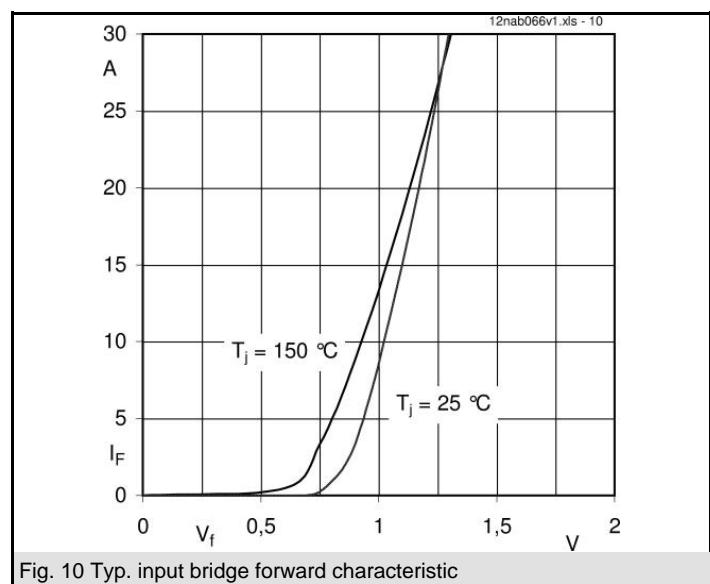


Fig. 10 Typ. input bridge forward characteristic

SKiiP 12NAB066V1(old)

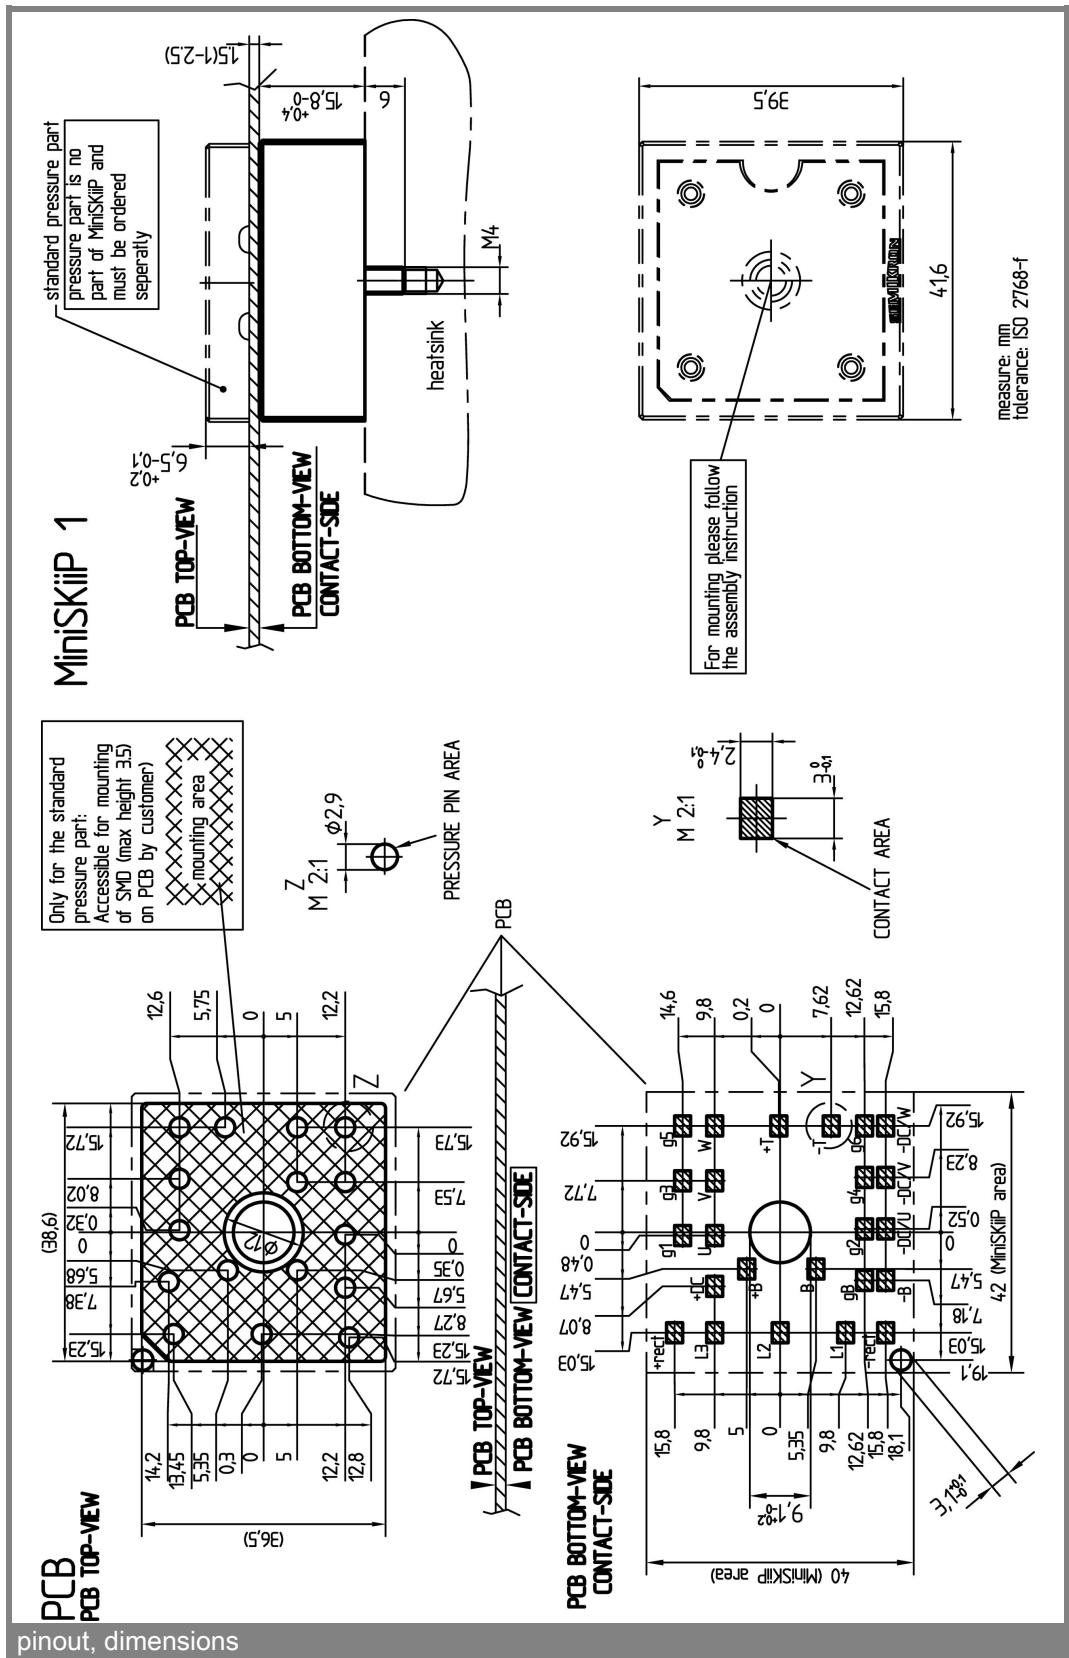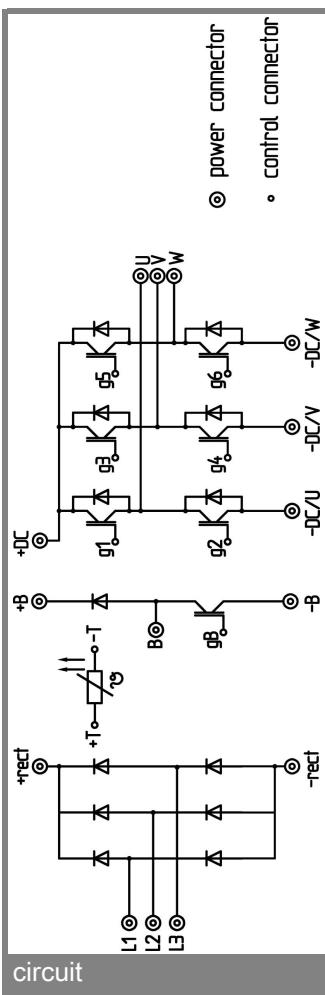

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.