



CYT6120 1.5A CMOS Super LDO Voltage Regulator

Description

The CYT6120 series of fixed output low dropout linear regulators are designed for portable battery powered applications, which require low power consumption and low dropout voltage. Each device contains a bandgap voltage reference, an error amplifier, a PMOS power transistor, and resistors for setting output voltage, and current limit and temperature limit protection circuits.

The CYT6120 has been designed to be used with low cost capacitors and requires a minimum output capacitor of 1.0 μ F. Standard voltage versions are 3.3, 3.0V, and adjustable output from 0.8V to 4.5V.


Features

- Typical 135mV Dropout Voltage at 500mA.
- Excellent Line and Load Regulation.
- High Accuracy Output Voltage of 2%.
- Ultra-Low Ground Current at 62 μ A (Typ.)
- Thermal and Over-Current Protection.
- Standard SOT-223 Package.


Application

- USB removable devices
- MPEG4 HDD devices
- Wireless LAN's
- Hand-Held Instrumentation.
- Portable DVD players
- Digital camera

Pin Configuration

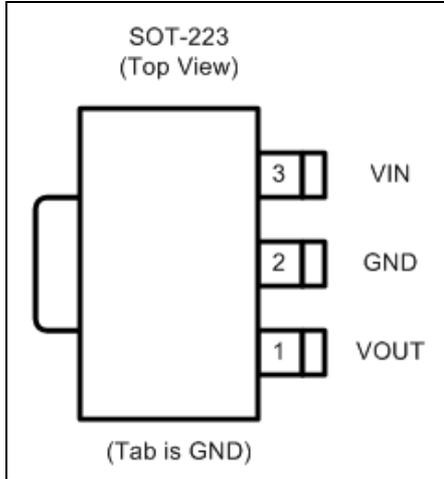

Block Diagram

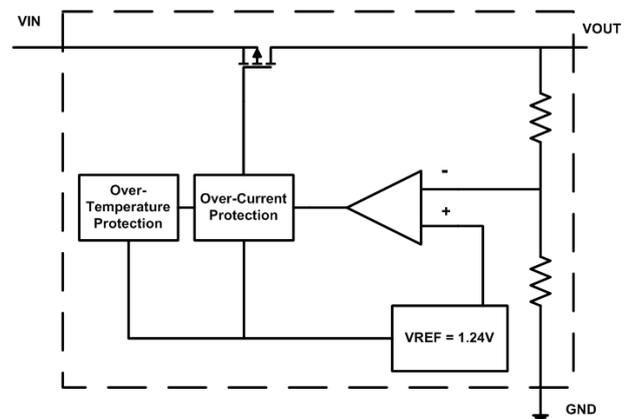




CYT6120

1.5A CMOS Super LDO Voltage Regulator

OUTLINE DRAWING SOT-223

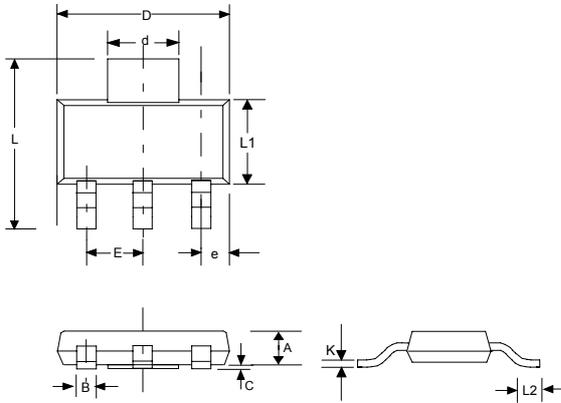

DIM ^N	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	—	0.071	—	1.80
B	0.025	0.033	0.640	0.840
C	0.012	—	0.31	—
D	0.248	0.264	6.30	6.71
d	0.115	0.124	2.95	3.15
E	—	0.090	—	2.29
e	0.033	0.041	0.840	1.04
L	0.264	0.287	6.71	7.29
L1	0.130	0.148	3.30	3.71
L2	0.012	—	0.310	—
K	0.010	0.014	0.250	0.360