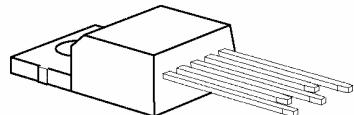


**Power Voltage Regulator 5 V/500mA
with Low Drop-out Voltage
(analog to TLE4260 -2, Siemens)**

ILE4260-2

ILE4260-2 (analog to TLE4260-2, Siemens) - single-chip integrated IC of power voltage regulator 5V/500 mA with low drop-out voltage implemented in 5-pin TO220AB/5 with external radiator. IC of power voltage regulator 5V/500mA is designed for creation of constant voltage of 5V with drop-out voltage less than 0.5V and load current up to 500 mA and used in electronic equipment power supplies. IC has protection against overvoltage of both positive and negative polarity, has internal limiting of maximum load current with temperature reset of output voltage.

ILE4260-2

ILE 4260-2 P-TO220-5-2


 $T_A = -40^\circ \div 125^\circ C$

Features:

- High precision of output voltage $5V \pm 2\%$
- Low drop-out voltage
- Low consumption current
- Low starting consumption current
- Overheat embedded protection
- Protection against outputs reversed polarity
- Input voltage up to 42V
- Internal limiting of maximum load current with temperature output voltage reset
- Overvoltage protection (input voltage more than 42 V)
- Chip temperature range from - 40 to +125°C.

Pins Description

Pin No.	Symbol	Description in catalog	Description
1	U_I	Input voltage	Input
2	QURES	Reset output	Reset output
3	GND	Ground	Common
4	DRES	Reset delay	Reset delay output
5	U	5-V output voltage	Output

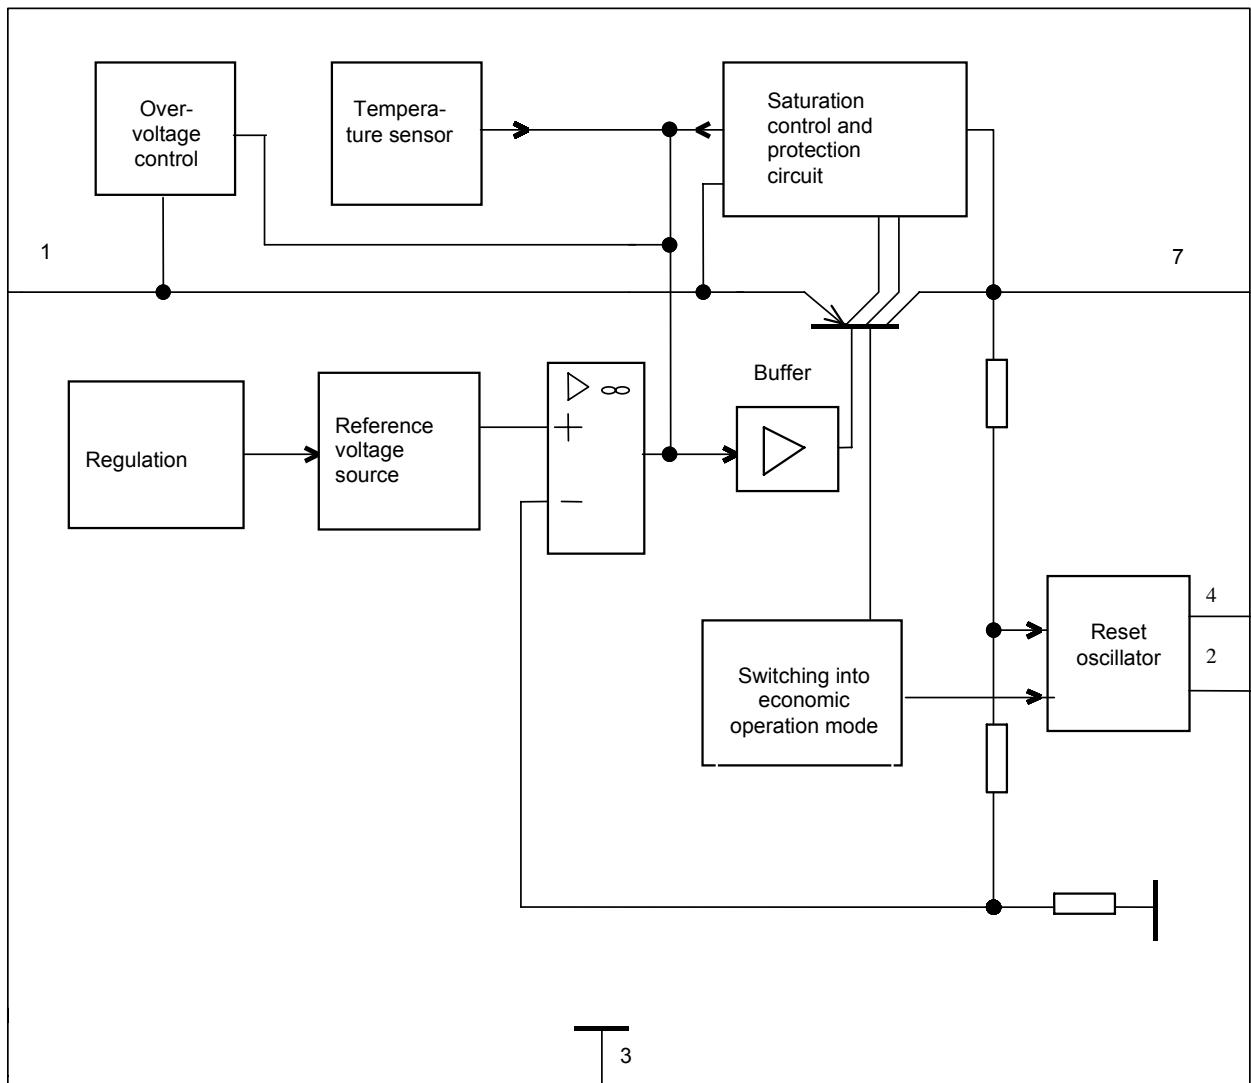Block Diagram

Maximum Ratings

Parameter	Unit	Maximum ratings		Absolute maximum ratings	
		min	max	min	max
Junction temperature, T_J	°C	-40	125	-40	150
Storage temperature, T_{stg}	°C	-	-	-50	150
Input voltage, U_I	V	-	32	-42	42
Input voltage, $U_{I(t)}$, $t \leq 400$ ms	V	-	-	-	65
Input current, I_I	A	-	1.6	-	1.6
Reset output voltage (pin 2), U_R	V	0.4	42	-0.3	42
Current on reset output (pin 2), I_R	A	-	Internally limited	-	Internally limited
Current on output "ground" (pin 3), I_{GND}	A	-0.5	-	-0.5	-
"Reset delay" output voltage (pin 4), U_D	V	0.4	42	-0.3	42
Current on output "Reset delay" (pin 4), I_D	A	-	Internally limited	-	Internally limited
difference between input and output voltages, $U_I - U_Q$	V	-	U_I	-5.25	U_I
Output current (on pin 5)	A	-	1.4	-	1.4
Resistance junction-case, R_{thJC}	°C/W	-	3	-	3
Resistance junction-ambient, R_{thJA}	°C/W	-	65	-	65

Typical values of electrical parameters

($V_I = 13.5$ V, $T_J = 25^\circ\text{C}$, unless otherwise is specified)


Parameter, Unit	Symbol	Test conditions	Typical value
Pulse smoothing factor, dB	SVR	$f = 100$ Hz, $U_R = 0.5U_{PP}$, $I_Q = 0$ mA	54
Temperature drift of output voltage, $1/\text{^oC}$	α_{VQ}	-	2×10^4
Reset output turn-on delay, ms	t_D	$C_D = 100\text{nF}$	25
Reset output turn-off delay, mks	t_t	$C_D = 100\text{nF}$	5
Hysteresis of turn-on input voltage, V	ΔU_I	-	3

Electrical parameters (Ta=25 °C)

(Vi=13.5V, TJ=25°C, unless otherwise is specified)

Parameter, unit	Symbol	Test conditions	Value		TJ, °C
			min	max	
Normal operation mode					
Output voltage, V	UQ	IQ = 250mA	4.95	5.05	+20...+125
Output voltage, V	UQ	IQ = 250mA	4.90	5.10	-40...+20
Short-circuit current, mA	IsC	Ui = 17 V VQ=0V	500		
Consumption current, mA, Iq = Ii - IQ	Iq	6V ≤ Ui ≤ 28V IQ=150 mA 6V ≤ Ui ≤ 28V IQ=500 mA Ui ≤ 6V IQ=500 mA IQ=0 mA		10 65 80 2.0	
Drop-out voltage, V	UDr	IQ=0.5A IQ=0.15A		0.5 0.3	
Change of output voltage versus load current change, mV	ΔUQ(I)	5mA ≤ IO ≤ 500mA		35	
Change of output voltage versus input voltage change, mV	ΔUQ(U)	6V ≤ Ui ≤ 28V IQ=100mA 6V ≤ Ui ≤ 16V IQ=100mA		50 25	
Parameters of reset oscillator					
Threshold voltage of Reset output turn-on Reset, in % from UQ	URT	IQ > 500 mA Ui=6V	94	97	
Saturation voltage, V	UR	R _R =1.8 kOhm		0.4	
Saturation voltage, mV	UC	Ui = 4.5 V		100	
Reverse current, mkA	IR	UR=5V		1	
Charge current, mkA	ID	-	7	13	
Saturation voltage, V	UR	IR=3 mA, Ui=4.5V		0.4	
Reverse current, mkA	IR	UR=5V		1	
Charge current, mkA	ID	-	7	13	
Turn-on threshold, V	UST	-	0.3	1.3	
Threshold voltage of turn- on delay, V	UDT	-	2.15	2.75	
General data					
Turn-off input voltage, V	Uoff	IQ<1 mA	40	45	
Reverse output current, mA	IQR	UQ=5V, Ui = open		2.5	
Leakage current, mkA	IQS			500	

Standard Application Circuit

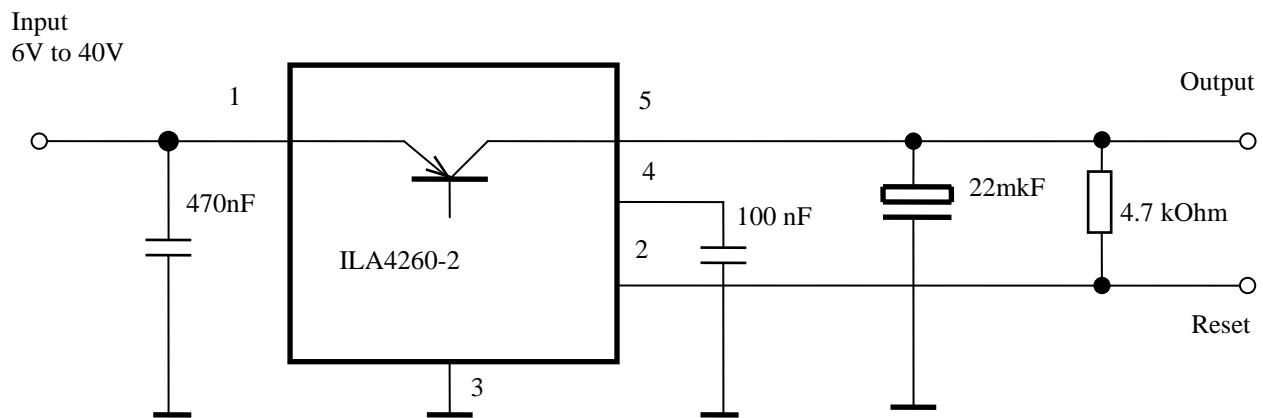

Standard Operation Diagram

