

Product Specification

RoHS-6 Compliant 1310nm XPAK Transponder

FTLX1451E2/FTLX1451E2S/FTLX1451F2

PRODUCT FEATURES

- Hot pluggable XPAK MSA Rev. 2.3 Compliant
- Transmission distance up to 10km¹⁾
- Total power consumption: 3.5 W maximum
- Uncooled directly modulated Distributed Feedback (DFB) laser at 1310 nm
- SC connector, single mode fiber
- Full duplex transmission mode
- Eye safety class 1 (IEC 60825-1:A2)
- Digital Optics Monitoring (DOM)
- XAUI electrical interface
 - 4x3.125 Gb/s Ethernet (FTLX1451E2/E2S)
 - 4x3.1875 Gb/s Fibre Channel, (FTLX1451F2)
- Power supply: +5.0 V, +3.3 V, Adaptable Power Supply (APS: +1.2 V)
- Separated signal/chassis ground
- Belly-to-belly applications
- De-latch mechanism with low extraction force (FTLX1451x3 only)
- Built-in heat sink



APPLICATIONS

- IEEE Std 802.3ae-2002 (FTLX1451E2/E2S)
- Fibre Channel 10GFC Draft 4.0 (FTLX1451F2)

PRODUCT SELECTION

| Part Number | Standards | De-Latch Mechanism |
|-------------|---------------|--------------------|
| FTLX1451E2 | Ethernet | Bail Release |
| FTLX1451E2S | Ethernet | Screw Mount |
| FTLX1451F2 | Fibre Channel | Bail Release |

I. Pin Descriptions

| Signal Name | Level | I/O | Pin No. | Description |
|--|---|-----|-------------|---|
| Management and Monitoring Ports | | | | |
| MDIO | Open Drain | I/O | 17 | Management Data I/O. Requires external 10 - 22 k Ω pull-up to the APS on host. |
| MDC | 1.2 V CMOS | I | 18 | Management Data Clock Input |
| PRTAD4 | 1.2 V CMOS | I | 19 | Port Address Input bit 4 |
| PRTAD3 | 1.2 V CMOS | I | 20 | Port Address Input bit 3 |
| PRTAD2 | 1.2 V CMOS | I | 21 | Port Address Input bit 2 |
| PRTAD1 | 1.2 V CMOS | I | 22 | Port Address Input bit 1 |
| PRTAD0 | 1.2 V CMOS | I | 23 | Port Address Input bit 0 |
| LASI | Open Drain | O | 9 | Link Alarm Status Interrupt Output. Open Drain Compatible Output with 10 - 20 k Ω pull-up on host. Logic high = Normal Operation Logic low = Status Flag Triggered |
| RESET | Open Drain | I | 10 | Reset Input. Open Drain Compatible Input with 22 k Ω pull-up to APS internal to transponder. Logic high = Normal Operation Logic low = RESET |
| Vendor Specific | | | 11,15,16,24 | Vendor Specific Pins. Leave unconnected when not used. |
| TX ON/OFF | Open Drain | I | 12 | TX ON/OFF Input. Open Drain Compatible Input with 22 k Ω pull-up to APS internal to transponder. Logic high = Transmitter On Logic low = Transmitter Off |
| MOD DETECT | | O | 14 | Pulled low inside transponder through a 1 k Ω resistor to Ground |
| Transmit Functions | | | | |
| Reserved | | I | 68 | Reserved For Future Use |
| Reserved | | I | 67 | Reserved For Future Use |
| TX LANE 3– TX LANE 3+ | AC-coupled, Internally biased differential XAUI | I | 65 | Module XAUI Input Lane 3– |
| | | I | 64 | Module XAUI Input Lane 3+ |
| TX LANE 2– TX LANE 2+ | | I | 62 | Module XAUI Input Lane 2– |
| | | I | 61 | Module XAUI Input Lane 2+ |
| TX LANE 1– TX LANE 1+ | | I | 59 | Module XAUI Input Lane 1– |
| | | I | 58 | Module XAUI Input Lane 1+ |
| TX LANE 0– TX LANE 0+ | | I | 56 | Module XAUI Input Lane 0– |
| | | I | 55 | Module XAUI Input Lane 0+ |

| Signal Name | Level | I/O | Pin No. | Description |
|--------------------------|---|-----|---|--|
| Receive Functions | | | | |
| Reserved | | O | 38 | Reserved For Future Use |
| Reserved | | O | 39 | Reserved For Future Use |
| RX LANE 0+ RX LANE 0– | AC-coupled, Internally biased differential XAUI | O | 41 | Module XAUI Output Lane 0+ |
| | | O | 42 | Module XAUI Output Lane 0– |
| RX LANE 1+ RX LANE 1– | | O | 44 | Module XAUI Output Lane 1+ |
| | | O | 45 | Module XAUI Output Lane 1– |
| RX LANE 2+ RX LANE 2– | | O | 47 | Module XAUI Output Lane 2+ |
| | O | 48 | Module XAUI Output Lane 2– | |
| RX LANE 3+ RX LANE 3– | | O | 50 | Module XAUI Output Lane 3+ |
| | | O | 51 | Module XAUI Output Lane 3– |
| DC Power | | | | |
| GND | 0 V DC | | 1, 2, 3, 33, 34, 35, 36, 37, 40, 43, 46, 49, 52, 53, 54, 57, 60, 63, 66, 69, 70 | Ground connection for signal ground on the module |
| APS | +1.2 V | | 7, 8, 28, 29 | Input from Adaptive Power Supply |
| APS SENSE | +1.2 V | | 27 | APS Sense Output. Connected to the APS input inside transponder. |
| APS SET | | | 25 | Feedback input from APS. Connected to GND through a 1180Ω resistor inside the transponder. |
| 3.3 V | +3.3 V DC | | 5, 6, 30, 31 | DC Power Input, +3.3 V DC, Nominal |
| 5.0 V | +5.0 V DC | | 4, 32 | DC Power Input, +5.0 V DC, Nominal |
| Reserved | | | 26 | Reserved for APD. |
| Reserved | | | 13 | Reserved. |

Electrical Pad Layout

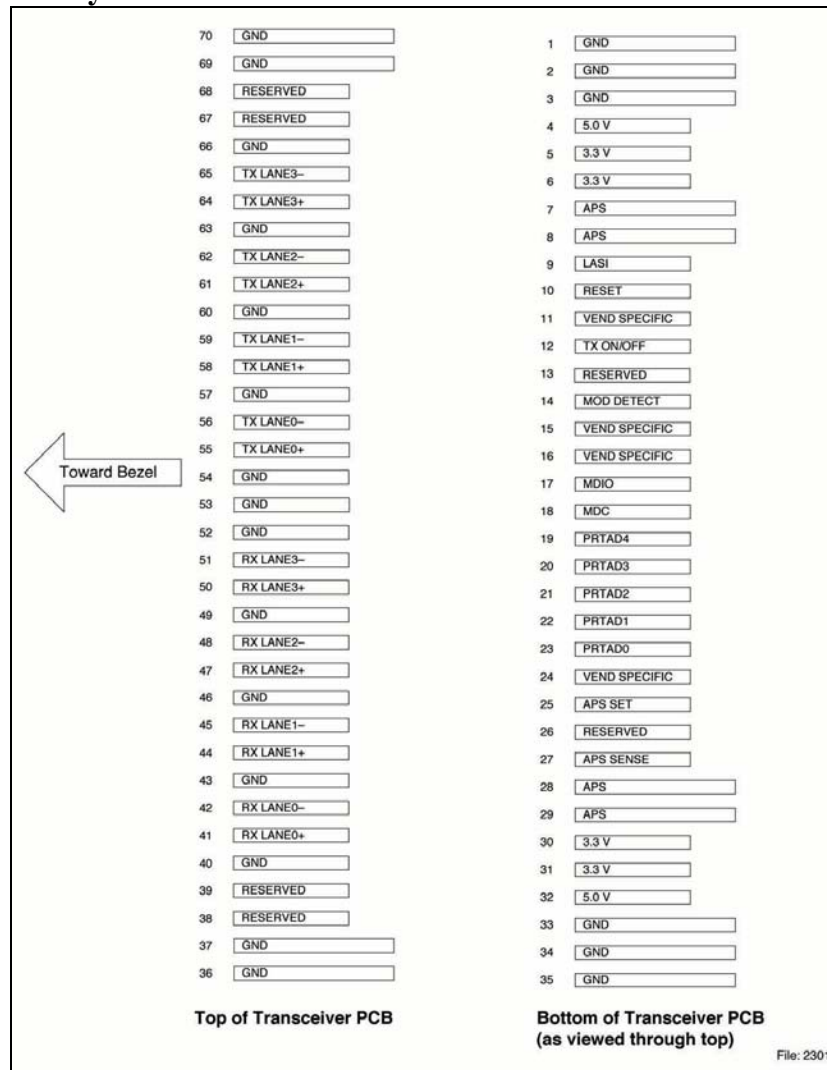


Figure 1 - XPAK Transponder Electrical Pad Layout

II. Absolute Maximum Ratings

| Parameter | Symbol | Limit Values | | Unit |
|---|----------------|--------------|------|------|
| | | min. | max. | |
| Storage Ambient Temperature ¹⁾ | T_S | -20 | 85 | °C |
| Operating Case Temperature ¹⁾ | T_C | 0 | 70 | °C |
| Supply Voltage +5.0 V | V_5 | 0 | 6 | V |
| Supply Voltage +3.3 V | V_3 | 0 | 4 | V |
| Supply Voltage APS | V_{aps} | 0 | 1.5 | V |
| Static Discharge Voltage, All Pins | ST_d | | 500 | V |
| Average Receive Optical Power | $R_{XP_{max}}$ | | 1.5 | dBm |

¹⁾ Non-condensing.

Exceeding any one of these values may permanently destroy the device.

III. Electrical Characteristics

Recommended Operating Conditions

| Parameter | Symbol | Values | | | Unit |
|-------------------------------------|---------------------|--------|------|-------|------|
| | | min. | typ. | max. | |
| Operating Case Temperature | T_C | 0 | | 70 | °C |
| Transponder Total Power Consumption | P | | | 3.5 | W |
| Supply Voltage +5.0 V | V_{CC5} | 4.75 | 5.0 | 5.25 | V |
| Supply Current +5.0 V | I_{CC5} | | | 300 | mA |
| Supply Voltage +3.3 V | V_{CC3} | 3.14 | 3.3 | 3.47 | V |
| Supply Current +3.3 V | I_{CC3} | | | 300 | mA |
| Supply Voltage APS | $V_{CC\text{ aps}}$ | 1.152 | 1.2 | 1.248 | V |
| Supply Current APS | $I_{CC\text{ aps}}$ | | | 1000 | mA |

Electrical DC Characteristics

($V_{CC5} = 4.75\text{ V to }5.25\text{ V}$, $V_{CC3} = 3.14\text{ V to }3.47\text{ V}$, $V_{CC\text{ aps}} = 1.152\text{ V to }1.248\text{ V}$, $T_C = 0^\circ\text{C to }70^\circ\text{C}$)

| Parameter | Symbol | Values | | | Unit |
|--|------------------------|--------|------|-------|---------------|
| | | min. | typ. | max. | |
| 1.2 V CMOS (1.8 V CMOS Compatible¹⁾) I/O DC Characteristics (PRTAD; LASI; RESET; TX_ONOFF) | | | | | |
| External Pull-up Resistor for Open Drain | R_{pullup} | 10 | | 22 | k Ω |
| Output High Voltage ²⁾ | V_{oh} | 1 | | | V |
| Output Low Voltage ²⁾ | V_{ol} | | | 0.15 | V |
| Input High Voltage | V_{ih} | 0.84 | | 1.5 | V |
| Input Low Voltage | V_{il} | | | 0.36 | V |
| Input Pull-down Current ³⁾ | I_{pd} | 20 | | 120 | μA |
| XAUI I/O DC Characteristics (TXLANE[0..3]; RXLANE[0..3]) | | | | | |
| Differential Input Amplitude (pk-pk) ⁴⁾ | $V_{\text{in_xaui}}$ | 200 | | 2500 | mV |
| Differential Output Amplitude (pk-pk) ⁴⁾ | $V_{\text{out_xaui}}$ | 800 | | 1600 | mV |
| MDIO I/O DC Characteristics (MDIO; MDC) | | | | | |
| Output Low Voltage ⁵⁾ | V_{OL} | -0.3 | | 0.2 | V |
| Output Low Current | I_{OL} | | | 4 | mA |
| Input High Voltage | V_{IH} | 0.84 | | 1.5 | V |
| Input Low Voltage | V_{IL} | -0.3 | | 0.36 | V |
| Pull-up Supply Voltage | V_{PU} | 1.152 | 1.2 | 1.248 | V |
| Input Capacitance | C_{IN} | | | 10 | pF |
| Load Capacitance | C_{LOAD} | | | 470 | pF |
| External Pull-up Resistance | R_{LOAD} | 200 | | | Ω |

¹⁾ For 1.8 V CMOS $V_{\text{oh}} = 1.65\text{ V min.}$, $V_{\text{ol}} = 0.15\text{ V max.}$, $V_{\text{ih}} = 1.17\text{ V min.}$, $V_{\text{il}} = 0.63\text{ V max.}$

²⁾ $R_{\text{pull-up}} = 10\text{ k}\Omega\text{ to }1.8\text{ V}$.

³⁾ $V_{\text{in}} = 1.2\text{ V}$.

⁴⁾ AC coupled.

⁵⁾ $I_{\text{OL}} = 100\ \mu\text{A}$.

Electrical AC Characteristics(V_{CC5} = 4.75 V to 5.25 V, V_{CC3} = 3.14 V to 3.47 V, V_{CCaps} = 1.152 V to 1.248 V, T_C = 0°C to 70°C)

| Parameter | Symbol | Values | | | Unit |
|--|--|--------|-----------------|------|-------------------|
| | | min. | typ. | max. | |
| XAUI Input AC Characteristics (TXLANE[0..3]) | | | | | |
| Baud Rate Fibre Channel Ethernet | R _{XAUIIN} | | 3.1875 3.125 | | Gbit/s |
| Baud Rate Tolerance | R _{TOLXAUI} | -100 | | 100 | ppm |
| Differential Input Impedance | Z _{INXAUI} | 80 | 100 | 120 | Ω |
| Differential Return Loss ¹⁾ | S ₁₁ | 10 | | | dB |
| Input Differential Skew ²⁾ | t _{SKEWIN} | | | 75 | ps |
| Jitter Amplitude Tolerance ³⁾ | J _{XAUITOL} | | | 0.65 | UI _{p-p} |
| XAUI Output AC Characteristics (RXLANE[0..3]) | | | | | |
| Baud Rate Fibre Channel Ethernet | R _{XAUIOUT} | | 3.1875 3.125 | | Gbit/s |
| Baud Rate Variation | R _{XAUIVAR} | -100 | | 100 | ppm |
| XAUI Eye Mask (far-end) | According to IEEE 802.3ae and Fibre Channel 1200-SM-LL-L | | | | |
| Output Differential Skew | t _{SKEWOUT} | | | 15 | ps |
| Output Differential Impedance | Z _{OUTXAUI} | 80 | 100 | 120 | Ω |
| Differential Output Return Loss ¹⁾ | S ₂₂ | 10 | | | dB |
| Total Jitter ⁴⁾ | TJ _{XAUI} | | | 0.35 | UI |
| Deterministic Jitter ⁴⁾ | DJ _{XAUI} | | | 0.37 | UI |
| Power-On Reset AC Characteristics | | | | | |
| Power-On Reset and TX_ONOFF Characteristics | According to XENPAK MSA Issue 3.0, 2002-9-18 | | | | |
| MDIO I/O AC Characteristics (MDIO; MDC) | | | | | |
| MDIO Data Hold Time | t _{HOLD} | 10 | | | ns |
| MDIO Data Setup Time | t _{SU} | 10 | | | ns |
| Delay from MDC Rising Edge to MDIO Data Change | t _{DELAY} | | | 300 | ns |
| MDC Clock Rate | f _{MAX} | | | 2.5 | MHz |

1) 100 MHz to 2.5 GHz.

2) At crossing point.

3) Per IEEE Std 802.3ae.

4) At near-end, No pre-equalization, 1 UI = 320 ps.

IV. Optical Characteristics

($V_{CC5} = 4.75 \text{ V to } 5.25 \text{ V}$, $V_{CC3} = 3.14 \text{ V to } 3.47 \text{ V}$, $V_{CC\text{aps}} = 1.152 \text{ V to } 1.248 \text{ V}$, $T_C = 0^\circ\text{C to } 70^\circ\text{C}$)

| Parameter | Symbol | Values | | | Unit |
|---|--|--------|------|-------|-------|
| | | min. | typ. | max. | |
| Transmitter | | | | | |
| Launch Power in OMA minus TDP | $P_{O\text{-OMA}}$ | -5.2 | | | dBm |
| Average Launch Power | $P_{O\text{-Avg}}$ | -8.2 | | 0.5 | dBm |
| Center Wavelength Range | $\lambda_{C\text{-Tx}}$ | 1290 | | 1330 | nm |
| Spectral Width (-20 dB) | σ_1 | | | 0.6 | nm |
| Side Mode Suppression Ratio | SMSR | 30 | | | dB |
| Extinction Ratio | ER | 3.5 | | | dB |
| Relative Intensity Noise ₁₂ OMA | RIN | | | -128 | dB/Hz |
| Optical Modulation Aplitude (OMA) | OMA | -5.2 | | | dBm |
| Transmitter and Dispersion Penalty | TDP | | | 3.2 | dB |
| Average Launch Power of OFF Transmitter | $P_{O\text{-OFF}}$ | | | -30 | dBm |
| Optical Return Loss Tolerance | ORL_T | | | 12 | dB |
| Transmitter Reflectance | REF_{TX} | | | -12 | dB |
| Eye Mask Definition | According to IEEE 802.3ae and Fibre Channel 1200-SM-LL-L | | | | |
| Receiver | | | | | |
| Stressed Receiver Sensitivity | $P_{IN\text{-S}}$ | | | -10.3 | dBm |
| Rx Sensitivity in OMA ¹⁾ | P_{IN} | | | -12.6 | dBm |
| Average Receive Power | $P_{IN\text{-max}}$ | -14.4 | | 0.5 | dBm |
| Receiver Damage Power | $P_{IN\text{-dmg}}$ | | | 1.5 | dBm |
| Loss Of Signal Assert Level | P_{LOSa} | | | -13 | dBm |
| Loss Of Signal Hysteresis | P_{LOSh} | 1 | | | dB |
| Receiver Reflectance | REF_{RX} | | | -12 | dB |
| Receive Electrical 3dB Upper Cutoff Frequency | F_C | | | 12.3 | GHz |
| Center Wavelength Range | $\lambda_{C\text{-RX}}$ | 1260 | | 1355 | nm |
| Stressed Signal Calibration | | | | | |
| Vertical Eye Closure Penalty | | 2.2 | | | dB |
| Stressed Eye Jitter | | 0.3 | | | UIpp |

¹⁾ Receiver sensitivity, which is defined for an ideal input signal is informative only.

V. General Specifications

Optical Interface Standard Specifications

- IEEE Std 802.3ae-2002 clause 52, 10GBASE-LR
- Fibre Channel 10GFC Draft 4.0, 1200-SM-LL-L
- XPAK MSA 2.3

| Standard | Differential Group Delay Maximum (ps) | Operating Range ¹⁾ (meters) |
|----------|---------------------------------------|--|
| B1.1 SMF | 10 | 2 to 10,000 |
| B1.3 SMF | 10 | 2 to 10,000 |

Notes:

1) Operating range as defined by IEEE and Fibre Channel standards. Longer reach possible depending upon link implementation.

Environmental Performance

Operating case temperature: 0°C to +70°C
 Operating humidity: 0% -95% RH non-condensing

Fibers and Connectors

The transponder has SC receptacles for both Tx and Rx. The transponder is designed for multimode SC cables, 0° polished endface (PC).

70-pin Connector

The module interface connector is a 70-pin, printed circuit board edge connection with a 0.5 mm pitch. The appropriate mating connector for the customer PCB is a 70-pin SMT, dual row, right angled, edge connector, 0.5 mm pitch (Tyco Electronics part number 1367337-1, Molex part number 74441-0003 or equivalent).

Cage Requirement

The cage assembly required to mount the XPAK module is defined by the MSA. Finisar recommends the low profile design –For correct operation and implementation always follow the manufacturer’s datasheet.

A recommended XPAK rail assembly is Molex part number 74732-0220..

Aqueous Wash

Finisar XPAK Transponders are neither solderable nor aqueous washable and are not intended for these processes.

VI. Regulatory Compliance

| Feature | Standard | Comments |
|---|--|--|
| ESD: Electrostatic Discharge to the Electrical Pins (HBM) | EIA/JESD22-A114-B (MIL-STD 883D Method 3015.7) | Class 1a (> 500 V) |
| Immunity: Against Electrostatic Discharge (ESD) to the Module Receptacle | EN 61000-4-2 IEC 61000-4-2 | Discharges ranging from ± 2 kV to ± 25 kV to the front end / faceplate / receptacle cause no damage to module (under recommended conditions). |
| Immunity: Against Radio Frequency Electromagnetic Field | EN 61000-4-3 IEC 61000-4-3 | With a field strength of 10 V/m, noise frequency ranges from 10 MHz to 2 GHz. No effect on module performance between the specification limits. |
| Emission: Electromagnetic Interference (EMI) | FCC 47 CFR Part 15, Class B EN 55022 Class B CISPR 22 | Noise frequency range: 30 MHz to 40 GHz Radiated emission does not exceed specified limits when the module is measured inside a shielding enclosure with an MSA conforming cutout. |

Eye Safety

Finisar FTLX1451 transponders are Class 1 Laser Products. They are certified per the following standards:

| Feature | Agency | Standard | Certificate Number |
|-------------------|----------|--|--------------------|
| Laser Eye Safety | FDA/CDRH | CDRH 21 CFR 1040 and Laser Notice 50 | 9210176-77 |
| Laser Eye Safety | TÜV | EN 60825-1: 1994+A11:1996+A2:2001 IEC 60825-1: 1993+A1:1997+A2:2001 IEC 60825-2: 2000, Edition 2 | R 72052602 |
| Electrical Safety | TÜV | EN 60950 | R 72052602 |
| Electrical Safety | UL/CSA | CLASS 3862.07 CLASS 3862.87 | 1439230 |

Copies of the referenced certificates will be available at Finisar Corporation upon request.

VII. DOM Parameters

| Parameter | Values | | | Unit |
|--|--------|------|------|------|
| | min. | typ. | max. | |
| Transponder Temperature Monitor Accuracy ¹⁾ | -5 | | +5 | °C |
| Laser Bias Current Monitor Accuracy ²⁾ | -10 | | +10 | % |
| Transmit Power Monitor Accuracy ³⁾ | -3 | | +3 | dB |
| Receive Power Monitor Accuracy | -3 | | +3 | dB |

¹⁾ 0 to 70°C case temperature.

²⁾ 0 to 60 mA.

³⁾ -8.2 dBm to +0.5 dBm.

VIII. Mechanical Specifications

| Parameter | Symbol | Values | | | Unit |
|--|----------------------|--------|------|------|------|
| | | min. | typ. | max. | |
| Module Retention Force (latch strength) | F _{RET} | | 200 | | N |
| Module Insertion Force | F _{IN} | | 40 | | N |
| Module Extraction Force (with kick-out) | F _{EXT-K} | | 16 | | N |
| Module Extraction Force (without kick-out) | F _{EXT} | | 25 | | N |
| 0-80 UNF Screw Torque ¹⁾ | τ_{0-80} UMF | | | 10 | cNm |

¹⁾ Two 0-80 UNF screws are used to secure the XPAK module (no bail de-latch version FTLX1451E2S) in the cage. Each XPAK module is shipped with the screws, and assembly is required after the insertion of the module into the cage.

Package Outlines

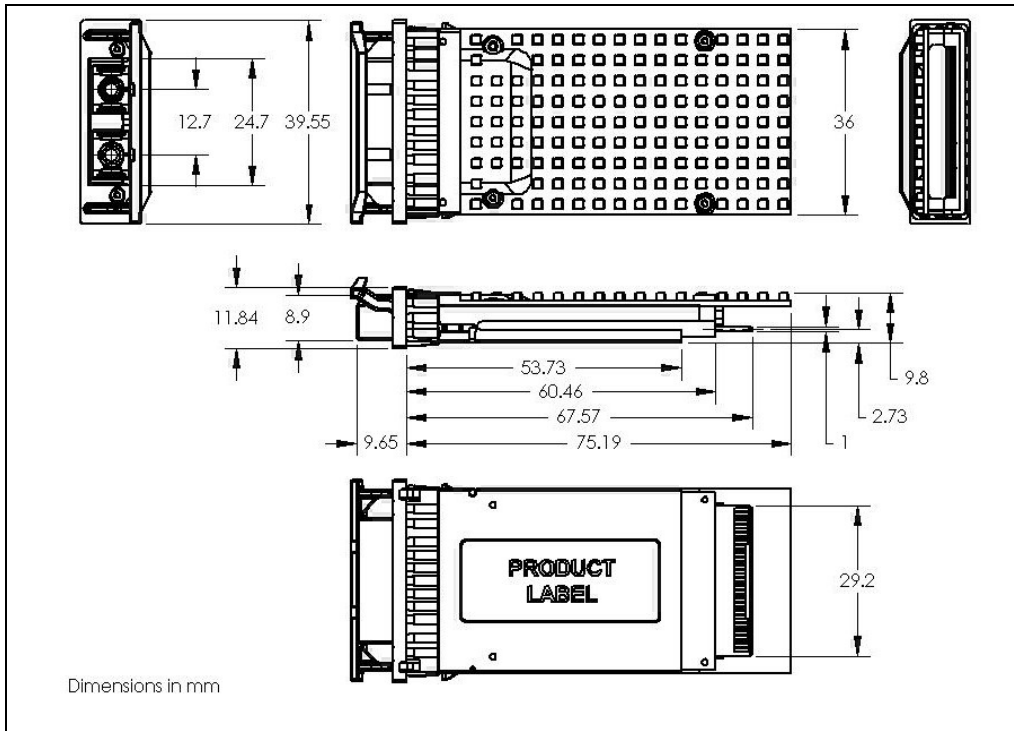


Figure 2-XPAK with Bail De-Latch Mechanism

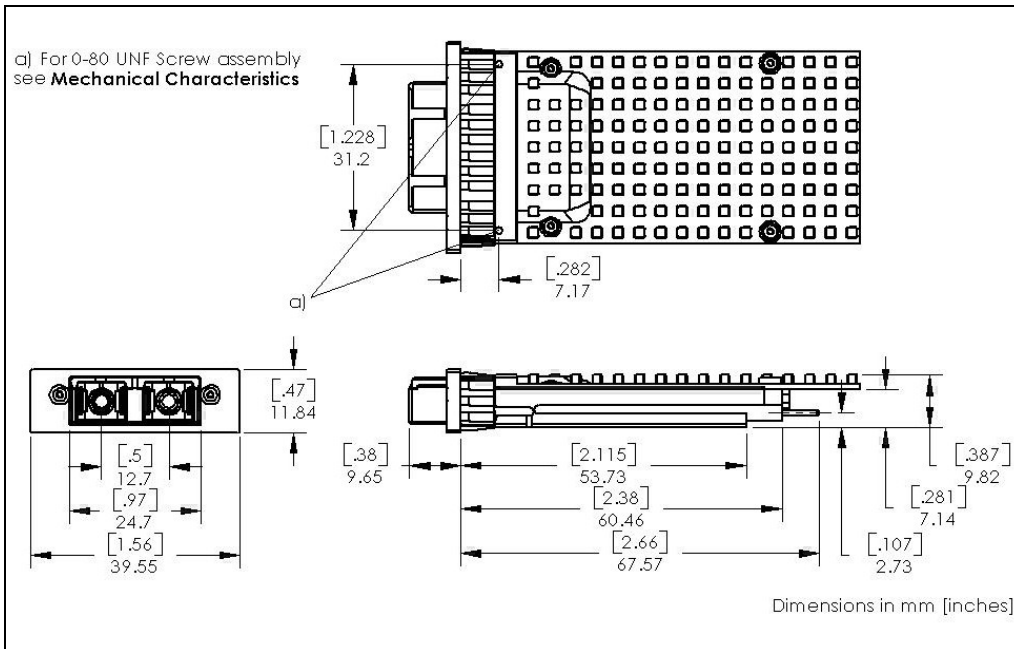


Figure 3 -XPAK with Screw Mount Assembly

IX. References

- IEEE Std 802.3ae-2002 clause 52, 10GBASE-LR
- Fibre Channel 10GFC Draft 4.0, 1200-SM-LL-L
- XPAK MSA 2.3

X. For More Information

Finisar Corporation
1389 Moffett Park Drive
Sunnyvale, CA 94089-1133
Tel. 1-408-548-1000
Fax 1-408-541-6138
sales@finisar.com
www.finisar.com