
# Integrated Silicon Pressure Sensor On-Chip Signal Conditioned, Temperature Compensated and Calibrated

The MP3V5050 series piezoresistive transducer is a state-of-the-art monolithic silicon pressure sensor designed for a wide range of applications, but particularly those employing a microcontroller or microprocessor with A/D inputs. This patented, single element transducer combines advanced micromachining techniques, thin-film metallization, and bipolar processing to provide an accurate, high level analog output signal that is proportional to the applied pressure.

#### Features

- 2.5% Maximum Error over 0° to 85°C
- Ideally suited for Microprocessor or Microcontroller-Based Systems
- Temperature Compensated Over –40° to +125°C
- Patented Silicon Shear Stress Strain Gauge
- Durable Epoxy Small Outline Package (SOP)
- Easy-to-Use Chip Carrier Option
- Multiple Porting Options for Design Flexibility
- Barbed Side Ports for Robust Tube Connection



**MP3V5050** 


SMALL OUTLINE PACKAGE PIN NUMBERS <sup>(1)</sup>						
1 N/C 5 N/C						
2	Vs	6	N/C			
3	Gnd	7	N/C			
4	V <sub>out</sub>	8	N/C			

1. Pins 1, 5, 6, 7, and 8 are internal device connections. Do not connect to external circuitry or ground. Pin 1 is noted by the notch in the lead.

ORDERING INFORMATION								
Device Type	Device Type         Options         Case No.         MP3V Series Order No.         Packing Options		Device Marking					
SMALL OUTLINE PACKAGE (MP3V5050 SERIES)								
Ported Elements	Side Port	1369	MP3V5050GP	Trays	MP3V5050G			
	Dual Port	1351	MP3V5050DP	Trays	MP3V5050G			
Axial Port		482A	MP3V5050GC6U	Rails	MP3V5050G			
		482A	MP3V5050GC6T1	Tape & Reel	MP3V5050G			



© Freescale Semiconductor, Inc., 2008. All rights reserved.

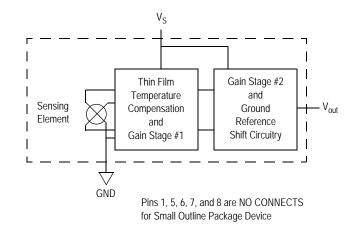



# Table 1. Maximum Ratings<sup>(1)</sup>

Rating	Symbol	Value	Unit
Maximum Pressure (P1 > P2)	P <sub>max</sub>	200	kPa
Storage Temperature	T <sub>stg</sub>	–40° to +125°	°C
Operating Temperature	T <sub>A</sub>	–40° to +125°	℃

1. Exposure beyond the specified limits may cause permanent damage or degradation to the device.

Characteristic		Symbol	Min	Тур	Max	Unit
Pressure Range <sup>(1)</sup>		P <sub>OP</sub>	0		50	kPa
Supply Voltage <sup>(2)</sup>		V <sub>S</sub>	2.7	3.0	3.3	Vdc
Supply Current		Ι <sub>ο</sub>	_	7.0	10	mAdc
Minimum Pressure Offset <sup>(3)</sup> @ V <sub>S</sub> = 3.0 Volts	(0 to 85°C)	V <sub>off</sub>	0.053	0.12	0.188	Vdc
Full Scale Output <sup>(4)</sup> @ V <sub>S</sub> = 3.0 Volts	(0 to 85°C)	V <sub>FSO</sub>	2.752	2.8	2.888	Vdc
Full Scale Span <sup>(5)</sup> @ V <sub>S</sub> = 3.0 Volts	(0 to 85°C)	V <sub>FSS</sub>	_	2.7	_	Vdc
Accuracy <sup>(6)</sup>	(0 to 85°C)	_	_	_	±2.5	%V <sub>FSS</sub>
Sensitivity		V/P	—	54		mV/kPa
Response Time <sup>(7)</sup>		t <sub>R</sub>	_	1.0		ms
Output Source Current at Full Scale Output		I <sub>o+</sub>	—	0.1		mAdc
Warm-Up Time <sup>(8)</sup>		_	_	20		ms
Offset Stability <sup>(9)</sup>		—	_	±0.5		%V <sub>FSS</sub>

**Table 2.** Operating Characteristics ( $V_S = 3.0 \text{ Vdc}$ ,  $T_A = 25^{\circ}\text{C}$  unless otherwise noted, P1 > P2. Decoupling circuit shown in Figure 4 required to meet electrical specifications.)

1. 1.0 kPa (kiloPascal) equals 0.145 psi.

2. Device is ratiometric within this specified excitation range.

3. Offset (Voff) is defined as the output voltage at the minimum rated pressure.

4. Full Scale Output (V<sub>FSO</sub>) is defined as the output voltage at the maximum or full rated pressure.

5. Full Scale Span (V<sub>FSS</sub>) is defined as the algebraic difference between the output voltage at full rated pressure and the output voltage at the minimum rated pressure.

6. Accuracy (error budget) consists of the following:

• Linearity: Output deviation from a straight line relationship with pressure over the specified pressure range.

- Temperature Hysteresis: Output deviation at any temperature within the operating temperature range, after the temperature is cycled to and from the minimum or maximum operating temperature points, with zero differential pressure applied.
- Pressure Hysteresis: Output deviation at any pressure within the specified range, when this pressure is cycled to and from the minimum or maximum rated pressure at 25°C.
- TcSpan: Output deviation over the temperature range of 0° to 85°C, relative to 25°C.
- TcOffset: Output deviation with minimum pressure applied, over the temperature range of 0° to 85°C, relative to 25°C.

• Variation from Nominal: The variation from nominal values, for Offset or Full Scale Span, as a percent of V<sub>FSS</sub> at 25°C.

7. Response Time is defined as the time for the incremental change in the output to go from 10% to 90% of its final value when subjected to a specified step change in pressure.

8. Warm-up Time is defined as the time required for the product to meet the specified output voltage after the Pressure has been stabilized.

9. Offset Stability is the product's output deviation when subjected to 1000 hours of Pulsed Pressure, Temperature Cycling with Bias Test.

Figure 3 illustrates the Differential/Gauge Sensing Chip in the basic chip carrier (Case 482). A fluorosilicone gel isolates the die surface and wire bonds from the environment, while allowing the pressure signal to be transmitted to the sensor diaphragm.

The MP3V5050 series pressure sensor operating characteristics, and internal reliability and qualification tests are based on use of dry air as the pressure media. Media, other than dry air, may have adverse effects on sensor performance and long-term reliability. Contact the factory for information regarding media compatibility in your application.

Figure 2 shows the sensor output signal relative to pressure input. Typical, minimum, and maximum output curves are shown for operation over a temperature range of 0° to 85°C using the decoupling circuit shown in Figure 4. The output will saturate outside of the specified pressure range.

Figure 4 shows the recommended decoupling circuit for interfacing the output of the integrated sensor to the A/D input of a microprocessor or microcontroller. Proper decoupling of the power supply is recommended.

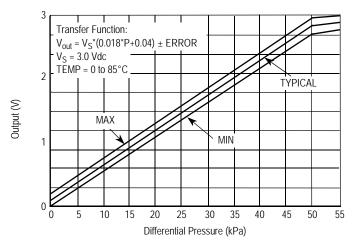


Figure 2. Output versus Pressure Differential

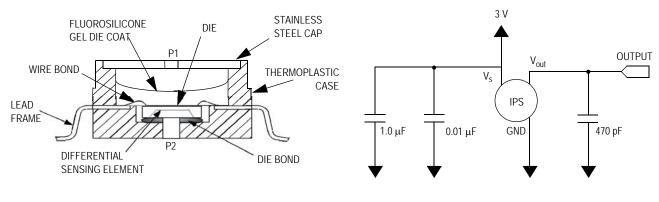





Figure 4. Recommended Power Supply Decoupling and Output Filtering (For additional output filtering, please refer to Application Note AN1646.)


## **Transfer Function**

```
Nominal Transfer Value: V_{out} = V_S (P \times 0.018 + 0.04)

\pm (Pressure Error \times Temp. Factor \times 0.018 \times V_S)

V_S = 3.0 V \pm 0.30 Vdc
```

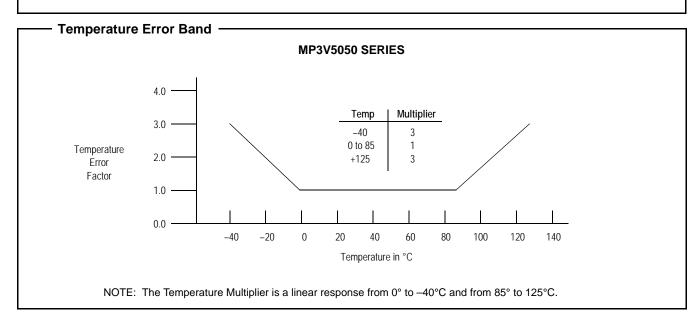

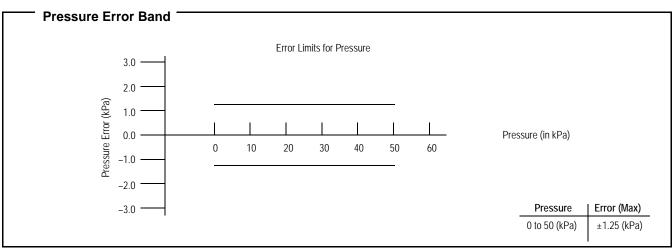


## PRESSURE (P1)/VACUUM (P2) SIDE IDENTIFICATION TABLE

Freescale designates the two sides of the pressure sensor as the Pressure (P1) side and the Vacuum (P2) side. The Pressure (P1) side is the side containing fluorosilicone gel which protects the die from harsh media. The MP3V pressure sensor is designed to operate with positive differential pressure applied, P1 > P2.

The Pressure (P1) side may be identified by using the table below:

Part Number	Case Type	Pressure (P1) Side Identifier
MP3V5050GP	1369	Side with Port Attached
MP3V5050DP	1351	Side with Part Marking
MP3V5050GC6U/T1	482A	Vertical Port Attached

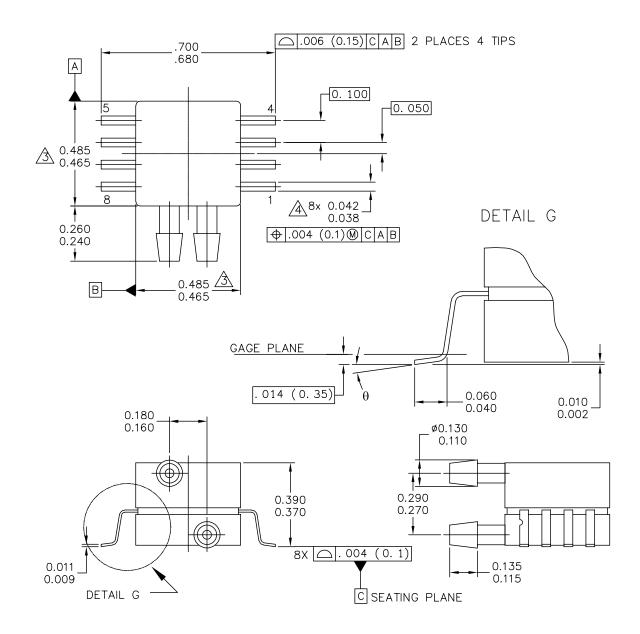

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.	MECHANICA	L OUTLINE PRINT VERSION N		OT TO SCALE	
TITLE:		DOCUMENT NO	): 98ASA99255D	REV: A	
8 LD SNSR. DUAL	PORT	CASE NUMBER	8: 1351–01	27 JUL 2005	
		STANDARD: NO	N-JEDEC		

PAGE 1 OF 2

## CASE 1351-01 ISSUE A SMALL OUTLINE PACKAGE

NOTES:

1. CONTROLLING DIMENSION: INCH

2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.

DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PPROTRUSIONS. MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 PER SIDE.

A DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 MAXIMUM.

STYLE 1:		STYLE 2:		
PIN 1:	GND	PIN	1:	N/C
PIN 2:	+Vout	PIN		
PIN 3:	Vs	PIN	3:	GND
PIN 4:	-Vout	PIN	4:	Vout
PIN 5:	N/C	PIN	5:	N/C
PIN 6:	N/C	PIN	6:	N/C
PIN 7:	N/C	PIN	7:	N/C
PIN 8:	N/C	PIN	8:	N/C


© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.		LOUTLINE	PRINT VERSION NO	DT TO SCALE
TITLE:		DOCUMENT NO	): 98ASA99255D	REV: A
8 LD SNSR, DUAL	PORT	CASE NUMBER	8: 1351–01	27 JUL 2005
		STANDARD: NO	N-JEDEC	

PAGE 2 OF 2

## CASE 1351-01 ISSUE A SMALL OUTLINE PACKAGE

#### MP3V5050

Sensors Freescale Semiconductor

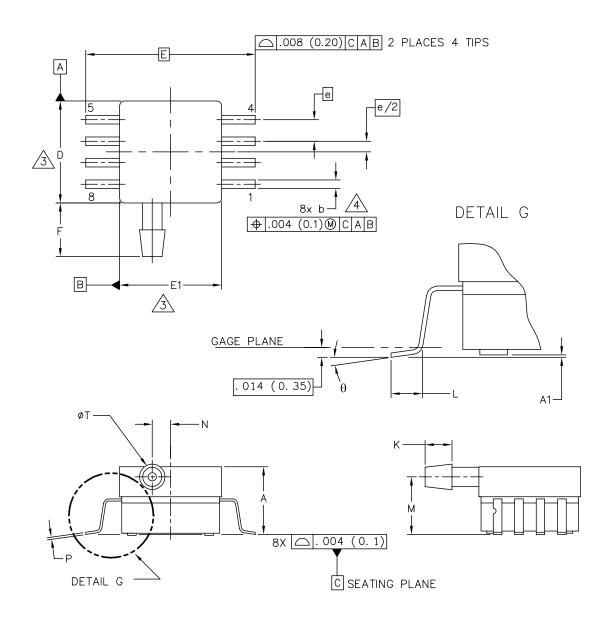

© FREESCALE SEMICONDUCTOR, INC. ALL RIGHTS RESERVED.		OUTLINE	PRINT VERSION NO	DT TO SCALE
TITLE:	D	OCUMENT NO	: 98ASA99303D	REV: B
8 LD SOP, SIDE PO	DRT C	ASE NUMBER	: 1369–01	24 MAY 2005
		STANDARD: NC	N-JEDEC	

PAGE 1 OF 2

## CASE 1369-01 ISSUE B SMALL OUTLINE PACKAGE

NOTES:

- 1. CONTROLLING DIMENSION: INCH
- 2. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
- A DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PPROTRUSIONS. MOLD FLASH AND PROTRUSIONS SHALL NOT EXCEED .006 (0.152) PER SIDE.
- A DIMENSION DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE .008 (0.203) MAXIMUM.


	INC	HES	MIL	LIMETERS		Ι	NCHES	MI	LLIMETERS
DIM	MIN	MAX	MIN	MAX	DIM	MIN	MAX	MIN	MAX
A	. 300	. 330	7.11	7.62	θ	0°	7°	0°	7 <b>°</b>
A 1	. 002	. 010	0. 05	0. 25	-				
b	. 038	. 042	0.96	1.07	-				
D	. 465	. 485	11. 81	12.32	-				
E	. 717	BSC	18	.21 BSC	-				
E1	. 465	. 485	11.81	12.32	-				
e	. 100	BSC	2.	54 BSC	-				
F	. 245	. 255	6. 22	6.47	-				
к	. 120	. 130	3. 05	3. 30	-				
L	. 061	. 071	1. 55	1.80	-				
м	. 270	. 290	6. 86	7.36	-				
N	. 080	. 090	2. 03	2. 28	-				
Р	. 009	. 011	0. 23	0. 28	-				
Т	. 115	. 125	2. 92	3. 17	-				
	FREESCALE SEN		INC.			-			
		TS RESERVED.	1110.	MECHANICA		TLINE	PRINI VER	SION NO	OT TO SCALE
TITLE:					DOCI	JMENT NO	): 98ASA99303	3D	REV: B
	8 LC	) SOP, S	IDE PO	DRT	CASE NUMBER: 1369-01 24 MAY 2			24 MAY 2005	
					STA	NDARD: NO	N-JEDEC		

PAGE 2 OF 2

## CASE 1369-01 ISSUE B SMALL OUTLINE PACKAGE

### MP3V5050

## PACKAGE DIMENSIONS

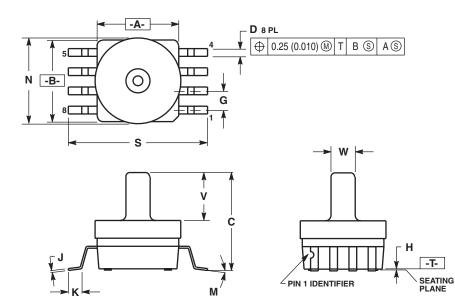

NOT	ES:	
1	DIMENSIONING	ΔΝΓ

NOTES: 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982. 2. CONTROLLING DIMENSION: INCH. 3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION. 4. MAXIMUM MOLD PROTRUSION 0.15 (0.006). 5. ALL VERTICAL SURFACES 5' TYPICAL DRAFT.

	INC	HES	ES MILLIN		
DIM	MIN	MAX	MIN	MAX	
Α	0.415	0.425	10.54	10.79	
В	0.415	0.425	10.54	10.79	
С	0.500	0.520	12.70	13.21	
D	0.038	0.042	0.96	1.07	
G	0.100 BSC		2.54 BSC		
Н	0.002	0.010	0.05	0.25	
J	0.009	0.011	0.23	0.28	
Κ	0.061	0.071	1.55	1.80	
М	0°	7°	0°	7°	
Ν	0.444	0.448	11.28	11.38	
S	0.709	0.725	18.01	18.41	
٧	0.245	0.255	6.22	6.48	
W	0.115	0.125	2.92	3.17	

CASE 482A-01 **ISSUE A** SMALL OUTLINE PACKAGE

#### How to Reach Us:

Home Page: www.freescale.com

Web Support: http://www.freescale.com/support

#### **USA/Europe or Locations Not Listed:**

Freescale Semiconductor, Inc. Technical Information Center, EL516 2100 East Elliot Road Tempe, Arizona 85284 1-800-521-6274 or +1-480-768-2130 www.freescale.com/support

#### Europe, Middle East, and Africa:

Freescale Halbleiter Deutschland GmbH Technical Information Center Schatzbogen 7 81829 Muenchen, Germany +44 1296 380 456 (English) +46 8 52200080 (English) +49 89 92103 559 (German) +33 1 69 35 48 48 (French) www.freescale.com/support

#### Japan:

Freescale Semiconductor Japan Ltd. Headquarters ARCO Tower 15F 1-8-1, Shimo-Meguro, Meguro-ku, Tokyo 153-0064 Japan 0120 191014 or +81 3 5437 9125 support.japan@freescale.com

#### Asia/Pacific:

Freescale Semiconductor China Ltd. Exchange Building 23F No. 118 Jianguo Road Chaoyang District Beijing 100022 China +86 010 5879 8000 support.asia@freescale.com

#### For Literature Requests Only:

Freescale Semiconductor Literature Distribution Center P.O. Box 5405 Denver, Colorado 80217 1-800-441-2447 or +1-303-675-2140 Fax: +1-303-675-2150 LDCForFreescaleSemiconductor@hibbertgroup.com Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals", must be validated for each customer application by customer's technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale<sup>™</sup> and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners. © Freescale Semiconductor, Inc. 2008. All rights reserved.



MP3V5050 Rev 0 08/2008