

M3T-FLX-100NSD

Converter for Connecting 100-core Flexible Board FLX100 to 100-pin 0.5mm-pitch LQFP

Function

The M3T-FLX-100NSD is a converter for connecting the FLX100 100-core flexible board to a foot pattern of a 100-pin 0.5mm-pitch LQFP (100P6Q-A=100P6D-A). This converter can be used during debugging and board-mounted evaluation in common.


Attaching Procedure

When debugging


- (1) Mount the NQPACK100SD-ND.
- (2) Attach the YQPACK100SD on the NQPACK100SD.
- (3) Secure the four corners of the YQPACK100SD by the included YQ-GUIDE's.
- (4) Attach the M3T-FLX-100NSD to the YQPACK100SD.
- (5) Attach the probe of the emulation pod to the M3T-FLX-100NSD.

During board-mounted evaluation


On top of NQPACK100SD-ND that is mounted on the target system, attach the MCU with on-chip flash memory or one-time PROM and the HQPACK100SD (option) in that order.

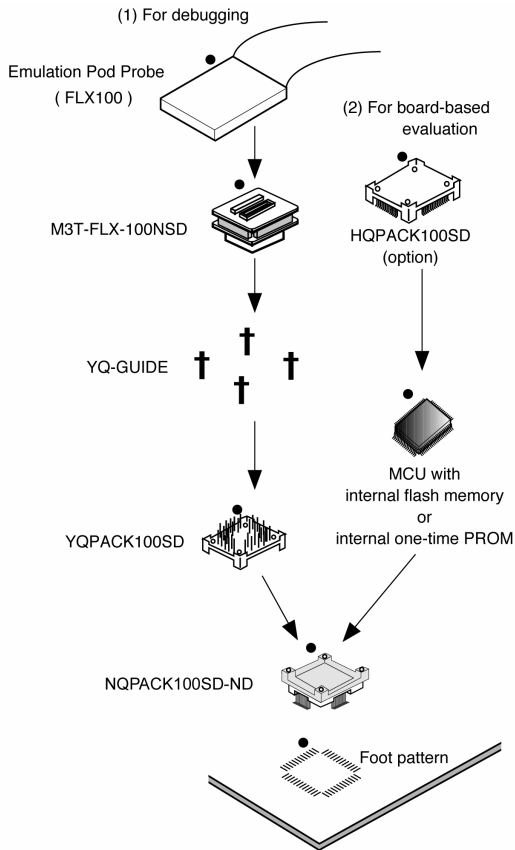

External View and Dimensions

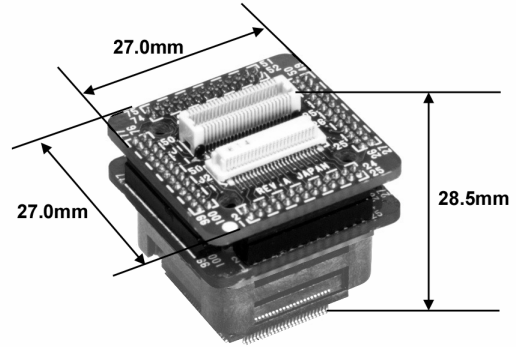

《Side View》

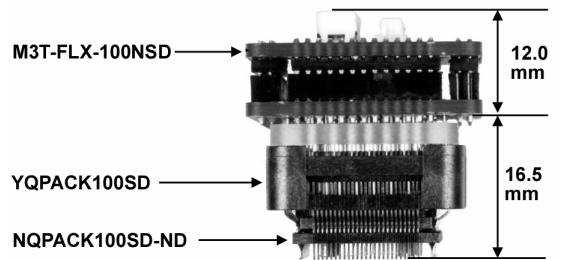

Package Components

- M3T-FLX-100NSD converter
- YQPACK100SD (made by Tokyo Eletech Co., Ltd.)
- NQPACK100SD-ND (made by Tokyo Eletech Co., Ltd.)
- YQ-GUIDE (× 4)
- User's manual

*Required components to connect to the target system are included with this product package. Each component made by Tokyo Eletech Co., Ltd. is optionally available alone from Tokyo Eletech Co., Ltd. See Appendix G "Contact Addresses for Partner Products".

Foot Pattern Reference Dimensions

See Appendix E "List of TQPACK/NQPACK Foot Patterns Made by Tokyo Eletech Co., Ltd."

[Ordering Information] See Appendix H "Ordering Information".