



## FXLA108

# Low-Voltage Dual-Supply 8-Bit Voltage Translator with Configurable Voltage Supplies and Signal Levels, 3-State Outputs, and Auto Direction Sensing

### Features

- Bi-Directional Interface between Two Levels: from 1.1V to 3.6V
- Fully Configurable: Inputs and Outputs Track V<sub>CC</sub>
- Non-Preferential Power-Up; Either V<sub>CC</sub> May Be Powered Up First
- Outputs Remain in 3-State Until Active V<sub>CC</sub> Level is Reached
- Outputs Switch to 3-State if Either V<sub>CC</sub> is at GND
- Power-Off Protection
- Bus-Hold on Data Inputs Eliminates the Need for Pull-Up Resistors
- Control Input (/OE) Referenced to V<sub>CCA</sub> Voltage
- Packaged in 20-Terminal DQFN (2.5mm x 4.5mm)
- Direction Control Not Necessary
- 100Mbps Throughput when Translating Between 1.8V and 2.5V
- ESD Protection Exceeds:
  - 8kV HBM  
(per JESD22-A114 & Mil Std 883e 3015.7)
  - 2kV CDM (per ESD STM 5.3)

### Applications

- Laptops, Notebooks,
- Routers, Switches

### Description

The FXLA108 is a configurable dual-voltage supply translator for both uni-directional and bi-directional voltage translation between two logic levels. The device allows translation between voltages as high as 3.6V to as low as 1.1V. The A port tracks the V<sub>CCA</sub> level and the B port tracks the V<sub>CCB</sub> level. This allows for bi-directional voltage translation over a variety of voltage levels: 1.2V, 1.5V, 1.8V, 2.5V, and 3.3V.

The device remains in three-state until both V<sub>CCs</sub> reach active levels, allowing either V<sub>CC</sub> to be powered up first. Internal power-down control circuits place the device in 3-state if either V<sub>CC</sub> is removed.

The /OE input, when HIGH, disables both the A and B ports by placing them in a 3-state condition. The /OE input is supplied by V<sub>CCA</sub>.

The FXLA108 supports bi-directional translation without the need for a direction control pin. The two ports of the device have auto-direction sense capability. Either port may sense an input signal and transfer it as an output signal to the other port.

### Ordering Information

Part Number	Operating Temperature Range	Eco Status	Package	Packing Method
FXLA108BQX	-40 to 85°C	Green	20-Terminal DQFN 2.5mm x 4.5mm Package	Tape and Reel



For Fairchild's definition of "green" Eco Status, please visit: [http://www.fairchildsemi.com/company/green/rohs\\_green.html](http://www.fairchildsemi.com/company/green/rohs_green.html).

## Pin Configuration

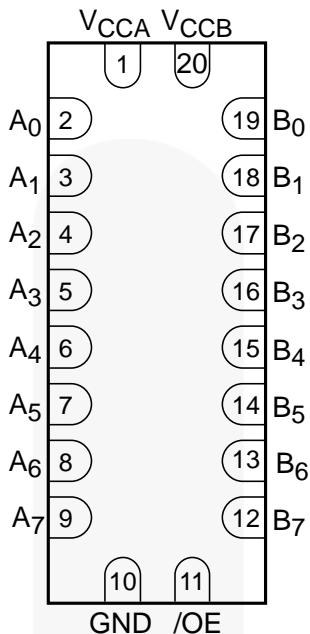


Figure 1. Pin Configuration (Top Through View)

## Pin Definitions

Pin #	Name	Description
1	$V_{CCA}$	A-Side Power Supply
2	$A_0$	A-Side Inputs or 3-State Outputs
3	$A_1$	A-Side Inputs or 3-State Outputs
4	$A_2$	A-Side Inputs or 3-State Outputs
5	$A_3$	A-Side Inputs or 3-State Outputs
6	$A_4$	A-Side Inputs or 3-State Outputs
7	$A_5$	A-Side Inputs or 3-State Outputs
8	$A_6$	A-Side Inputs or 3-State Outputs
9	$A_7$	A-Side Inputs or 3-State Outputs
10	$GND$	Ground
11	$/OE$	Output Enable Input
12	$B_7$	B-Side Inputs or 3-State Outputs
13	$B_6$	B-Side Inputs or 3-State Outputs
14	$B_5$	B-Side Inputs or 3-State Outputs
15	$B_4$	B-Side Inputs or 3-State Outputs
16	$B_3$	B-Side Inputs or 3-State Outputs
17	$B_2$	B-Side Inputs or 3-State Outputs
18	$B_1$	B-Side Inputs or 3-State Outputs
19	$B_0$	B-Side Inputs or 3-State Outputs
20	$V_{CCB}$	B-Side Power Supply

## Functional Diagram

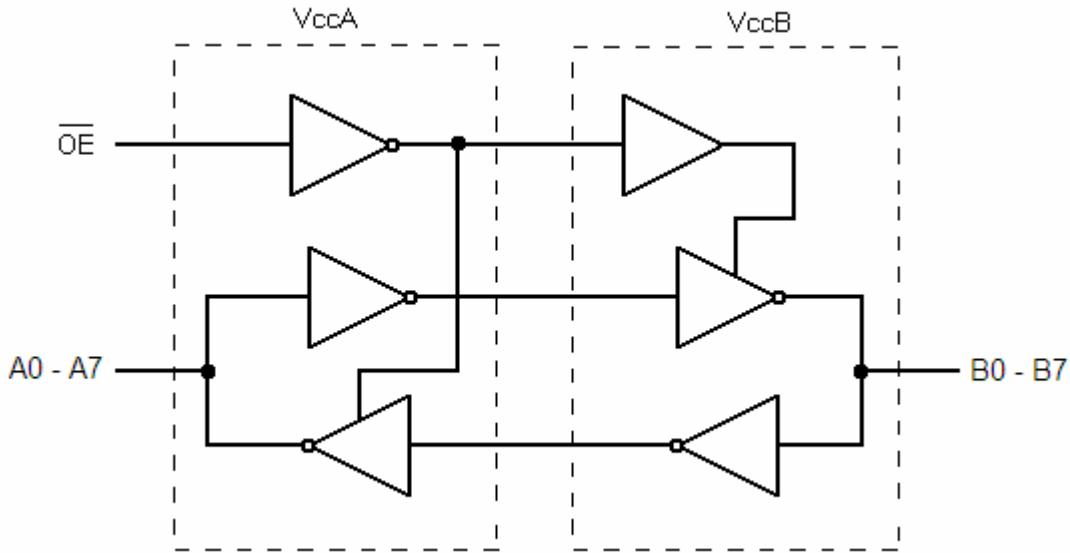


Figure 2. Functional Diagram

## Functional Table

Control	Outputs
/OE	
LOW Logic Level	Normal Operation
HIGH Logic Level	3-State

## Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameter	Conditions	Min.	Max.	Unit
$V_{CC}$	Supply Voltage	$V_{CCA}$	-0.5	4.6	V
		$V_{CCB}$	-0.5	4.6	
$V_I$	DC Input Voltage	I/O Ports A and B	-0.5	4.6	V
		Control Input (/OE)	-0.5	4.6	
$V_O$	Output Voltage <sup>(2)</sup>	Output 3-State	-0.5	4.6	V
		Output Active ( $A_n$ )	-0.5	$V_{CCA} + 0.5$	
		Output Active ( $B_n$ )	-0.5	$V_{CCB} + 0.5$	
$I_{IK}$	DC Input Diode Current	$V_I < 0V$		-50	mA
$I_{OK}$	DC Output Diode Current	$V_O < 0V$		-50	mA
		$V_O > V_{CC}$		+50	
$I_{OH}/I_{OL}$	DC Output Source/Sink Current		-50	+50	mA
$I_{CC}$	DC $V_{CC}$ or Ground Current (per Supply Pin)			$\pm 100$	mA
$T_{STG}$	Storage Temperature Range		-65	+150	°C

### Notes:

1.  $I_O$  absolute maximum ratings must be observed.
2. All unused inputs and input/outputs must be held at  $V_{CCI}$  or GND.

## Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Conditions	Min.	Max.	Unit
$V_{CC}$	Power Supply	Operating $V_{CCA}$ or $V_{CCB}$	1.1	3.6	V
$V_{IN}$	Input Voltage	Ports A and B	0	3.6	V
		Control Input (/OE)	0	$V_{CCA}$	V
$T_A$	Operating Temperature, Free Air		-40	+85	°C
$dt/dV$	Minimum Input Edge Rate	$V_{CCA/B} = 1.1$ to $3.6V$		10	ns/V

## Power-Up/Power-Down Sequence

FXL translators offer an advantage in that either  $V_{CC}$  may be powered up first. This benefit derives from the chip design. When either  $V_{CC}$  is at 0V, outputs are in a high-impedance state. The control input (/OE) is designed to track the  $V_{CCA}$  supply. A pull-up resistor tying /OE to  $V_{CCA}$  should be used to ensure that bus contention, excessive currents, or oscillations do not occur during power-up or power-down. The size of the pull-up resistor is based upon the current-sinking capability of the device driving the /OE pin.

The recommended power-up sequence is:

1. Apply power to the first  $V_{CC}$ .
2. Apply power to the second  $V_{CC}$ .
3. Drive the /OE input LOW to enable the device.

The recommended power-down sequence is:

1. Drive /OE input HIGH to disable the device.
2. Remove power from either  $V_{CC}$ .
3. Remove power from other  $V_{CC}$ .

## DC Electrical Characteristics

$T_A = -40$  to  $85^\circ\text{C}$ .

Symbol	Parameter	Conditions	$V_{CCA}$ (V)	$V_{CCB}$ (V)	Min.	Typ.	Max.	Units	
$V_{IHA}$	High-Level Input Voltage	Data Inputs $A_n$ Control Pin /OE	2.70 to 3.60	1.10 to 3.60	2.00			V	
			2.30 to 2.70		1.60				
			1.65 to 2.30		.65x $V_{CCA}$				
			1.40 to 1.65		.65x $V_{CCA}$				
			1.10 to 1.40		.90x $V_{CCA}$				
$V_{IHB}$		Data Inputs $B_n$	2.70 to 3.60	1.10 to 3.60	2.00			V	
			2.30 to 2.70		1.60				
			1.65 to 2.30		.65x $V_{CCB}$				
			1.40 to 1.65		.65x $V_{CCB}$				
			1.10 to 1.40		.90x $V_{CCB}$				
$V_{ILA}$	Low-Level Input Voltage	Data Inputs $A_n$ Control Pin /OE	2.70 to 3.60	1.10 to 3.60			.80	V	
			2.30 to 2.70				.70		
			1.65 to 2.30				.35x $V_{CCA}$		
			1.40 to 1.65				.35x $V_{CCA}$		
			1.10 to 1.40				.10x $V_{CCA}$		
$V_{ILB}$		Data Inputs $B_n$	2.70 to 3.60	1.10 to 3.60			.80	V	
			2.30 to 2.70				.70		
			1.65 to 2.30				.35x $V_{CCB}$		
			1.40 to 1.65				.35x $V_{CCB}$		
			1.10 to 1.40				.10x $V_{CCB}$		
$V_{OHA}$	High-Level Output Voltage <sup>(3)</sup>	$I_{OH}=-4\mu\text{A}$	1.10 to 3.60	1.10 to 3.60	$V_{CCA} - .40$			V	
$V_{OHB}$		$I_{OH}=-4\mu\text{A}$	1.10 to 3.60	1.10 to 3.60	$V_{CCB} - .40$				
$V_{OLA}$	Low-Level Output Voltage <sup>(3)</sup>	$I_{OL}=4\mu\text{A}$	1.10 to 3.60	1.10 to 3.60			.4	V	
$V_{OLB}$		$I_{OL}=4\mu\text{A}$	1.10 to 3.60	1.10 to 3.60			.4		
$I_{I(HOLD)}$	Bus-Hold Input Minimum Drive Current	$V_{IN}=0.80\text{V}$	3.00	3.00	75.0			$\mu\text{A}$	
		$V_{IN}=2.00\text{V}$	3.00	3.00	-75.0				
		$V_{IN}=0.7\text{V}$	2.30	2.30	45.0				
		$V_{IN}=1.60\text{V}$	2.30	2.30	-45.0				
		$V_{IN}=0.57\text{V}$	1.65	1.65	25.0				
		$V_{IN}=1.07\text{V}$	1.65	1.65	-25.0				
		$V_{IN}=0.49\text{V}$	1.40	1.40	11.0				
		$V_{IN}=0.91\text{V}$	1.40	1.40	-11.0				
		$V_{IN}=0.11\text{V}$	1.10	1.10		4.0			
		$V_{IN}=0.99\text{V}$	1.10	1.10		-4.0			

Continued on following page...

**DC Electrical Characteristics** (Continued) $T_A = -40$  to  $85^\circ\text{C}$ .

Symbol	Parameter	Conditions	$V_{CCA} (\text{V})$	$V_{CCB} (\text{V})$	Min.	Max.	Units
$I_{I(ODH)}$	Bus-Hold Input Overdrive High Current <sup>(4)</sup>	Data Inputs $A_n, B_n$	3.60	3.60	450.00		$\mu\text{A}$
			2.70	2.70	300.00		
			1.95	1.95	200.00		
			1.60	1.60	120.00		
			1.40	1.40	80.00		
$I_{I(ODL)}$	Bus-Hold Input Overdrive Low Current <sup>(5)</sup>	Data Inputs $A_n, B_n$	3.60	3.60	-450.00		$\mu\text{A}$
			2.70	2.70	-300.00		
			1.95	1.95	-200.00		
			1.60	1.60	-120.00		
			1.40	1.40	-80.00		
$I_I$	Input Leakage Current	Control Inputs /OE, $V_I = V_{CCA}$ or GND	1.10 to 3.60	3.60		$\pm 1.0$	$\mu\text{A}$
$I_{OFF}$	Power-Off Leakage Current	$A_n V_O = 0\text{V}$ to 3.6V	0	3.6		$\pm 2.0$	$\mu\text{A}$
		$B_n V_O = 0\text{V}$ to 3.6V	3.60	0		$\pm 2.0$	
$I_{OZ}$	3-State Output Leakage	$A_n, B_n V_O = 0\text{V}$ or 3.6V, /OE= $V_{IH}$	3.6	3.60		$\pm 5.0$	$\mu\text{A}$
		$A_n V_O = 0\text{V}$ or 3.6V, /OE=GND	3.60	0		$\pm 5.0$	
		$B_n V_O = 0\text{V}$ or 3.6V, /OE=GND	0	3.60		$\pm 5.0$	
$I_{CCA/B}$	Quiescent Supply Current <sup>(6, 7)</sup>	$V_I = V_{CCI}$ or GND; $I_o = 0$ , /OE=GND	1.10 to 3.60	1.10 to 3.60		10.0	$\mu\text{A}$
$I_{CCZ}$		$V_I = V_{CCI}$ or GND; $I_o = 0$ , /OE= $V_{IH}$	1.10 to 3.60	1.10 to 3.60		10.0	$\mu\text{A}$
$I_{CCA}$	Quiescent Supply Current	$V_I = V_{CCB}$ or GND; $I_o = 0$ B-to-A Direction, /OE=GND	0	1.10 to 3.60		-10.0	$\mu\text{A}$
		$V_I = V_{CCA}$ or GND; $I_o = 0$ A-to-B Direction	1.10 to 3.60	0		10.0	
$I_{CCB}$		$V_I = V_{CCA}$ or GND; $I_o = 0$ , A-to-B Direction, /OE=GND	1.10 to 3.60	0		-10.0	$\mu\text{A}$
		$V_I = V_{CCB}$ or GND; $I_o = 0$ B-to-A Direction	0	1.10 to 3.60		10.0	

**Notes:**

3. This is the output voltage for static conditions. Dynamic drive specifications are given in the Dynamic Output Electrical Characteristics table.
4. An external drive must source at least the specified current to switch LOW-to-HIGH.
5. An external drive must source at least the specified current to switch HIGH-to-LOW.
6.  $V_{CCI}$  is the  $V_{CC}$  associated with the input side.
7. Reflects current per supply,  $V_{CCA}$  or  $V_{CCB}$ .

## Dynamic Output Electrical Characteristic

### A Port ( $A_n$ )

Output Load:  $C_L=15\text{pF}$ ,  $R_L \geq M\Omega$  ( $C_{I/O}=4\text{pF}$ ),  $T_A=-40$  to  $85^\circ\text{C}$

Symbol	Parameter	$V_{CCA}=3.0\text{V}$ to $3.6\text{V}$		$V_{CCA}=2.3\text{V}$ to $2.7\text{V}$		$V_{CCA}=1.65\text{V}$ to $1.95\text{V}$		$V_{CCA}=1.4\text{V}$ to $1.6\text{V}$		$V_{CCA}=1.1\text{V}$ to $1.3\text{V}$		Units
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	
$t_{rise}$	Output Rise Time A Port <sup>(9)</sup>		3.0		3.5		4.0		5.0	7.5		ns
$t_{fall}$	Output Fall Time A Port <sup>(10)</sup>		3.0		3.5		4.0		5.0	7.5		ns
$I_{OHD}$	Dynamic Output Current High <sup>(9)</sup>	-11.4		-7.5		-4.7		-3.2		-1.7		mA
$I_{OLD}$	Dynamic Output Current Low <sup>(10)</sup>	+11.4		+7.5		+4.7		+3.2		+1.7		mA

### B Port ( $B_n$ )

Output Load:  $C_L=15\text{pF}$ ,  $R_L \geq M\Omega$  ( $C_{I/O}=5\text{pF}$ ),  $T_A=-40$  to  $85^\circ\text{C}$

Symbol	Parameter	$V_{CCB}=3.0\text{V}$ to $3.6\text{V}$		$V_{CCB}=2.3\text{V}$ to $2.7\text{V}$		$V_{CCB}=1.65\text{V}$ to $1.95\text{V}$		$V_{CCB}=1.4\text{V}$ to $1.6\text{V}$		$V_{CCB}=1.1\text{V}$ to $1.3\text{V}$		Units
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	
$t_{rise}$	Output Rise Time B Port <sup>(9)</sup>		3.0		3.5		4.0		5.0	7.5		ns
$t_{fall}$	Output Fall Time B Port <sup>(10)</sup>		3.0		3.5		4.0		5.0	7.5		ns
$I_{OHD}$	Dynamic Output Current High <sup>(9)</sup>	-12.0		-7.9		-5.0		-3.4		-1.8		mA
$I_{OLD}$	Dynamic Output Current Low <sup>(10)</sup>	+12.0		+7.9		+5.0		+3.4		+1.8		mA

#### Notes:

8. Dynamic output characteristics are guaranteed, but not tested.
9. See Figure 7.
10. See Figure 8.

## AC Characteristics

$V_{CCA} = 3.0V \text{ to } 3.6V, T_A = -40 \text{ to } 85^\circ C$

Symbol	Parameter	$V_{CCB}=3.0V \text{ to } 3.6V$		$V_{CCB}=2.3V \text{ to } 2.7V$		$V_{CCB}=1.65V \text{ to } 1.95V$		$V_{CCB}=1.4V \text{ to } 1.6V$		$V_{CCB}=1.1V \text{ to } 1.3V$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Typ.		
$t_{PLH}, t_{PHL}$	A to B	0.2	4.0	0.3	4.2	0.5	5.4	0.6	6.8	6.9	ns	
	B to A	0.2	4.0	0.2	4.1	0.3	5.0	0.5	6.0	4.5	ns	
$t_{PZL}, t_{PZH}$	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	$\mu s$	
$t_{SKW}$	A Port, B Port <sup>(11)</sup>		0.5		0.5		0.5		1.0	1.0	ns	

$V_{CCA} = 2.3V \text{ to } 2.7V, T_A = -40 \text{ to } 85^\circ C$

Symbol	Parameter	$V_{CCB}=3.0V \text{ to } 3.6V$		$V_{CCB}=2.3V \text{ to } 2.7V$		$V_{CCB}=1.65V \text{ to } 1.95V$		$V_{CCB}=1.4V \text{ to } 1.6V$		$V_{CCB}=1.1V \text{ to } 1.3V$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Typ.		
$t_{PLH}, t_{PHL}$	A to B	0.2	4.1	0.4	4.5	0.5	5.6	0.8	6.9	7.0	ns	
	B to A	0.3	4.2	0.4	4.5	0.5	5.5	0.5	6.5	4.8	ns	
$t_{PZL}, t_{PZH}$	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	$\mu s$	
$t_{SKW}$	A Port, B Port <sup>(11)</sup>		0.5		0.5		0.5		1.0	1.0	ns	

$V_{CCA} = 1.65V \text{ to } 1.95V, T_A = -40 \text{ to } 85^\circ C$

Symbol	Parameter	$V_{CCB}=3.0V \text{ to } 3.6V$		$V_{CCB}=2.3V \text{ to } 2.7V$		$V_{CCB}=1.65V \text{ to } 1.95V$		$V_{CCB}=1.4V \text{ to } 1.6V$		$V_{CCB}=1.1V \text{ to } 1.3V$		Units
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Typ.		
$t_{PLH}, t_{PHL}$	A to B	0.3	5.0	0.5	5.5	0.8	6.7	0.9	7.5	7.5	ns	
	B to A	0.5	5.4	0.5	5.6	0.8	6.7	1.0	7.0	5.4	ns	
$t_{PZL}, t_{PZH}$	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	$\mu s$	
$t_{SKW}$	A Port, B Port <sup>(11)</sup>		0.5		0.5		0.5		1.0	1.0	ns	

### Note:

- Skew is the variation of propagation delay between output signals and applies only to output signals on the same port  $A_n$  or  $B_n$  and switching with the same polarity (LOW-to-HIGH or HIGH-to-LOW) (see Figure 10). Skew is guaranteed, but not tested.

**AC Characteristics** (Continued) **$V_{CCA} = 1.4V \text{ to } 1.6V, T_A = -40 \text{ to } 85^\circ C$** 

<b>Symbol</b>	<b>Parameter</b>	$V_{CCB}=3.0V \text{ to } 3.6V$		$V_{CCB}=2.3V \text{ to } 2.7V$		$V_{CCB}=1.65V \text{ to } 1.95V$		$V_{CCB}=1.4V \text{ to } 1.6V$		$V_{CCB}=1.1V \text{ to } 1.3V$		<b>Units</b>
		<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>	<b>Min.</b>	<b>Max.</b>	<b>Typ.</b>		
$t_{PLH}, t_{PHL}$	A to B	0.5	6.0	0.5	6.5	1.0	7.0	1.0	8.5	7.9	ns	
	B to A	0.6	6.8	0.8	6.9	0.9	7.5	1.0	8.5	6.1	ns	
$t_{PZL}, t_{PZH}$	/OE to A, /OE to B		1.7		1.7		1.7		1.7	1.7	$\mu s$	
$t_{SKW}$	A Port, B Port <sup>(12)</sup>		1.0		1.0		1.0		1.0	1.0	ns	

 **$V_{CCA} = 1.1V \text{ to } 1.3V, T_A = -40 \text{ to } 85^\circ C$** 

<b>Symbol</b>	<b>Parameter</b>	$V_{CCB}=3.0V \text{ to } 3.6V$		$V_{CCB}=2.3V \text{ to } 2.7V$		$V_{CCB}=1.65V \text{ to } 1.95V$		$V_{CCB}=1.4V \text{ to } 1.6V$		$V_{CCB}=1.1V \text{ to } 1.3V$		<b>Units</b>
		<b>Typ.</b>	<b>Typ.</b>	<b>Typ.</b>	<b>Typ.</b>	<b>Typ.</b>	<b>Typ.</b>	<b>Typ.</b>	<b>Typ.</b>	<b>Typ.</b>		
$t_{PLH}, t_{PHL}$	A to B	4.6		4.8		5.4		6.2		9.2	ns	
	B to A	6.8		7.0		7.4		7.8		9.1	ns	
$t_{PZL}, t_{PZH}$	/OE to A, /OE to B	1.7		1.7		1.7		1.7		1.7	$\mu s$	
$t_{SKW}$	A Port, B Port <sup>(12)</sup>	1.0		1.0		1.0		1.0		1.0	ns	

**Note:**

12. Skew is the variation of propagation delay between output signals and applies only to output signals on the same port ( $A_n$  or  $B_n$ ) and switching with the same polarity (LOW-to-HIGH or HIGH-to-LOW) (see *Figure 10*). Skew is guaranteed, but not tested.

**Maximum Data Rate<sup>(13, 14)</sup>** $T_A = -40 \text{ to } 85^\circ\text{C}$ .

$V_{CCA}$	$V_{CCB} = 3.0V \text{ to } 3.6V$	$V_{CCB} = 2.3V \text{ to } 2.7V$	$V_{CCB} = 1.65V \text{ to } 1.95V$	$V_{CCB} = 1.4V \text{ to } 1.6V$	$V_{CCB} = 1.1V \text{ to } 1.3V$	Units
	Min.	Min.	Min.	Min.	Typ.	
$V_{CCA} = 3.00V \text{ to } 3.60V$	140	120	100	80	40	Mbps
$V_{CCA} = 2.30V \text{ to } 2.70V$	120	120	100	80	40	Mbps
$V_{CCA} = 1.65V \text{ to } 1.95V$	100	100	80	60	40	Mbps
$V_{CCA} = 1.40V \text{ to } 1.60V$	80	80	60	60	40	Mbps
$V_{CCA} = 1.10V \text{ to } 1.30V$	Typ.	Typ.	Typ.	Typ.	Typ.	
	40	40	40	40	40	Mbps

**Notes:**

13. Maximum data rate is guaranteed, but not tested.
14. Maximum data rate is specified in megabits per second (see *Figure 9*). It is equivalent to two times the F-toggle frequency, specified in megahertz. For example, 100Mbps is equivalent to 50MHz.

**Capacitance**

Symbol	Parameter		Conditions	$T_A = +25^\circ\text{C}$ Typical	Units
$C_{IN}$	Input Capacitance Control Pin (/OE)		$V_{CCA} = V_{CCB} = \text{GND}$	3	pF
$C_{I/O}$	Input/Output Capacitance		$V_{CCA} = V_{CCB} = 3.3V, /OE = V_{CCA}$	4	pF
	$A_n$	5			
$C_{pd}$	Power Dissipation Capacitance		$V_{CCA} = V_{CCB} = 3.3V, V_i = 0V \text{ or } V_{CC}, f = 10\text{MHz}$	25	pF

## Test Diagrams

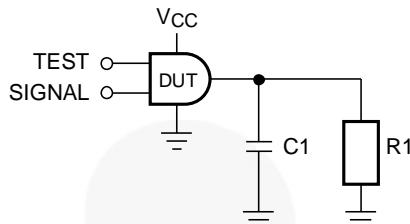


Figure 3. Test Circuit

Table 1. AC Test Conditions

Test	Input Signal	Output Enable Control
$t_{PLH}, t_{PHL}$	Data Pulses	0V
$t_{PZL}$	0V	HIGH to LOW Switch
$t_{PZH}$	$V_{CCI}$	HIGH to LOW Switch

Table 2. AC Load

$V_{CCO}$	C1	R1
$1.2V \pm 0.1V$	15pF	$1M\Omega$
$1.5V \pm 0.1V$	15pF	$1M\Omega$
$1.8V \pm 0.15V$	15pF	$1M\Omega$
$2.5V \pm 0.2V$	15pF	$1M\Omega$
$3.3V \pm 0.3V$	15pF	$1M\Omega$

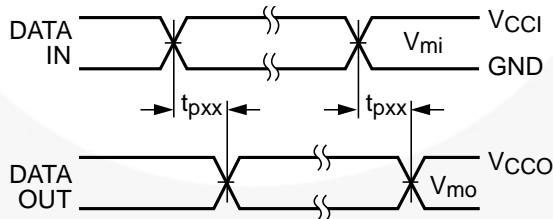


Figure 4. Waveform for Inverting and Non-Inverting Functions

**Notes:**

15. Input  $t_R = t_F = 2.0\text{ns}$ , 10% to 90%.
16. Input  $t_R = t_F = 2.5\text{ns}$ , 10% to 90%, at  $V_I = 3.0\text{V}$  to  $3.6\text{V}$  only.

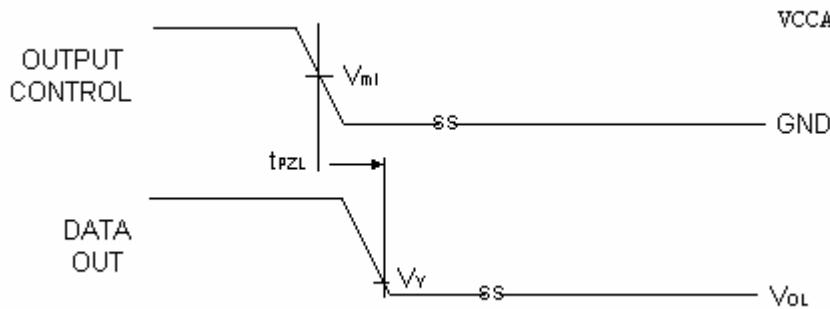


Figure 5. 3-State Output Low Enable Time for Low Voltage Logic

**Notes:**

17. Input  $t_R = t_F = 2.0\text{ns}$ , 10% to 90%.  
 18. Input  $t_R = t_F = 2.5\text{ns}$ , 10% to 90%, at  $V_I = 3.0\text{V}$  to  $3.6\text{V}$  only.

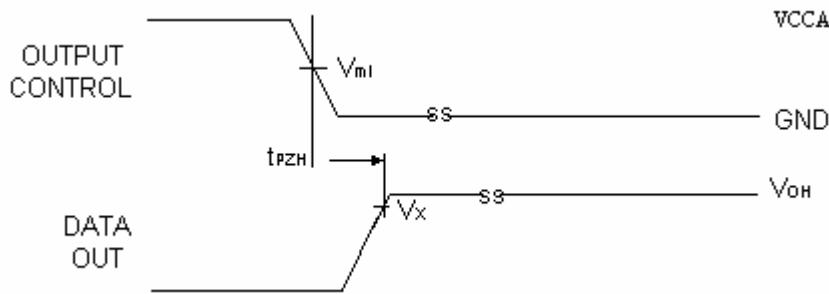


Figure 6. 3-State Output High Enable Time for Low Voltage Logic

**Notes:**


19. Input  $t_R = t_F = 2.0\text{ns}$ , 10% to 90%.  
 20. Input  $t_R = t_F = 2.5\text{ns}$ , 10% to 90%, at  $V_I = 3.0\text{V}$  to  $3.6\text{V}$  only.

Table 3. Test Measure Points

Symbol	$V_{DD}$
$V_{MI}^{(21)}$	$V_{CCI}/2$
$V_{MO}$	$V_{CCO}/2$
$V_X$	$0.9 \times V_{CCO}$
$V_Y$	$0.1 \times V_{CCO}$


**Note:**

21.  $V_{CCI}=V_{CCA}$  for control pin /OE or  $V_{MI}=(V_{CCA}/2)$ .

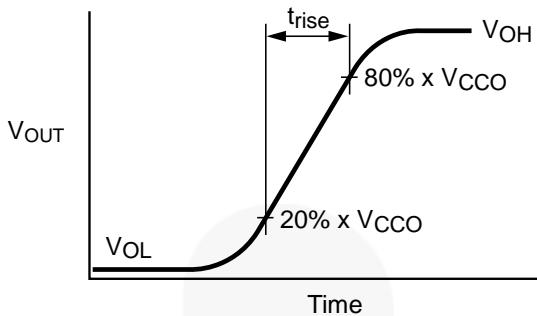


$$I_{OHD} \approx (C_L + C_{I/O}) \times \frac{\Delta V_{OUT}}{\Delta t} = (C_L + C_{I/O}) \times \frac{(20\% - 80\%) \cdot V_{CCO}}{t_{RISE}}$$

**Figure 7. Active Output Rise Time and Dynamic Output Current High**

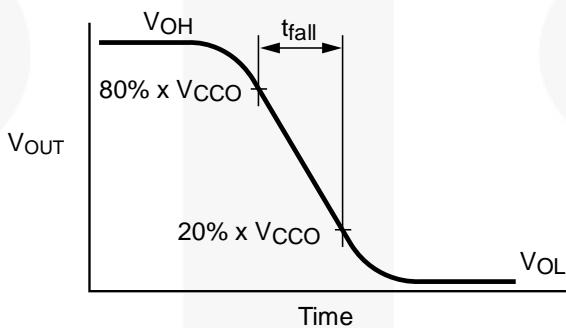


$$I_{OLD} \approx (C_L + C_{I/O}) \times \frac{\Delta V_{OUT}}{\Delta t} = (C_L + C_{I/O}) \times \frac{(80\% - 20\%) \cdot V_{CCO}}{t_{FALL}}$$

**Figure 8. Active Output Fall Time and Dynamic Output Current Low**

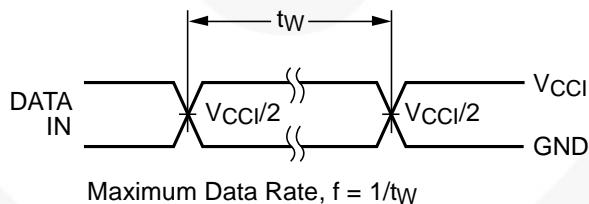

**Figure 9. Maximum Data Rate**

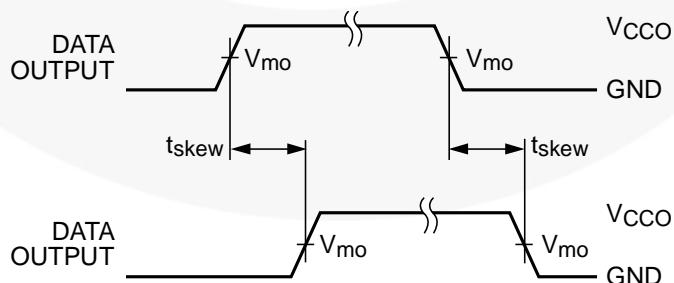


**Figure 10. Output Skew Time**

**Note:**

22.  $t_{SKEW} = (t_{pHLmax} - t_{pHLmin})$  or  $(t_{pLHmax} - t_{pLHmin})$

## Physical Dimensions

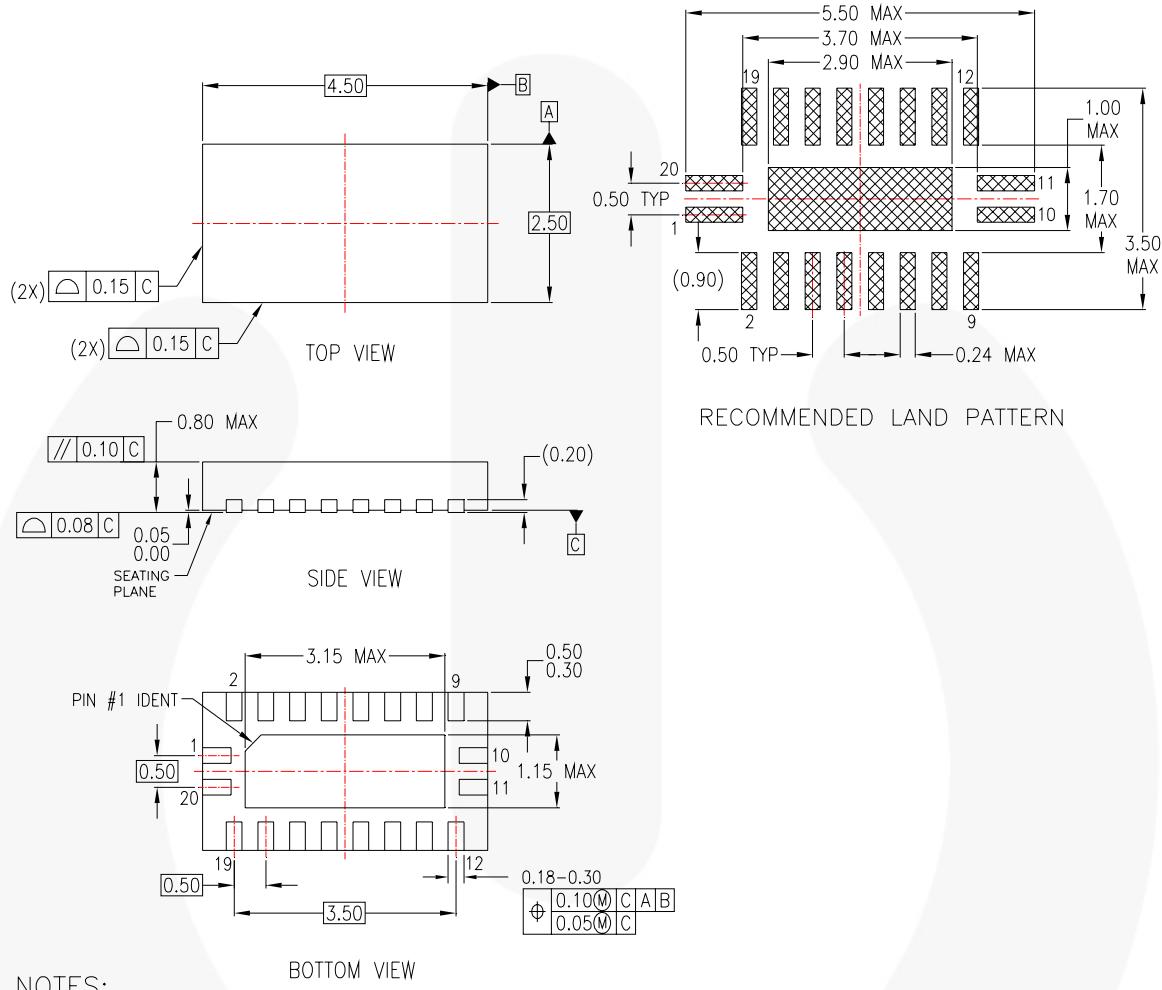

### NOTES:

- CONFORMS TO JEDEC REGISTRATION MO-241, VARIATION AC
- DIMENSIONS ARE IN MILLIMETERS.
- DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994

MLP20BrevA

**Figure 11. 20-Terminal DQFN 2.5mm x 4.5mm Package**

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:  
<http://www.fairchildsemi.com/packaging/>.



#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

Build it Now™  
CorePLUS™  
CorePOWER™  
CROSSVOLT™  
CTL™  
Current Transfer Logic™  
EcoSPARK®  
EfficientMax™  
EZSWITCH™  
™\*  
®  
Fairchild®  
Fairchild Semiconductor®  
FACT Quiet Series™  
FACT®  
FAST®  
FastvCore™  
FlashWriter®  
FPS™  
F-PFSTM

FRFET®  
Global Power Resource™  
Green FPST™  
Green FPST™ e-Series™  
GTO™  
IntelliMAX™  
ISOPLANAR™  
MegaBuck™  
MICROCOUPLER™  
MicroFET™  
MicroPak™  
MillerDrive™  
MotionMax™  
Motion-SPM™  
OPTOLOGIC®  
OPTOPLANAR®  
PDP SPM™  
Power-SPM™  
PowerTrench®  
PowerXSTM

Programmable Active Droop™  
QFET®  
QST™  
Quiet Series™  
RapidConfigure™  
™  
Saving our world, 1mW/V/V at a time™  
SmartMax™  
SMART START™  
SPM®  
STEALTH™  
SuperFET™  
SuperSOT™3  
SuperSOT™6  
SuperSOT™8  
SupreMOS™  
SyncFET™  
 SYSTEM GENERAL  
The Power Franchise®

**the power franchise**  
TinyBoost™  
TinyBuck™  
TinyLogic®  
TINYOPTO™  
TinyPower™  
TinyFWTM™  
TinyWire™  
Trifault Detect™  
TRUECURRENT™  
μSerDes™  
™  
UHC®  
Ultra FRFET™  
UniFET™  
VOXTM™  
VisualMax™  
XSTM™

\* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, [www.fairchildsemi.com](http://www.fairchildsemi.com), under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage, and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

##### Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

Rev. I39