


MPA800R Series

Industrial 800W Single Output Power Factor Corrected AC/DC Power Supplies

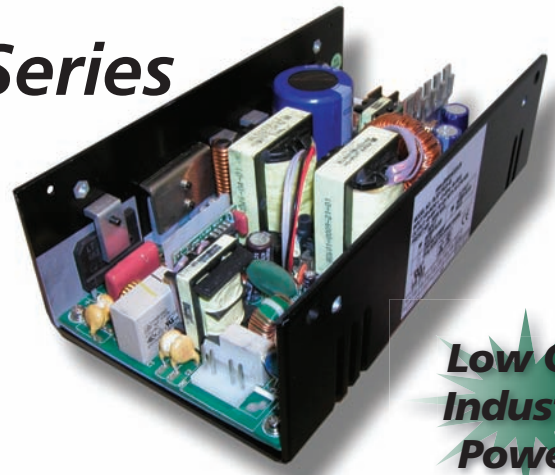

**Low Cost
Industrial
Power!!**

Key Features:

- 800W Output Power
- Universal 90-264 VAC Input
- PFC to EN61000-3-2 "D"
- UL, cUL, TUV Approvals
- CE Certified
- FCC Class B Emissions
- 12 - 60 V Output Voltages
- N+1 Current Share Option
- Three Mechanical Options

Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range		90		264	VAC
Input Frequency		47		63	Hz
Under Voltage Shutdown	See Note 1				
Input Current, Full Load	200 - 240 VAC		6		A
Inrush Current, Cold Start	230 VAC			70	A
Leakage Current (Note 2)	240 VAC		3.5		mA
Power Factor Correction	Active, Meets EN61000-3-2 Class D				
Input Protection	T10A/250V Fuse				

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Adjustment	By Trim Pot		±5.0		%
Output Regulation (Note 3)			±1.0		%
Hold Time	220 VAC, 80% Load		20		mSec
Ripple & Noise (20 MHz) (Note 4)	See Model Selection Guide				
Overload Protection	Foldback Mode	110		140	%
Over Voltage Protection	>130% of Rated Output Voltage. Recycle AC Input.				
Over Temperature Protection	>+85°C Ambient with Autorecovery				
Temperature Coefficient			±0.04		%/°C
Transient Recovery Time (Note 5)	50% Load Change		2.5		mS
Transient Response Deviation			5		%
Overshoot/Undershoot	At Turn On/Off			5.0	%
Turn On Delay	120 VAC			1	S
Output Short Circuit	Continuous With Autorecovery				

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Input - Output	3,000			VAC
	Input - FG (Frame Ground)	1,500			
	Primary - Core	1,500			
Switching Frequency	Fixed		23		kHz

Interface Signals	Conditions	Min.	Typ.	Max.	Units
Power Supply On	Green LED (LED1) on the PCB				
Power Good Signal	PG on CN3. Goes TTL high 100 to 500 mS after regulation. Goes low at least 1 mS before the loss of regulation. Will sink 100 mA.				
Current Sharing	CSH on CN3. Single wired, forced current sharing option. Up to four units may be connected in parallel within 10% accuracy at full load.				
Current Monitor	CMN on CN3. A 0.5V to 3.0V output that represents 0% to 100% of the unit output current				
Remote Sense	RS + and RS- on CN3. Compensates for up to a 0.5V line drop. (not on models with current share option)				
Remote On/Off	RSW on CN3. A TTL low signal inhibits the output				

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	0	+25	+50	°C
Output Derating	2.5%/ °C from +50 °C to +70 °C				
Storage Temperature Range		-20		+85	°C
Cooling	See Model Selection Guide				
Operating Humidity	RH, Non-condensing			90	%
Vibration	Frequency 5-50 Hz, Acceleration 7.35 m/(S x S) on X, Y & Z Axis				

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 30°C, Gnd Benign	150			kHours
Safety Standards	UL 60950; CSA C22.2 No. 60950; TUV EN60950; CB Report (IEC 60950)				
EMI Compliance	Compliance to EN55022 (CISPR22) Class B; EN61000-3-2,3				
EMS Immunity Compliance	EN61000-4-2,3,4,5,6,8,11; EN55024;; CE Marked (LVD)				



CB



MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Model Selection Guide

Model Number	Output Voltage		Output Current (Notes 7, 8, 9)			Ripple & Noise	Efficiency (Note 7)
	Factory PreSet	Range (Note 6)	('U' units) Max. with 30 CFM	Min	"E" Units Int. Fan		
MPA800Rx-12zz	12 VDC	12.0 - 14.0 VDC	62.50A	0.0A	62.50A	1% p-p	80%
MPA800Rx-15zz	15 VDC	15.0 - 19.0 VDC	50.00A	0.0A	50.00A	1% p-p	83%
MPA800Rx-24zz	24 VDC	20.0 - 26.0 VDC	40.00A	0.0A	40.00A	1% p-p	83%
MPA800Rx-36zz	36 VDC	27.0 - 36.0 VDC	29.63A	0.0A	29.63A	1% p-p	83%
MPA800Rx-40zz	40 VDC	37.0 - 47.0 VDC	21.62A	0.0A	21.62A	1% p-p	83%
MPA800Rx-48zz	48 VDC	48.0 - 60.0 VDC	16.67A	0.0A	16.67A	1% p-p	83%

- Notes:**
- If the input voltage drops below 80 VAC \pm 5 VAC, the unit power will shut down. When the input voltage rises above 86 VAC, the unit will recover automatically.
 - Models are available with leakage current specified as low as 750 μ A. Contact the factory for details.
 - Output regulation includes line & load.
 - Ripple & noise is measured from 10 Hz to 20 MHz. Measurement connection to the unit is made with a 0.1 μ F ceramic capacitor & a 22 μ F electrolytic capacitor connected in parallel.

- Transient recovery is measured to within a 1% error band for a load step change of 50% to 100%.
- The full output range (see table above) is covered in the safety agency certification. Standard models are factory set to the "Preset" voltage. This may be set to other levels within the range without affecting the agency certification. Contact the factory for details.
- A minimum load of 1% is required to maintain load regulation and ripple specifications.
- Output current is given for the factory preset voltage. With the exception of the "12" (750W) output model, the maximum continuous output power level is 800W with 30 CFM. For more information, contact the factory.
- Units will provide peak power of 900W for 500 μ S. For units capable of longer durations, contact the factory.

Input Connector CN1:

U-Chassis (U,C)
Howder Terminal Block No. HD-121-3P (3-pin) or Mating Molex Part No. 09-91-0700 (7 pin, 5 used) or equivalent.

Enclosed with Fan (E)
Dinkle Terminal Block No. DT-35-A02W-3 (3-pin) or IEC 320 or equivalent snap-in mounting type.

Output Connector CN2:
Howder Terminal Block No. HD-121-8P (8-pin) or Mating Molex Part No. 09-91-2000 (20 pin) or equivalent.

Output Pin Assignment:

Howder	Molex
Pins 1 ~ 4: V+	Pins 1 ~ 10: V+
Pins 5 ~ 8: V-	Pins 11 ~ 20: V-


Logic Signal Connector CN3:

Mating JST XHP-7 or equivalent (CHYAO SHIUNN JS-2001-07).


Fan driver connector (FAN):

12 VDC / 500 mA is available to drive an external fan. Mating JST XHP-2 or equivalent (CHYAO SHIUNN JS-2001-02).


Mechanical Dimensions: U-Chassis (U Suffix)

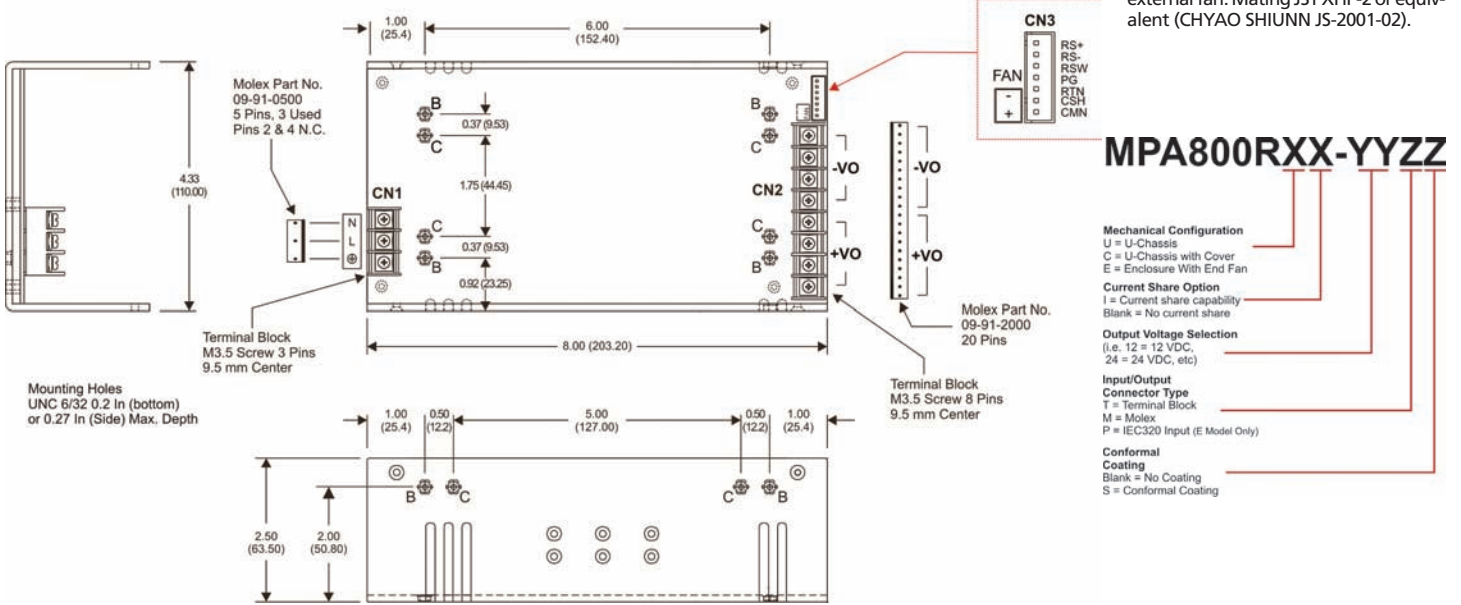

Enclosure With Fan (E Suffix)

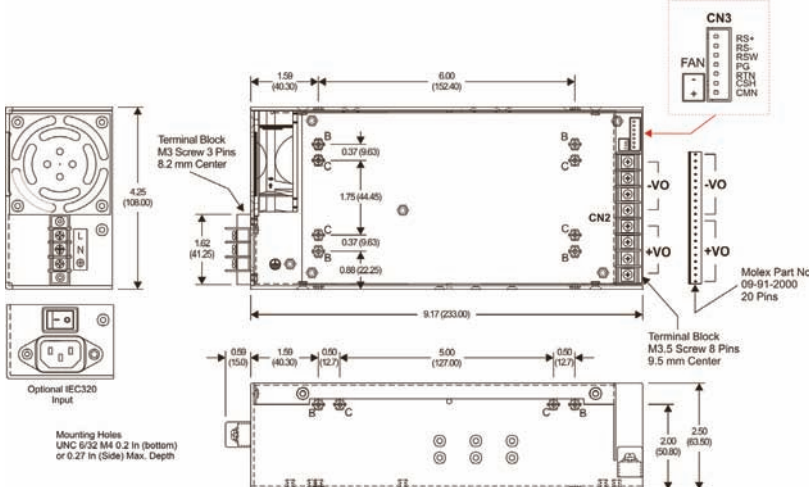

U-Chassis Cover (C Suffix)

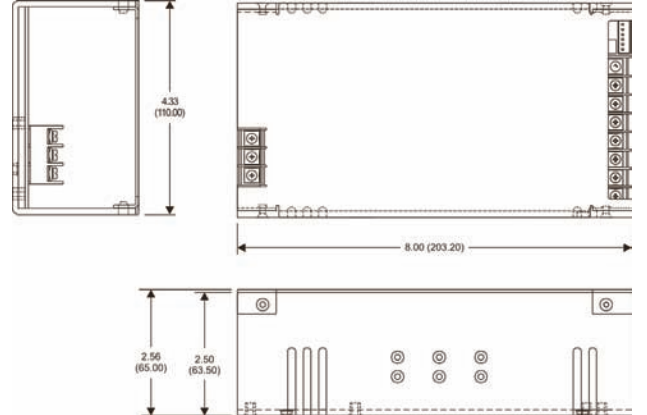

MicroPower Direct
www.micropowerdirect.com